

(19)



(11)

EP 2 584 080 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

14.06.2017 Bulletin 2017/24

(51) Int Cl.:

D04B 1/22 (2006.01)

(21) Application number: **12006563.6**

(22) Date of filing: **18.09.2012**

(54) **Spacer fabric knitting method and spacer fabric**

Verfahren zum Stricken eines Abstandsgestrickes und Abstandsgestrick

Procédé de tricotage d'un tricot double parois et tricot double parois

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **17.10.2011 JP 2011227993**

(43) Date of publication of application:

24.04.2013 Bulletin 2013/17

(73) Proprietor: **SHIMA SEIKI MFG. LTD.**

Wakayama-shi

Wakayama 641-0003 (JP)

(72) Inventors:

• **KOSUI, Tatsuya**

Wakayama-shi

Wakayama 641-0003 (JP)

• **GOTO, Masashi**

Wakayama-shi

Wakayama 641-0003 (JP)

• **ASHIBE, Shinsuke**

Wakayama-shi

Wakayama 641-0003 (JP)

(74) Representative: **Schmidbauer, Andreas Konrad**

Wagner & Geyer Partnerschaft

Patent- und Rechtsanwälte

Gewürzmühlstrasse 5

80538 München (DE)

(56) References cited:

WO-A1-92/13125 DE-U1-202006 016 338

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 584 080 B1

Description

Technical Field

[0001] The present invention relates to knitting of a spacer fabric, and particularly relates to knitting of a spacer fabric in which one side of the spacer fabric is convex at desired positions and the other side is flat, or both sides alternately have convexities.

Background Art

[0002] Patent Literature 1 (JP 2004-107800A) discloses knitting of a thick spacer fabric in which tuck stitches are formed to insert connecting yarn made of woolly nylon or the like into a gap between a front knitted fabric and a rear knitted fabric. However, this spacer fabric is formed such that not only one side of, but both sides of the spacer fabric are convex. Patent Literature 2 (JP S52-108377U) discloses knitting in which a front knitted fabric and a rear knitted fabric are made of different materials, and another yarn is inserted by inlay into a gap between the front and the rear knitted fabrics thereby making one of the front and the rear knitted fabrics convex. However, according to Patent Literature 2, the front and the rear knitted fabrics have to be made of mutually different materials.

Citation List

Patent Literature

[0003]

[Patent Literature 1] JP 2004-107800A

[Patent Literature 2] JP S52-108377U

[0004] EP 1 915 926 A1 discloses a knitted seat cover comprising a body support region knitted in one piece with alternate spacer fabric zones and thinner opaque or open-mesh zones.

[0005] Prior Art document WO 92/13125 A1 discloses a thermal insulating material comprising a double-faced knitted glass fibre fabric in which the faces of the fabric are interconnected by at least one linking thread which passes from one face to the other.

Summary of the Invention

Technical Problem

[0006] It is an object of the present invention to provide a spacer fabric in which one side is convex and the other side is flat at desired positions, and a method for knitting the spacer fabric.

Means for Solving Problem

[0007] This and other objects are solved by a knitting

method as defined in claim 1. Preferred embodiments of the knitting method are stated in the subclaims 2 to 4. The objects are also met by the space of fabric defined in claim 5.

[0008] The present invention is directed to a knitting method for knitting a spacer fabric having a front knitted fabric, a rear knitted fabric, and a connecting yarn that connects the front knitted fabric and the rear knitted fabric, using a knitting machine provided with at least a pair of needle beds each having a plurality of needles, and a carriage, the method characterized by, in order to knit the spacer fabric in which one side of the space fabric is convex and the other side is flat or both the front and rear knitted fabrics alternately have convexities:

a step (a) of repeatedly forming tuck stitches with the connecting yarn alternately on stitches in the front knitted fabric caught on the needles and stitches in the rear knitted fabric caught on the needles such that the tuck stitches are formed at a pitch of a plurality of stitches along the needle beds both on the front knitted fabric and on the rear knitted fabric but are not formed on mutually opposing stitches, while changing stitches to be tucked such that the tuck stitches are formed on each stitch of the front knitted fabric and the rear knitted fabric;

a step (b) of knitting next stitches at a pitch of a plurality of stitches on the stitches of the front knitted fabric on which the tuck stitches have been formed; and

a step (c) of knitting next stitches at a pitch of a plurality of stitches on the stitches of the rear knitted fabric on which the tuck stitches have been formed;

wherein the next stitches are knitted on each stitch of the front knitted fabric and the rear knitted fabric on the stitches where the tuck stitches have been formed on, by repeating the step (b) and the step (c), while changing stitches for forming the next stitches, and

in the step (b) and the step (c), the next stitches are knitted firstly on the knitted fabric to be made flat, and the next stitches are knitted lastly on the tuck stitches in the knitted fabric to be made convex, which are connected via the connecting yarn to the tuck stitches on which the next stitches have been firstly knitted.

[0009] The present invention has the following aspects.

- Tuck stitches is repeatedly formed with the connecting yarn alternately on stitches in the front knitted fabric caught on the needles and stitches in the rear knitted fabric caught on the needles such that the tuck stitches are formed at a pitch of a plurality of stitches both on the front knitted fabric and on the rear knitted fabric but are not formed on mutually opposing stitches, while stitches to be tucked are changed such that the tuck stitches are formed on each stitch of the front knitted fabric and the rear

knitted fabric.

- Next stitches are knitted at a pitch of a plurality of stitches on the stitches of the front knitted fabric on which the tuck stitches have been formed, and next stitches are knitted at a pitch of a plurality of stitches on the stitches of the rear knitted fabric on which the tuck stitches have been formed, wherein stitches for forming the next stitches are changed, so that the next stitches are knitted on each stitch of the front knitted fabric and the rear knitted fabric on which the tuck stitches have been formed.
- One side of the spacer fabric is made convex and the other side is made flat, using the order in which the next stitches are knitted on the stitches on which the tuck stitches have been formed.
- The tuck stitches on which the next stitches are firstly knitted is connected via the connecting yarn to the tuck stitches on which the next stitches are knitted last, and the knitted fabric on the side of the tuck stitches on which the next stitches are knitted first relatively shrinks and becomes flat, and the knitted fabric on the side of the tuck stitches on which the next stitches are knitted last becomes relatively convex.

[0010] According to the present invention, a spacer fabric may be knitted in which one side of the spacer fabric is convex, without a difference in material between the front knitted fabric and the rear knitted fabric. Furthermore, the convex side has convexities about twice as large as those in the case where both sides are convex. The stitch loop length, the number of courses, or the like does not have to be made different between the front and the rear knitted fabrics. The convexities may be formed at desired positions on the front knitted fabric and the rear knitted fabric, and the portions opposite the convexities become flat, and, thus, a spacer fabric having a shape suitable for various applications is obtained.

[0011] It is preferable that plain portion and rib portion are formed in the step (b) and the step (c), thereby connecting the front knitted fabric and the rear knitted fabric to each other at the rib portion, and making the spacer fabric thicker at the plain portion and thinner at the rib portion. Accordingly, due to the contrast between the convex portions and the thin portions surrounding the convex portions, the spacer fabric may be emphasized with recesses and protrusions.

[0012] It is particularly preferable that the plain portions and the rib portions are each formed at a plurality of positions in the step (b) and the step (c), thereby connecting the front knitted fabric and the rear knitted fabric to each other at the plurality of positions, and shifting positions of the rib stitches along a wale direction of the spacer fabric such that the positions of the rib portions are arranged oblique with respect to the wale direction and cross each other. Accordingly, a quilt-like knitted fabric is obtained in which the convex portions are in the shape of a parallelogram.

[0013] Furthermore, it is preferable that the next stitches are knitted on every other stitch in both the step (b) and the step (c), and, when repeating the step (b) and the step (c), the next stitches are knitted lastly on the stitches with the tuck stitches opposing the next stitches that have been firstly knitted. Accordingly, the side on which the next stitches are lastly knitted becomes convex, and the side on which the next stitches are firstly knitted on the opposite side becomes flat.

[0014] Also, the present invention is directed to a spacer fabric, comprising:

a front knitted fabric:

a rear knitted fabric; and

a connecting yarn that connects the front knitted fabric and the rear knitted fabric;

wherein one side of the spacer fabric is convex and the other side is flat or both the front and rear knitted fabrics (4, 6) alternately have convexities,

tuck stitches are formed with the connecting yarn alternately on stitches of the front knitted fabric and stitches of the rear knitted fabric such that the tuck stitches are formed at a pitch of a plurality of stitches both on the front knitted fabric and on the rear knitted fabric but are not formed on mutually opposing stitches, while stitches to be tucked are changed such that the tuck stitches are formed on each stitch of the front knitted fabric and the rear knitted fabric,

next stitches are knitted at a pitch of a plurality of stitches on the stitches of the front knitted fabric on which the tuck stitches have been formed, and the stitches for forming the next stitches are changed, so that the next stitches are knitted in a plurality of courses on each stitch on which the tuck stitches have been formed in the front knitted fabric,

next stitches are knitted at a pitch of a plurality of stitches on the stitches of the rear knitted fabric on which the tuck stitches have been formed, and the stitches for forming the next stitches are changed, so that the next stitches are knitted in a plurality of courses on each stitch on which the tuck stitches have been formed in the rear knitted fabric, and

the next stitches are knitted firstly on the knitted fabric on the side that is to be made flat, the next stitches are knitted lastly on the tuck stitches in the knitted fabric on the side that is to be made convex, which is connected via the connecting yarn to the tuck stitches on which the next stitches are firstly knitted, and an interval between next stitches in the knitted fabric on the side that is to be made flat is made smaller than that in the knitted fabric on the side that is to be made convex.

[0015] A connecting yarn extends from a tuck stitch A on which the next stitches are knitted last, to a tuck stitch B, in the knitted fabric on the opposite side facing the tuck stitch A, on which the next stitches are knitted first. Immediately before the next stitches are knitted on the tuck stitch A, the tuck stitch B has already been released from the needles on the needles bed and is pulled toward the tuck stitch A, a prolongation between stitches knitted after the tuck stitches is placed on a prolongation between the tuck stitches A and B, the tuck stitch A is tensioned, the connecting yarn is pulled from the tuck stitch B toward the tuck stitch A, and, thus, the tuck stitch B shrinks. In this state, if next stitches are knitted on the tuck stitch A, and the tuck stitch A is released from the needles, the knitted fabric to which the tuck stitch B belongs relatively shrinks and becomes flat, and the knitted fabric to which the tuck stitch A belongs becomes relatively convex. Note that the interval between the stitches in the knitted fabric to which the tuck stitch B belongs becomes relatively smaller, and the interval between the stitches in the knitted fabric to which the tuck stitch A belongs becomes relatively larger.

[0016] With the spacer fabric according to the present invention, convexities may be formed without a difference in material between the front knitted fabric and the rear knitted fabric. Furthermore, the convexities when only one of the front and rear knitted fabrics is convex are about twice as large as those when both the front and the rear knitted fabrics are convex. The convexities may be formed at desired positions on the front knitted fabric and the rear knitted fabric, and the portions opposite the convexities become flat. Thus, this spacer fabric is suitable for supporters, shoe soles, and the like, when it is used such that the flat side is in contact with the person's body. Furthermore, this spacer fabric is suitable for cushions, chair seats, chair backrests, back pads of backpacks, and the like, when it is used such that the convex side is in contact with the person's body. The spacer fabric according to the present invention may be convex at desired positions, and, thus, it may have a shape suiting various applications. Note that, in this specification, the description regarding the spacer fabric knitting method is directly applicable to the spacer fabric. Although the front knitted fabric is convex and the rear knitted fabric is flat in the embodiment below, a spacer fabric may be knitted that has convex portions in the front knitted fabric and flat portions in the rear knitted fabric, and, conversely, flat portions in the front knitted fabric and convex portions in the rear knitted fabric.

Brief Description of the Drawings

[0017]

FIG. 1 is a cross-sectional view of a main portion of a quilt-like fabric according to an embodiment.

FIG. 2 is a cross-sectional view of a main portion of

a fabric in which both the front and the rear knitted fabrics have recesses and protrusions according to the embodiment.

FIG. 3 is a process chart showing a knitting method according to the embodiment.

FIG. 4 is a diagram showing the arrangement of a tuck stitch According to the embodiment.

FIG. 5 is a diagram schematically showing the arrangement of a tuck stitch and knit stitches caught on needles.

FIG. 6 is a photograph showing a front side of the quilt-like fabric according to the embodiment.

FIG. 7 is a photograph showing a back side of the quilt-like fabric according to the embodiment.

FIG. 8 is a photograph showing an enlarged front side of the quilt-like fabric according to the embodiment.

FIG. 9 is a photograph showing a front side of the fabric in which both the front and the rear knitted fabrics have recesses and protrusions according to the embodiment.

FIG. 10 is a photograph showing a back side of the fabric in which both the front and the rear knitted fabrics have recesses and protrusions according to the embodiment.

FIG. 11 is a photograph showing an enlarged front side of the fabric in which both the front and the rear knitted fabrics have recesses and protrusions according to the embodiment.

Description of Embodiments

[0018] Hereinafter, an optimal embodiment for carrying out the present invention will be described.

Embodiment

[0019] FIGS. 1 to 11 show the embodiments. FIG. 1 shows a quilt-like spacer fabric 2 in which one of the front and the rear knitted fabrics has recesses and protrusions and the other knitted fabric is flat, where 4 denotes a front knitted fabric that has recesses and protrusions, 6 denotes a rear knitted fabric that is flat, and 8 denotes a cushion layer that is filled with a connecting yarn made of woolly nylon, silk gut, aramid yarn, or the like between the knitted fabrics 4 and 6. In order to connect the knitted fabrics 4 and 6, stitches of the knitted fabrics 4 and 6 are linked to each other by tuck stitches. Furthermore, 10 denotes a link portion in which the front knitted fabric 4

and the rear knitted fabric 6 are knitted by rib stitches. In this portion, a knitting yarn that has been used for knitting the front knitted fabric 4 is then used for knitting the rear knitted fabric 6, and a knitting yarn that has been used for knitting the rear knitted fabric 6 is then used for knitting the front knitted fabric 4, thereby causing the knitting yarns of the front and the rear knitted fabrics to cross each other. Furthermore, the front knitted fabric 4 and the rear knitted fabric 6 are knitted, for example, by plain stitches in the portions other than the link portions 10. Since the link portions 10 are thin, convexities in the other portions of the front knitted fabric 4 are denoted. Note that the left and the right end portions of the front knitted fabric 4 are linked to the left and the right end portions of the rear knitted fabric 6, for example, making the whole front knitted fabric 4 and the rear knitted fabric 6 tubular.

[0020] FIG. 2 shows a spacer fabric 12 in which both the front and the rear knitted fabrics alternately have convexities. In FIG. 2, the same constituent components as those in FIG. 1 are denoted by the same reference numerals. In the spacer fabric 12, the link portions 10 do not denote recesses and protrusions, but merely connect the knitted fabrics 4 and 6. Accordingly, the link portions 10 may not be provided.

[0021] FIG. 3 shows a method for knitting the spacer fabrics 2 and 12, where FB denotes a front needles bed of a flat knitting machine used for knitting, and BB denotes a rear needles bed. Each of the needle beds FB and BB has a large number of needles, and a spacer fabric is knitted by causing a carriage (not shown) to travel back and forth on the needle beds FB and BB and operate the needles. Furthermore, a connecting yarn and a knitting yarn, which is used to knit stitches, are fed from carriers (not shown) of the flat knitting machine. In FIG. 3, numerals 1 to 4 indicate the course number when knitting next stitches on tuck stitches. For example, "1" indicates knitting of the next stitches in the course S1. In FIG. 3, 10 in the lowermost portion indicates an area that will be formed into the link portion 10. The number of carriers that feed the connecting yarn and the knitting yarn may be freely selected, and, for example, one carrier may be allocated to each yarn type, or four carriers may be allocated to each yarn type, for example.

[0022] After stitches for one row are knitted both in the front and the rear knitted fabrics, a connecting yarn is inserted into a gap between the front and the rear knitted fabrics by forming tuck stitches with the connecting yarn on each stitch of the front and the rear knitted fabrics. For example, the tuck stitches are formed on every four stitches alternately on the front and the rear knitted fabrics, that is, as a whole, the tuck stitches are formed in an eight stitch cycle such that tuck stitches is formed on a knitted fabric on the same side on every eight stitches. Tuck courses are repeatedly knitted such that, for example, one to three tuck stitch are formed on each stitch. Note that, in this specification, a "course" refers to one travel of a carriage. When the tuck courses are completed, one course of next stitches is formed by performing

a knit on each of the stitches on which tuck stitches have been formed, and, thus, the tuck stitches are released from the needles. The next stitches are knitted, for example, in four courses. For example, next stitches are knitted in the first knit course S1 on stitches with the reference numeral 1 attached thereto, next stitches are knitted in the course S2 on stitches with the reference numeral 2 attached thereto, next stitches are knitted in the course S3 on stitches with the reference numeral 3 attached thereto, and next stitches are knitted in the last knit course S4 on stitches with the reference numeral 4 attached thereto. The knitted fabrics are knitted by plain stitches in the portions other than the link portions 10. In the courses S1 to S4, in the portions other than the link portions 10, stitches are knitted on every other stitch in the same knitted fabric, for example. Here, the next stitches may be knitted, for example, in six courses.

[0023] The state after the course S4 in FIG. 3 is the same as the state after stitch formation in the lowermost portion in FIG. 3. The cycle from the tuck courses to the course S4 is repeated such that tuck courses are performed first, and the courses S1 to S4 are then knitted. In each cycle, for example, one next stitch and two tuck stitches are formed on each stitch.

[0024] First stitches knitted in the course S1 and last stitches knitted in the course S4 face each other on the needle beds, and tuck stitches are formed so as to connect these stitches. Furthermore, second stitches knitted in the course S2 and third stitches knitted in the course S3 face each other on the needle beds, and the tuck stitches are formed so as to connect these stitches.

[0025] FIG. 4 shows a state in which the tuck courses have been completed in FIG. 3. The stitches knitted before the tuck stitches are caught on the needles, but are not shown in this drawing. Respective needles 20 have caught, for example, two tuck stitches t1 to t4. Note that each needle may have one tuck stitch, three tuck stitches, or the like, instead of two tuck stitches. The tuck stitches t1 and the tuck stitches t4 face each other, and the tuck stitches t2 and the tuck stitches t3 face each other. The connecting yarns 22 and 24 make tuck stitches, for example, on every four stitches alternately on the front and the rear knitted fabrics, but may make tuck stitches on every two stitches, every six stitches, or the like.

[0026] FIG. 5 shows a state immediately before the last knit course S4 in FIG. 3, where 26 denotes stitches knitted in the course S1, 27 denotes stitches knitted in the course S2, and 28 denotes stitches knitted in the course S3. Two tuck stitches t4 are caught together with one stitch on the needles 20, but, in this drawing, only one tuck stitch is shown. Furthermore, p3 denotes a prolongation between the stitches 28, 28, and this prolongation is over the stitches 26 because they were formed after the stitches 26.

[0027] The tuck stitch t1 and the tuck stitch t4 are connected to each other via the connecting yarn, and the tuck stitch t2 and the tuck stitch t3 are connected to each other via the connecting yarn. In the steps of knitting stitch-

es on tuck stitches (S1 to S4 in FIG. 3), first, the first stitches 26 are knitted on tuck stitches t1, and then the stitches 27 and 28 are respectively formed on the tuck stitches t2 and t3. At the point of time shown in FIG. 5, the tuck stitches t4 are caught on the needles 20, and, thus, the tuck stitches t1 connected thereto are pulled toward the tuck stitches t4. Furthermore, on the prolongation between the tuck stitches t1 and the tuck stitches t4, prolongations p2 between the stitches 27,27 knitted on the tuck stitches t2 and prolongations p3 between the stitches 28,28 knitted on the tuck stitches t3 are placed. Accordingly, the tuck stitches t4 are tensioned, the connecting yarns are pulled into the tuck stitches t4 from the tuck stitches t1 that have been already released from the needles due to formation of the stitches 26, and, thus, the tuck stitches t1 shrink. In this state, if stitches are knitted on the tuck stitches t4, and the tuck stitches t4 are released from the needles, the knitted fabric to which the tuck stitches t1 belong relatively shrinks and becomes flat, and the knitted fabric to which the tuck stitches t4 belong becomes relatively convex. The knitted fabric having the tuck stitches t4 is made greatly convex as follows. When knitting stitches on tuck stitches in the courses S1 to S4 in FIG. 3, pairing the mutually connected tuck stitches t1 and tuck stitches t4 and the mutually connected tuck stitches t2 and tuck stitches t3, knitting stitches firstly on the tuck stitches t1, and knitting stitches lastly on the tuck stitches t4.

[0028] Which knitted fabric of the front and the rear knitted fabrics is to be made convex is determined based on the arrangement of the tuck stitches t1 and t4, in particular, the tuck stitches t4, and, thus, a knitted fabric on a desired side is convex at desired positions. Furthermore, convexities are about twice as large when one side of the spacer fabric is convex, as those when both the knitted fabrics are convex. The front and the rear knitted fabrics may be, for example, knitted using knitting yarns made of the same material according to the same knitting conditions such as the same loop length and the same number of stitch rows. Note that, however, the front and the rear knitted fabrics may be knitted using knitting yarns made of different materials according to different knitting conditions.

[0029] FIGS. 6 to 8 show a spacer fabric having the structure in FIG. 1. The front side shown in FIG. 6 is provided with recesses and protrusions, and convexities of the recesses and the protrusions are emphasized by the thin link portions, whereas the back side shown in FIG. 7 is flat. FIG. 8 shows an enlarged front side of the spacer fabric shown in FIG. 6. Note that, in FIGS. 6 and 7, the lower edge portion of the spacer fabric is a knit starting portion, which is to be removed later. The positions of the link portions 10 are shifted obliquely along the wale direction of the spacer fabric such that the link portions 10 cross each other and thus define rhombic convexities, and, thus, a quilt-like spacer fabric is formed. This spacer fabric is suitable, for example, for cushions, backrests, soles, supporters, and the like.

[0030] FIGS. 9 to 11 show a spacer fabric having the structure in FIG. 2, where both of the front and the rear knitted fabrics are provided with convex portions and flat portions, and the convex portions and the flat portions extend parallel to the wale direction. The spacer fabric in FIGS. 9 to 11 also may be used for supporters, cushions, backrests, and the like, but is most suitable for backpacks and the like because it has a high cushioning performance and a high air permeability.

List of Reference Numerals

[0031]

2, 12	Spacer fabric
4	Front knitted fabric
6	Rear knitted fabric
8	Cushion layer
10	Link portion
20	Needles
22, 24	Connecting yarn
26-28	Stitch
t1-t4	Tuck stitch
p3	Prolongation

Claims

1. A knitting method for knitting a spacer fabric (2) having a front knitted fabric (4), a rear knitted fabric (6), and a connecting yarn (22, 24) that connects the front knitted fabric (4) and the rear knitted fabric (6), using a knitting machine provided with at least a pair of needle beds (FB, BB) each having a plurality of needles (20), and a carriage, the method **characterized by**,
in order to knit the spacer fabric (2) in which one side of the space fabric (4, 6) is convex and the other side is flat or both the front and rear knitted fabrics (4, 6) alternately have convexities:

a step (a) of repeatedly forming tuck stitches with the connecting yarn (22, 24) alternately on stitches in the front knitted fabric (4) caught on the needles (20) and stitches in the rear knitted fabric (6) caught on the needles (20) such that the tuck stitches are formed at a pitch of a plurality of stitches along the needle beds (FB, BB) both on the front knitted fabric (4) and on the rear knitted fabric (6) but are not formed on mutually opposing stitches, while changing stitches to be tucked such that the tuck stitches are formed on each stitch of the front knitted fabric (4) and the rear knitted fabric (6);

a step (b) of knitting next stitches at a pitch of a plurality of stitches on the stitches of the front knitted fabric (4) on which the tuck stitches have been formed; and

a step (c) of knitting next stitches at a pitch of a plurality of stitches on the stitches of the rear knitted fabric (6) on which the tuck stitches have been formed;

wherein the next stitches are knitted on each stitch of the front knitted fabric (4) and the rear knitted fabric (6) on the stitches where the tuck stitches have been formed on, by repeating the step (b) and the step (c), while changing stitches for forming the next stitches, and

in the step (b) and the step (c), the next stitches are knitted firstly on the knitted fabric on the side that is to be made flat, and the next stitches are knitted lastly on the tuck stitches in the knitted fabric to be made convex, which are connected via the connecting yarn (22, 24) to the tuck stitches on which the next stitches have been firstly knitted.

2. The knitting method for knitting a spacer fabric (2) according to claim 1, **characterized in that** plain portion and rib portion are formed in the step (b) and the step (c), thereby connecting the front knitted fabric (4) and the rear knitted fabric (6) to each other at the rib portion, and making the spacer fabric (2) thicker at the plain portion and thinner at the rib portion.
3. The knitting method for knitting a spacer fabric (2) according to claim 2, **characterized in that** the plain portions and the rib portions are each formed at a plurality of positions in the step (b) and the step (c), thereby connecting the front knitted fabric (4) and the rear knitted fabric (6) to each other at the plurality of positions, and shifting the positions of the rib portion along a wale direction of the spacer fabric (2) such that the positions of the rib portions are arranged oblique with respect to the wale direction and cross each other.
4. The knitting method for knitting a spacer fabric (2) according to any one of claims 1 to 3, **characterized in that** the next stitches are knitted on every other stitch in both the step (b) and the step (c), and, when repeating the step (b) and the step (c), the next stitches are knitted lastly on the stitches the tuck stitches opposing the next stitches that have been firstly knitted.

5. A spacer fabric (2), comprising:

a front knitted fabric (4):

a rear knitted fabric (6); and

a connecting yarn (22, 24) that connects the front knitted fabric (4) and the rear knitted fabric (6);

wherein one side of the spacer fabric (4, 6) is convex and the other side is flat or both

the front and rear knitted fabrics (4, 6) alternately have convexities,

characterized by tuck stitches formed with the connecting yarn (22, 24) alternately on stitches of the front knitted fabric (4) and stitches of the rear knitted fabric (6) such that the tuck stitches are formed at a pitch of a plurality of stitches of both on the front knitted fabric (4) and on the rear knitted fabric (6) but are not formed on mutually opposing stitches, while stitches to be tucked are changed such that the tuck stitches are formed on each stitch of the front knitted fabric (4) and the rear knitted fabric (6), next stitches knitted at a pitch of a plurality of stitches on the stitches of the front knitted fabric (4) on which the tuck stitches have been formed, and the stitches for forming the next stitches are changed, so that the next stitches are knitted in a plurality of courses on each stitch on which the tuck stitches have been formed in the front knitted fabric (4),

next stitches knitted at a pitch of a plurality of stitches on the stitches of the rear knitted fabric (6) on which the tuck stitches have been formed, and the stitches for forming the next stitches are changed, so that the next stitches are knitted in a plurality of courses on each stitch on which the tuck stitches have been formed in the rear knitted fabric (6), and

the next stitches knitted firstly on the other side of the spacer fabric (6, 4) to be made flat, the next stitches knitted lastly on the tuck stitches in the one side of the spacer fabric (4, 6) to be made convex, which are connected via the connecting yarn (22, 24) to the tuck stitches on which the next stitches are firstly knitted, and an interval between next stitches in the other side of the spacer fabric (6, 4) to be made flat is made smaller than that in the one side of the spacer fabric (4, 6) to be made convex.

Patentansprüche

1. Strickverfahren zum Stricken eines Abstandsgericks (2) mit einem vorderen Gestrück (4), einem hinteren Gestrück (6) und einem Verbindungsfaden (22, 24), der das vordere Gestrück (4) mit dem hinteren Gestrück (6) verbindet, unter Verwendung einer Strickmaschine mit wenigstens einem Paar von Nadelbetten (FB, BB), die jeweils eine Vielzahl von Nadeln (20) aufweisen, und einem Schlitten, wobei das Verfahren **gekennzeichnet ist durch**:

um das Abstandsgestrick (2) zu stricken, bei dem eine Seite des Abstandsgestricks (4, 6) konvex ist und die andere Seite flach ist oder beide vordere und hintere Gestricks (4, 6) alternierend Konvexitäten aufweisen:

einen Schritt (a) zum wiederholten Bilden von Fangmaschen mit dem Verbindungsfaden (22, 24) alternierend an Maschen in dem vorderen Gestrick (4), die an den Nadeln (20) hängen, und an Maschen in dem hinteren Gestrick (6), die an den Nadeln (20) hängen, sodass die Fangmaschen mit einem Abstand von einer Vielzahl von Maschen entlang der Nadelbetten (FB, BB) sowohl an dem vorderen Gestrick (4) als auch an dem hinteren Gestrick (6) gebildet werden, aber nicht an einander gegenüberliegenden Maschen gebildet werden, wobei die zu fangenden Maschen derart gewechselt werden, dass die Fangmaschen an jeder Masche des vorderen Gestricks (4) und des hinteren Gestricks (6) gebildet werden, einen Schritt (b) zum Stricken von folgenden Maschen mit einem Abstand von einer Vielzahl von Maschen an den Maschen des vorderen Gestricks (4), an dem die Fangmaschen gebildet wurden, und einen Schritt (c) zum Stricken von folgenden Maschen mit einem Abstand von einer Vielzahl von Maschen an den Maschen des hinteren Gestricks (6), an dem die Fangmaschen gebildet wurden, wobei die folgenden Maschen an jeder Masche des vorderen Gestricks (4) und des hinteren Gestricks (6) an den Maschen, an denen die Fangmaschen gebildet wurden, **durch** das Wiederholen des Schritts (b) und des Schritts (c) gebildet werden, während die Maschen für das Bilden der folgenden Maschen gewechselt werden, und in dem Schritt (b) und dem Schritt (c) die folgenden Maschen zuerst an dem Gestrick auf der flach vorzusehenden Seite gestrickt werden, und die folgenden Maschen zuletzt an den Fangmaschen in dem konvex vorzusehenden Gestrick gestrickt werden, die über den Verbindungsfaden (22, 24) mit den Fangmaschen, an denen die nächsten Maschen zuerst gestrickt wurden, verbunden werden.

2. Strickverfahren zum Stricken eines Abstandsgestricks (2) nach Anspruch 1, **dadurch gekennzeichnet, dass** ein glatter Teil und ein Rippenteil in dem Schritt (b) und dem Schritt (c) gebildet werden, um das vordere Gestrick (4) und das hintere Gestrick (6) an dem Rippenteil miteinander zu verbinden und

um das Abstandsgestrick (2) an dem ebenen Teil dicker und an dem Rippenteil dünner zu machen.

3. Strickverfahren zum Stricken eines Abstandsgestricks (2) nach Anspruch 2, **dadurch gekennzeichnet, dass** die glatten Teile und die Rippenteile jeweils an einer Vielzahl von Positionen in dem Schritt (b) und dem Schritt (c) gebildet werden, um das vordere Gestrick (4) und das hintere Gestrick (6) an der Vielzahl von Positionen miteinander zu verbinden, und die Positionen des Rippenteils entlang einer Maschenstäbchenrichtung des Abstandsgestricks (2) derart verschoben werden, dass die Positionen der Rippenteile schräg in Bezug auf die Maschenstäbchenrichtung angeordnet sind und einander kreuzen.
4. Strickverfahren zum Stricken eines Abstandsgestricks (2) nach einem der Ansprüche 1 bis 3, **dadurch gekennzeichnet, dass** die folgenden Schritte in jeder zweiten Masche in dem Schritt (b) und dem Schritt (c) gestrickt werden und, wenn der Schritt (b) und der Schritt (c) wiederholt werden, die folgenden Maschen zuletzt an den Fangmaschen gegenüber den zuerst gestrickten folgenden Maschen gestrickt werden.
5. Abstandsgestrick (2), das umfasst:

ein vorderes Gestrick (4),
ein hinteres Gestrick (6), und
einen Verbindungsfaden (22, 24), der das vordere Gestrick (4) mit dem hinteren Gestrick (6) verbindet,
wobei eine Seite des Abstandsgestricks (4, 6) konvex und die andere Seite flach ist oder beide vordere und hintere Gestricks (4, 6) alternierend Konvexitäten aufweisen,
dadurch gekennzeichnet, dass Fangmaschen mit dem Verbindungsfaden (22, 24) alternierend an Maschen des vorderen Gestricks (4) und an Maschen des hinteren Gestricks (6) gebildet werden, sodass die Fangmaschen mit einem Abstand von einer Vielzahl von Maschen an dem vorderen Gestrick (4) und dem hinteren Gestrick (6), aber nicht an einander gegenüberliegenden Maschen gebildet werden, wobei die zu fangenden Maschen derart gewechselt werden, dass die Fangmaschen an jeder Masche des vorderen Gestricks (4) und des hinteren Gestricks (6) gebildet werden, folgende Maschen mit einem Abstand von einer Vielzahl von Maschen an den Maschen des vorderen Gestricks (4), an denen die Fangmaschen gebildet wurden, gestrickt werden und die Maschen für das Bilden der folgenden Maschen derart gewechselt werden, dass die folgenden Maschen in einer Vielzahl von Reihen an jeder

Masche, an der die Fangmaschen in dem vorderen Gestrück (4) gebildet wurden, gestrickt werden,
 folgende Maschen mit einem Abstand von einer Vielzahl von Maschen an den Maschen des hinteren Gestrücks (6), an denen die Fangmaschen gebildet wurden, gestrickt werden, und die Maschen für das Bilden der folgenden Maschen derart gewechselt werden, dass die folgenden Maschen in einer Vielzahl von Reihen an jeder Masche, an der die Fangmaschen in dem hinteren Gestrück (6) gebildet wurden, gestrickt werden, und
 die folgenden Maschen zuerst auf der flach vorzusehenden anderen Seite des Abstandsgestrücks (6, 4) gestrickt werden, und die folgenden Maschen zuletzt an den Fangmaschen auf der konvex vorzusehenden einen Seite des Abstandsgestrücks (4, 6) gestrickt werden, die über die Verbindungsfaden (22, 24) mit den Fangmaschen, an denen die folgenden Maschen zuerst gestrickt werden, verbunden sind, wobei ein Intervall zwischen folgenden Maschen auf der flach vorzusehenden anderen Seite des Abstandsgestrücks (6, 4) kleiner vorgesehen ist als auf der konvex vorzusehenden einen Seite des Abstandsgestrücks (4, 6).

Revendications

1. Procédé de tricotage pour tricoter un tissu à double paroi (2) comportant un tissu tricoté avant (4), un tissu tricoté arrière (6) et un fil de connexion (22, 24) qui connecte le tissu tricoté avant (4) et le tissu tricoté arrière (6), en utilisant une machine à tricoter munie d'au moins deux fontures (FB, BB) comportant chacune une pluralité d'aiguilles (20), et d'un chariot, le procédé étant **caractérisé par**, afin de tricoter le tissu à double paroi (2) dans lequel un côté du tissu à double paroi (4, 6) est convexe et l'autre côté est plat, ou les deux tissus tricotés avant et arrière (4, 6) ont alternativement des convexités :

une étape (a) consistant à former de façon répétitive des mailles rentrées avec le fil de connexion (22, 24) alternativement sur des mailles dans le tissu tricoté avant (4) attrapées sur les aiguilles (20) et des mailles dans le tissu tricoté arrière (6) attrapées sur les aiguilles (20) de sorte que les mailles rentrées sont formées avec un pas de plusieurs mailles le long des fontures (FB, BB) à la fois sur le tissu tricoté avant (4) et sur le tissu tricoté arrière (6) mais ne sont pas formées sur des mailles mutuellement opposées, tout en changeant des mailles qui doivent être rentrées de sorte que les mailles rentrées sont formées sur chaque maille du tissu tricoté

avant (4) et du tissu tricoté arrière (6) ;
 une étape (b) consistant à tricoter des mailles suivantes avec un pas de plusieurs mailles sur les mailles du tissu tricoté avant (4) sur lesquelles les mailles rentrées ont été formées ; et
 une étape (c) consistant à tricoter des mailles suivantes avec un pas de plusieurs mailles sur les mailles du tissu tricoté arrière (6) sur lesquelles les mailles rentrées ont été formées ;

dans lequel les mailles suivantes sont tricotées sur chaque maille du tissu tricoté avant (4) et du tissu tricoté arrière (6) sur les mailles où les mailles rentrées ont été formées, en répétant l'étape (b) et l'étape (c), tout en changeant des mailles pour former les mailles suivantes, et
 dans l'étape (b) et l'étape (c), les mailles suivantes sont tricotées en premier sur le tissu tricoté du côté qui doit être fait plat, et les mailles suivantes sont tricotées en dernier sur les mailles rentrées dans le tissu tricoté qui doit être fait convexe, mailles qui sont connectées par l'intermédiaire du fil de connexion (22, 24) aux mailles rentrées sur lesquelles les mailles suivantes ont été tricotées en premier.

2. Procédé de tricotage pour tricoter un tissu à double paroi (2) selon la revendication 1, **caractérisé en ce qu'une** portion normale et une portion de côte sont formées dans l'étape (b) et l'étape (c), connectant ainsi le tissu tricoté avant (4) et le tissu tricoté arrière (6) entre eux au niveau de la portion de côte, et rendant le tissu à double paroi (2) plus épais au niveau de la portion normale et plus mince au niveau de la portion de côte.
3. Procédé de tricotage pour tricoter un tissu à double paroi (2) selon la revendication 2, **caractérisé en ce que** chacune des portions normales et des portions de côte est formée au niveau d'une pluralité de positions dans l'étape (b) et l'étape (c), connectant ainsi le tissu tricoté avant (4) et le tissu tricoté arrière (6) entre eux au niveau de la pluralité de positions, et en décalant les positions de la portion de côte le long d'une direction de colonnes de mailles du tissu à double paroi (2) de sorte que les positions des portions de côte sont agencées obliquement par rapport à la direction de colonnes de mailles et se croisent entre elles.
4. Procédé de tricotage pour tricoter un tissu à double paroi (2) selon l'une quelconque des revendications 1 à 3, **caractérisé en ce que** les mailles suivantes sont tricotées une maille sur deux à la fois dans l'étape (b) et l'étape (c), et, lors de la répétition de l'étape (b) et de l'étape (c), les mailles suivantes sont tricotées en dernier sur les mailles rentrées opposées aux mailles suivantes qui ont été tricotées en premier.

5. Tissu à double paroi (2), comprenant :

un tissu tricoté avant (4) ;
 un tissu tricoté arrière (6) ; et
 un fil de connexion (22, 24) qui connecte le tissu 5
 tricoté avant (4) et le tissu tricoté arrière (6) ;
 dans lequel un côté du tissu à double paroi (4,
 6) est convexe et l'autre côté est plat ou les deux
 tissus tricotés avant et arrière (4, 6) ont alterna- 10
 tivement des convexités,
caractérisé par des mailles rentrées formées
 avec le fil de connexion (22, 24) alternativement
 sur des mailles du tissu tricoté avant (4) et des
 mailles du tissu tricoté arrière (6), de sorte que 15
 les mailles rentrées sont formées avec un pas
 de plusieurs mailles à la fois sur le tissu tricoté
 avant (4) et sur le tissu tricoté arrière (6) mais
 ne sont pas formées sur des mailles mutuelle- 20
 ment opposées, alors que des mailles devant
 être rentrées sont changés de sorte que les
 mailles rentrées sont formées sur chaque maille
 du tissu tricoté avant (4) et du tissu tricoté arrière
 (6),
 des mailles suivantes tricotées avec un pas de 25
 plusieurs mailles sur les mailles du tissu tricoté
 avant (4) sur lesquelles les mailles rentrées ont
 été formées, et les mailles pour former les
 mailles suivantes sont changées, de sorte que
 les mailles suivantes sont tricotées dans une 30
 pluralité de courses sur chaque maille sur la-
 quelle les mailles rentrées ont été formées dans
 le tissu tricoté avant (4),
 des mailles suivantes tricotées avec un pas de
 plusieurs mailles sur les mailles du tissu tricoté 35
 arrière (6) sur lesquelles les mailles rentrées ont
 été formées, et les mailles pour former les
 mailles suivantes sont changées, de sorte que
 les mailles suivantes sont tricotées dans une
 pluralité de courses sur chaque maille sur la- 40
 quelle les mailles rentrées ont été formées dans
 le tissu tricoté arrière (6), et
 les mailles suivantes tricotées en premier sur
 l'autre côté du tissu à double paroi (6, 4) qui doit
 être fait plat, les mailles suivantes tricotées en 45
 dernier sur les mailles rentrées dans le premier
 côté du tissu tricoté (4, 6) qui doit être fait con-
 vexe, qui sont connectées par l'intermédiaire du
 fil de connexion (22, 24) aux mailles rentrées sur
 lesquelles les mailles suivantes sont tricotées 50
 en premier, et un intervalle entre les mailles sui-
 vantes dans l'autre côté du tissu à double paroi
 (6, 4) qui doit être fait plat est fait plus petit que
 celui dans le premier côté du tissu à double paroi
 (4, 6) qui doit être fait convexe. 55

FIG. 1

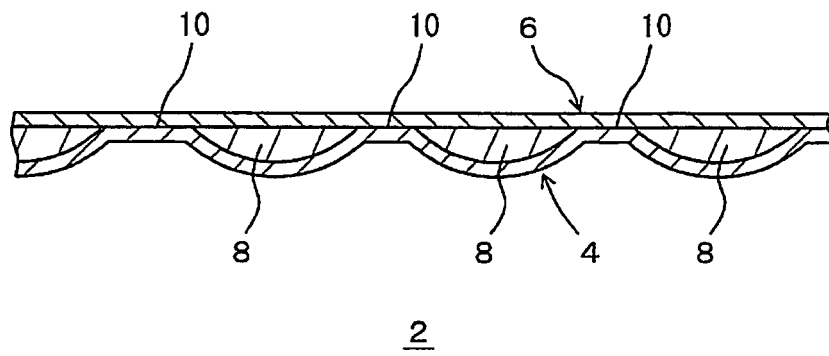


FIG. 2



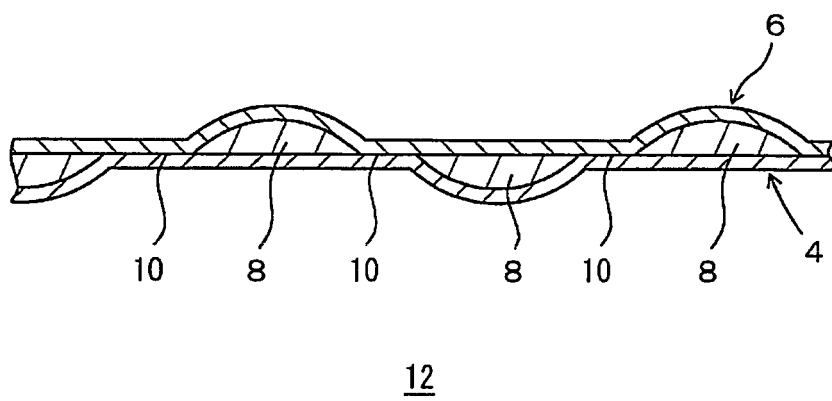


FIG. 3

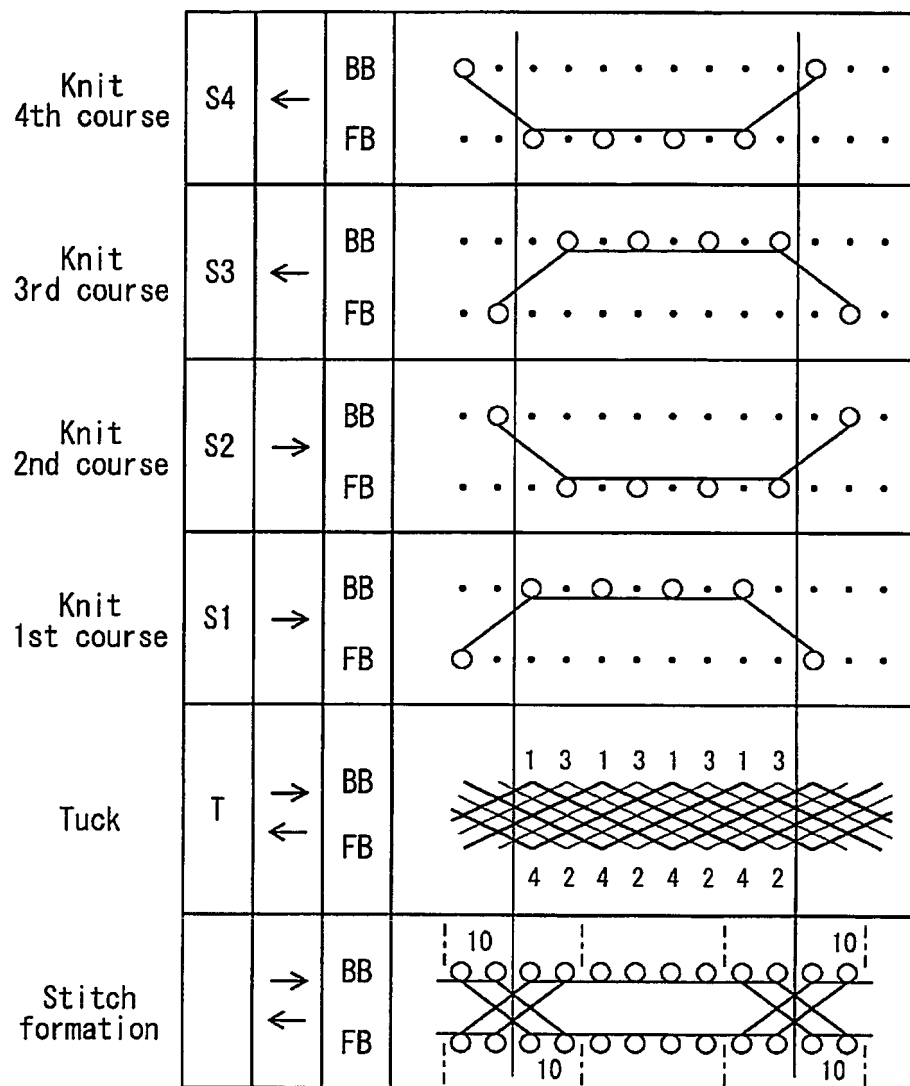

F I G. 4

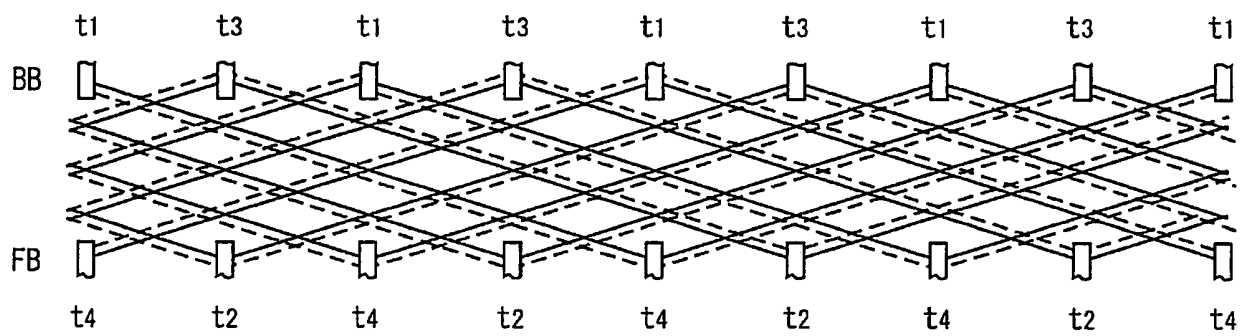

□ □ : 20 Needle

t1 ~ t4 : Tuck portion

— : 22 Connecting yarn

---- : 24 Connecting yarn

FIG. 5

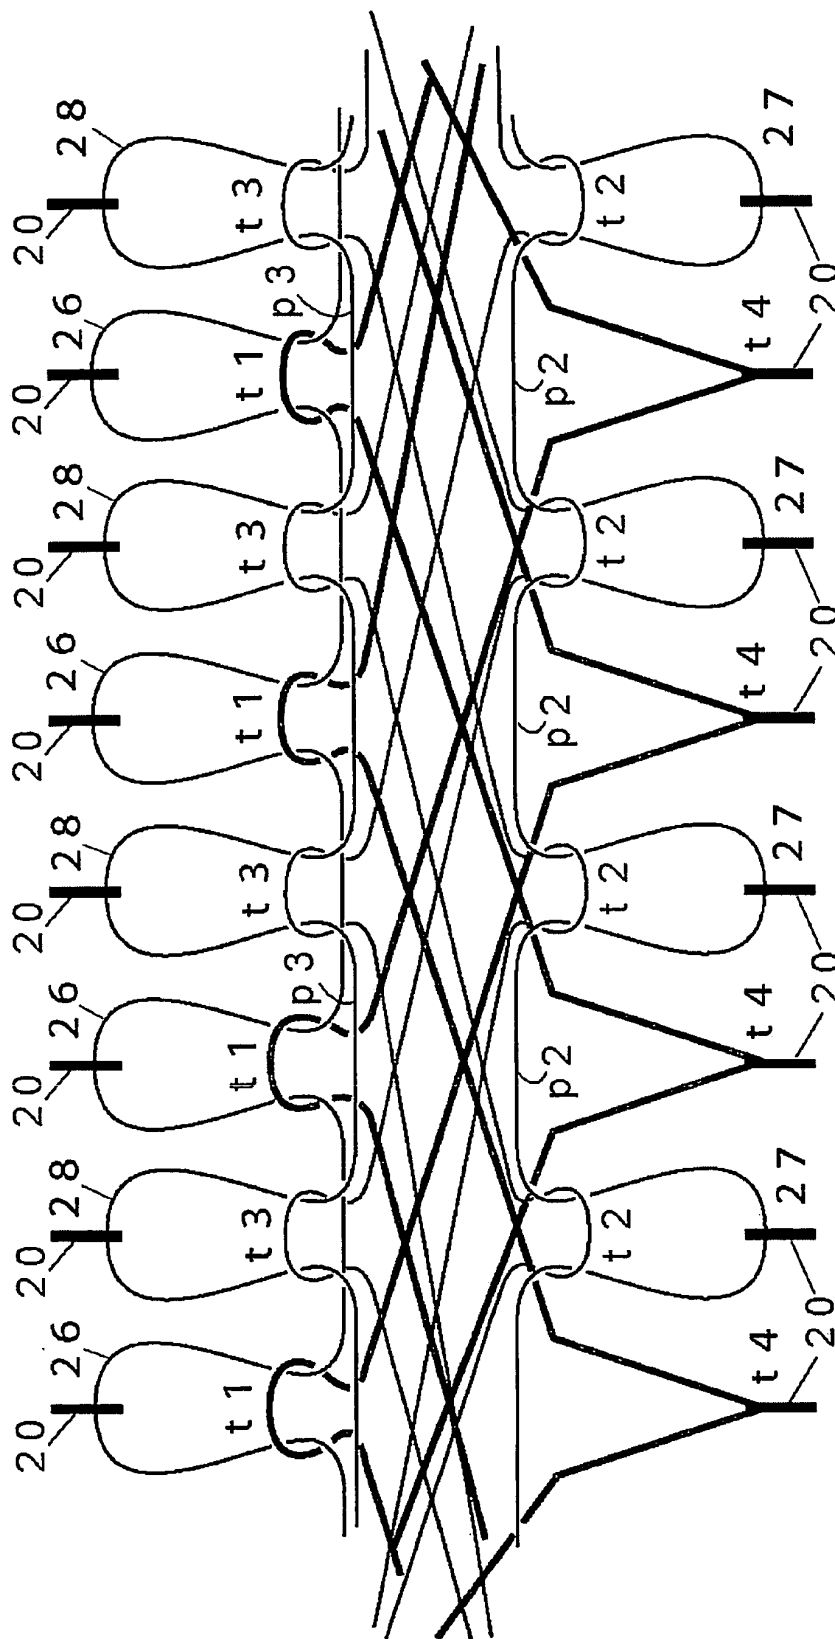


FIG. 6

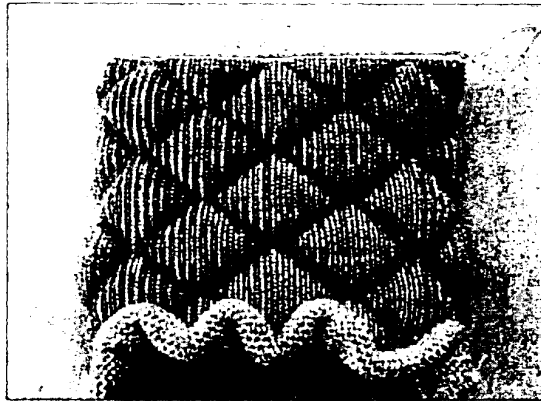


FIG. 7

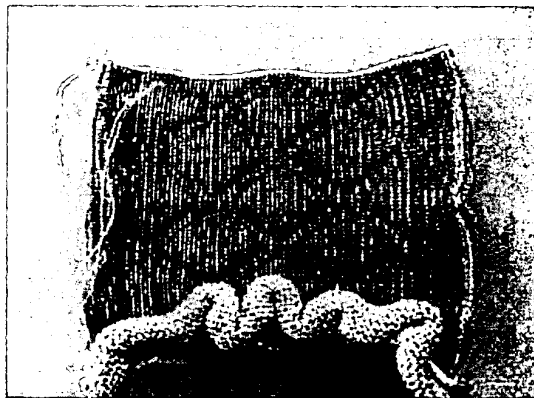


FIG. 8



FIG. 9

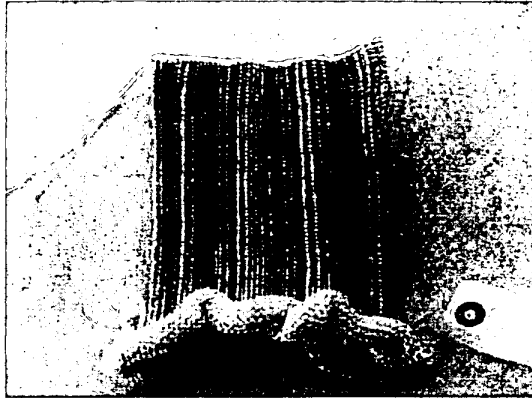


FIG. 10


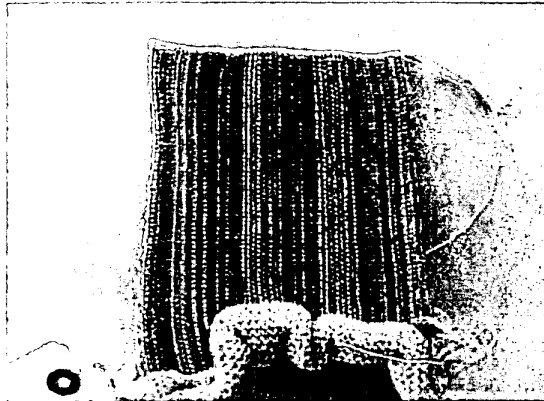


FIG. 11

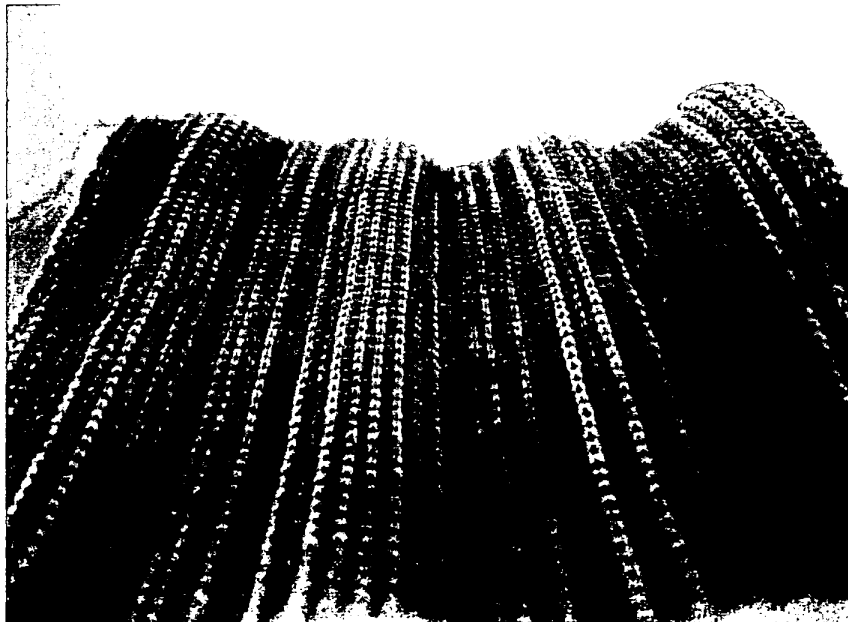

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2004107800 A [0002] [0003]
- JP 52108377 U [0002] [0003]
- EP 1915926 A1 [0004]
- WO 9213125 A1 [0005]