



(11) **EP 2 586 498 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
29.11.2017 Bulletin 2017/48

(51) Int Cl.:
A62C 13/00 (2006.01) A62C 13/64 (2006.01)

(21) Application number: **12190071.6**

(22) Date of filing: **25.10.2012**

(54) **Automatic fire extinguishing system with internal dip tube**

Automatisches Feuerlöschsystem mit internem Tauchrohr

Système d'extinction d'incendie automatique avec tube plongeur

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **25.10.2011 US 201113281199**

(43) Date of publication of application:
01.05.2013 Bulletin 2013/18

(73) Proprietor: **Kidde Technologies, Inc.
Wilson, NC 27896 (US)**

(72) Inventors:
• **Dunster, Robert G.**
Burnham, Slough, Berkshire SL1 6ER (GB)
• **Weller, Paul W.**
Cippenham, Berkshire SL1 5EG (GB)
• **Pallant, Robert**
Slough, Berkshire SL1 2HY (GB)

- **Clarence, Francis T.**
Egham, Surrey TW20 8EB (GB)
- **Porterfield, John W. Jr.**
Raleigh, NC 27616 (US)
- **MacLachlan, Daniel Ray**
Wilson, NC 27893 (US)

(74) Representative: **Taylor, Adam David et al**
Dehns
St Bride's House
10 Salisbury Square
London EC4Y 8JD (GB)

(56) References cited:
WO-A1-00/57959 CN-Y- 201 186 118
FR-A1- 2 888 124 GB-A- 365 277
US-A- 3 861 474 US-A- 5 845 716
US-A- 5 992 528

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 586 498 B1

Description

BACKGROUND OF THE INVENTION

[0001] The present invention relates to fire extinguishing systems, and more specifically, to systems and methods for an attitude insensitive high rate discharge extinguisher.

[0002] Automatic Fire Extinguishing (AFE) systems deploy after a fire or explosion event has been detected. In some cases, AFE systems are deployed within a confined space such as the crew compartment of a military vehicle following an event. AFE systems typically use high speed Infra red (IR) and/or ultra violet (UV) sensors to detect the early stages of fire/explosion development. The AFE systems typically include a cylinder filled with an extinguishing agent, a fast acting valve and a nozzle, which enables rapid and efficient deployment of agent throughout the confined space. Conventional AFE systems are mounted upright within the vehicle to enable the entire contents to be deployed effectively at the extremes of tilt, roll and temperature experienced within military vehicles, for example. In order to maintain system efficacy, the nozzles are located such that they can provide an even distribution of the agent within the vehicle. For these types of systems this requirement can be met by adding a hose at the valve outlet which extends to the desired location within the vehicle. Though effective this measure adds an extra level of system complexity and therefore cost.

[0003] Such conventional fire extinguishing systems are disclosed in US 5,992,528, WO 00/57959 A1, US3,861,474 and CN 201186118 Y. In all these systems, a dry powder fire suppression agent is stored in the canister.

[0004] Several solutions exist that resolve the problems of a suppressor that is required to be mounted upright. For example, a pipe type extinguisher design can be mounted at any orientation within a vehicle and still provides an efficacious discharge of extinguishing agent against a vehicle fire or explosion challenge. The extinguisher would also work were the vehicle to assume any orientation prior to or during the incident. Rapid desorption of dissolved nitrogen (or other inert gas) from the fire extinguishing agent(s) forming a two phase mixture (e.g., a foam or mousse) substantially fills the volume within the extinguisher and causes the discharge of agent from the valve assembly. The formation of this two-phase mixture enables the fire extinguishing agent to be adequately discharged regardless of the extinguisher orientation. However, current solutions including the pipe design do not fully address attitude insensitive needs of confined spaces that experience the extremes of tilt, roll and temperature experienced within military vehicles.

BRIEF DESCRIPTION OF THE INVENTION

[0005] According to the invention, there is provided An

automatic fire extinguishing system, comprising: a canister having a central axis; an outlet port disposed on the canister; a nozzle manifold and nozzle, wherein the outlet port is disposed between the canister and the nozzle manifold; a dip tube disposed in the canister about the central axis; an electric actuator coupled to the canister; a propellant gas mixture having a first propellant gas and a second propellant gas within the canister; a gaseous fire suppression agent disposed in the canister; and a dry powder fire suppression agent disposed in the dip tube, wherein the dry powder fire suppression agent is discharged at the early stages of the overall extinguisher discharge; characterised in that: the dip tube comprises: dip tube side holes; an inlet port having a number of inlet openings at the axial end of the dip tube remote from the outlet port, which are covered by a semi-permeable membrane; and an internal ring that is coupled to a central rod, which is disposed in the canister and the dip tube about the central axis; wherein the dip tube is in partial fluid communication via the semi-permeable membrane with the canister and is coupled to the outlet port; and the electric actuator after actuation is mechanically coupled to the central rod, wherein driving of the central rod causes shifting of the internal ring, which uncovers the internal ring from the dip tube side holes.

BRIEF DESCRIPTION OF THE DRAWINGS

[0006] The subject matter which is regarded as the invention is particularly pointed out and distinctly claimed in the claims at the conclusion of the specification. The foregoing and other features, and advantages of the invention are apparent from the following detailed description taken in conjunction with the accompanying drawings in which:

FIG. 1 is a view of an automatic fire extinguishing (AFE) system in accordance with one embodiment;

FIG. 2 is a close up perspective view of the AFE system of FIG. 1;

FIG. 3 is an internal view of the AFE system of FIG. 1;

FIG. 4 is a view of the AFE system of FIG. 1 in an open and fully activated state; and

FIG. 5 is a view of the AFE system of FIG. 1 system in an open and fully activated state.

DETAILED DESCRIPTION

[0007] The Figures illustrate an automatic fire extinguishing (AFE) system 100 in accordance with one embodiment. The system 100 is configured to rapidly disperse extinguishing agents within a confined space such as the crew compartment of a military vehicle following a fire or explosion event.

[0008] The system 100 includes a canister 105, which can be any suitable material such as stainless steel. The canister 105 is configured to receive both gaseous fire suppression agents and propellant gases (e.g., inert gases such as N₂). It can be appreciated that many conventional gaseous fire suppression agents are contemplated including but not limited to 1,1,1,2,3,3,3-heptafluoropropane (i.e., HFC-227ea (e.g., FM200®)), bromotrifluoromethane (i.e. BTM (e.g. Halon 1301)) and 1,1,1,2,2,4,5,5,5-nonafluoro-4-(trifluoromethyl)-3-pentanone (i.e., FK-5.1.12 (e.g., Novec 1230®)). In addition, the canister 105 includes other propellant gas components (e.g., CO₂) as further described herein. The pressure in the canister 105 can be monitored via a switch 106 from a source of the gases (i.e., fire suppression agent and propellant gas). The system 100 further includes any suitable nozzle manifold 110 and nozzle 115 for directing and releasing extinguishing agents and propellant gas into the confined space. The system 100 further includes a dip tube 120 disposed within the canister 105. The dip tube 120 is configured to be in fluid communication with the canister 105 and the nozzle manifold 110 as further described herein. The dip tube 120 includes an internal ring 125 that is coupled to a central rod 160, which is disposed in the canister 105 and the dip tube 120 about a central axis 101. The internal ring 125 has apertures through it as shown in FIGS. 2 and 5. The central rod 160 includes a stop 161 having a radius larger than a radius of the central rod 160. The dip tube 120 includes a number of dip tube side holes 130 disposed around a circumference of the dip tube 120. The internal ring 125 covers the dip tube side holes 130 when the system 100 is in a closed and non-activated state. The dip tube 120 further includes an inlet port 135 having a number of openings 136 at the axial end of the dip tube remote from an outlet port 111, which are covered by a semi-permeable membrane 137. In addition, the canister 105 is hermetically sealed from the external environment. In addition, the dip tube 120 and the central rod 160 freely allow contents of the canister 105 to move around via the semi-permeable membrane 137. The dip tube 120 further includes a lip 121 having a radius greater than a radius of the internal ring 125. As further described herein, the dip tube 120 includes further extinguishing agents such as a dry powder fire suppression agent. It can be appreciated that the dry powder fire suppression agent can include any conventional dry powder fire suppression agent including but not limited to potassium bicarbonate (i.e., KHCO₃ e.g. PurpleK™) and a sodium bicarbonate (i.e., NaHCO₃, e.g. KiddeX™) based extinguishing agent with additional silica to enhance the flow properties. It can be appreciated that the semi-permeable membrane 137 provides partial fluid and gaseous communication between the canister 105 and the dip tube 120. In this way, the dry powder extinguishing agent remains isolated within the dip tube 120. However, the propellant gases within the canister 105 can permeate the semi-permeable membrane 137 and keep the dip tube 120 pressurized

at the same or substantially the same pressure as the canister 105.

[0009] An outlet port 111 is disposed between the canister 105 and the nozzle manifold 110, and is coupled to the dip tube 120. A broad cutting head 165 is coupled to the central rod 160 and positioned adjacent a burst disc 170 and covers the outlet port 111 when the system 100 is in the closed and non-activated state. The burst disc 170 maintains hermetically sealed isolation between contents of the canister 105 including the dip tube 120, and the nozzle manifold 110. As such, the canister 105 remains pressurized with respect to the external environment. The system 100 further includes an electric actuator 150 coupled to the canister 105. The electric actuator 150 is configured to on actuation mechanically couple to the central rod 160 disposed in the canister 105 and the dip tube 120. A mechanical pin 151 is coupled between the electric actuator 150 and the central rod 160. A diaphragm 152 hermetically seals the canister 105 from the external environment so that the compressed gases within the canister 105 do not escape.

[0010] In one embodiment, once the system 100 detects a fire or explosion event as described herein, the electric actuator 150 is activated, which drives the mechanical pin 151 through the diaphragm 152. The mechanical pin 151 further drives the central rod 160. Driving of the central rod 160 causes shifting of the internal ring 125 because the internal ring 125 is coupled to the central rod 160. The shifting of the internal ring 125 uncovers the internal ring 125 from the dip tube side holes 130. In addition, the driving of the central rod 160 drives the broad cutting head 165 through the burst disc 170. The system 100 then becomes in an open and activated state. The driving of the central rod 160 is limited when the stop 161 contacts the inlet port 135. When the system 100 is in the open and fully activated state, the pressurized canister 105 releases the pressurized gases into the external environment. The pressure differential between the canister 105 and the external environment causes the semi-permeable membrane 137 to fold out of the way, thereby exposing the inlet openings 136. When the system 100 is in the open and activated state, the canister 105 and the dip tube 120 are in full fluid communication. The dry powder extinguishing agent, which is pressurized in the dip tube 120 by the propellant gases and isolated from the canister 105, is released to the external environment, followed by the remaining propellant gases and the gaseous extinguishing agent, from the canister 105. FIGS. 4 and 5 illustrate the AFE system 100 in the open and fully activated state.

[0011] As described herein, the inert propellant gases can include N₂. Although 62 bar(g) (900 psig) of nitrogen overpressure, for example, can provide sufficient suppression efficiency when the canister 105 is filled with a design concentration of gaseous fire suppression agents and dry powder fire suppression agents, suppression performance and mass of agents out of the canister 105 can suffer at lower operating temperatures and varying

attitudes of the canister 105. (e.g., the nozzle 115 facing upwards). In one embodiment, the overpressure of the N₂ can be increased above 62 bar(g) (900 psig). In addition, an additional propellant gas such as CO₂ is added to the N₂ propellant gas. By increasing the N₂ overpressure and by adding CO₂, the extinguishing performance and the total mass out of extinguishing agent are both enhanced. For example, a smaller scale experiment in a container partially filled with FM200® illustrated that 4.3 g (0.1 mole) of CO₂ is required to produce a 10 bar(g) overpressure. When the experiment was repeated with nitrogen only 0.7 g (0.025 mole) was added to achieve the same pressure. This result shows that CO₂ is significantly more soluble in FM200® than N₂. By analogy therefore the rate of desorption of CO₂ from FM200® is significantly greater than for N₂ during the discharge of a suppressor, such as the system 100. However, above certain limits CO₂ is known to be toxic to humans (i.e., the OSHA, NIOSH, and ACGIH occupational exposure standards are 0.5 vol% CO₂ averaged over a 40 hour week, 3 vol% average for a short-term (15 minute) exposure, and 4 vol% as the maximum instantaneous limit considered immediately dangerous to life and health). As such, in one embodiment, the system 100 includes an amount of CO₂ limited to give less than 2 vol% within the protected zone, which should cause no harmful effects to occupants for the short duration of these types of events. It can be appreciated that the addition of CO₂ within the N₂ propellant gas improves the rate of desorption of the pressurising gases from the bulk gaseous fire suppression agent. The violent reaction forms a two phase mixture (e.g., a foam or mousse) that substantially fills the volume of the canister 105 and allows agent to exit when the system 100 is in the open and activated state. This feature is the primary mechanism for releasing agent from the canister 105 and enhances the mass of agent discharged and suppression performance. In addition, by adding a portion of CO₂, the overall extinguishing performance (i.e. heat capacity) of the fire suppression agents is increased by a small amount. In one embodiment, since the CO₂ is more soluble in the gaseous fire suppression agent than N₂, the gaseous fire suppression agent is first added to the canister 105, followed by the CO₂, then the N₂. In one embodiment, up to 20 bar(g) (290 psig) of the CO₂ is added followed by the overpressure of up to 62 bar(g) (900 psig). Although the addition of CO₂ mixed with N₂ within the canister 105 filled with a combination of gaseous fire suppression agents and dry powder fire suppression agents has been described, it can be appreciated that other inert gases and volatile/vaporising liquid extinguishing agents (e.g. an extinguishing agent which contains a portion of liquid and gas when stored) is also contemplated in other embodiments. Some examples of other inert gases used to pressurise high rate discharge type extinguishers include but are not limited to helium, argon and Argonite®. It is possible that air could also be used as the pressurising gas. Other extinguishing agents can include but are not limited to

Halon 1301, Halon 1211, FE36, FE25, FE13 and PFC410 and Novec 1230.

[0012] In one embodiment, dimensions of the outlet port 111 can be varied. In the confined spaces described herein, certain parameters are set in order to meet requirements of the confined space. For example, the addition of CO₂ and increase in charge pressure as described herein results in enhanced suppression performance and a higher mass of agent discharged. However, certain limits of the confined space (e.g., peak sound levels tolerable by humans) can be surpassed. In one embodiment, the diameter of the outlet port 111 can be adjusted while maintaining suppression performance. For example, when the canister 105 is filled with a recommended design amount of gaseous fire suppression agent and dry powder fire suppression agent, and partially pressurised to 15 bar(g) (218 psig) with CO₂ and then fully pressurised to 76 bar(g) (1100 psig) with N₂, adequate suppression capabilities are met with an outlet port 111 size of 38 - 40 mm. If the outlet port was smaller then the agent mass flow rate and therefore suppression performance fell below acceptable limits. If the outlet port size is larger, one or more of the confined space limits would be overcome (i.e. suppressor became too loud or too much impact force from the extinguishing agent). In one embodiment, a relationship between the outlet port 111 size and the gaseous and dry powder fire suppression agents can vary. For example, for a 62 bar(g) (900 psig), filled with N₂ only, a sufficient outlet port 111 size is 50 - 55 mm diameter. This relationship can change depending on the extinguishing agents and pressurising gases used plus the overpressure used. In one embodiment, the system 100 is a high rate discharge (HRD) type extinguisher that implements inert propelling gas as the primary mechanism for discharging the agent from the canister 105.

[0013] As described herein, the canister 105 includes a gaseous fire suppression agent and propellant gases. In addition, the dip tube 120 includes a dry powder fire suppression agent. In this way, the dip tube 120 ensures delivery of a dry powder fire suppression agent at the early stages of the discharge regardless of the orientation of the system 100, thereby providing the attitude insensitive features of the system 100. As shown in FIGS. 1-3, the dip tube 120 holds the dry powder fire suppression agent close to the outlet port 111 regardless of the orientation (i.e., attitude) of the system 100. As described herein, the semi-permeable membrane 137 enables the mixture of the propellant gases (e.g., the CO₂ and the N₂) as well as the gaseous fire suppression agent to form within the interstices of the dry powder fire suppression agent structure. When the system is placed into its open and activated state, the dry powder fire suppression agent is discharged at the early stages of the overall extinguisher discharge. The fact that this dry powder fire suppression agent reaches an expanding fireball in the early stages has been shown to both improve extinguishing performance and reduce the quantity of acid gas gen-

erated. As described herein, the dry powder fire suppression agent can include any conventional dry powder fire suppression agent, as long as it is chemically compatible with all the other agents within the container, including but not limited to potassium bicarbonate (i.e., KHCO_3 , e.g. Purple K™) and a sodium bicarbonate (i.e., NaHCO_3 , e.g. KiddeX™) based extinguishing agent with additional silica to enhance the flow properties.

[0014] As described herein, in one embodiment, the dip tube 120 can be customized to provide adequate attitude insensitive delivery of the gaseous fire suppression agent and the dry powder fire suppression agent, which can be a particular issue in cold storage conditions. As described herein, the dip tube 120 includes a series of dip tube side holes 130 as well as inlet openings 136. The dip tube side holes 130 are adjacent the inlet port 135 and the inlet openings 136. In one embodiment, by altering the ratio of areas between the inlet port 135 (via the inlet openings 136) and dip tube side holes 130 relative to the outlet port 111 of the canister 105, the discharge characteristics can be adjusted to provide very similar properties regardless of attitude or operating temperature. The adjustments also maintain adequate suppression performance and meet confined space requirements. Examples of the dip tube 120 design are based around an outlet port 111 diameter of 40 mm. For example, the area of the inlet openings 136 is 100% of the area of the outlet port 111, and the area of the dip tube side holes 130 is further 50% of the area of the outlet port 111. In another example, the area of the inlet openings 136 is 50% of the outlet port 111 and the area of the dip tube side holes 130 is 100% of the area of the outlet port 111. In both examples, the sum of the areas of the inlet openings 136 and area of the dip tube side holes 130 is 150% of the area of the outlet port 111. It can be appreciated that were the dip tube 120 to include no dip tube side holes 130, an initial discharge of the dry powder fire suppression agent and a slug of the gaseous fire suppression agent, which changes from a liquefied state to gaseous upon discharge, would result in a reduction in the mass flow rate and density of agent from the outlet port 111 whilst the gaseous fire suppression agent still would be forming into a two phase solution within the canister 105. By including a dip tube with side holes 130 and controlling the relative proportions of the areas within the dip tube 120 design, the time taken to discharge agent from the canister 105 with two-phase agent is reduced. As a result after the initial discharge of dry chemical from the canister 120 an enhanced mass flow rate of gaseous extinguishing agent is maintained whilst the gaseous fire suppression agent still is forming into a two phase solution within the canister 105. This less restrictive path of flow maximises the mass out of extinguishing agent per unit of pressure decay during the discharge. As such, a high degree of attitude insensitivity is displayed by the system 100 even at the lower operating temperatures.

[0015] While the invention has been described in detail in connection with only a limited number of embodiments,

it should be readily understood that the invention is not limited to such disclosed embodiments. Rather, the invention can be modified to incorporate any number of variations, alterations, substitutions or equivalent arrangements not heretofore described, but which are commensurate with the scope of the invention. Additionally, while various embodiments of the invention have been described, it is to be understood that aspects of the invention may include only some of the described embodiments. Accordingly, the invention is not to be seen as limited by the foregoing description, but is only limited by the scope of the appended claims.

15 Claims

1. An automatic fire extinguishing system (100), comprising:

a canister (105) having a central axis (101);
 an outlet port (111) disposed on the canister;
 a nozzle manifold (110) and nozzle (115), wherein the outlet port is disposed between the canister and the nozzle manifold;
 a dip tube (120) disposed in the canister about the central axis;
 an electric actuator (150) coupled to the canister;
 a propellant gas mixture having a first propellant gas and a second propellant gas within the canister;
 a gaseous fire suppression agent disposed in the canister; and
 a dry powder fire suppression agent disposed in the dip tube, wherein the dry powder fire suppression agent is discharged at the early stages of the overall extinguisher discharge;

characterised in that:

the dip tube comprises:

dip tube side holes (130);
 an inlet port (135) having a number of inlet openings (136) at the axial end of the dip tube remote from the outlet port, which are covered by a semi-permeable membrane (137); and
 an internal ring (125) that is coupled to a central rod (160), which is disposed in the canister and the dip tube about the central axis;

wherein the dip tube is in partial fluid communication via the semi-permeable membrane with the canister and is coupled to the outlet port; and

the electric actuator after actuation is mechanically coupled to the central rod, where-

in driving of the central rod causes shifting of the internal ring, which uncovers the internal ring from the dip tube side holes.

2. The system as claimed in Claim 1 wherein a sum of an area of the dip tube side holes and an area of the inlet openings is 150% of an area of the outlet port. 5
3. The system as claimed in Claim 1 or 2 wherein an area of the dip tube side holes is 100% of an area of the outlet port and an area of the inlet openings is 50% of the area of the outlet port. 10
4. The system as claimed in Claim 1 or 2 wherein an area of the dip tube side holes is 50% of an area of the outlet port and an area of the inlet openings is 100% of the area of the outlet port. 15
5. The system as claimed in any preceding Claim further comprising: 20
 - a broad head cutter (165) disposed on the central rod; and
 - a burst disc (170) disposed in the outlet port and adjacent the broad head cutter. 25
6. The system as claimed in any preceding Claim wherein the first propellant gas and the second propellant gas are CO₂ and N₂. 30

Patentansprüche

1. Automatisches Feuerlöschsystem (100), umfassend: 35
 - einen Kanister (105) mit einer Mittelachse (101);
 - eine Auslassöffnung (111), die am Kanister angeordnet ist;
 - einen Düsenverteiler (110) und eine Düse (115), 40
 - wobei die Auslassmündung zwischen dem Kanister und dem Düsenverteiler angeordnet ist;
 - ein Tauchrohr (120), das im Kanister um die Mittelachse herum angeordnet ist;
 - ein elektrisches Stellglied (150), das an den Kanister gekoppelt ist; 45
 - ein Treibgasgemisch mit einem ersten Treibgas und einem zweiten Treibgas in dem Kanister;
 - ein gasförmiges Feuerbekämpfungsmittel, das im Kanister angeordnet ist; und 50
 - ein Trockenpulverfeuerbekämpfungsmittel, das im Tauchrohr angeordnet ist,
 - wobei das Trockenpulverfeuerbekämpfungsmittel in den frühen Stufen der Löschmittelabgabe insgesamt abgegeben wird; 55
 - dadurch gekennzeichnet, dass:**

das Tauchrohr Folgendes umfasst:

Tauchrohrseitenlöcher (130);
eine Einlassmündung (135) mit einer Anzahl von Einlassöffnungen (136) am axialen Ende des Tauchrohrs entfernt von der Auslassmündung aufweist, die mit einer semipermeablen Membran (137) bedeckt sind; und
einen internen Ring (125), der an eine Mittelstange (160) gekoppelt ist, die im Kanister und im Tauchrohr um die Mittelachse herum angeordnet ist;

wobei das Tauchrohr über die semipermeable Membran mit dem Kanister in Teilfluidverbindung steht und an die Auslassmündung gekoppelt ist; und
das elektrische Stellglied nach der Betätigung mechanisch an die Mittelstange gekoppelt ist, wobei das Antreiben der Mittelstange ein Verlagern des internen Rings bewirkt, was den internen Ring von den Tauchrohrseitenlöchern entfernt.

2. System nach Anspruch 1, wobei eine Summe einer Fläche der Tauchrohrseitenlöcher und einer Fläche der Einlassöffnungen 150 % einer Fläche der Auslassmündung beträgt.
3. System nach Anspruch 1 oder 2, wobei eine Fläche der Tauchrohrseitenlöcher 100 % einer Fläche der Auslassmündung beträgt und eine Fläche der Einlassöffnungen 50 % der Fläche der Auslassmündung beträgt.
4. System nach Anspruch 1 oder 2, wobei eine Fläche der Tauchrohrseitenlöcher 50 % einer Fläche der Auslassmündung beträgt und eine Fläche der Einlassöffnungen 100 % der Fläche der Auslassmündung beträgt.
5. System nach einem der vorangehenden Ansprüche, ferner umfassend:
 - eine Breitkopfschneide (165), die an der Mittelstange angeordnet ist; und
 - eine Berstscheibe (170), die in der Auslassmündung und benachbart zu der Breitkopfschneide angeordnet ist.
6. System nach einem der vorangehenden Ansprüche, wobei das erste Treibgas und das zweite Treibgas CO₂ und N₂ sind.

Revendications

1. Système d'extinction d'incendie automatique (100), comprenant :

une cartouche (105) ayant un axe central (101) ;
 un orifice de sortie (111) disposé sur la cartouche ;
 un collecteur de buse (110) et une buse (115), dans lequel l'orifice de sortie est disposé entre la cartouche et le collecteur de buse ;
 un tube plongeur (120) disposé dans la cartouche autour de l'axe central ;
 un actionneur électrique (150) couplé à la cartouche ;
 un mélange de gaz propulseur ayant un premier gaz propulseur et un second gaz propulseur à l'intérieur de la cartouche ;
 un agent de suppression d'incendie gazeux disposé dans la cartouche ; et
 un agent de suppression d'incendie à poudre sèche disposé dans le tube plongeur, dans lequel l'agent de suppression d'incendie à poudre sèche est déchargé aux premiers stades de la décharge de l'extincteur globale ;
caractérisé en ce que :

le tube plongeur comprend :

des trous latéraux de tube plongeur (130) ;
 un orifice d'entrée (135) ayant un certain nombre d'ouvertures d'entrée (136) au niveau de l'extrémité axiale du tube plongeur à distance de l'orifice de sortie, qui sont recouvertes d'une membrane semi-perméable (137) ; et
 un anneau interne (125) qui est couplé à une tige centrale (160), qui est disposée dans la cartouche et le tube plongeur autour de l'axe central ;

dans lequel le tube plongeur est en communication fluidique partielle par l'intermédiaire de la membrane semi-perméable avec la cartouche et est couplé à l'orifice de sortie ;
 et
 l'actionneur électrique, après l'actionnement, est mécaniquement couplé à la tige centrale, dans lequel l'entraînement de la tige centrale provoque le déplacement de l'anneau interne, qui découvre l'anneau interne à partir des trous latéraux de tube plongeur.

2. Système selon la revendication 1 dans lequel une somme d'une zone des trous latéraux de tube plongeur et d'une zone des ouvertures d'entrée constitue 150 % d'une zone de l'orifice de sortie.

3. Système selon la revendication 1 ou 2 dans lequel une zone des trous latéraux de tube plongeur constitue 100 % d'une zone de l'orifice de sortie et une

zone des ouvertures d'entrée constitue 50 % de la zone de l'orifice de sortie.

4. Système selon la revendication 1 ou 2 dans lequel une zone des trous latéraux de tube plongeur constitue 50 % d'une zone de l'orifice de sortie et une zone des ouvertures d'entrée constitue 100 % de la zone de l'orifice de sortie.

5. Système selon une quelconque revendication précédente comprenant en outre :

un dispositif de coupe à tête large (165) disposé sur la tige centrale ; et
 un disque d'éclatement (170) disposé dans l'orifice de sortie et adjacent au dispositif de coupe à tête large.

6. Système selon une quelconque revendication précédente dans lequel le premier gaz propulseur et le second gaz propulseur sont le CO₂ et le N₂.

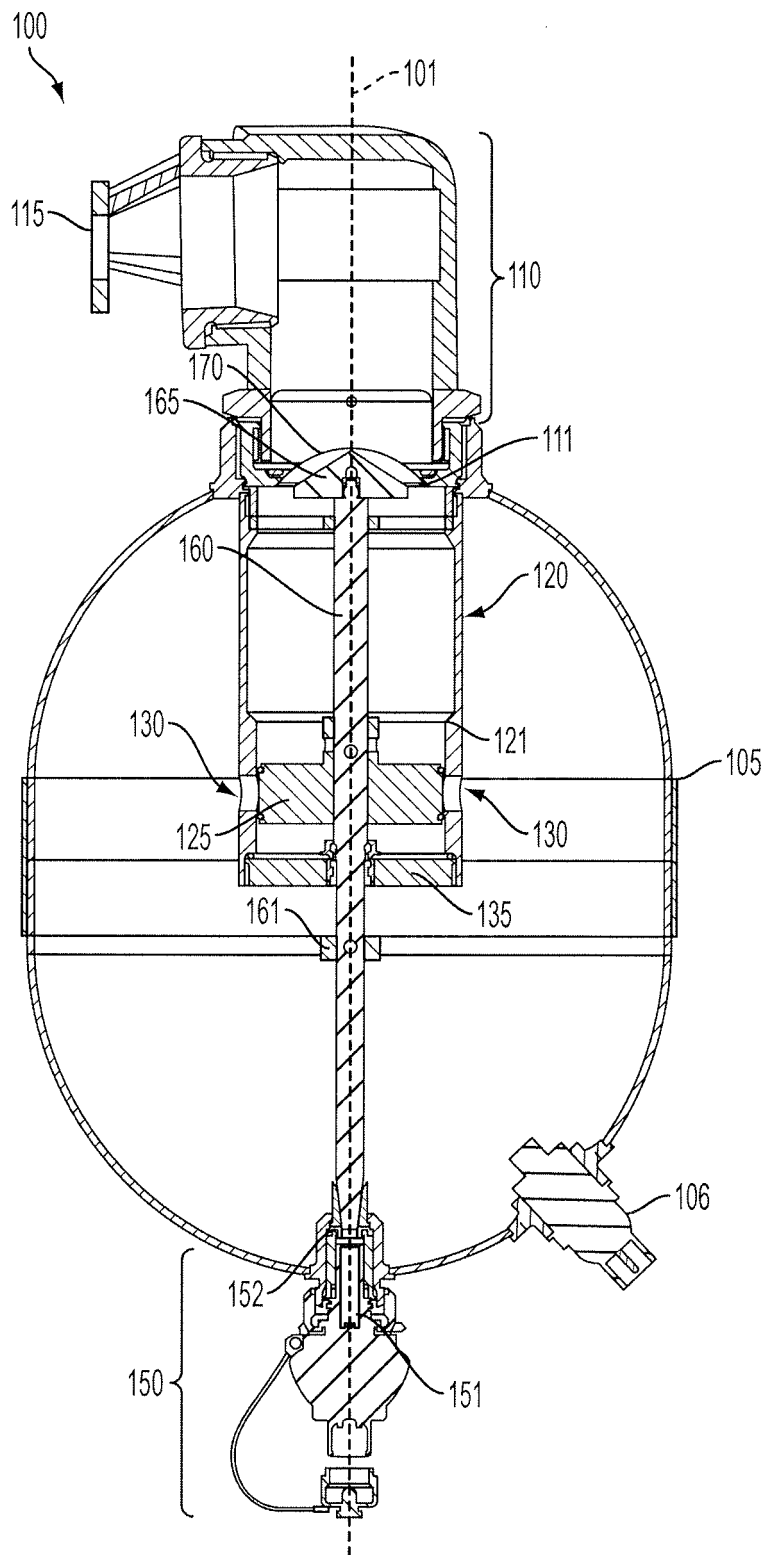


FIG. 1

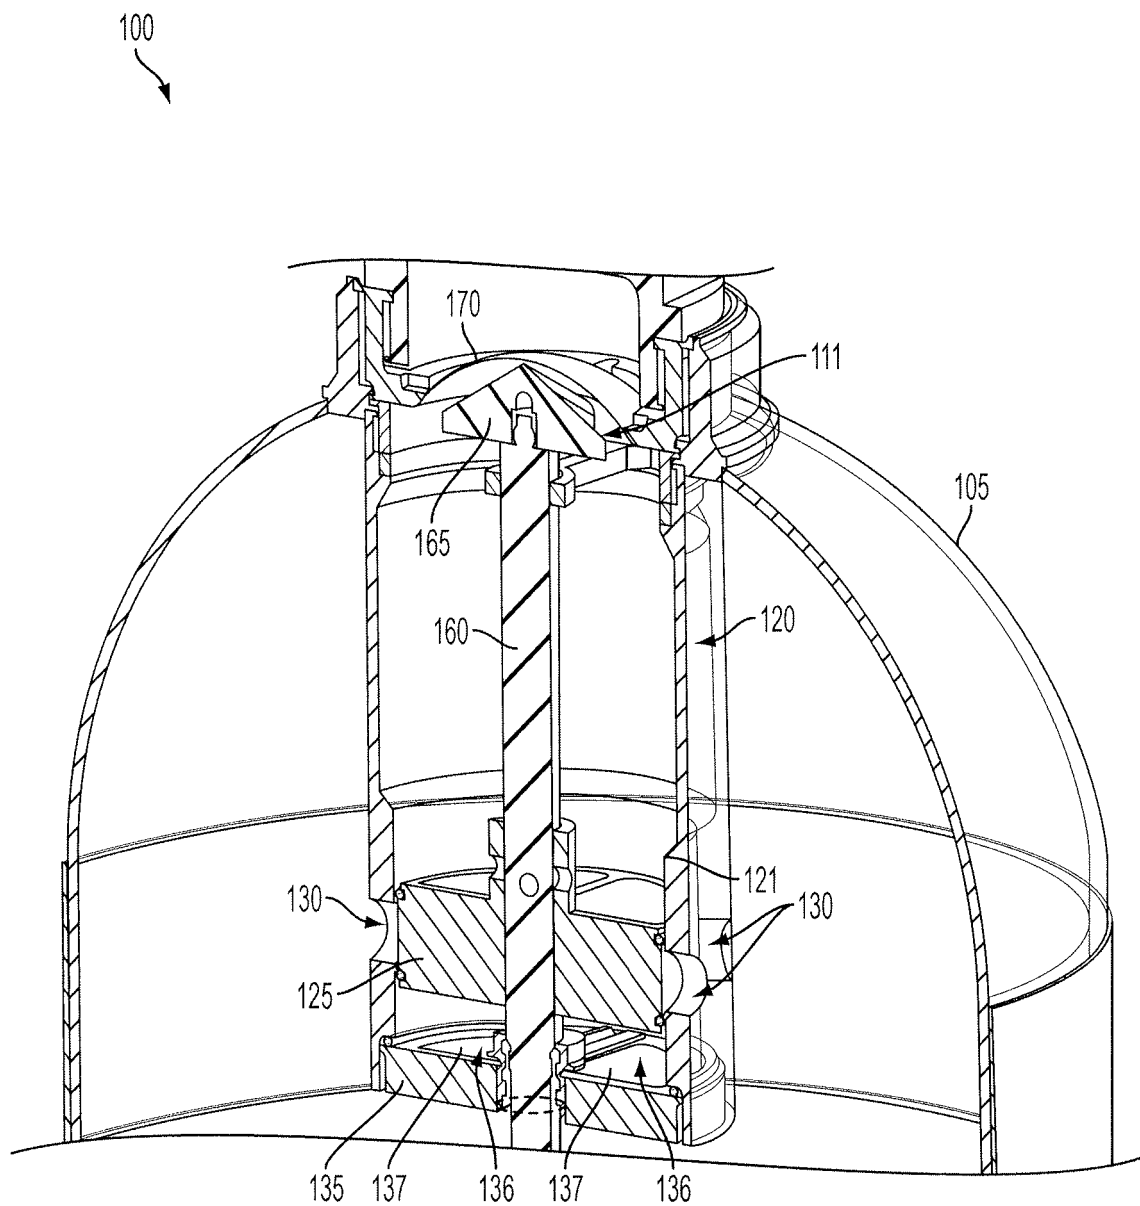


FIG. 2

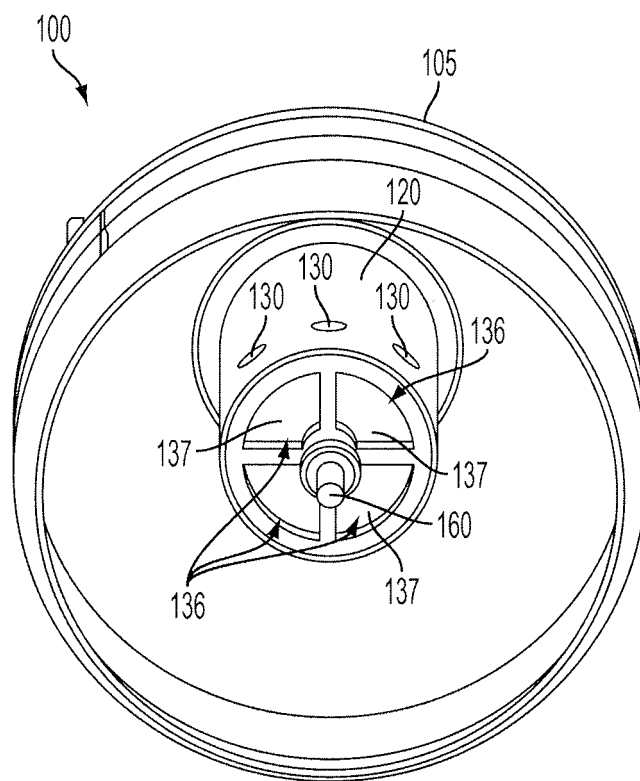


FIG. 3

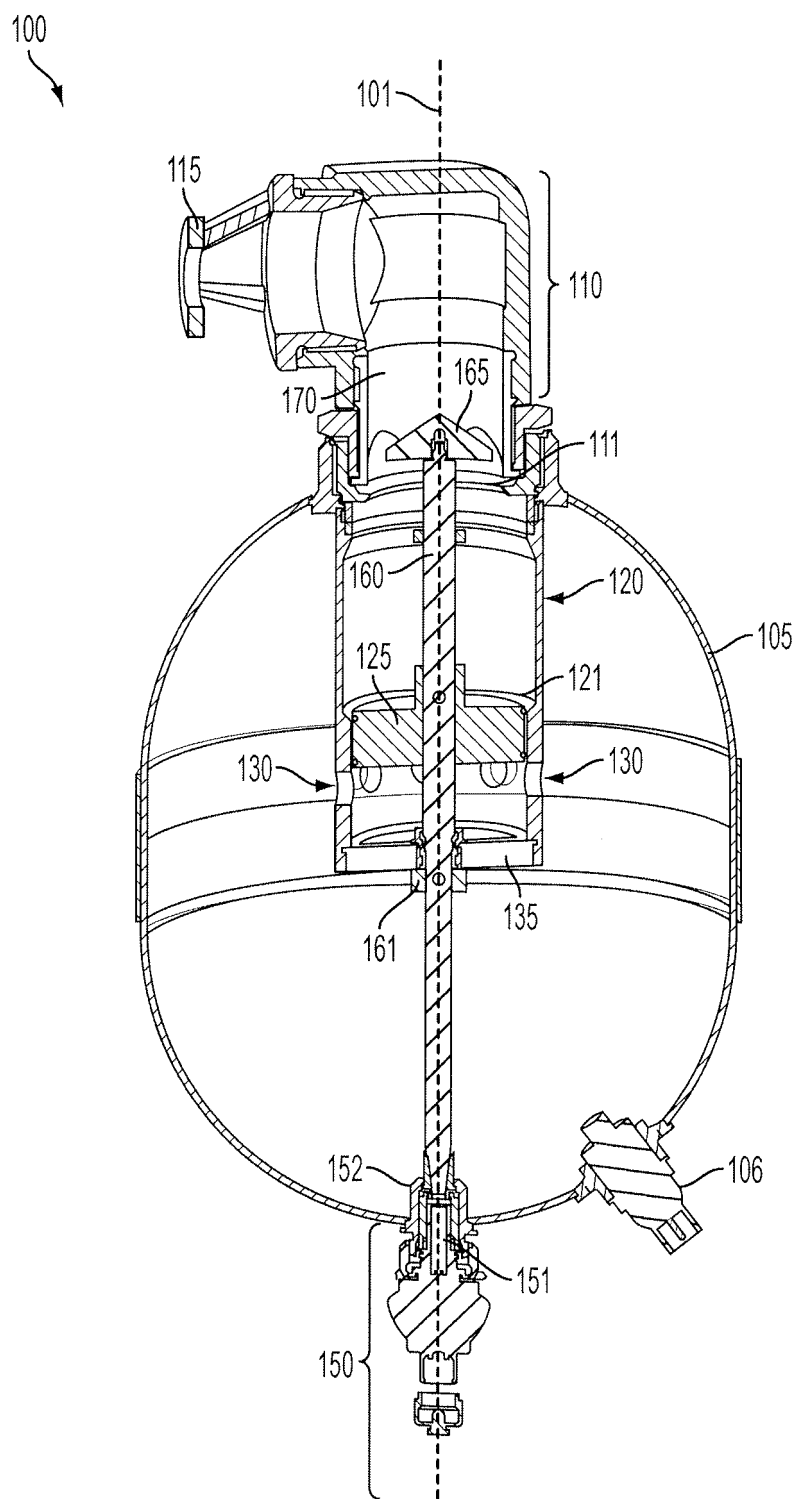


FIG. 4

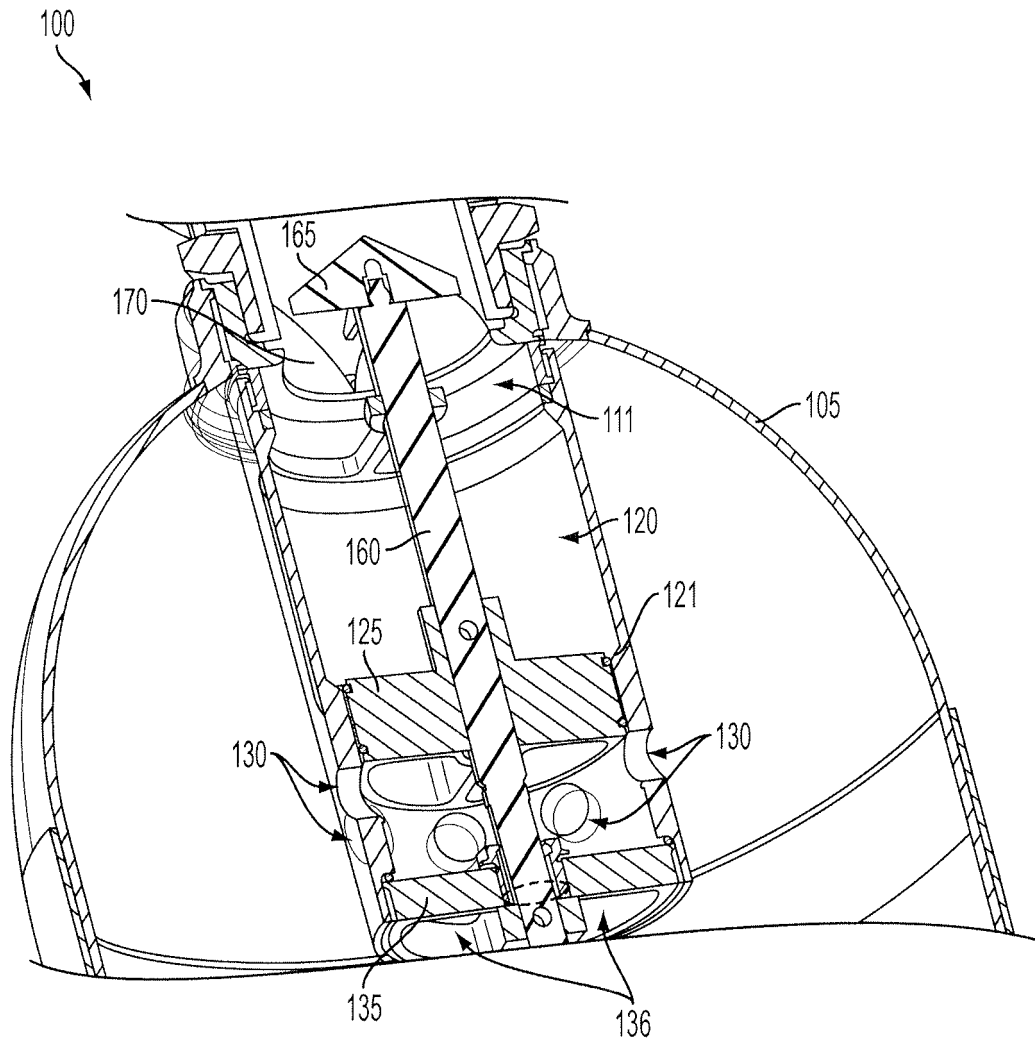


FIG. 5

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5992528 A [0003]
- WO 0057959 A1 [0003]
- US 3861474 A [0003]
- CN 201186118 Y [0003]