



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
29.05.2013 Bulletin 2013/22

(51) Int Cl.:
F25J 3/02 (2006.01)

(21) Application number: **11190285.4**

(22) Date of filing: **23.11.2011**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME

- **Ogedengbe, Temitope Olaniyi**
2288 GK Rijswijk (NL)
- **Vink, Kornelis Jan**
Kuala Lumpur 50490 (MY)

(71) Applicant: **Shell Internationale Research Maatschappij B.V.**
2596 HR The Hague (NL)

(74) Representative: **Matthezing, Robert Maarten**
Shell Internationale Research Maatschappij B.V.
Intellectual Property Services
P.O. Box 384
2501 CJ The Hague (NL)

(72) Inventors:
• **van Amelsvoort, Jan**
2288 GK Rijswijk (NL)

(54) **Method and apparatus for preparing a lean methane-containing gas stream**

(57) A hydrocarbon feed stream is passed to an extraction column. A recycle portion of the liquid bottom stream withdrawn from the extraction column is recycled back into the extraction column, whereby the recycle portion enters the extraction column in liquid phase. The

recycle portion has the same composition as the liquid bottom stream being withdrawn from the extraction column. A vaporous overhead stream is withdrawn from the extraction column, from which a lean methane-containing gas stream is produced.

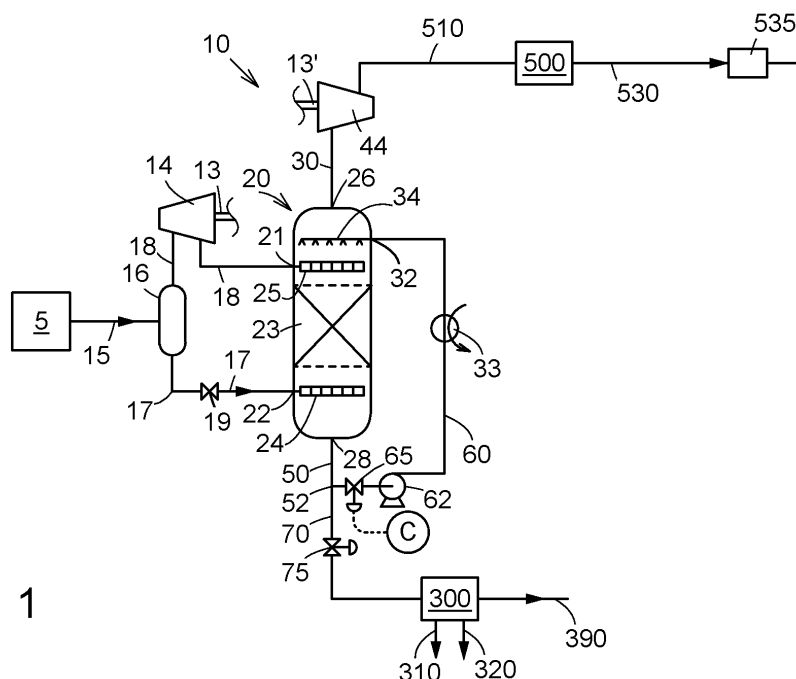


FIG. 1

Description

[0001] The present invention relates to a method and apparatus for preparing a lean methane-containing gas stream. At least part of the lean methane-containing gas may subsequently be subjected to full condensation and subcooling, to provide a liquefied methane-containing stream.

[0002] An important example of a methane-containing gas is natural gas. Natural gas, and other methane-containing gases, may in addition to methane ("C₁") contain amounts of hydrocarbons heavier than methane ("C₂+"; sometimes referred to as "higher hydrocarbons"), including ethane ("C₂"), propane ("C₃"), butanes ("C₄"), and hydrocarbons heavier than butanes ("C₅+"), such as pentanes ("C₅") and higher. Various hydrocarbons heavier than methane may be extracted from the methane-containing gas to various degrees. The resulting gas is referred to as lean methane-containing gas stream, which means that the content of hydrocarbons heavier than methane in the gas stream is lower than in the methane-containing gas prior to said extracting.

[0003] The resulting lean methane-containing gas may be employed in various ways, including sending to a pipeline or gas network, for instance to be sold as sales gas, e.g. in the form of domestic gas, and liquefying. When liquefied, the methane-containing gas stream can be transported and sold in the form of Liquefied Natural Gas (LNG).

[0004] The heavier hydrocarbons are usually extracted in condensed form as natural gas liquids, and fractionated to yield valuable hydrocarbon products.

[0005] US patent application publication 2006/0260355 describes a process and apparatus for integrated natural gas liquids (NGL) recovery and liquefied natural gas production. An admixture of methane with ethane and higher hydrocarbons is separated in a scrub column into a methane-rich overhead stream and a liquid methane-depleted bottom liquid. The methane-rich overhead stream is partially condensed to provide reflux to the scrub column. Additional reflux is derived from an ethane-enriched stream from fractionation of the bottoms liquid. Absorber liquid containing C₄ and/or C₅ from the fractionation may also be introduced into the scrub column. Such absorber liquid, sometimes referred to as "lean oil", functions as a washing liquid that helps to improve NGL recovery. The vapour fraction remaining after partial condensation can be liquefied to provide an LNG product.

[0006] A drawback of the process and apparatus described in this US patent application publication is that it requires a fractionation train to be operative. Moreover, lean oil pumps (or LPG pumps) need to be operative in order to enable the absorber liquids to be reinjected at a high gravitational level in the scrub column.

[0007] In a first aspect, the present invention provides a method of preparing a lean methane-containing gas stream, comprising:

- feeding a hydrocarbon feed stream, containing methane and one or more C₂+ hydrocarbons, into an extraction column at a first feeding position at an actual feed rate;
- withdrawing from the extraction column a vaporous overhead stream;
- producing a lean methane-containing gas stream from said vaporous overhead stream;
- withdrawing from the extraction column a liquid bottom stream, from a first withdrawal level being gravitationally lower than the first feeding position;
- recycling a recycle portion, being a portion of the liquid bottom stream, into the extraction column whereby said recycle portion enters the extraction column in liquid phase, which recycle portion has the same composition as the liquid bottom stream being withdrawn from the extraction column.

[0008] In another aspect, the present invention provides an apparatus for preparing a lean methane-containing gas stream, comprising:

- an extraction column comprising a first feeding inlet located in a first feeding position, an overhead vapour outlet for discharging a vaporous overhead stream containing the lean methane-containing gas stream, and a liquid bottom stream outlet located at a first withdrawal level, said first withdrawal level being gravitationally lower than the first feeding position, and said first feeding inlet fluidly connected to a feed supply of a hydrocarbon feed stream;
- a flow control system arranged to control an actual feed rate of the hydrocarbon feed stream flowing into the extraction column;
- a liquid bottom stream recycling line connected to the liquid bottom stream outlet for allowing recycling of a recycle portion of the liquid bottom stream in liquid phase, which recycle portion has the same composition as the liquid bottom stream being withdrawn from the extraction column.

[0009] The present invention will now be further illustrated by way of example, and with reference to the accompanying non-limiting drawings, in which:

Figure 1 schematically shows a process line up for preparing a lean methane-containing gas stream wherein a first

embodiment of the invention is employed;

Figure 2 schematically shows a process line up for preparing a lean methane-containing gas stream wherein a second embodiment of the invention is employed;

Figure 3 schematically shows a process line up for preparing a lean methane-containing gas stream wherein a third embodiment of the invention is employed.

[0010] For the purpose of this description, a single reference number will be assigned to a line as well as a stream carried in that line. The same reference numbers refer to similar components, streams or lines.

[0011] In the methods and apparatus disclosed herein, a portion of the liquid bottom stream is recycled, along a recycle path, back into the extraction column in liquid phase. The amount of the liquid bottom stream comprised in the recycle portion is more than zero, expressed as a fraction of the liquid bottom stream being withdrawn from the extraction column. This portion has the same composition as the liquid bottom stream being withdrawn from the extraction column, including ethane, but it surprisingly helps to improve recovery of ethane from the hydrocarbon feed.

[0012] As a result, the ethane recovery is improved without the need for the fractionation system. Since the recycle portion has the same composition as the liquid bottom stream from the extraction column, fractionation of the bottom stream can be dispensed with in the context of the present invention, or applied only to a remaining residue portion of the liquid bottom stream, which is not recycled.

[0013] Notwithstanding, a fractionation system may be optionally provided and operated. Even when this is the case the invention can be beneficial as it does not need LPG pumps to pump absorber liquid from the fractionation system back into the extraction column.

[0014] A fractionation system is often operated at a lower pressure than the extraction column. Preferably the recycle path bypasses any fractionation system that is provided, so that the recycle portion does not pass through the fractionation system or part thereof. An advantage of this is that the required head for recycling is lower compared to when the recycle stream passes through a fractionation system.

[0015] Another benefit of the invention is that it decouples the quality, particularly the C_5+ content, of the lean methane-containing gas stream that is produced from the start-up of any fractionation unit. This may comprise initially recycling a substantial amount of, for instance more than 75 % of, the liquid bottom stream to achieve the targeted the C_5+ content in the lean methane-containing gas stream, and subsequently to gradually reduce the recycle fraction, for instance by opening a valve to a fractionation system.

[0016] The invention can be applied with any type of extraction column, such as a scrub column or an NGL extraction column. A scrub column is typically operated at a higher pressure than an NGL extraction column (40 bara or above, as compared to between 25 and 35 bara for a typical NGL extraction column).

[0017] Therefore the invention is typically more beneficial when applied on a scrub column, as recovery of ethane (and propane) in a scrub column is typically less deep than in NGL extraction columns.

[0018] Furthermore, while the invention can be applied on any hydrocarbon feed stream that contains methane and one or more C_2+ hydrocarbons, the invention is typically more beneficial when applied on relatively lean hydrocarbon feed streams. It is envisaged that the invention becomes increasingly beneficial when treating hydrocarbon feed streams having a methane content of at least 80 mol% and a non-zero ethane content of less than 5 mol% and/or a total content of $C_2 + C_3$ of less than 7 mol%.

[0019] Figure 1 shows a schematic line up containing an embodiment of the invention. Part of the line up is an apparatus 10 for preparing a lean methane-containing gas stream 510. It employs an extraction column 20 with a first feeding inlet 22 located in a first feeding position. The first feeding inlet may be any suitable inlet including optional feed internals 24. The extraction column 20 also has an overhead vapour outlet 26, for discharging a vaporous overhead stream 30. The lean methane-containing gas stream 510 can be produced from the vaporous overhead stream 30.

[0020] In the example of Figure 1, the drawing of the lean methane-containing gas stream 510 from the vaporous overhead stream 30 involves recompression via at least overhead compressor 44, optionally followed by one or more booster compressors (not shown). An optional overhead cold recovery heat exchanger (not shown, but reference is made to e.g. US patent application publication No. 2009/0064713 which contains an example) may optionally be provided, wherein the lean methane-containing gas stream 510 is in indirect heat exchanging contact with the vaporous overhead stream 30 before it is recompressed in the overhead compressor 44. Various suitable options are available for said producing of the lean methane-containing gas stream 510 from the vaporous overhead stream 30, including merely accepting the vaporous overhead stream 30 as discharged from the extraction column 20 to form the lean methane-containing gas stream 510. In Figure 2 another way of producing the lean methane-containing gas stream 510 from the vaporous overhead stream 30 is illustrated. This will be discussed in more detail herein below.

[0021] The extraction column 20 also has a liquid bottom stream outlet 28 located at a first withdrawal level. The first withdrawal level is gravitationally lower than the first feeding position. The extraction column 20 may further comprise other internals, such as for example one or more contacting devices 23 in the form of a plurality of contacting trays and/or packing (structured packing or non-structured packing).

[0022] The first feeding inlet 22 is in fluid communication with a feed supply 5 of a hydrocarbon feed stream 15. In the embodiment as shown, this feeding inlet 22 is arranged below at least one of the one or more contacting devices 23. In the embodiment of Figure 1, an optional inlet phase separator 16 is provided between the feed supply 5 and the first feeding inlet 22. A liquid phase feed line 17 extends between a liquid outlet of the optional inlet phase separator 16 and the first feeding inlet 22. A Joule Thomson valve 19 is provided in the liquid phase feed line 17.

[0023] A vapour phase feed line 18 extends between a vapour outlet of the optional inlet phase separator 16 and an auxiliary feeding inlet 21 into the extraction column 20. The auxiliary feeding inlet 21 may be any suitable inlet including optional feed internals 25. Means for partially condensing the vapour phase is provided in line 18. Such means for partially condensing the vapour phase may comprise at least one from the group consisting of a heat exchanger to extract heat from the vapour phase in line 18 and an expansion device to lower the pressure and a combination thereof. The expansion device may be in the form of a Joule Thomson valve and/or a dynamic expander such as, for example, an expansion turbine, and/or a combination thereof.

[0024] In the example of Figure 1, the means for partially condensing the vapour phase is represented by an expander in the form of a turbo expander 14. The turbo expander 14 is shaft-coupled to an overhead compressor 44 via shaft 13-13'.

[0025] A flow control system comprising a flow rate controller is arranged to control an actual feed rate of the hydrocarbon feed stream 15 flowing into the extraction column 20. The flow control system may take any suitable form. It may, for instance, be provided in the form of a flow restriction valve in the feed line 15 between the feed supply 5 and the extraction column 20. In the example of Figure 1, however, it is embodied as part of a depressurizing system 535 downstream of an (optional) liquefaction system 500. More about such optional liquefaction system 500 and optional depressurizing system 535 will be described below.

[0026] The liquid bottom stream outlet 28 feeds into a liquid bottom stream discharge line 50. A stream splitter 52 is provided in the liquid bottom stream discharge line 50, via which a residue discharge line 70 is connected to the liquid bottom stream outlet 28. A recycling line 60 is fluidly connected to the stream splitter 52 to draw off a recycle portion from the liquid bottom stream into the recycling line 60. The recycling line 60 follows a recycle path to a location into the extraction column 20 that is preferably gravitationally higher than the first feeding position. In this case, the recycle path extends from the liquid bottom stream outlet 28, through the stream splitter 52, a recycle pump 62, and a recycle chiller 33, to a second feeding inlet 32 into the extraction column 20. Preferably, the second feeding inlet 32 is in a second feeding position that is gravitationally higher than the first feeding position.

[0027] In one group of embodiments, the recycle chiller 33 may be a stand-alone chiller unit with chilling of the recycle stream 60 as its sole specific function. In other groups of embodiments, the recycle chiller 33 may be integrated with any other heat exchanger arrangement in the process. It may be integrated with, for instance, the liquefaction system 500 if provided and/or exercise a combined function. For instance, it may share a heat exchanger with another stream to be cooled, such as a stream derived from the lean methane-containing gas stream 510 and/or it may share in refrigeration duty from a refrigerant circuit that also refrigerates another stream.

[0028] The second feeding inlet 32 may comprise any suitable form of internals for handling liquids, such as for example a liquid nozzle distributor 34. In specific embodiments, the second feeding inlet 32 and/or its associate internals, may optionally be integrated with and/or combined with the auxiliary inlet 21 and/or its associated internals.

[0029] The remainder of the liquid bottom stream is discharged from the stream splitter 52 into the residue discharge line 70, which is in fluid communication with the stream splitter 52. The stream splitter 52 does not alter the composition of the liquid bottom stream 50, such that the composition of the recycle portion and that of the remaining residue bottom stream 70 and that of the liquid bottom stream 50 are equal to each other.

[0030] In specific embodiments, the residue discharge line 70 is fluidly connected to a fractionation system 300. Fractionation systems are well known to the person skilled in the art, and the details of such systems are not essential in the context of the present invention. A fractionation system typically employs a plurality of consecutively arranged fractionation columns, to receive at least a part of the liquid bottom stream that is to be subjected to fractionation into one or more fractionated streams 310, 320 each of single component with a relatively high purity compared to the residue bottom stream 70. Such fractionated streams can be used as refrigerant make-up, or sold separately or sold as natural gas liquids (NLG) and/or liquefied petroleum gas (LPG) products. The fractionated streams 310, 320 often consist of hydrocarbon components that are vaporous under atmospheric pressure and temperature. Typically, the fractionation system also produces a so-called stabilized liquid stream 390, which can remain in liquid phase under atmospheric pressure and ambient temperature conditions. However, all this is entirely optional. Even if a fractionation system 300 is provided, it does not have to be operative or fully operative, when carrying out the present invention.

[0031] A residue flow control valve 75 is provided in the residue line 70, suitably on liquid level control of the extraction column 20.

[0032] A recycle control valve 65 is provided in the recycling line 60 to control how large a fraction of the liquid bottom stream 50 is discharged into the recycling line 60. In the embodiment of Figure 1 the recycle control valve 65 is provided in line 60. The recycle flow control valve 65 may be operated under manual control by an operator, or it may be operationally connected to a split ratio controller C.

[0033] In preferred embodiments, the split ratio controller C is arranged to lower the recycle fraction, which is the fraction of the liquid bottom stream 50 that is drawn from the liquid bottom stream 50 into the recycle portion over the course of time. Preferably, the reduction is applied in response to an actual increase of the actual feed rate over said course of time. For example, a signal to represent the actual feed rate may originate from a rundown flow rate sensor F downstream of the optional liquefaction system 500. Generally, a flow rate signal may be obtained from any suitable location upstream or downstream of the extraction column 20, including locations selected from the non-exhaustive list consisting of: the overhead vapour stream 30; the lean methane stream 510; the liquid bottom stream 50; the feed supply 5; the hydrocarbon feed stream 15; and anywhere else between the feed supply 5 of the hydrocarbon feed stream 15 and the extraction column 20.

[0034] The liquefaction system 500 is entirely optional. If it is provided, as is the case in Figure 1, it is arranged in fluid communication with the overhead vapour outlet 26 of the extraction column 20. In such a liquefaction system 500, the lean methane-containing gas stream 510 can be subjected to full condensation and subcooling, to provide a liquefied methane-containing stream 530. Many possible liquefaction processes are available to the person skilled in the art, including processes that employ heat exchanging of the lean methane-containing gas stream 510, or parts thereof, against evaporating refrigerants that are circulated in two or more refrigeration circuits. Various parts of the apparatus described herein, including for instance the feed supply 5 and/or the recycle chiller 33 may be integrated with, and/or form part of, the liquefaction system 500, for instance by sharing or making use of refrigeration duty from the liquefaction system 500 (not shown in the drawing).

[0035] An optional depressurization system 535 may be provided downstream of the liquefaction system 500, to depressurize the liquefied methane-containing stream 530, preferably to a pressure of between 1 and 2 bara. The depressurization system 535 may comprise one or more expander turbines and/or one or more Joule Thomson valves and/or a combination thereof, as well as a flash vapour separator arranged to receive the depressurized liquefied methane-containing stream 530 and remove flashed-off vapours from the depressurized liquefied methane-containing stream 530 (not shown). In specific embodiments, the depressurization system 535 may be integrated with the liquefaction system 500 and/or form a part of the liquefaction system 500. In one example, part of the flashed-off vapours is re-compressed and reinjected into the process stream in the liquefaction system 500 (not shown).

[0036] The apparatus of Figure 1 works as follows. A hydrocarbon feed stream 15 is fed from the feed supply 5 into the extraction column 20 at the first feeding position and at an actual feed rate. The hydrocarbon feed stream 15 contains methane, and one or more C_2+ hydrocarbons. In preferred embodiments, the hydrocarbon feed stream 15 contains ethane as one of the C_2+ hydrocarbons, in any non-zero amount.

[0037] In the embodiment of Figure 1, the feeding of the hydrocarbon feed stream 15 into the extraction column 20 comprises separating a liquid phase of the hydrocarbon feed stream 15 from a vapour phase. The liquid phase is discharged from the optional inlet phase separator 16 into the liquid phase feed line 17, and in the embodiment of Figure 1 only essentially this liquid phase 17 is passed into the extraction column 20 via said first feeding inlet 22. The Joule Thomson valve 19 serves to match the pressure of the liquid phase 17 to the operating pressure in the extraction column 20 (corresponding to the extraction pressure). The vapour phase is discharged into the vapour phase feed line 18, then partially condensed by refrigeration and/or expansion, and passed to and into the extraction column 20 via the auxiliary inlet 21. In the embodiment of Figure 1, the partial condensation of the vapour phase in line 18 is achieved by expanding in the turbo expander 14. Work generated in the turbo expander 14 is optionally used to drive the overhead compressor 44 via the shaft 13-13'.

[0038] The hydrocarbon feed stream from the feed supply 5 may be formed out of any hydrocarbon containing gas stream. A common example of such hydrocarbon containing gas stream is a natural gas stream, obtained from natural gas or petroleum reservoirs. As an alternative the hydrocarbon feed stream may also be obtained from another supply source, including for instance a synthetic source, such as a Fischer-Tropsch process.

[0039] When the hydrocarbon feed stream 15 is obtained from a natural gas stream, it is usually comprised primarily of methane. The hydrocarbon feed stream 15 may comprise at least 50 mol% methane, and often at least 80 mol% methane as is often the case with natural gas.

[0040] Depending on the source, hydrocarbon feed stream may contain varying amounts of hydrocarbons heavier than methane, such as in particular ethane, propane and the butanes, and possibly lesser amounts of pentanes and aromatic hydrocarbons. The composition varies depending upon the type and location of the gas.

[0041] Natural gas may also contain non-hydrocarbons such as H_2O , N_2 , CO_2 , Hg, H_2S and other sulphur compounds, and the like, which may be removed to various degrees as well. Particularly, CO_2 and hydrocarbons heavier than butanes should be removed in order to avoid freezing out of these components during subsequent liquefaction.

[0042] Thus, if desired, the hydrocarbon feed stream 15 may have been pre-treated as part of being supplied from the feed supply 5. Pre-treatment may comprise reduction and/or removal of undesired components such as CO_2 and H_2S or other steps such as early cooling, pre-pressurizing or the like. As these steps are well known to the person skilled in the art, their mechanisms are not further discussed here.

[0043] Hydrocarbons heavier than methane are removed in various degrees from the hydrocarbon feed stream 15,

as part of producing the lean methane-containing gas stream. The extraction column 20 that may be employed for this purpose may be operated at an extraction pressure in a range of from 20 bara to 60 bara, preferably in a range of from 40 bara to 60 bara.

[0044] In the embodiment of Figure 1, the removing of the hydrocarbons heavier than methane from the hydrocarbon feed stream 15 involves withdrawing a vaporous overhead stream 30 from the extraction column 20. The vaporous overhead stream contains at least the majority of the methane from the hydrocarbon feed stream 15. The lean methane-containing gas stream 510 is produced from the vaporous overhead stream 30. In the embodiment of Figure 1, this involves recompression of the vaporous overhead stream 30 in the overhead compressor 14, which is driven by turbo-expander 14.

[0045] At the same time, a liquid bottom stream 50 is withdrawn from the extraction column 20 from the first withdrawal level. The liquid bottom stream 50 contains at least a recovery fraction of the C_2+ hydrocarbons from the hydrocarbon feed stream 15. The liquid bottom stream 50 is split into a recycle portion 60 and a residue portion 70. The recycle portion 60 has the same composition as the liquid bottom stream 50 being withdrawn from the extraction column 20.

[0046] Since the recycle portion 60 has not been subjected to fractionation, and since the extraction column 20 is operated mainly to achieve a desired specification of heavier hydrocarbons than methane in the vaporous overhead stream 30 rather than to minimize the amount of methane in the liquid bottom stream 50, there may be a significant amount of methane in the liquid bottom stream 50 and the recycle portion 60. The methane content in the liquid bottom stream 50 and the recycle portion 60 may be between 5 and 50 mol%, and usually between 15 and 50 mol%.

[0047] The recycle portion 60 contains a recycle fraction of less than unity (1.00) from the liquid bottom stream 50 being withdrawn from the extraction column 20, and it is fed back into the extraction column 20 in liquid phase, preferably fully liquid phase free from any vapour. The fraction of the liquid bottom stream 50 comprised in the recycle portion is more than zero.

[0048] In the embodiment of Figure 1, the recycle portion 60 is fed back into the extraction column 20 via the second feeding inlet 32. To that end, the recycle portion 60 is pumped with the recycle pump 62 to provide head to elevate the recycle portion 60 to the second feeding position. The recycle portion 60 is optionally refrigerated (sub-cooled) in the recycle chiller 33, by heat exchanging the recycle portion 60 against a chilling stream.

[0049] The residue portion 70 may optionally be subjected to fractionation in the fractionation system 300, thereby obtaining at least one fractionation product stream (310,320) being enriched in a selected hydrocarbon component from the residue stream 70.

[0050] The fraction of the liquid bottom stream 50 that is split off from the liquid bottom stream 50 into the recycle portion 60 may be controlled using the split ratio controller C. This split ratio controller C is preferably programmed to reduce the fraction of the liquid bottom stream 50 that is split off into the recycle portion 60 over a course of time. There can be several reasons for this. One reason could be that in specific embodiments the function of the recycle stream 60 may slowly be taken over by another absorber liquid, such as a fractionated stream 320 from the fractionation system 300 (if provided) when such fractionated stream 320 becomes available. A second reason could be that liquid build-up in the extraction column 20 limits the allowable flow rate of the recycle portion 60 over the course of time. Particularly if, in the course of time, the actual feed rate is allowed to increase, the fraction of the liquid bottom stream 50 that is split off in the recycle portion 60 may have to be lowered to avoid overloading the recycle pump 62 and/or the extraction column 20.

[0051] Figure 2 illustrates an embodiment that combines the recycle capability of Figure 1 with a reflux capability to generate a reflux stream from the vaporous overhead stream 30. In this embodiment, the hydrocarbon feed stream 15 from the feed supply 5 is in fluid communication with the first feeding inlet 22 without first being separated in the inlet separator 16 of Figure 1.

[0052] Furthermore, the embodiment of Figure 2 is provided with an overhead condenser 31 which is fluidly connected to the overhead vapour outlet 26, arranged to receive and partially condense the vaporous overhead stream from the extraction column 20. The overhead condenser 31 may comprise a plurality of consecutive heat exchangers operating at progressively decreasing temperature levels, for instance each operating with a different refrigerant composition and/or at different pressure level. In one group of embodiments, the overhead condenser 31 may be a stand-alone heat exchange unit having as its sole specific function removing of heat from the overhead vapour stream 30. In other groups of embodiments, the overhead condenser 31 may be integrated with any other heat exchanger arrangement in the process. It may be integrated with, for instance, the liquefaction system 500 if provided and/or exercise a combined function. For instance, it may share a heat exchanger with another stream to be cooled, such as a stream derived from the lean methane-containing gas stream 510 and/or it may share in refrigeration duty from a refrigerant circuit that also refrigerates another stream.

[0053] An overhead phase separator 39 is fluidly connected to the overhead condenser 31 to receive the partially condensed effluent stream from the overhead condenser 31. It is arranged to receive and phase separate a partially condensed overhead stream from the overhead condenser 31, into the lean methane-containing gas stream 510 and a liquid reflux stream 36. The lean methane-containing gas line 510 communicates with the overhead phase separator

39 via a vapour outlet. The overhead phase separator 39 is furthermore connected to the second feeding inlet 32 into the extraction column 20, via a reflux line 36, for feeding the liquid reflux stream into the extraction column 20. A reflux pump 38 is optionally provided in the reflux line 36. Alternatively, flow of the liquid reflux stream 39 can be driven by gravity if the overhead phase separator 39 is arranged sufficiently high above the second feeding position.

[0054] In the embodiment of Figure 2, the vaporous overhead stream 30 is partially condensed in the overhead condenser 31, by removing heat from the vaporous overhead stream 30 by indirect heat exchanging. An effluent stream containing the partially condensed overhead stream 30 is discharged from the overhead condenser 31, and passed to the overhead phase separator 39 where the partially condensed overhead stream is allowed to separate into two phases. The lean methane-containing gas stream is drawn from the overhead phase separator 39 in vapour phase, while a liquid reflux stream 36 is drawn from the overhead phase separator 39 in liquid phase.

[0055] The liquid reflux stream 36 is fed into the extraction column 20 at the second feeding position, optionally assisted by the reflux pump 38 and/or gravity.

[0056] A mixing junction 37 is optionally provided in the overhead vapour line 30, for admixing the recycle portion 60 with the vaporous overhead stream upstream of the overhead condenser 31. In the embodiment of Figure 2 the mixing junction 37 is arranged in fluid communication with the recycling line 60 and upstream of the overhead condenser 31 between the overhead vapour outlet 26 and the overhead condenser 31. The mixing junction 37 is in fluid communication with the overhead condenser 31. Preferably, a recycle chiller 33 is provided in the recycling line 60 similar to the embodiment of Figure 1. In the embodiment of Figure 2, the recycle chiller 33 can be arranged in the recycling line 60 between the stream splitter 52 and the mixing junction 37.

[0057] Other elements that have not been described with specific reference to Figure 2 may be identical to, or similar to, corresponding elements of the embodiment of Figure 1, and work in the same way as described above with reference to Figure 1.

[0058] In operation, the recycle portion 60 in the embodiment of Figure 2 is split off from the liquid bottom stream 50 in the same way as described above with reference to the embodiment of Figure 1. However, in the embodiment of Figure 2 the recycle portion 60 flows through the recycling line 60 to and into the mixing junction 37, where the recycle portion 60 is admixed with the vaporous overhead stream 30 thereby forming an admixed stream. The admixed stream flows through the overhead condenser 31, where it is subjected to the indirect heat exchanging by which the partial condensing of the vaporous overhead stream 30 is accomplished while at the same time the recycle portion 60 in the admixed stream is (further) subcooled.

[0059] The embodiment of Figure 3 is similar to the embodiment of Figure 2, except for the location of the mixing junction 37 which in the case of Figure 3 is located in the reflux line 36. Preferably, the mixing junction 37 is arranged between the reflux pump 38 (if provided) and the second feeding inlet 32, which has as advantage that the recycle flow from the recycling line 60 does not load the reflux pump 38. Alternatively (not shown), the reflux stream 36 and the recycle stream 60 are fed into the extraction column 20 via mutually separate inlets, which can be at the same gravitational level or at mutually different gravitational levels in the extraction column 20.

[0060] Model calculations have been performed using the line up of Figure 2 as example, to illustrate the effect of the recycle stream 60 on the recovery of C_2 . Table 1 shows the composition of the hydrocarbon feed stream 15, which is fed into the extraction column 20 at a pressure of 58 bara and a temperature of 20 °C. Under these conditions, the hydrocarbon feed stream 15 is practically fully vaporous. The full capacity feed rate in this example is 180 kg/s. However, in these calculations the extraction column 20 has been operated at 50 % of its full capacity, thereby simulating circumstances during a start up procedure, and allowing spare capacity in the extraction column 20 for handling a substantial recycle stream 60.

Table 1 : composition of the hydrocarbon feed stream

Nitrogen (N_2)	8.20 mol%
Methane (C_1)	86.6 mol%
Ethane (C_2)	3.17 mol%
Propane (C_3)	1.12 mol%
Butanes (C_4)	0.52 mol%
Heavies (C_5^+)	0.41 mol%

[0061] According to the model calculation, cooling the overhead condenser 31 at a base duty of 8.55 MW results in 7.14 kg/s of reflux stream in reflux line 36 at a temperature of about -46 °C. The recovery of ethane, without recycle, is 1.78 % while the amount of C_5^+ in the lean methane-containing gas stream 510 is 0.040 mol%. In the present context,

recovery of a selected component (e.g. C_2 or C_3) is defined as the flow rate of that selected component in the residue stream 70 expressed as a percentage of the flow rate of the same component in the hydrocarbon feed stream 15 as it is delivered from the feed source 5.

[0062] Calculated values of the recovery percentages of ethane (C_2 recovery) and propane (C_3 recovery) in the residue stream 70, the overhead condenser 31 cooling duty, and the total liquid flow rate of liquid passing through reflux line 36, are presented in Table 2 for a variety of recycle portions consisting of various recycle fractions from the liquid bottom stream 50, varying from 0 % (no recycle) to about 75 %. Each time the overhead condenser 31 duty was adapted to achieve 0.040 mol% of C_5+ in the lean methane-containing gas stream 510. The temperature of the liquid bottom stream 50 was about -13 °C.

Table 2: Ethane and propane recovery in the liquid bottom stream. In each case the C_5+ content in the lean methane-containing gas stream 510 is 0.040 mol%.

Recycle fract. (%)	C_1 in recycle portion 60 (mol%)	Flow in reflux line 36 (kg/s)	Duty in overhead condenser 31 (MW)	C_2 recov. (%)	C_3 recov. (%)
0	n/a	7.14	8.55	1.78	5.93
25	31.8	7.69	8.30	1.79	5.96
50	31.9	9.42	8.02	1.85	6.17
67	32.8	14.2	8.71	2.35	8.14
75	33.2	18.8	9.10	2.64	9.45

[0063] It can be seen that up to about 0.65 recycle fraction an improved recovery of C_2 and C_3 is found while the duty on the overhead condenser 31 necessary to achieve 0.040 mol% C_5+ in the lean methane-containing gas stream 510 can be reduced.

[0064] Clearly, higher recycle fractions help to further increase the recovery of ethane and/or propane. Starting with recycling at recycle fraction of 0.50 the recycling becomes relatively effective (per recycled amount) at improving both C_2 and C_3 recovery. However, it is not recommended to employ recycle fractions of above 75% for a prolonged duration. Preferably, the recycle fraction is limited to a value whereby the total flow rate of the reflux stream 36 and the recycle stream 60 combined exceeds the reflux flow rate attained when the extraction column 20 is operated at 130 % of its capacity. Otherwise, the total liquid loading of the extraction column 20 may exceed its capacity. In the present example, this translates to maintaining the recycle fraction to 0.75, to avoid overloading the extraction column 20 by adding too much of the liquids at the top.

[0065] It is preferred to limit the total flow rate of the reflux stream 36 and the recycle stream 60 combined to the reflux flow rate attained when the extraction column 20 is operated at 100 % of its capacity. In the present example, this translates to limiting the recycle fraction to about 0.67 or lower.

[0066] The calculations above assume an actual feed rate of 50 % of the full capacity, which represents a typical condition during start-up phase of a line-up. It is not unusual in the start-up phase of a full natural gas liquefaction plant that the fraction system is not fully operative and thus holding up the start-up of the liquefaction system. Gradually, as the liquefaction system is cooled down, the actual feed rate can be increased. It is envisaged that the recycle fraction is lowered as the actual feed rate increases.

[0067] The invention has been illustrated with reference to non-reboiled extraction columns. In particular, in the specific embodiments shown at least part of the hydrocarbon feed stream 15 is fed into the extraction column 20 below the lowest of the contacting devices 23 arranged in the extraction column 20. However, the invention can be applied to extraction column arrangements, including reboiled columns.

[0068] The increased recovery of ethane (and propane) allows for faster production of refrigerant make-up for initial loading of refrigeration cycles in a liquefaction system.

[0069] The person skilled in the art will understand that the present invention can be carried out in many various ways without departing from the scope of the appended claims.

Claims

1. Method of preparing a lean methane-containing gas stream, comprising:

- feeding a hydrocarbon feed stream, containing methane and one or more C_2+ hydrocarbons, into an extraction column at a first feeding position at an actual feed rate;
 - withdrawing from the extraction column a vaporous overhead stream;
 - producing a lean methane-containing gas stream from said vaporous overhead stream;
 - withdrawing from the extraction column a liquid bottom stream, from a first withdrawal level being gravitationally lower than the first feeding position;
 - recycling a recycle portion, being a portion of the liquid bottom stream, into the extraction column whereby said recycle portion enters the extraction column in liquid phase, which recycle portion has the same composition as the liquid bottom stream being withdrawn from the extraction column.

2. The method of claim 1, wherein said recycle portion enters the extraction column gravitationally higher than the first feeding position.

3. The method of claim 1 or 2, wherein the recycle portion contains between 5 and 50 mol% methane.

4. The method of any one of the preceding claims, wherein said recycling comprises splitting the liquid bottom stream into said recycle portion and a residue portion, wherein said recycle portion contains a fraction of less than unity of the liquid bottom stream being withdrawn from the extraction column.

5. The method of claim 4, wherein said residue portion is subjected to fractionation in a fractionation system, thereby obtaining at least one fractionation product stream being enriched in a selected hydrocarbon component from the residue stream.

6. The method of claim 4 or 5, further comprising lowering the fraction of the liquid bottom stream in the recycle portion over a course of time.

7. The method of claim 6, comprising allowing the actual feed rate to increase over said course of time.

8. The method of any one of the preceding claims, wherein said producing of said lean methane-containing gas stream from the vaporous overhead stream comprises:

- partially condensing the vaporous overhead stream comprising removing heat from the vaporous overhead stream by indirect heat exchanging, thereby providing a partially condensed overhead stream;
 - phase separating the partially condensed overhead stream thereby providing the lean methane-containing gas stream in vapour phase and a liquid reflux stream in liquid phase;
 and wherein said method further comprises:
 - feeding the liquid reflux stream into the extraction column at a second feeding position, said second feeding position being located gravitationally higher than the first feeding position.

9. The method of claim 8, further comprising forming an admixed stream by admixing the recycle portion and the vaporous overhead stream upstream of said partially condensing of the vaporous overhead stream and upstream of said indirect heat exchanging, whereby said admixed stream is subjected to said indirect heat exchanging.

10. The method of any one of the preceding claims, further comprising subjecting at least part of said lean methane-containing gas stream to full condensation and subcooling, optionally followed by depressurization, to provide a liquefied methane-containing stream.

11. Apparatus for preparing a lean methane-containing gas stream, comprising:

- an extraction column comprising a first feeding inlet located in a first feeding position, an overhead vapour outlet for discharging a vaporous overhead stream containing the lean methane-containing gas stream, and a liquid bottom stream outlet located at a first withdrawal level, said first withdrawal level being gravitationally lower than the first feeding position, and said first feeding inlet fluidly connected to a feed supply of a hydrocarbon feed stream;
 - a flow control system arranged to control an actual feed rate of the hydrocarbon feed stream flowing into the extraction column;
 - a liquid bottom stream recycling line connected to the liquid bottom stream outlet for allowing recycling of a recycle portion of the liquid bottom stream in liquid phase, which recycle portion has the same composition as

the liquid bottom stream being withdrawn from the extraction column.

5 **12.** The apparatus of claim 11, comprising a recycle path extending through the recycling line to a location into the extraction column that is gravitationally higher than the first feeding position.

13. The apparatus of claim 11 or 12, further comprising a stream splitter connected to the liquid bottom stream outlet to receive the liquid bottom stream, and connected to the recycling line to discharge the recycle portion into the recycling line, and to a residue discharge line.

10 **14.** The apparatus of claim 13, further comprising a recycle flow control valve operationally connected to a split ratio controller, arranged to control a fraction of the liquid bottom stream that is discharged into the recycling line, wherein the split ratio controller is arranged to lower the fraction of the liquid bottom stream in the recycle portion over the course of time in response to an actual increase of the actual feed rate over said course of time.

15 **15.** The apparatus of claim 13 or 14, further comprising a fractionation system fluidly connected to the residue discharge line.

20

25

30

35

40

45

50

55

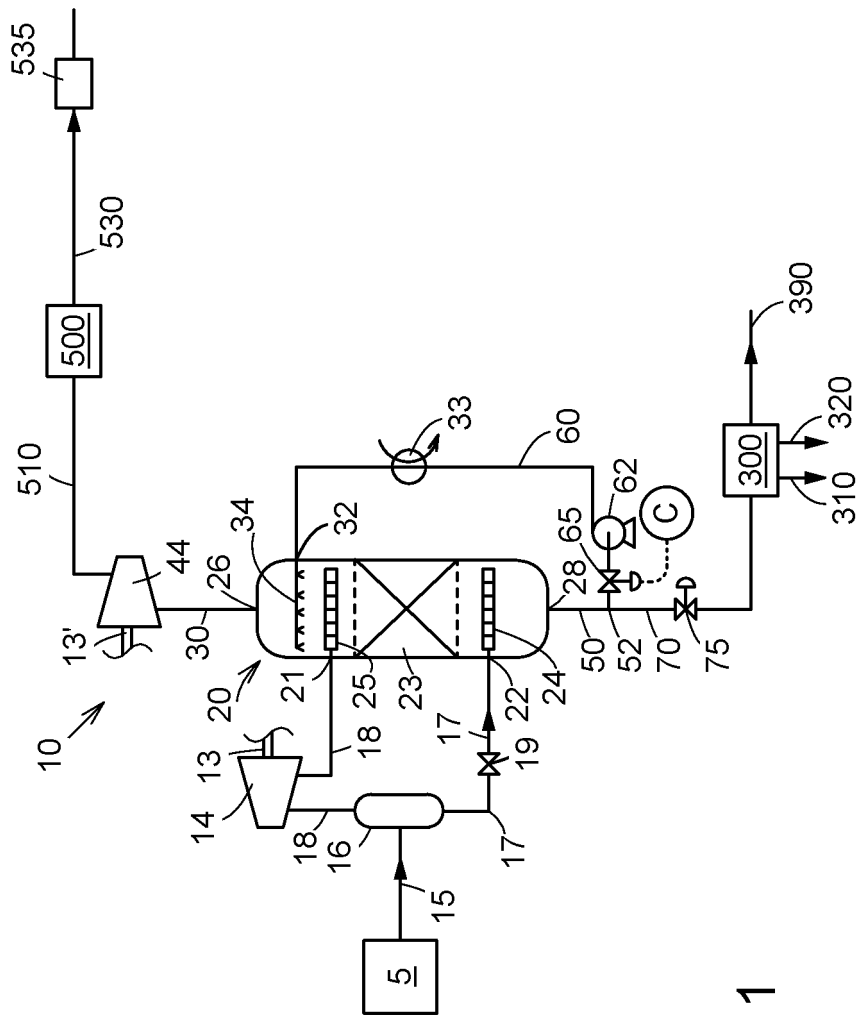


FIG. 1

FIG. 3


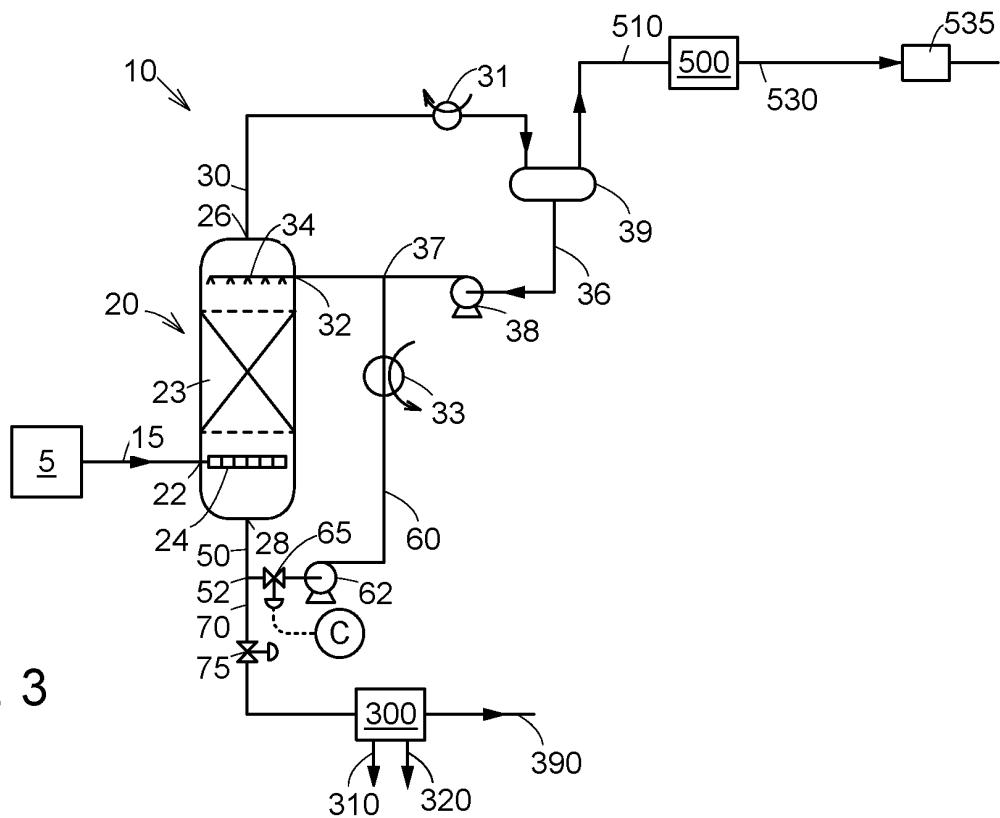


FIG. 2



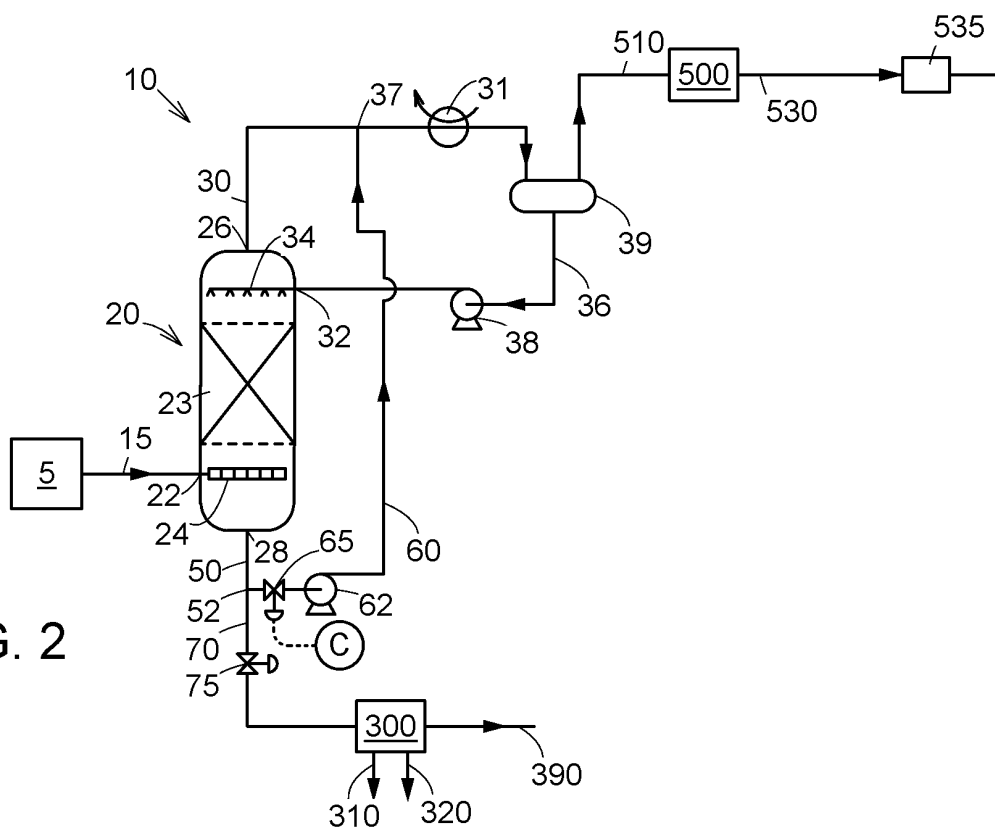

EUROPEAN SEARCH REPORT

Application Number
EP 11 19 0285

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	GB 2 178 445 A (LINDE AG LINDE AG [DE]) 11 February 1987 (1987-02-11)	1-4,6,7, 11-14	INV. F25J3/02
Y	* figure 1 * * page 2, lines 49-73 * -----	5,8-10, 15	
Y	US 6 662 589 B1 (ROBERTS MARK JULIAN [US] ET AL) 16 December 2003 (2003-12-16) * abstract * * figure 1 * * column 3, line 57 - column 4, line 11 * * column 5, lines 50-62 * -----	5,8,10, 15	
Y	WO 97/15639 A1 (ADVANCED EXTRACTION TECHNOL [US]) 1 May 1997 (1997-05-01) * abstract * * figures 5,6 * -----	5,9,15	
A	US 5 325 673 A (DURR CHARLES A [US] ET AL) 5 July 1994 (1994-07-05) * abstract * * figure 1 * * column 4, line 46 - column 5, line 39 * -----	1-15	
A	US 4 883 515 A (MEHRA YUV R [US] ET AL) 28 November 1989 (1989-11-28) * abstract * * column 9, line 67 - column 10, line 14 * -----	1-15	TECHNICAL FIELDS SEARCHED (IPC) F25J
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 7 May 2012	Examiner Alvarez Rodriguez, C
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

1
EPO FORM 1503 03/82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 11 19 0285

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

07-05-2012

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
GB 2178445	A	11-02-1987	DE	3528071 A1	05-02-1987
			GB	2178445 A	11-02-1987
			IN	168463 A1	06-04-1991
			NL	8601999 A	02-03-1987
			NO	863146 A	06-02-1987
			SU	1438628 A3	15-11-1988
			US	4881960 A	21-11-1989

US 6662589	B1	16-12-2003	CN	1539930 A	27-10-2004
			EP	1469266 A1	20-10-2004
			JP	4230956 B2	25-02-2009
			JP	2005042093 A	17-02-2005
			NO	20041530 A	18-10-2004
			US	6662589 B1	16-12-2003

WO 9715639	A1	01-05-1997	AU	701928 B2	11-02-1999
			AU	6916696 A	15-05-1997
			DE	19681631 C2	12-12-2002
			DE	19681631 T1	01-10-1998
			GB	2324362 A	21-10-1998
			NO	981851 A	24-04-1998
			PL	326427 A1	14-09-1998
			WO	9715639 A1	01-05-1997

US 5325673	A	05-07-1994	AU	662089 B2	17-08-1995
			AU	5515194 A	01-09-1994
			DE	69402589 D1	22-05-1997
			DE	69402589 T2	24-07-1997
			EP	0612968 A1	31-08-1994
			ES	2101367 T3	01-07-1997
			JP	6299175 A	25-10-1994
			US	5325673 A	05-07-1994

US 4883515	A	28-11-1989	NONE		

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20060260355 A [0005]
- US 20090064713 A [0020]