

(19)



(11)

EP 2 599 404 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

14.12.2016 Bulletin 2016/50

(51) Int Cl.:

A47B 3/08 (2006.01)

(86) International application number:

PCT/JP2011/002788

(21) Application number: **11783287.3**

(22) Date of filing: **19.05.2011**

(87) International publication number:

WO 2011/145350 (24.11.2011 Gazette 2011/47)

(54) FLIP-UP TABLE AND METHOD FOR STOWING TOP BOARD

KLAPPTISCH UND VERFAHREN ZUR VERSTAUUNG DER PLATTE

TABLE RABATTABLE ET PROCÉDÉ DE RANGEMENT DE PANNEAU SUPÉRIEUR

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **21.05.2010 JP 2010117735**

(43) Date of publication of application:

05.06.2013 Bulletin 2013/23

(73) Proprietor: **Kotobuki Seating Co. Ltd.**

Tokyo 101-0062 (JP)

(72) Inventor: **YOSHIMORI, Akira**

Tokyo 101-0062 (JP)

(74) Representative: **Grünecker Patent- und
Rechtsanwälte**

PartG mbB

Leopoldstraße 4

80802 München (DE)

(56) References cited:

JP-A- 2003 259 918 JP-A- 2008 104 793

JP-A- 2008 104 793 US-A1- 2007 261 609

EP 2 599 404 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Technical Field

[0001] The present invention relates to a flip-up table that can store a top board from a use position to a stored position, the top board for the flip-up table, a leg for the flip-up table, and a method for storing the top board.

Background Art

[0002] Conventionally, flip-up tables that can store a top board from a use position to a stored position for containing the tables in a warehouse or the like have been known. Among these flip-up tables, there has been a movable table, in which casters protrude downward from a bottom end of a leg portion and are in contact with a floor surface, and which is movable on the floor surface (PTL 1). This movable table includes: a swingable fine adjusting lock lever; a link member that turns a float interlock pipe as the fine adjusting lock lever is swung; a lifting mechanism that causes the casters to protrude according to a rotation of the float interlock pipe, and the like. In a state where the top board is at the use position, the lifting mechanism causes the casters to be apart from the floor surface. In a state where the top board is at the stored position, the lifting mechanism causes the casters to be in contact with the floor surface.

Citation List

Patent Literature

[0003] PTL 1: Japanese Patent Application Laid-Open No. 2008-104793 (Abstract, Figs. 1 and 7)

Summary of Invention

Technical Problem

[0004] However, this movable table requires a plurality of components, such as a rod, a lever and a float, for the lifting mechanism. Furthermore, the rod and the like are required to be linked to each other in a movable manner. Accordingly, the number of components is large and assembly is complicated. The manufacturing cost is high and the manufacturing time is also long.

Solution to Problem

[0005] In order to solve the above problems, a flip-up table of the present invention includes: a top board body movable to a use position and to a stored position; a cam which is connected to the top board body and swingable about a supporting shaft as the top board body is moved; a first leg which is connected to the supporting shaft, and supports the top board body when the top board body is in the use position; and a second leg which is stored in

the first leg and is movable with respect to the first leg, and supports the top board body via a supporting surface when the top board body is in the stored position; wherein, when the top board body is in the use position, the supporting surface faces a facing portion of the cam, and, when the top board body is in the stored position, the supporting surface is in contact with a contact portion of the cam, and a distance from the supporting shaft to the contact portion is longer than a distance from the supporting shaft to the facing portion.

Advantageous Effects of Invention

[0006] According to the flip-up table of the present invention, the top board body is moved from the use position to the stored position, thereby allowing the supporting to be easily switched from supporting by the first leg to supporting by the second leg. The switching is achieved by the cam connected to the top board body and the supporting surface of the second leg. Accordingly, in comparison with the conventional art, the number of components of the flip-up table can be reduced. Since the number of components is reduced, the flip-up table can be easily assembled. This can reduce the manufacturing cost and manufacturing time.

Brief Description of Drawings

[0007]

Fig. 1 shows a top view and a back view of a flip-up table.

Fig. 2 shows side views of the flip-up table in a use state and a stored state.

Fig. 3 shows a schematic side view of a top board.

Fig. 4 shows a diagram showing a lock lever, a lock plate and a lock spring.

Fig. 5 shows a schematic side view of a leg.

Fig. 6 shows a partially enlarged sectional view of the flip-up table in the use state.

Fig. 7 illustrates a first leg.

Fig. 8 illustrates a guide cap.

Fig. 9 illustrates a second leg.

Fig. 10 illustrates an operation of the flip-up table.

Description of Embodiments

[0008] An embodiment of the present invention will hereinafter be described based on drawings. Fig. 1A is a top view of a flip-up table of the present invention. Fig. 1B is a back view, and shows a state where the flip-up table is viewed from a user side. Figs. 1A and 1B show a state where a top board 1 is in a use position.

[0009] The flip-up table includes the top board 1 and a pair of legs 2 for supporting the top board 1. The top board 1 is supported in a movable manner with respect to the pair of legs 2. The top board 1 includes a top board body 11 supported substantially parallel to a ground sur-

face 3 in a use state. Note that, in a stored state, the top board body 11 is supported in a state of being inclined to a perpendicular line extending from the ground surface 3 to the flip-up table by a few degrees.

[0010] The pair of legs 2 includes leg frames 21 as first legs supporting the top board 1 when the top board body 11 is at the use position. The pair of leg frames 21 are coupled to each other by a rail 22. Although not shown in Fig. 1, an inner leg 23, which is a second leg supporting the top board 1 when the top board body 11 is at the stored position, is stored in the inside of the leg frame 21 (Fig. 5).

[0011] A modesty panel 12 is attached to the top board body 11. Furthermore, a top board frame 13 is attached to the top board body 11. The top board frame 13 is welded to a pair of top board arms 17 (Fig. 2). That is, the pair of top board arms 17 are coupled by the top board frame 13. Lock levers 14 for locking the top board 1 or releasing the locking of the top board 1 are swingably attached to the pair of top board arms 17, respectively. The pair of lock levers 14 are coupled by a lever shaft 15. Accordingly, as one lock lever 14 is swung about a lever shaft 15, the other lock lever 14 is also swung about the lever shaft 15 in synchronization therewith.

[0012] Fig. 2 shows side views of the flip-up table. Fig. 2A shows the flip-up table in a state where the top board body 11 is at the use position, that is, in the use state. Fig. 2B shows the flip-up table in a state where the top board body 11 is at the stored position, that is, in the stored state. The flip-up table of the present invention is bilaterally symmetrical. Accordingly, only one side view is shown, and the other side view is omitted.

[0013] A top board arm 17, which is a connecting part for connecting the top board 1 and the leg 2 to each other, is screwed to the top board body 11. The lock lever 14 is attached to the top board arm 17. As the lock lever 14 is swung toward the top board 1 in a direction indicated by an arrow 50, the locking is released. At the use position, the top board body 11 is supported substantially parallel to the ground surface 3. Releasing the locking of the top board 1 allows the top board 1 to turn to the stored position shown in Fig. 2B. The modesty panel 12 is coupled to the leg frames 21 via links 18, and to the top board 1 via links (not shown). Accordingly, as the top board 1 is turned between the use position and the stored position, the modesty panel 12 also moves in accordance with turning of the top board 1.

[0014] The top board 1 in the use state is supported by the leg frame 21. Accordingly, base caps 24 attached to base frames 213 of the respective leg frames 21, and adjusters 25 screwed to the respective base frames 213 are contact with the ground surface 3. As the top board 1 is moved to the stored position, the top board 1 is moved in a direction away from the ground surface 3 in a manner supported by the inner legs 23 stored in the leg frames 21. At this time, the leg frames 21 are also moved in accordance with the top board 1. Accordingly, the base caps 24 and the adjusters 25 are also moved in the di-

rection away from the ground surface 3. This allows the top board 1 in the stored state to be supported by the inner legs 23. Accordingly, only a pair of casters 26 attached to the inner legs 23 are in contact with the ground surface 3.

[0015] Guide caps 27 are fitted into tip ends of the respective leg frames 21. The guide cap 27 shields a cam portion and the like of the top board arm 17 from the outside. This prevents a user from getting his/her finger or the like faultily caught in a gap between the top board arm 17 and the leg frame 21. A hook 28, on which an object can be hung, is formed on the guide cap 27. Note that, if there is no need to hang an object, the hook 28 is not necessarily formed.

[0016] Fig. 3 shows the top board 1 of the flip-up table. Fig. 3A is a schematic side view of the top board 1. Fig. 3B shows an enlarged sectional view of Fig. 3A taken along line A-A. In Fig. 3A, illustration of the modesty panel 12 and a lock spring are omitted. The top board 1 has the bilaterally symmetrical configuration. Accordingly, Fig. 3A only shows one side view of the top board 1.

[0017] Referring to Fig. 3A, the top board arm 17, which is formed of a steel plate, is screwed on the undersurface of the top board body 11 of the top board 1, i.e. on a surface of the leg 2 side. The top board arm 17 has a U-shaped cross-section, which includes: a supporting portion 171 supporting the top board body 11; a cam portion 172 which is a cam of the flip-up table; and a central portion 173 between the supporting portion 171 and the cam portion 172. The top board arm 17 is screwed to the top board body 11 by screws inserted into respective screw holes formed in the central portion 173. The top board frame 13 is welded to the supporting portion 171.

[0018] Furthermore, the lock lever 14 is attached to the top board arm 17. The lock lever 14 is swingable about the lever shaft 15. A lock plate 141 is attached to the inside of the lock lever 14. When the top board 1 is supported at the use position, the lock plate 141 is in contact with a first engaging groove 41 (Fig. 5A) of a rail frame 219 of the leg frame 21. The supporting portion 171 and the cam portion 172 of the top board arm 17 are coupled to each other by a stopper 174. When the top board 1 is supported at the use position, the stopper 174 is in contact with a second engaging groove 42 (Fig. 5A) of the rail frame 219. Furthermore, holes 177, into which the supporting shaft for supporting the top board 1 is inserted, are formed at the supporting portion 171 and the cam portion 172.

[0019] A contact portion 175, which is in contact with the supporting surface of the leg 2 when the top board body 11 is at the stored position, is formed at the cam portion 172. Furthermore, a facing portion 176, which is opposed to the supporting surface of the leg 2 when the top board body 11 is at the use position, is formed at the cam portion 172. The distance from the hole 177 of the supporting shaft to the contact portion 175 is longer than the distance from the hole 177 of the supporting shaft to the facing portion 176. Accordingly, when turning of the

top board body 11 causes the contact portion 175 to come into contact with and run onto the supporting surface of the leg 2, the supporting shaft moves in the direction away from the ground surface. This also moves the top board arm 17 having the cam portion 172 in the direction away from the ground surface. Note that, in a state where the top board 1 is attached to the legs 2, the distance from the supporting shaft 19 to the contact portion 175 is longer than the distance from the supporting shaft 19 to the facing portion 176 (Fig. 10).

[0020] As shown in Fig. 3B, which is a sectional view of Fig. 3A taken along line A-A, the lock plate 141 is attached to the lock lever 14. The lock plate 141 is swung in accordance with swinging of the lock lever 14. A lock spring 144 is engaged with a spring receiving portion 143 of the lock lever 14. One end of the lock spring 144 is in contact with the central portion 173 of the top board arm 17, and the other end is in contact with a stopper 148 (Fig. 4) of the lock lever 14. Thus, the lock spring 144 urges the lock lever 14 in a direction away from the top board body 11. Accordingly, in order to release the locking, a user swings the lock lever 14 against the urging force by the lock spring 144.

[0021] Moreover, the lever shaft 15 is inserted into the lock lever 14 and the lock plate 141. The lever shaft 15 is further inserted into the holes 142 of the cam portion 172 and the supporting portion 171 of the top board arm 17. Accordingly, the lock lever 14 can be swung about the lever shaft 15. Note that the lever shaft 15 is attached to the cam portion 172 by an outer fastener 145, and to the supporting portion 171 by an inner fastener 146.

[0022] Fig. 4 shows exploded views of the lock lever 14, the lock plate 141 and the lock spring 144. A groove 147 for storing the lock plate 141 is formed in the lock lever 14. The lock plate 141 is fitted into the groove 147. The spring receiving portion 143 is formed at the lock lever 14. The lock spring 144 is engaged with the spring receiving portion 143. One end of the lock spring 144 engaged with the spring receiving portion 143 is in contact with the stopper 148 of the lock lever 14.

[0023] Holes 149, into which the lever shaft 15 is inserted, is formed in the lock plate 141 and the spring receiving portion 143. Note that, since the lever shaft 15 of this embodiment has a rectangular cross-section, every hole 149 has an externally rectangular shape. An engaging protrusion 40, which is in contact with the engaging groove of the rail frame 219 of the leg frame 21, is formed at the lock plate 141.

[0024] Fig. 5A is a schematic side view showing the leg 2 in the state where the top board 1 is at the use position. Fig. 5B is an enlarged sectional view of Fig. 5A taken along line B-B. Each of the pair of legs 2 has symmetric configuration. Accordingly, Fig. 5 only shows one leg 2, and illustration of the other leg 2 is omitted. The leg 2 of this embodiment includes the hook 28 (Fig. 2). However, for the sake of simplification of illustration, illustration of the hook 28 is omitted.

[0025] The leg frame 21 of the leg 2 includes a base

frame 213 and a frame body 212. The frame body 212 is welded to the base frame 213 in a state of being inclined thereto. The rail frame 219, which is formed of a steel plate and serves as a supporting member for connecting the top board 1 and the leg 2 to each other, is screwed to the leg frames 21. The first engaging groove 41 and the second engaging groove 42 are formed at the rail frame 219. The engaging protrusion 40 (Fig. 4) of the lock plate 141 connected to the lock lever 14 is engaged into the first engaging groove 41 and the second engaging groove 42. That is, the first engaging groove 41 and the second engaging groove 42 of the rail frame 219, and the engaging protrusion 40 of the lock plate 141 configure a locking mechanism of the flip-up table.

[0026] The rail 22 is welded to the rail frame 219, which is coupled to the other rail frame 219 of the other leg via the rail 22. Furthermore, a hole 214, into which one end of the supporting shaft 19 (Fig. 6) for supporting the top board 1 is inserted, is formed at the rail frame 219. The other end of the supporting shaft 19 is inserted into the hole 177 (Fig. 3) of the top board arm 17. This allows the top board 1 to be connected to the leg 2 and supported. The state where the top board 1 is connected to the leg 2 will be described using Fig. 6.

[0027] Fig. 6 shows connecting parts of the top board 1 and the leg 2 of the flip-up table in the use state, and shows an enlarged sectional view of Fig. 2 taken along line C-C. In Fig. 6, the rail frame 219, to which the rail 22 is welded, is connected to the frame body 212 of the leg frame 21. The supporting shaft 19 is inserted into the holes 177 of the supporting portion 171 and the cam portion 172 of the top board arm 17. This allows the supporting portion 171 and the cam portion 172 to be connected to the rail frame 219 via the supporting shaft 19. That is, the top board 1 is connected to the legs 2 having the frame bodies 212 via the supporting portions 171 and the cam portions 172.

[0028] As described above, the top board 1 is connected to the legs 2 only by the supporting shaft 19 and supported. Accordingly, the number of components can be reduced, and the flip-up table can be easily assembled. Furthermore, only detachment of the supporting shaft 19 easily separates the top board 1 and the leg 2 from each other. This allows the storing space for the flip-up table to be reduced, and enables the flip-up table to be easily transported. Note that, in the use state, a gap exists between the facing portion 176 of the cam portion 172 and an inner end 231 of the inner leg 23 stored in the leg frame 21. That is, the inner legs 23 do not support the top board 1.

[0029] Note that, in Fig. 6, an inner plate 215 is arranged between the frame body 212 and the inner leg 23. The rail frame 219, together with the inner plate 215, is screwed to the leg frame 21. Instead, the rail frame 219 can be formed integrally with the leg frame 21. In this case, the rail 22 is welded to the leg frame 21, and a part of the frame body 212 of the leg frame 21 extends in a direction toward the top board 1. The engaging pro-

trusion 40 (Fig. 4) of the lock plate 141 is engaged with this extending part.

[0030] Returning to Fig. 5, the inner leg 23, to which the casters 26 are attached, is stored in the leg frame 21. The guide cap 27, which restricts movement of the inner leg 23, is fitted into the tip end of the leg frame 21. Accordingly, when the inner leg 23 is moved in the leg frame 21 in the direction toward the top board 1, the inner leg 23 comes into contact with a part of the guide cap 27. This can prevent the inner leg 23 from falling off the leg frame 21 during assembly of the leg 2. Furthermore, the guide cap 27 includes a guide portion 271 to be inserted into the leg frame 21. When the inner leg 23 is attached, the inner end 231 of the inner leg 23 is inserted into the guide portion 271. Accordingly, even if the inner leg 23 moves in the leg frame 21, the guide portion 271 and the inner end 231 come into contact with each other to regulate movement of the inner leg 23. Thus, when moving the flip-up table or the like, the inner leg 23 is prevented from being in contact with the inner surface of the leg frame 21 to make a strange sound.

[0031] Furthermore, the inner leg 23 includes: a base portion 232, to which the casters 26 are attached; and an inner leg body 233 coupled to the base portion 232. The inner leg body 233 has a hollow cylindrical shape. An inner guide 234 is attached between the inner leg 23 and the leg frame 21. In more detail, the inner guide 234 is attached to the outside of the inner leg body 233, which is the inside of the frame body 212. The inner leg 23 is stored in the leg frame 21 in a state where the inner guide 234 is attached to the inner leg 23.

[0032] Referring to Fig. 5B, the inner guide 234 will be described in more detail. The inner guide 234 includes a fixing protrusion 235. This fixing protrusion 235 is fixed into a fixing hole 236 of the inner leg body 233. A plurality of protrusions 237 are formed on the outer surface of the inner guide 234 so as to be in contact with the inner surface of the frame body 212. Accordingly, even if a force is applied to the inner leg 23 in the leg frame 21, the plurality of protrusions 237 are in contact with the inner surface of the frame body 212 to thereby regulate movement of the inner leg 23.

[0033] Note that the internal size of the inner guide 234 is designed to be contact with the outer surface of the inner leg body 233. The inner guide 234 is inserted from the tip end of the inner leg 23 and can be slid to the fixing hole 236 of the inner leg body 233. The fixing protrusion 235 of the inner guide 234 is then slid to a position of being fixed into the fixing hole 236, thereby allowing the inner guide 234 to be attached. The inner leg 23 is movable in a direction toward the ground surface 3 and in a direction toward the top board 1 with respect to the leg frame 21. That is, the inner leg 23 is movable in the leg frame 21 in the direction toward the ground surface 3 and in the direction toward the top board 1.

[0034] The height of a rear of the base frame 213 of the leg frame 21 is formed lower than the height of a front thereof. That is, the height of the base frame 213 on a

user side is formed lower than the height on a side of the modesty panel 12. As to the base portion 232 of the inner leg 23 arranged in the base frame 213, the height of a rear is also formed lower than the height of a front thereof.

This can prevent the base frame 213 from catching a foot when the user enters and goes out of a space on the user side of the flip-up table. Accordingly, the user can easily enter and go out of the space.

[0035] Referring to Fig. 7, the leg frame 21 will be described in more detail. Note that Fig. 7 shows a state where the leg frame 21 is viewed from the inside of the flip-up table, i.e. viewed from the center side of the flip-up table. The guide cap 27 to be inserted into the leg frame 21 is shown in an upper part of Fig. 7. Furthermore, the rail frame 219 to be screwed to the outside of the leg frame 21 is shown in a right part of Fig. 7.

[0036] A first screw hole 276 is formed in the guide cap 27. A first screw hole 216, a second screw hole 217 and a third screw hole 218 are formed in the rail frame 219. Furthermore, a first screw hole 226, a second screw hole 227 and a third screw hole 228 are formed also in the inner plate 215 screwed to the inside of the leg frame 21 and the frame body 212 of the leg frame 21. The hole 214, into which the supporting shaft 19 for supporting the top board 1 is inserted, is also formed in the rail frame 219. The rail 22 is welded on the outer surface of the rail frame 219, i.e. a surface that does not face the frame body 212.

[0037] The first screw hole 276 of the guide cap 27, the first screw hole 216 of the rail frame 219, and the first screw holes 226 of the frame body 212 and the inner plate 215 are arranged such that the positions thereof are coaxial. The second screw holes 217 and 227 and the third screw holes 218 and 228 are also arranged such that the positions thereof are coaxial. Then, a screw is inserted from the outer surface of the rail frame 219 into the first screw holes 276, 216 and 226. This allows the rail frame 219, the inner plate 215 and the guide cap 27 to be connected to the frame body 212. Likewise, a screw is also inserted into the second screw hole 217 of the rail frame 219, and the second screw holes 227 of the frame body 212 and the inner plate 215. A screw is also inserted into the third screw hole 218 of the rail frame 219, and the third screw holes 228 of the frame body 212 and the inner plate 215.

[0038] The base frame 213 is welded to the frame body 212. An adjuster 25 is screwed to a rear of the base frame 213. In the use state, the adjuster 25 is turned to adjust the height of the flip-up table. A base cap 24 is screwed to a front of the base frame 213.

[0039] The base cap 24 internally includes a step portion 241. The position of the step portion 241 corresponds to the position of a step portion 238 (Fig. 9) of the base portion 232 of the inner leg 23. Accordingly, even if the inner leg 23 moves in a direction of falling out, the inner leg 23 comes into contact with the step portion 241 of the base cap 24 before falling off the leg frame 21. This can prevent the inner leg 23 from falling off the leg frame

21. Such a step portion 241 negates the need to separately provide a component for preventing the inner leg 23 from falling off, thereby allowing the number of components to be reduced.

[0040] Subsequently, referring to Fig. 8, the guide cap 27 will be described in more detail. Fig. 8A shows the guide cap 27 viewed in the direction from the inside of the flip-up table. Fig. 8B shows a sectional view of Fig. 8A taken along line D-D. Fig. 8C shows the guide cap 27 viewed from the front of the flip-up table. Note that the hook 28 is formed at the guide cap 27 of this embodiment. However, illustration of the hook 28 is omitted. Furthermore, in addition to the guide cap 27, Fig. 8B shows the inner leg 23, the inner plate 215, a screw 277 and the leg frame 21 by chain double-dashed lines.

[0041] A first recess 279, into which the inner leg 23 is engaged, is formed in the guide cap 27. A second recess 278, into which the inner plate 215 attached to the inner surface of the leg frame 21 is engaged, is formed at an outer part of the first recess 279. Furthermore, the screw hole 276 is formed in the guide cap 27. The screw 277 to be inserted into the screw hole 276 penetrates the first screw holes 226 of the leg frame 21 and the inner plate 215. The guide cap 27 is thus screwed to the leg frame 21. The guide portion 271 is formed at the bottom end of the guide cap 27, i.e. on the side of the leg frame 21. A slope 280 is formed at the end of the guide portion 271. Because of the slope 280, the tip end of the guide portion 271 is narrowed. This allows the guide cap 27 to be easily inserted into the leg frame 21 even in a state of storing the inner leg 23.

[0042] As shown in Fig. 8C, a third recess 281 is formed at the tip end of the guide cap in order to secure a space for arranging the cam portion 172 of the top board arm 17. In a state after the flip-up table is assembled, the facing portion 176 and the contact portion 175 of the cam portion 172 are disposed in the third recess 281. Accordingly, in each of the use and stored states, the facing portion 176 and the contact portion 175 are shielded by a head 282 of the guide cap 27.

[0043] Subsequently, referring to Fig. 9, the inner leg 23 will be described in more detail. The inner leg body 233 and the base portion 232 of the inner leg 23 are formed of steel plates. The inner leg body 233 is welded to the base portion 232. A weld protruding toward the inner leg body 233 is formed at a part of the base portion 232. The step portion 238 is formed at the front of the base portion 232. Note that the step portion 241 is formed at the base cap 24 attached to the base frame 213 of the leg frame 21, on the position corresponding to the step portion 238. This can prevent the inner leg 23 from falling off the leg frame 21. The base portion 232 and the inner leg body 233 may be integrally formed of one steel plate.

[0044] The casters 26 are screwed to the base portion 232. The caster 26 can oscillate about the screw. Accordingly, when the flip-up table is moved, the directions of the casters 26 can be changed to the traveling direction. Note that the number of screw holes for screwing

the caster 26 is not limited to two. Three or more screw holes may be provided to thereby allow the position of the caster 26 to be changed.

[0045] The inner end 231 made of plastic is fitted into the tip end of the inner leg body 233 of the inner leg 23, i.e. onto the end on the side of the top board 1. A supporting surface 239 inclined to the facing portion 176 of the cam portion 172 is formed at the inner end 231. The supporting surface 239 is in contact with the contact portion 175 of the cam portion 172 of the top board arm 17, when the top board 1 is at the stored position. This allows the top board 1 to be supported via the inner ends 231, the inner leg bodies 233, the base portions 232 and the casters 26.

[0046] In the case of assembling the leg 2 including such an inner leg 23, first, the casters 26 are screwed to the base portion 232 of the inner leg 23. Subsequently, the inner guide 234 is inserted into the inner leg body 233. At this time, the inner guide 234 is slid until the fixing protrusion 235 (Fig. 5) is fixed to the fixing hole 236 of the inner leg body 233. Then, the inner end 231 is fitted into the tip end of the inner leg body 233.

[0047] Subsequently, the assembled inner leg 23 is inserted into the leg frame 21. The rail frame 219 and the inner plate 215 are then screwed to the leg frame 21. Finally, the guide cap 27 is fitted into the tip end of the leg frame 21, and screwed to the leg frame 21. Note that the rail frames 219 of the assembled legs 2 are connected to the top board arms 17 of the top board 1 by the supporting shaft 19.

[0048] Next, referring to Fig. 10, an operation of the flip-up table will be described. Fig. 10A shows the use state. Fig. 10B shows a state of being flipped. Fig. 10C shows the stored state. Fig. 10 also shows an operation of the locking mechanism and an operation of the cam portion 172. Note that, for the sake of illustration, the components such as the guide cap 27 are omitted.

[0049] First, the operation of the locking mechanism will be described. In the flip-up table in the use state, the engaging protrusion 40 of the lock plate 141 is in contact with the first engaging groove 41 of the rail frame 219. The stopper 174 of the top board arm 17 is in contact with the second engaging groove 42 of the rail frame 219. Accordingly, the top board 1 is locked and fixed to the legs 2 at the use position. Note that, when the top board 1 is at the use position, the lock lever 14 is urged in the direction toward the leg 2 by the lock spring 144 (Fig. 4).

[0050] In order to store the top board 1, the user swings the lock lever 14 about the lever shaft 15 in the direction toward the top board 1 against the urging force by the lock spring 144. This releases the engagement between the engaging protrusion 40 and the first engaging groove 41. After the locking is released, the user flips up the top board 1 about the supporting shaft 19 in the direction indicated by an arrow 51. Accordingly, the lock lever 14 and the lock plate 141 are moved to the position of being flipped, shown in Fig. 10B. The stopper 174 is simultaneously moved to the position of being flipped, shown in

Fig. 10B. As a result, the stopper 174 is moved in the direction away from the second engaging groove 42.

[0051] After the top board 1 is turned to the stored position shown in Fig. 10C, the user finished the operation on the lock lever 14. Thus, the lock lever 14 is urged again in the direction toward the leg 2 by the lock spring 144. Accordingly, the lock lever 14 is swung about the lever shaft 15 in a leg direction indicated by an arrow 52. As a result, the engaging protrusion 40 of the lock plate 141 comes into contact with the second engaging groove 42, and the top board 1 is locked and fixed to the legs 2 in the stored position.

[0052] Subsequently, the operation of the cam portion 172 and the operation of the flip-up table in accordance therewith will be described. As shown in Fig. 10A, in the flip-up table in the use state, a gap indicated by an arrow a exists between the facing portion 176 of the cam portion 172 of the top board arm 17 and the supporting surface 239 of the inner end 231. The top board 1 is supported via the supporting portions 171 of the top board arms 17, the supporting shaft 19, the rail frames 219, the frame bodies 212, the base frames 213, the base caps 24 and the adjusters 25.

[0053] Accordingly, in the use state, the base caps 24 and the adjusters 25 of the base frames 213 are in contact with the ground surface 3 as indicated by an arrow b. That is, in the use state, the top board 1 is supported by the leg frames 21. Note that, in the use state, the inner leg 23 is moved by the self weight in the leg frame 21 in the direction toward the ground surface 3. Accordingly, the casters 26 of the inner leg 23 are also in contact with the ground surface 3.

[0054] Subsequently, as the user releases the locking of the top board 1 to flip up the top board 1, the cam portion 172 is also swung in accordance with turning of the top board 1 as shown in Fig. 10B. That is, the cam portion 172 swingable about the supporting shaft 19 is connected to the top board body 11 and serves as a part of the top board arm 17. Accordingly, the cam portion 172 is swung in accordance with turning of the top board body 11. As a result, as indicated by an arrow c, the contact portion 175 of the cam portion 172 is in contact with the supporting surface 239 of the inner end 231.

[0055] Note that, in Fig. 10A, the distance from the supporting shaft 19 of the top board 1 to the contact portion 175 of the cam portion 172 is indicated by an arrow g. The distance from the supporting shaft 19 of the top board 1 to the facing portion 176 of the cam portion 172 is indicated by an arrow h. The distance indicated by the arrow g is shorter than the distance indicated by the arrow h. That is, the distance from the supporting shaft 19 to the contact portion 175 is longer than the distance from the supporting shaft 19 to the facing portion 176.

[0056] Accordingly, as the top board 1 is turned, the contact portion 175 is moved to an upper part of the supporting surface 239 so as to climb on the supporting surface 239. In other words, the contact portion 175 runs on the supporting surface 239 and moves in a direction away

from the ground surface 3. Accordingly, the contact portion 175 comes into contact with a more distal part of the inner end 231. As a result, as the top board 1 is turned, the distance from the supporting shaft 19 to the ground surface 3 is increased. That is, the supporting shaft 19 is moved in a direction away from the ground surface 3.

[0057] The supporting shaft 19 is connected to the top board body 11 via the supporting portion 171 of the top board arm 17, and to the frame body 212 of the leg frame 21 via the rail frame 219. Accordingly, as the supporting shaft 19 is moved in the direction away from the ground surface 3, the top board body 11 and the leg frame 21 are also moved in the direction away from the ground surface 3. After the leg frame 21 is apart from the ground surface 3, the top board 1 is supported by the inner leg 23 via the cam portion 172.

[0058] Fig. 10B shows the state where the top board 1 is flipped up to a certain extent and the top board 1 is supported by the inner leg 23. In this state, as indicated by an arrow d, the adjuster 25 and the base cap 24 are apart from the ground surface 3. Accordingly, the top board 1 is supported by the inner legs 23 via the casters 26 in contact with the ground surface 3.

[0059] As the top board 1 is further turned to cause the top board 1 to move to the stored position shown in Fig. 10C, a position at which the contact portion 175 and the supporting surface 239 are in contact with each other moves to an upper part of the supporting surface 239 as indicated by an arrow e. Accordingly, the supporting shaft 19 is moved in the direction away from the ground surface 3, and the top board body 11 and the leg frame 21 are also moved in the direction away from the ground surface 3. As a result, turning the top board 1 to the stored position maximizes clearances between the ground surface 3 and the adjusters 25 and between the ground surface 3 and the base caps 24 as indicated by an arrow f.

[0060] The description has been made on the embodiment of the present invention. However, the present invention is not limited to the configuration of the embodiment. The configuration of the embodiment can appropriately be modified within a scope without substantially changing the content of the present invention. For instance, the rail frame 219 of the embodiment is screwed to the inner side surface of the leg frame 21, i.e. the side surface on the top board 1 side. Instead, the rail frame 219 formed integrally with the leg frame 21 may be adopted. In this case, a part of the leg frame 21 is extended, and the extended part forms the rail frame 219.

[0061] As to the top board arm 17 of the embodiment, the supporting portion 171 and the cam portion 172 are formed integrally with each other. Instead, the supporting portion 171 and the cam portion 172 may be formed separately from each other. In this case, the supporting portion 171 and the cam portion 172 are screwed to the top board body 11.

[0062] Furthermore, the inner leg 23 of the embodiment is prevented from falling off by the guide cap 27. Instead, an elongate hole may be formed at the inner leg

23, and a screw inserted into a screw hole of the rail frame 219 may be inserted into this elongate hole to thereby prevent falling. In this case, even if a force is applied to the inner leg 23 in the leg frame 21, the screw is in contact with an edge of the elongate hole to thereby restrict the movement of the inner leg 23.

[0063] The supporting surface 239 of the inner end 231 according to the present invention may be any shape so as to heighten a height from the casters 26. Accordingly, the shape of the supporting surface 239 is not limited to the inclined surface. Instead, the shape may be a curved shape or a stepped shape having a slight step. Instead of providing of the inner end 231, the supporting surface 239 can be formed directly at the tip end of the inner leg 23.

[0064] The variations described above can appropriately be combined within the scope as defined by the appended claims without substantially changing the content of the present invention.

Reference Signs List

[0065]

1	top board
2	leg
3	ground surface
11	top board body
19	supporting shaft
21	first leg
23	second leg
172	cam
175	contact portion
176	facing portion
239	supporting surface

Claims

1. A flip-up table, comprising:

a supporting shaft (19);
 a top board body (11) being movable to a use position and to a stored position;
 a cam (172) which is connected to the top board body (11) and swingable about the supporting shaft (19) as the top board body (11) is moved;
 a first leg (21) which is connected to the supporting shaft (19), and configured to support the top board body (11) when the top board body (11) is in the use position; and
 a second leg (23) which is movable with respect to the first leg (21), and configured to support the top board body (11) via a supporting surface (239) when the top board body (11) is in the stored position;

wherein the supporting surface (239) is configured to face a facing portion (176) of the cam (172) when the top board body (11) is in the use position, and the supporting surface (239) is in contact with a contact portion (175) of the cam (172) when the top board body (11) is in the stored position, a distance (g) from the supporting shaft (19) to the contact portion (175) is longer than a distance (h) from the supporting shaft (19) to the facing portion (176), and the second leg (23) is stored in the first leg (21).

2. The flip-up table according to claim 1, wherein the cam (172) is configured to swing so as to run onto the supporting surface (239) when the top board body (11) is moved from the use position to the stored position, the supporting shaft (19) is configured to move in a direction away from a ground surface of the flip-up table as the cam (172) runs onto the supporting surface (239), and the first leg (21) is configured to move in a direction away from the ground surface as the supporting shaft (19) is moved.

3. The flip-up table according to any one of claims 1 or 2, wherein the supporting surface (239) is inclined, and the contact portion (175) is moved in a direction away from the ground surface on the supporting surface (239) as the top board body (11) is moved from the use position to the stored position.

4. The flip-up table according to any one of claims 1 to 3, wherein the top board body (11) can be turned about the supporting shaft (19) to the use position and to the stored position, and the first leg (21) is configured to support the top board body (11) via the supporting shaft (19) in the use position.

5. The flip-up table according to any one of claims 1 to 4, wherein a guide cap (27) restricting movement of the second leg (23) is attached at a tip end of the first leg (21), and the contact portion (175) is shielded by the guide cap (27).

6. The flip-up table according to any one of claims 1 to 5, wherein a guide (271) preventing the first leg (21) and the second leg (23) from being in contact with each other is attached between the first leg (21) and the second leg (23).

7. The flip-up table according to any one of claims 1 to 6, wherein a caster (26) is attached to the second leg (23).

8. A method for storing a top board (1), which is used for a flip-up table having a top board body (11), a

first leg (21), a second leg (23) which is stored in the first leg, wherein the first and second legs (21, 23) support the top board body (11), from a use position to a stored position,

wherein the top board body (11), which is in the use position and supported by the first leg (21), is turned about a supporting shaft (19),

characterized in that

a cam (172) connected to the top board body (11) is swung about the supporting shaft (19) as the top board body (11) is turned, to cause a contact portion (175) of the cam (172) to be in contact with a supporting surface (239) of the second leg (23), the top board body (11) is turned in a state where the contact portion (175) and the supporting surface (239) are in contact with each other, to cause the cam (172) to run onto the supporting surface (239), as the cam (172) runs onto the supporting surface (239), the supporting shaft (19) is moved in a direction away from a ground surface of the flip-up table, and

as the supporting shaft (19) is moved, the first leg (21) is moved in a direction away from the ground surface.

Patentansprüche

1. Klapptisch, der umfasst:

eine Tragewelle (19);
einen oberen Plattenkörper (11), der an eine Einsatzposition und an eine verstaute Position bewegt werden kann;
eine Kurvenscheibe (172), die mit dem oberen Plattenkörper (11) verbunden ist und um die Tragewelle (19) herum geschwenkt werden kann, wenn der obere Plattenkörper (11) bewegt wird;
einen ersten Schenkel (21), der mit der Tragewelle (19) verbunden und so eingerichtet ist, dass er den oberen Plattenkörper (11) stützt, wenn sich der obere Plattenkörper (11) in der Einsatzposition befindet; und
einen zweiten Schenkel (23), der in Bezug auf den ersten Schenkel (21) bewegt werden kann und so eingerichtet ist, dass er den oberen Plattenkörper (11) über eine Tragefläche (239) stützt, wenn sich der obere Plattenkörper (11) in der verstaute Position befindet;

wobei die Tragefläche (239) so eingerichtet ist, dass sie einem zugewandten Abschnitt (176) der Kurvenscheibe (172) zugewandt ist, wenn sich der obere Plattenkörper (11) in der Einsatzposition befindet, und die Tragefläche (239) in Kontakt mit einem Kontaktabschnitt (175) der Kurvenscheibe (172) ist, wenn sich der obere Plattenkörper (11) in der verstaute Position befindet,

ein Abstand (g) von der Tragefläche (19) zu dem Kontaktabschnitt (175) länger ist als ein Abstand (h) von der Tragewelle (19) zu dem zugewandten Abschnitt (176), und

der zweite Schenkel (23) in dem ersten Schenkel (21) untergebracht ist.

2. Klapptisch nach Anspruch 1,

wobei die Kurvenscheibe (172) so eingerichtet ist, dass sie geschwenkt wird und auf der Tragefläche (239) läuft, wenn der obere Plattenkörper (11) von der Einsatzposition an die verstaute Position bewegt wird,

die Tragewelle (19) so eingerichtet ist, dass sie sich in einer Richtung von einer Bodenfläche des Klapptischs weg bewegt, wenn die Kurvenscheibe (172) auf der Tragefläche (239) läuft, und

der erste Schenkel (21) so eingerichtet ist, dass er sich in einer Richtung von der Bodenfläche weg bewegt, wenn die Tragewelle (19) bewegt wird.

3. Klapptisch nach einem der Ansprüche 1 oder 2,

wobei die Tragefläche (239) geneigt ist, und der Kontaktabschnitt (175) in einer Richtung von der Bodenfläche auf der Tragefläche (239) weg bewegt wird, wenn der obere Plattenkörper (11) von der Einsatzposition an die verstaute Position bewegt wird.

4. Klapptisch nach einem der Ansprüche 1 bis 3, wobei

der obere Plattenkörper (11) um die Tragewelle (19) herum an die Einsatzposition und an die verstaute Position gedreht werden kann und der erste Schenkel (21) so eingerichtet ist, dass er den oberen Plattenkörper (11) in der Einsatzposition über die Tragewelle (19) stützt.

5. Klapptisch nach einem der Ansprüche 1 bis 4,

wobei eine Führungskappe (27), die Bewegung des zweiten Schenkels (23) einschränkt, an einem vorderen Ende des ersten Schenkels (21) angebracht ist, und der Kontaktabschnitt (175) mit der Führungskappe (27) abgeschirmt wird.

6. Klapptisch nach einem der Ansprüche 1 bis 5, wobei

eine Führung (271), die verhindert, dass der erste Schenkel (21) und der zweite Schenkel (23) in Kontakt miteinander sind, zwischen dem ersten Schenkel (21) und dem zweiten Schenkel (23) angebracht ist.

7. Klapptisch nach einem der Ansprüche 1 bis 6, wobei

eine Laufrolle (26) an dem zweiten Schenkel (23) angebracht ist.

8. Verfahren, mit dem eine obere Platte (1) von einer

Einsatzposition an eine verstaute Position verstaute wird, die für einen Klapptisch eingesetzt wird, der

einen oberen Plattenkörper (11), einen ersten Schenkel (21) und einen in dem ersten Schenkel untergebrachten zweiten Schenkel (23) hat, wobei der erste und der zweite Schenkel (21, 23) den oberen Plattenkörper (11) stützen, und der obere Plattenkörper (11), der sich in der Einsatzposition befindet und von dem ersten Schenkel (21) gestützt wird, um eine Tragewelle (19) herum gedreht wird,

dadurch gekennzeichnet, dass

eine Kurvenscheibe (172), die mit dem oberen Plattenkörper (11) verbunden ist, um die Tragewelle (19) herum geschwenkt wird, wenn der obere Plattenkörper (11) gedreht wird, um zu bewirken, dass ein Kontaktabschnitt (175) der Kurvenscheibe (172) in Kontakt mit einer Tragefläche (239) des zweiten Schenkels (23) ist,

der obere Plattenkörper (11) in einem Zustand gedreht wird, indem der Kontaktabschnitt (175) und die Tragefläche (239) in Kontakt miteinander sind, um zu bewirken, dass die Kurvenscheibe (172) auf der Tragefläche (239) läuft,

wenn die Kurvenscheibe (172) auf der Tragefläche (239) läuft, die Tragewelle (19) in einer Richtung von einer Bodenfläche des Klapptischs weg bewegt wird, und

wenn die Tragewelle (19) bewegt wird, der erste Schenkel (21) in einer Richtung von der Bodenfläche weg bewegt wird.

Revendications

1. Table rabattable comprenant :

un axe de support (19),
un corps de panneau supérieur (11) qui est mobile entre une position d'utilisation et une position de stockage,
une came (172) qui est reliée au corps de panneau supérieur (11) et qui peut basculer autour de l'axe de support (19) lorsque le corps de panneau supérieur (11) est déplacé,
un premier montant (21) qui est relié à l'axe de support (19) et configuré pour supporter le corps de panneau supérieur (11) lorsque le corps de panneau supérieur (11) se trouve en position d'utilisation, et
un second montant (23) qui est mobile par rapport au premier montant (21) et configuré pour supporter le corps de panneau supérieur (11) par l'intermédiaire d'une surface de support (239) lorsque le corps de panneau supérieur (11) se trouve en position de stockage,

dans laquelle la surface de support (239) est configurée pour faire face à une partie en regard (176) de la came (172) lorsque le corps de panneau su-

périeur (11) se trouve en position d'utilisation, et la surface de support (239) est en contact avec une partie formant contact (175) de la came (172) lorsque le corps de panneau supérieur (11) se trouve en position de stockage,

la distance (g) allant de l'axe de support (19) à la partie formant contact (175) est plus longue que la distance (h) allant de l'axe de support (19) à la partie en regard (176), et

le second montant (23) est stocké dans le premier montant (21).

2. Table rabattable selon la revendication 1, dans laquelle la came (172) est configurée pour basculer de façon à courir sur la surface de support (239) lorsque le corps de panneau supérieur (11) est déplacé de la position d'utilisation à la position de stockage,

l'axe de support (19) est configuré pour se déplacer dans une direction s'écartant de la surface de base de la table rabattable à mesure que la came (172) court sur la surface de support (239), et le premier montant (21) est configuré pour se déplacer dans une direction s'écartant de la surface de base à mesure que l'axe de support (19) est déplacé.

3. Table rabattable selon l'une quelconque des revendications 1 ou 2, dans laquelle la surface de support (239) est inclinée, et

la partie formant contact (175) est déplacée dans une direction s'écartant de la surface de base sur la surface de support (239) à mesure que le corps de panneau supérieur (11) est déplacé de la position d'utilisation à la position de stockage.

4. Table rabattable selon l'une quelconque des revendications 1 à 3, dans laquelle on peut faire tourner le corps de panneau supérieur (11) autour de l'axe de support (19) vers la position d'utilisation et vers la position de stockage, et le premier montant (21) est configuré pour supporter le corps de panneau supérieur (11) par l'intermédiaire de l'axe de support (19) dans la position d'utilisation.

5. Table rabattable selon l'une quelconque des revendications 1 à 4, dans laquelle une coiffe de guidage (27) limitant le mouvement du second montant (23) est fixée à un embout du premier montant (21), et la partie formant contact (175) est protégée par la coiffe de guidage (27).

6. Table rabattable selon l'une quelconque des revendications 1 à 5, dans laquelle un guide (271), empêchant le premier montant (21) et le second montant (23) de se trouver en contact l'un avec l'autre, et fixé entre le premier montant (21) et le second montant

(23).

7. Table rabattable selon l'une quelconque des revendications 1 à 6, dans laquelle une roulette (26) est fixée au second montant (23). 5

8. Procédé de stockage d'un panneau supérieur (1) qui est utilisé pour une table rabattable comportant un corps de panneau supérieur (11), un premier montant (21), un second montant (23) qui est stocké dans le premier montant (21), les premier et second montants (21, 23) supportant le corps de panneau supérieur (11) depuis une position d'utilisation jusqu'à une position de stockage, 10
 dans lequel on fait tourner le corps de panneau supérieur (11), qui se trouve en position d'utilisation et qui est supporté par le premier montant (21), autour d'un axe de support (19), 15
caractérisé en ce que
 une came (172) reliée au corps de panneau supérieur (11) est amenée à tourner autour de l'axe de support (19) à mesure que le corps de panneau supérieur (11) est tourné, dans le but d'amener une partie formant contact (175) de la came (172) à être en contact avec une surface de support (239) du second montant (23), 20
 on fait tourner le corps de panneau supérieur (11) jusqu'à un état dans lequel la partie formant contact (175) et la surface de support (239) sont en contact l'une avec l'autre, afin d'amener la came (172) à courir sur la surface de support (239), 25
 à mesure que la came (172) court sur la surface de support (239), l'axe de support (19) est déplacé dans une direction s'écartant de la surface de base de la table rabattable, et 30
 à mesure que la surface de support (19) est déplacée, le premier montant (21) est déplacé dans une direction s'écartant de la surface de base. 35

40

45

50

55

FIG. 1

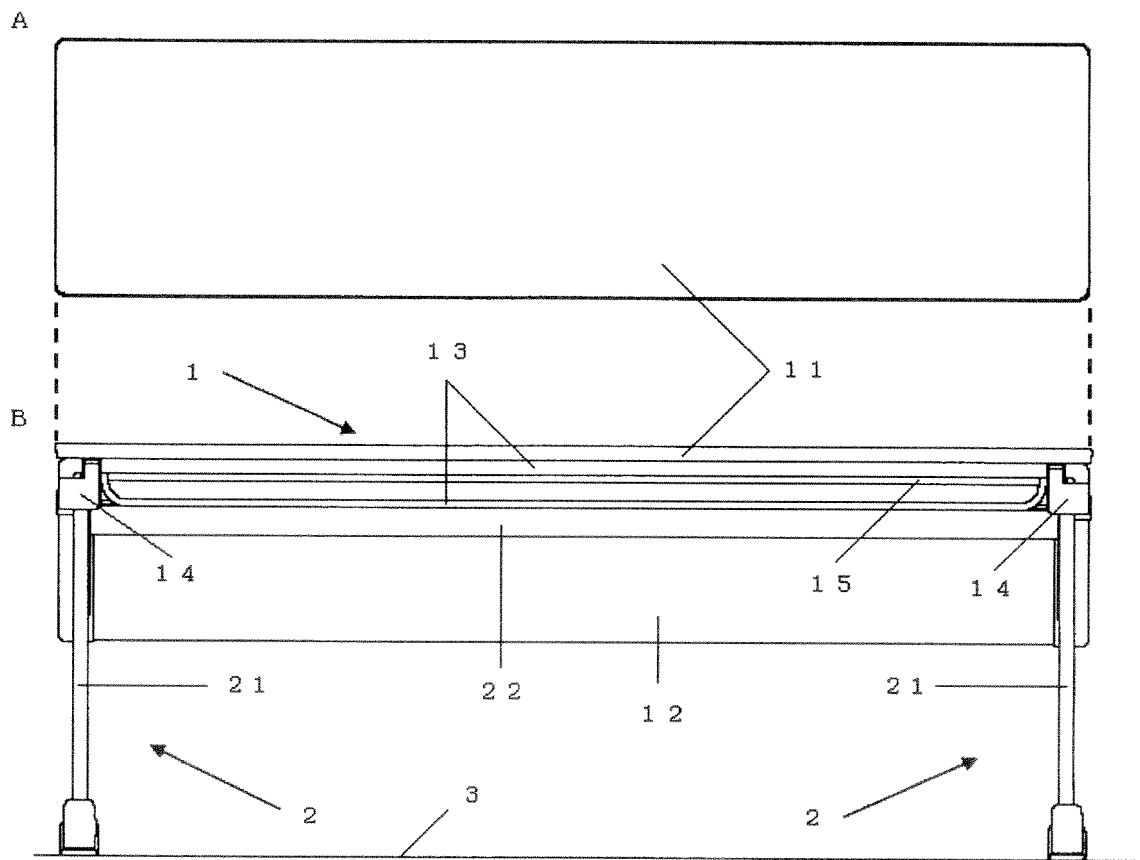


FIG. 2

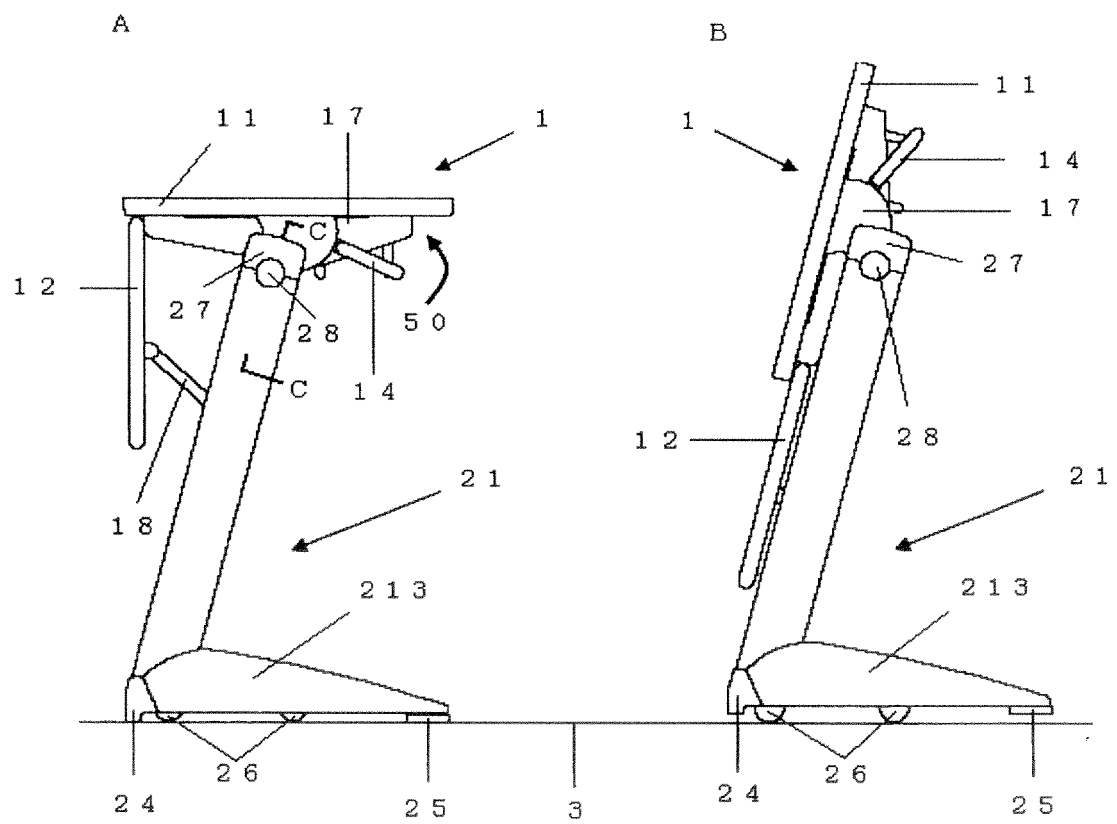


FIG. 3

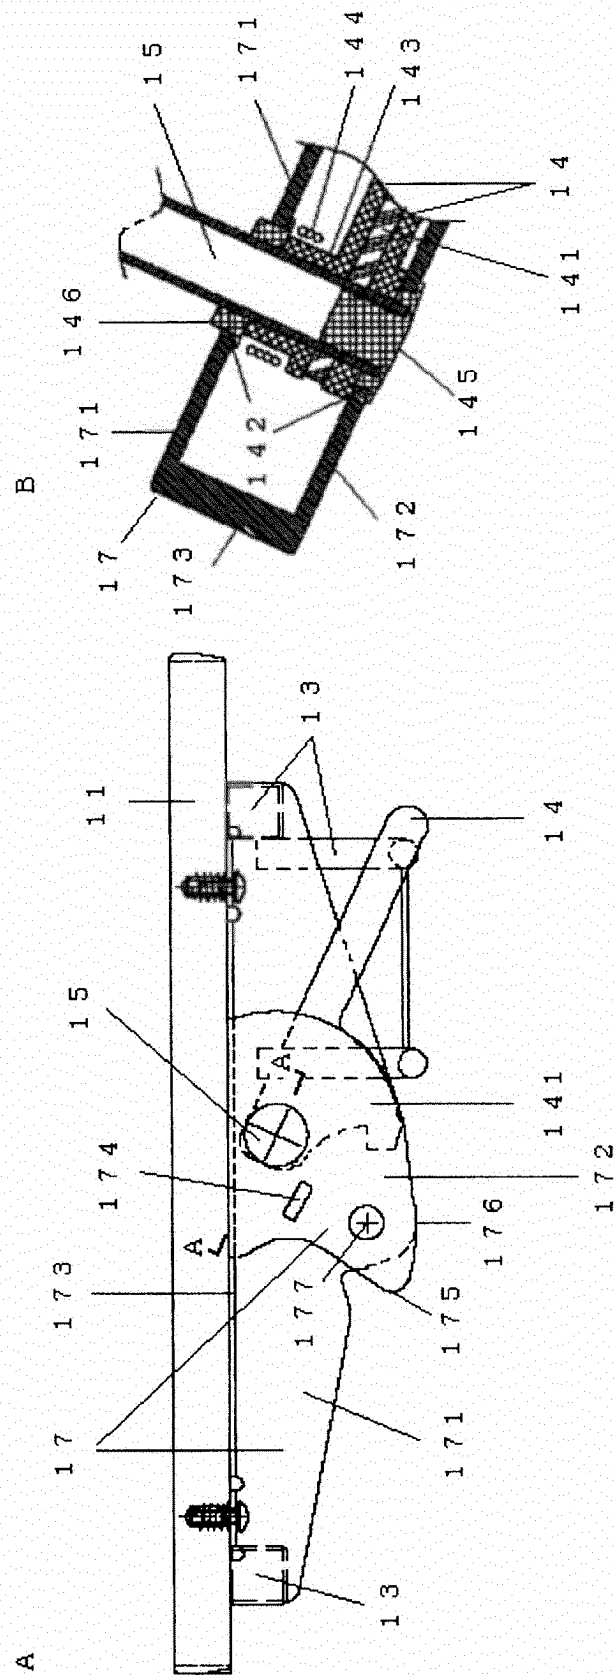


FIG. 4

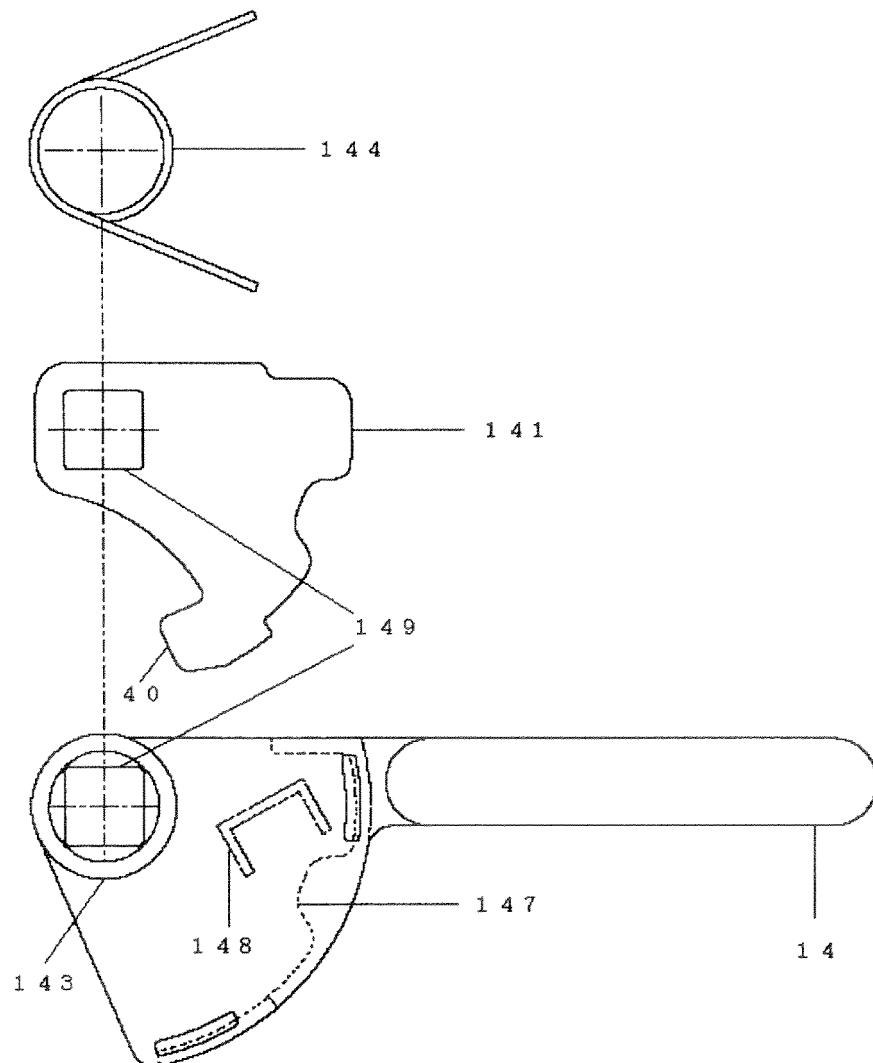


FIG. 5

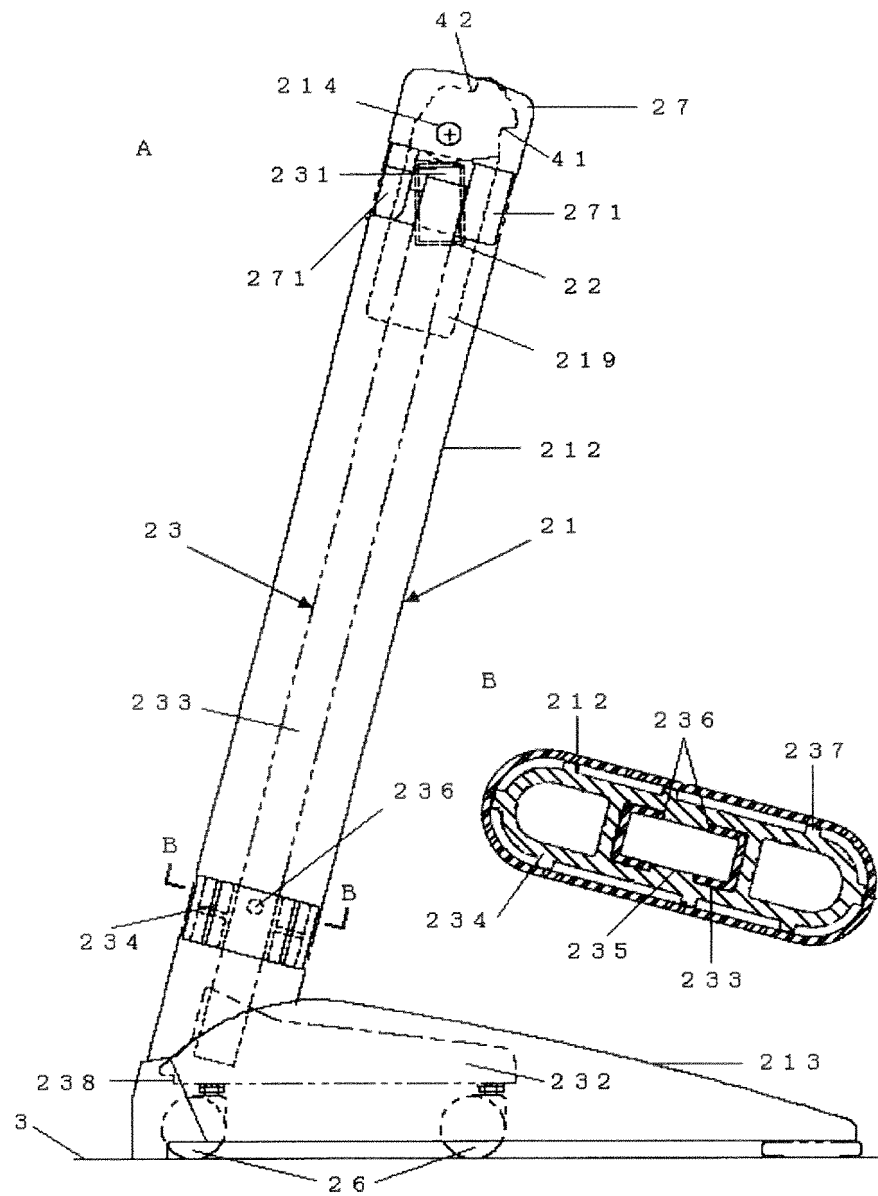


FIG. 6

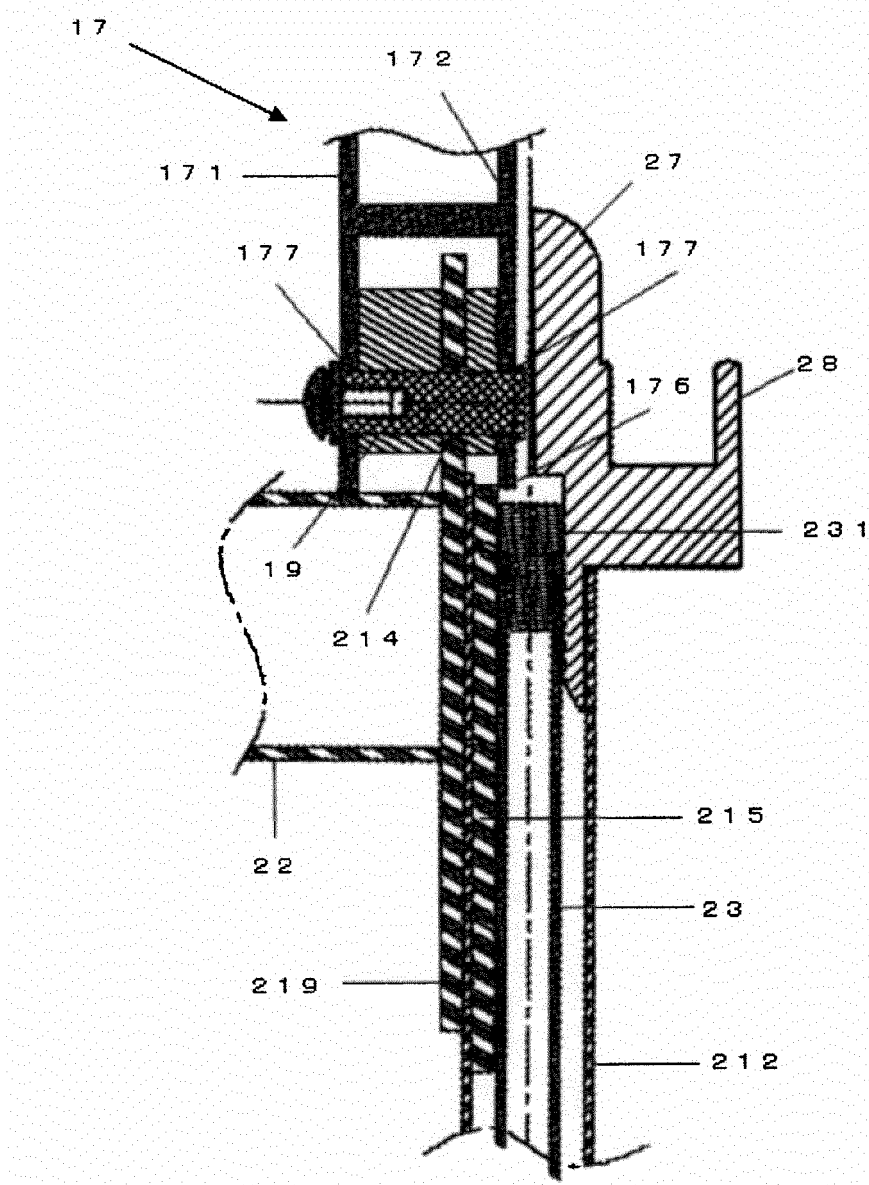


FIG. 7

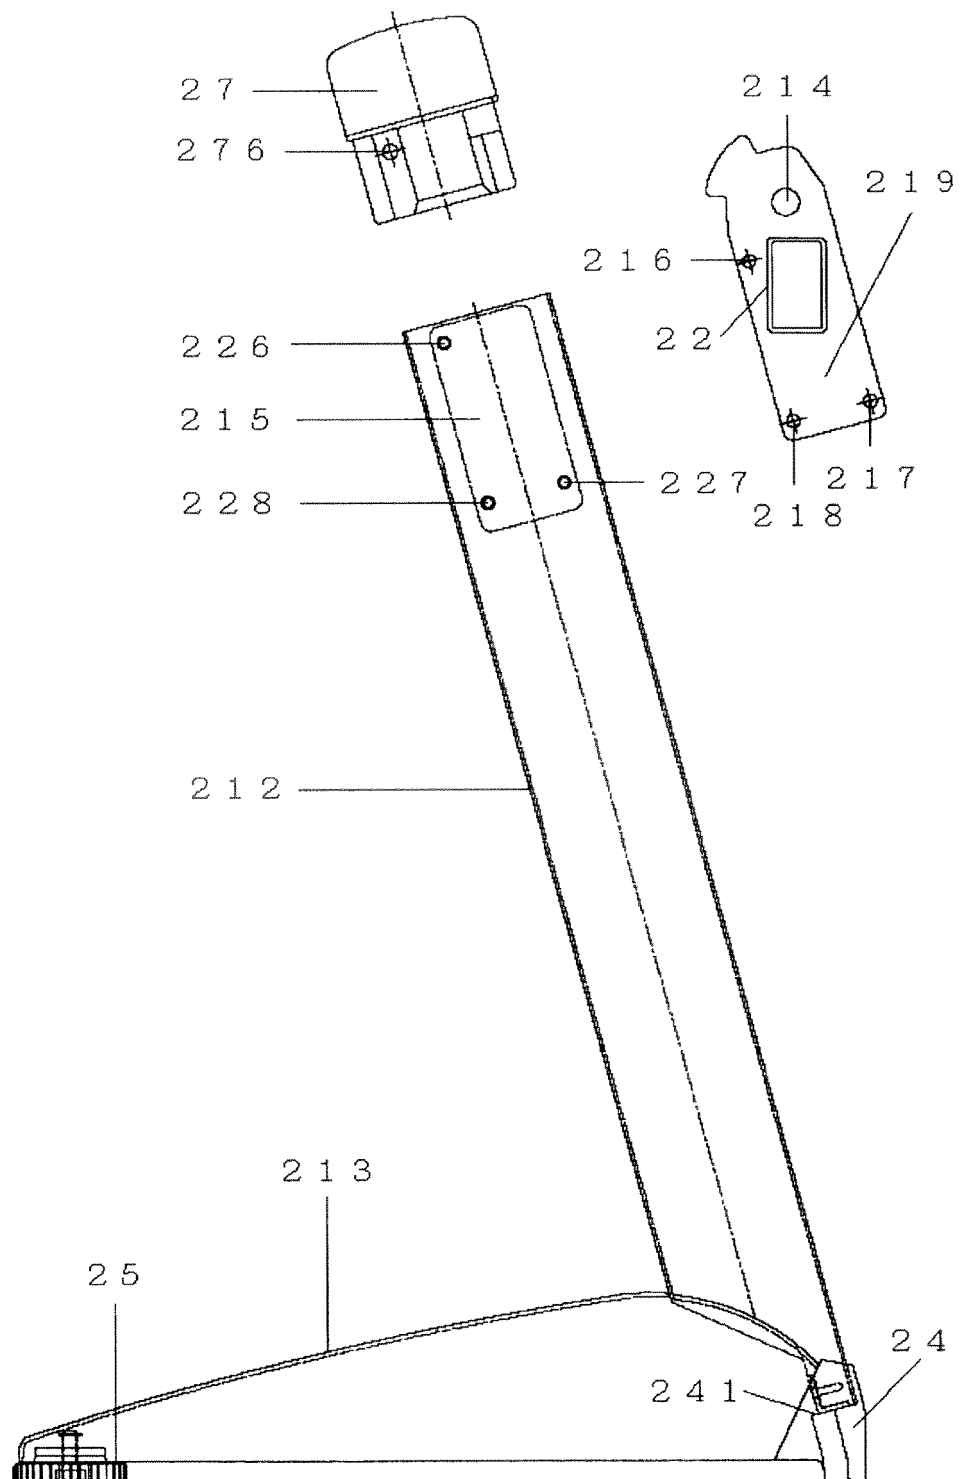


FIG. 8

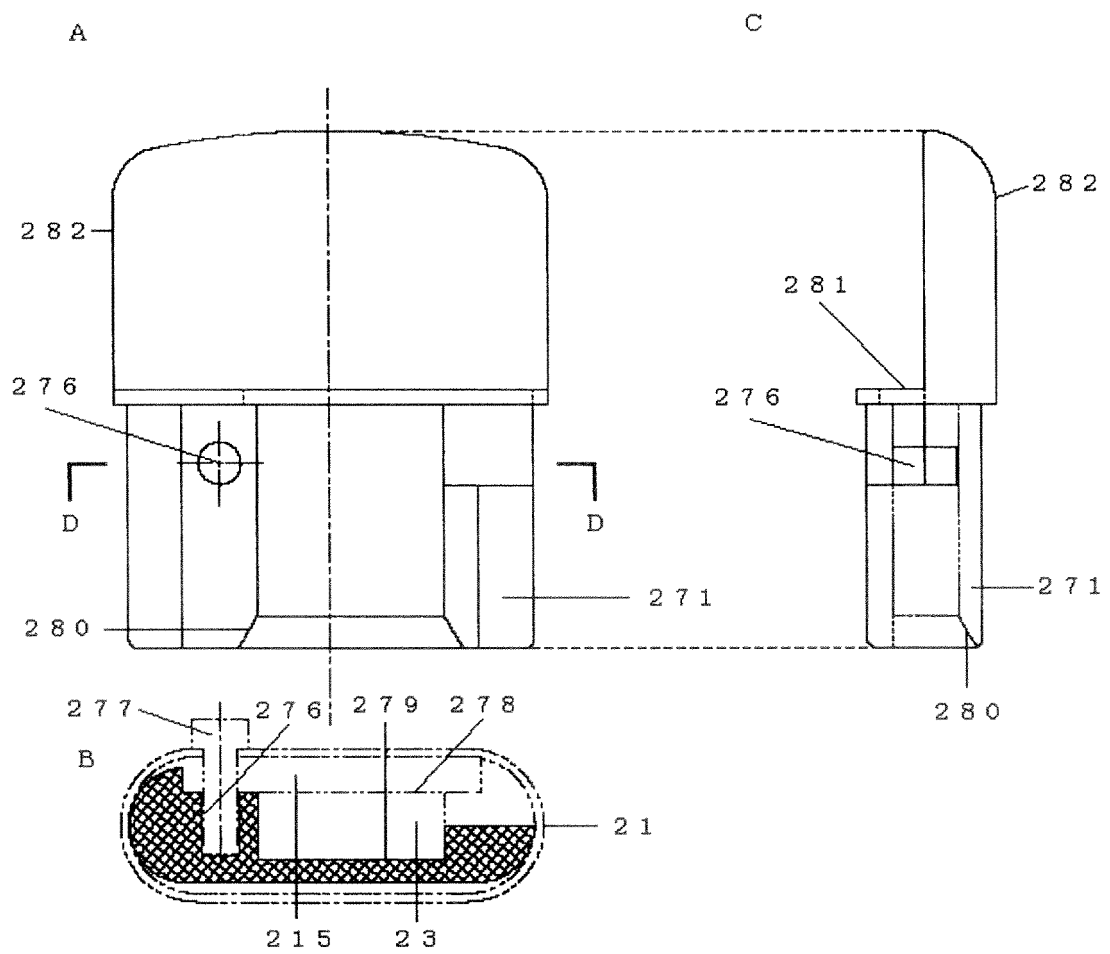


FIG. 9


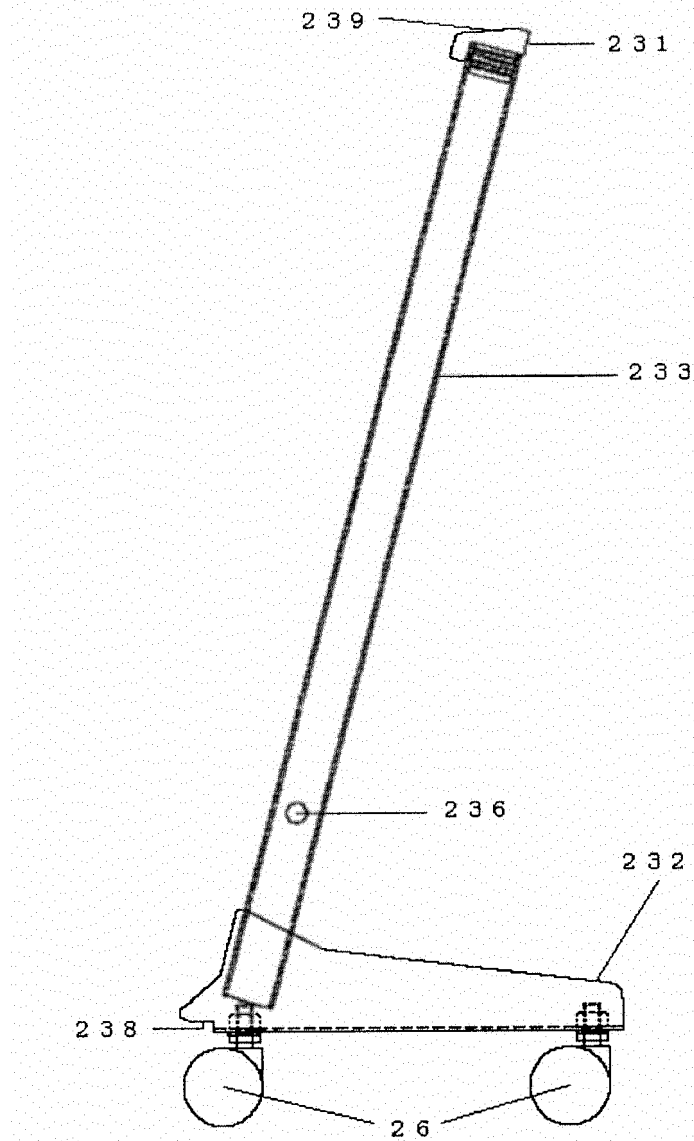


FIG. 10

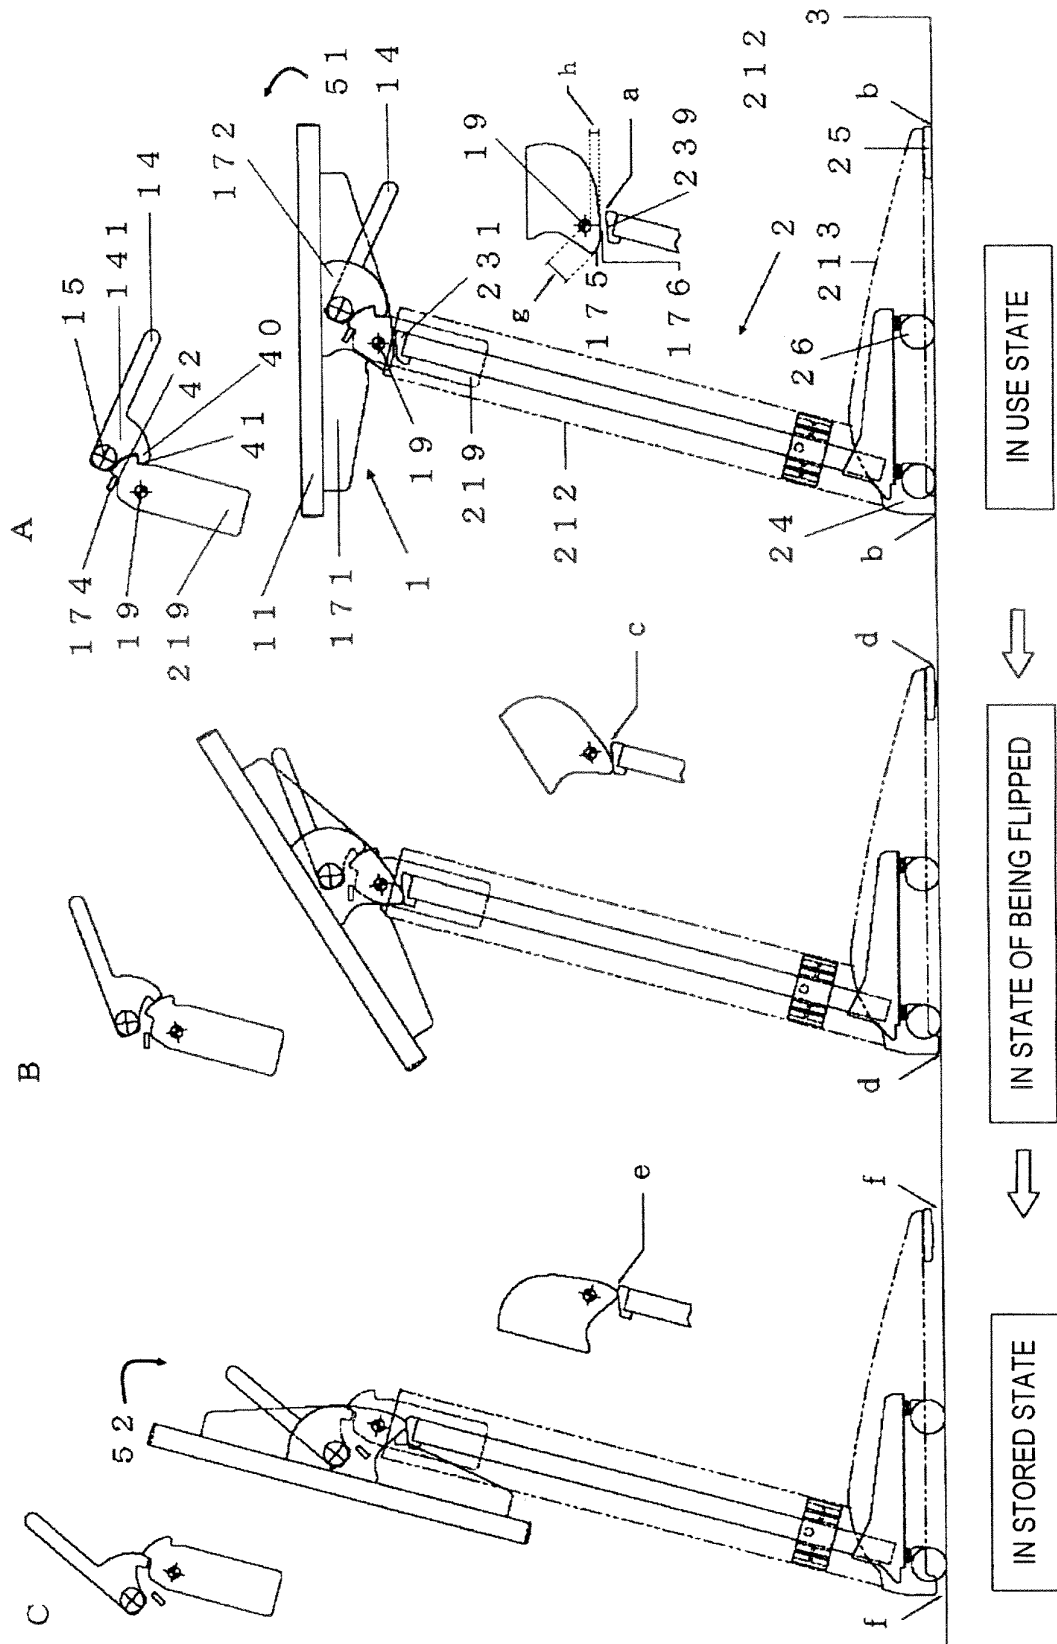

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2008104793 A [0003]