

Description

[0001] The present invention relates to a roof flashing used for sealing the joint between the roof-penetrating structure and roofing material, wherein the flashing substantially consists of the top member, the bottom member and the side members and is equipped with means protecting against weather conditions the area where the oblong element with relatively small cross-sectional area, e.g. a bar or electric power cable, passes through the said flashing. Most often such sealing is required when electric conductors from outdoor-mounted electric devices, e.g. roller shutter, awning, or exterior roller blind, pass through the roof to indoor parts of electric system. An efficient sealing of such passage is difficult, particularly in the case of relatively thin roof coverings like flake-type or other similar roofing material, where there are no sufficiently wide gaps between individual elements of the covering. This is particularly applicable to non-demountable roof coverings, e.g. flat sheets or roofing felt, where any gaps usually constitute a potentially leaky areas.

[0002] From previous solutions the construction and assembly method of roof flashing is known in which the plastic sealing compound bonded to underside of the bottom member allows bonding the flashing top to the roofing material and ensures the joint tightness. The assembly of roof flashing starts in putting the bottom element in place and fitting the apron made of elastic material. The remaining elements are mounted in the order from bottom to top in such a manner that each next element overlaps the previous one. In some solutions the side members can be composed of more than one part, depending on the length of the roof-penetrating structure. In most cases such members are secured to the roof opening frame and to the battens. Due to joint tightness requirements, the auxiliary metal sheet strips are used for fixing the roof flashing to the battens. The assembly finishes with mounting of top element which requires additional fixing. In known solutions used to date this top element is fixed directly to the frame by nails or screws. Such solutions are impractical for the reason that flashing elements are flat, without any embossment, positioned parallel to the frame and pressed against it, so there is no possibility to install a power cable between side or top/bottom element of the roof-penetrating structure and side or top/bottom element of roof flashing, respectively. In such solutions the cable supplying the electric device located outside the roof window frame (basically the roof-penetrating structure) cannot be installed easily and without breaking the continuity of roof covering layer, therefore both the window structure and roof covering are exposed to unfavourable weather conditions.

[0003] The methods are known on the market for passing the feeder cable through the structure of roof window or flashings around it, wherein one of roof window flashing elements have a special hole situated in place relatively sheltered from weather conditions. In order to ensure tightness, in most cases special sealing elements,

e.g. made of rubber, are used. Sometimes a sealing compound is used for this purpose. These solutions are easy in assembly, but they also have a disadvantage consisting in that the properties of sealing compound deteriorate with time due to ageing phenomena in varying atmospheric conditions, leading to compound breakages and unsealing of the joint.

[0004] Furthermore, there are also solutions known on the market, disclosed also in patent specification DE 19600949, wherein the roof window rolling shutter roll-up mechanism may be operated and driven by hand or by using electric energy, depending on the embodiment. Such solutions also have a weak point consisting in that both the electric feeder cable and the bar or a set of articulated bars must pass through the roof window frame, thus disturbing or even damaging the material structure and causing a potential leakage at the place of penetration through roof window frame.

[0005] In every described solution known the cable supplying the driving mechanism with electric power is located in sub-covering layer of the roof structure, running near the roof window or inside the structure of roof window frame and then to the source of electric power. However, it is always necessary to make an additional through-hole disturbing the structure of flashing that seal the roof structure.

[0006] The purpose of the invention is to ensure protection against weather conditions of the flashing-type joint of the roof-penetrating structure with the roof covering material, when it becomes necessary to pass an oblong element with relatively small cross-sectional area, e.g. a bar or an electric cable, through the flashing.

[0007] The distinctive feature of the invention is that in the flashing that join the roof-penetrating structure with roof covering material an additional cheap and easy to install roof-penetrating element is used, preferably made of steel sheet with suitably formed shape and ensuring tight passage of electric power supply cable coming from the electric device mounted outside the roof-penetrating structure or installed in the roof slope and going to indoor part of electric system. Such penetrating element may form a part of complete flashing set or may be added to the standard flashing set as an additional element, so the proposed solution may be used during installation of the flashing or the penetrating element may be retrofitted to the existing flashing structure. The proposed solution is not limited to sealing of just electric cable going through the roof structure, but can also be employed for efficient protecting of the area in which any oblong element with relatively regular shape and small cross-sectional area goes through the flashing. Flexible elements like electric cables, ropes etc. adapt their shape to the guiding profile of the roof-penetrating element themselves, whereas stiff elements like steel and other metal wires require to be pre-shaped to fit to the guiding profile shape. If a stiff element with known shape has to go through the flashing, it is possible to fabricate the guiding channel of required shape earlier at the production stage.

[0008] The roof-penetrating element can be lap mounted between any two neighbouring members of roof flashing. The shape of said roof-penetrating element ensures that the basic function of flashing is performed in the place where this element is installed. The roof-penetrating element is preferably situated between side members of the flashing or in the point where the top member of the flashing joins the side member. It is also possible to install it at the point where the side member of the flashing joins the bottom member. The design of roof-penetrating element ensures that it can be mounted regardless the mounting sequence of the flashing members. This is a significant advantage of proposed solution, since it is possible to attach the roof-penetrating element to any standard flashing completely mounted on the roof with no loss of tightness.

[0009] The roof-penetrating element substantially features with the U-section shape, preferably bent from a metal sheet, with the angle between legs corresponding to the shape of adjacent flashing elements. Preferably, this angle is usually close to the right one. The horizontal leg of roof-penetrating element profile, substantially positioned in the roof plane after assembly, is lap joined with adjacent flashing elements, whereas the vertical legs are also lap joined with top surfaces of adjacent flashing elements. For the purposes of this specification, the term "horizontal leg" shall mean the leg parallel to the roof plane, and the term "vertical leg" shall mean the leg perpendicular to the roof plane.

[0010] The roof-penetrating element of the flashing has the profiled embossment in the form of half-open guiding channel which may guide the electric cables supplying the external devices mounted on the roof slope or on external side of roof window or the roof-penetrating structure. The cable or other element going through the roof in the guiding channel is pressed down during the assembly by the neighbouring flashing elements. The roof-penetrating element allows for tight penetration of a cable or other oblong, elastic or flexible element through the flashing and also allows guiding it from underside of the roof towards outside of the roof without breaking the continuity of roof covering sealing layer. The entire system will remain tight provided it is mounted on a sloping rooftop, due to typically lapped joints and lack of additional seals between elements of the flashing.

[0011] The guiding channel can be formed as the embossment in horizontal leg and/or vertical legs. The direction of guiding channel in the part where the cable goes out from the roof is preferably parallel to the bending line between the vertical leg and horizontal leg. Such limitation for the cable direction results from mounting the roof-penetrating element on a sloping roof and protects against leakages to the inside of roof covering structure, assuming typical weather conditions. From this point of view the most favourable solution is such that the guiding channel is formed in vertical leg having no direct contact with down flowing water. In such embodiment the internal outlet of guiding channel leading to un-

der-roof space is, in most cases, perpendicular to the plane of horizontal leg. However, depending on further direction of the cable inside the roof structure, this angle may be different. The guiding channel between internal outlet and the external outlet should feature with guiding curve in the shape of gentle arc having the radius not less than the minimum bending radius of dedicated element going through the flashing.

[0012] The flashing is mounted in a typical way, i.e. the bottom member is fastened first, then side members and the roof-penetrating element with the cable inserted into guiding channel, and finally the top member.

[0013] The advantage of this solution is that it is simple and eliminates the points where the tightness of roof covering layer may deteriorate. Also, a significant advantage is that the assembly work necessary for correct and tight placement of cables is much easier and efficient, since it is no longer necessary to make penetrations (punctures) through the sealing layer, therefore a significant savings in time and labour can be obtained. Further, the possibility to replace the feeder cables, if necessary, with no need to dismantle the roof covering and breaking the tightness of covering layer, is an unquestionable merit of proposed solution.

[0014] In the proposed embodiment, the roof flashing according to the invention is composed of the following parts, listed here according to the assembly sequence: the bottom member (1), symmetrically located side members (2), roof-penetrating element (3) and top member (4). The expanded view of roof-penetrating element lap mounted between side member (2) and top member (4) is shown in Fig. 1, whereas the same flashing completely assembled is shown in Fig. 2. Fig. 3 shows structural details of roof-penetrating element (3), its position in the entire assembly and the way how the cable (5) goes through the roof from outside. Finally, Fig. 4 shows the roof-penetrating element (3) with the cable (5) located inside the guiding channel (31).

[0015] The roof-penetrating element (3) lap mounted between the side member (2) and top member (4) has the cross-sectional profile in the form of asymmetrical U-shape, preferably bent from metal sheet. The lap mount means that the roof-penetrating element is placed on the upper part of side member (2), and then the upper member (4) is placed on the upper part of roof-penetrating element (3) and, for the sake of tightness, simultaneously on the upper part of side member. The horizontal leg (32) of roof-penetrating element (3) is parallel to the surface of side member (2) and is pressed against this surface by corresponding surface of the top member. At the same time the vertical leg (33) contacts with vertical walls of adjacent flashing elements, i.e. the side member (2) and the top member (4). The leg opposite the vertical leg (33) forms the edge used for standing seam joint with the roof covering and performs the same function as the corresponding part of the side member (2). In some applications this leg is superfluous and the roof-penetrating element has the form of an angle with one leg (33) vertical.

[0016] The roof-penetrating element (3) of the flashing has the profiled embossment in the form of half-open guiding channel (31) formed in the vertical leg (33); the said channel can guide the electric cable (5) going to external devices mounted on the roof slope or on external side of roof window. After mounting of the roof-penetrating element (3), the adjacent vertical leg of the side member (2) closes the guiding channel (31). The direction of guiding channel (31) in the area of external outlet (34) through which the cable (5) goes outside the roof is parallel to the bending line between the vertical leg (33) and horizontal leg (32), which means that after assembly of the flashing on the roof this direction is the same as the direction of the roof slope. A part of the guiding channel (31) in the area of internal outlet (35) through which the cable (5) goes inside the roof is perpendicular to the surface of horizontal leg (32); such angle of internal outlet (35) causes that the cable (5) goes out perpendicularly to the roof covering surface. However, other angles may be used as well, depending on specific application needs. The guiding channel (31) between the area of external outlet (34) and the area of internal outlet (35) is formed as a gentle arc with radius corresponding to the minimum bending radius of the cable (5) which penetrates the flashing.

Claims

1. Sealing roof flashing used for sealing the joint between the roof-penetrating structure and sloped roof covering material, wherein the flashing substantially consists of the top member, the bottom member and the side members and is equipped with means protecting against weather conditions the area where the oblong element with relatively small cross-sectional area, substantially an electric cable, goes through said flashing, **characterized in that** the flashing has an additional roof-penetrating element (3) located between any of its members and so shaped that the cable (5) or other oblong element can tightly penetrate through the flashing.
2. Sealing roof flashing according to claim 1, **characterized in that** the shape of roof-penetrating element (3) allows for lap joining of this element with adjacent members of this flashing.
3. Sealing roof flashing according to claim 2, **characterized in that** it is made of substantially U-shaped section with horizontal leg (32) which after assembly is substantially positioned in the roof plane and remains in contact with bottom parts of adjacent members of the flashing, and the vertical leg (33) remains in contact with preferably vertical walls of adjacent members of the flashing, i.e. side member (3), top member (4), or bottom member (1).
4. Sealing roof flashing according to claim 2, **characterized in that** it is made of substantially angle-shaped section with horizontal leg (32) which after assembly is substantially positioned in the roof plane and remains in contact with preferably vertical walls of adjacent members of the flashing, i.e. side member (3), top member (4), or bottom member (1).
5. Sealing roof flashing according to claim 1, **characterized in that** the shaped half-open channel (31) for guiding the cable (5) is formed in horizontal leg (32) or vertical leg (33).
6. Sealing roof flashing according to claim 5, **characterized in that** the direction of guiding channel (31) in the area of external outlet (34) is preferably parallel to the bending line between the vertical leg (33) and the horizontal leg (32).
7. Sealing roof flashing according to claim 6, **characterized in that** the guiding channel (31) is formed in the vertical leg (33).
8. Sealing roof flashing according to claim 6, **characterized in that** the guiding channel (31) is formed in the horizontal leg (32).
9. Sealing roof flashing according to claim 7, **characterized in that** the direction of guiding channel (31) in the area of internal outlet (35) is preferably perpendicular to the surface of horizontal leg (32).
10. Sealing roof flashing according to claim 9, **characterized in that** the guiding channel (31) between the area of external outlet (34) and the area of internal outlet (35) has the guiding curve in the form of an arc with the radius not less than the minimum bending radius of dedicated element passing through the flashing.

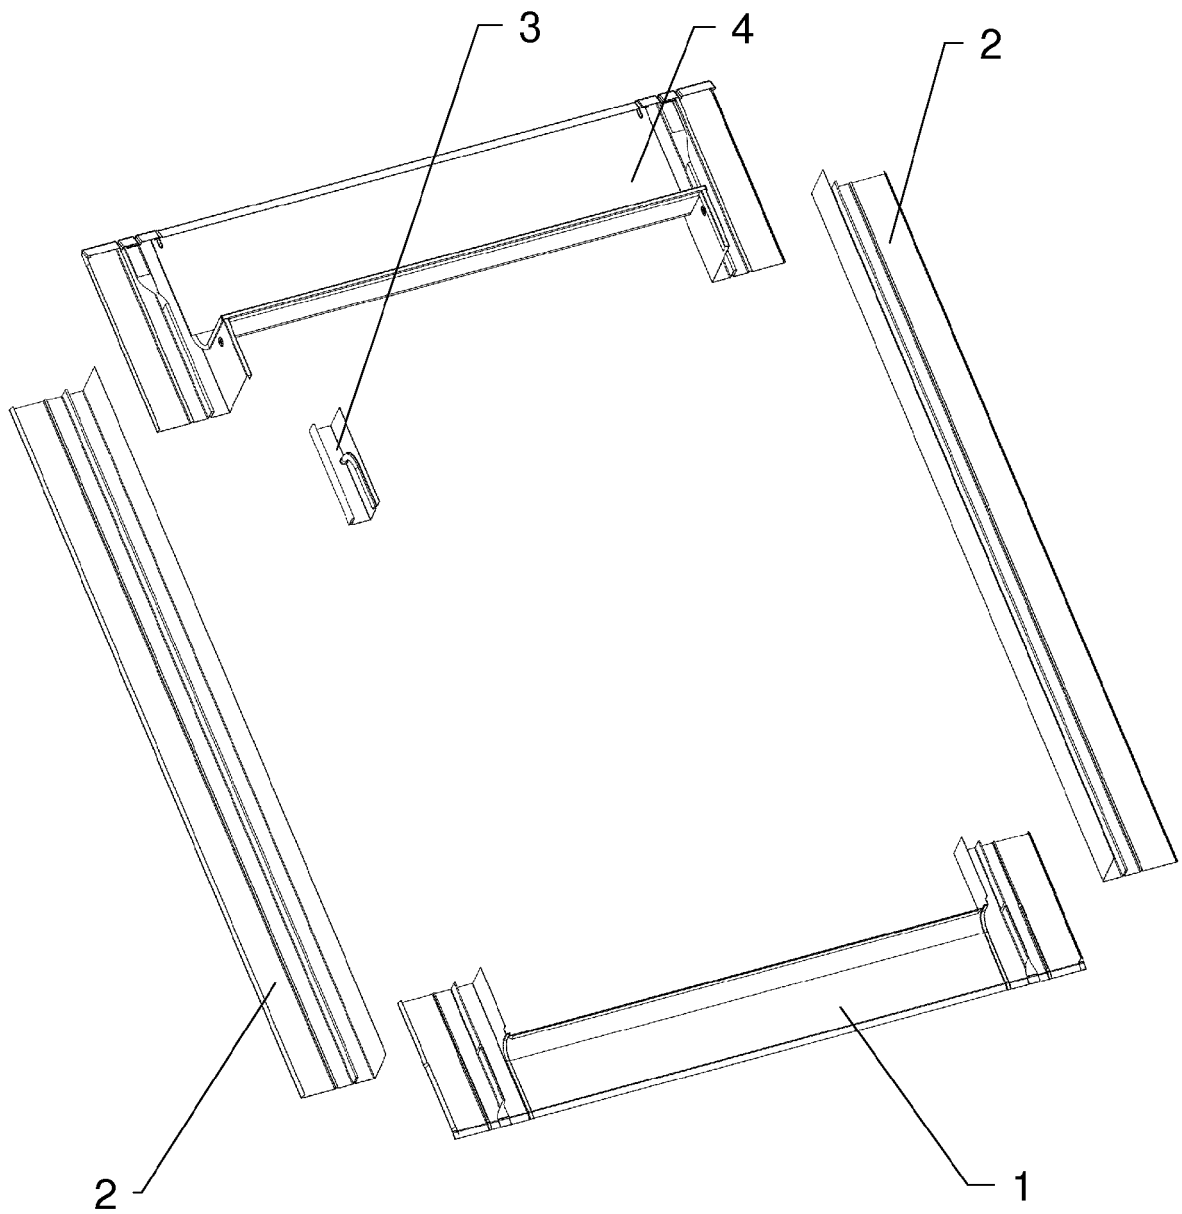


Fig. 1

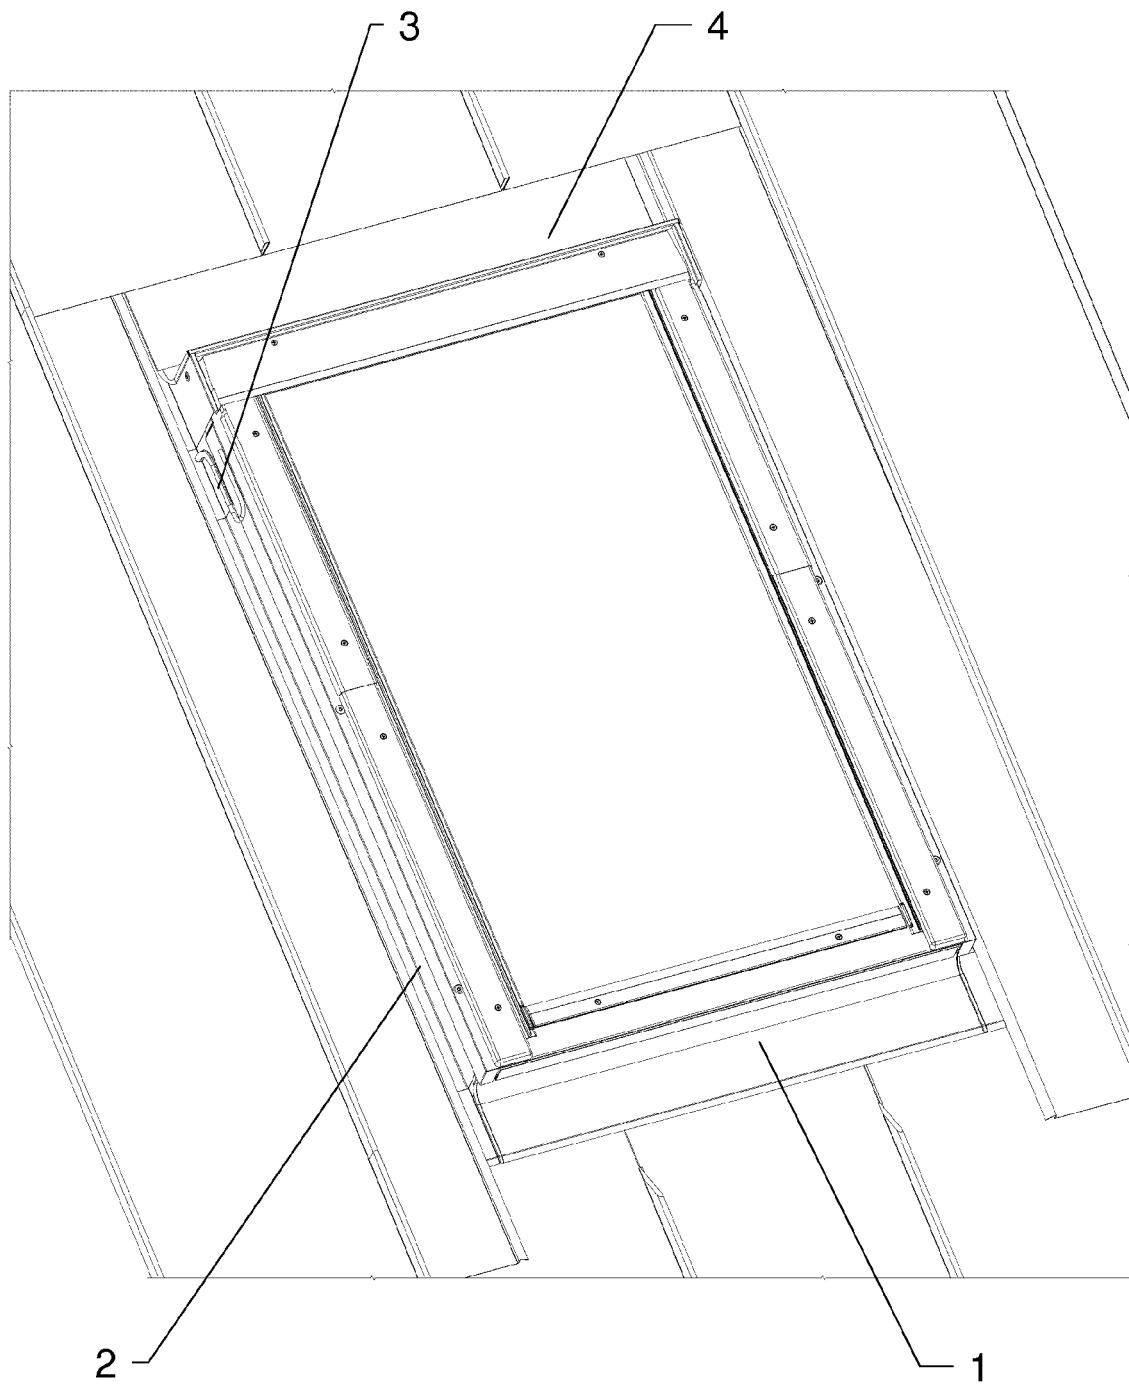


Fig. 2

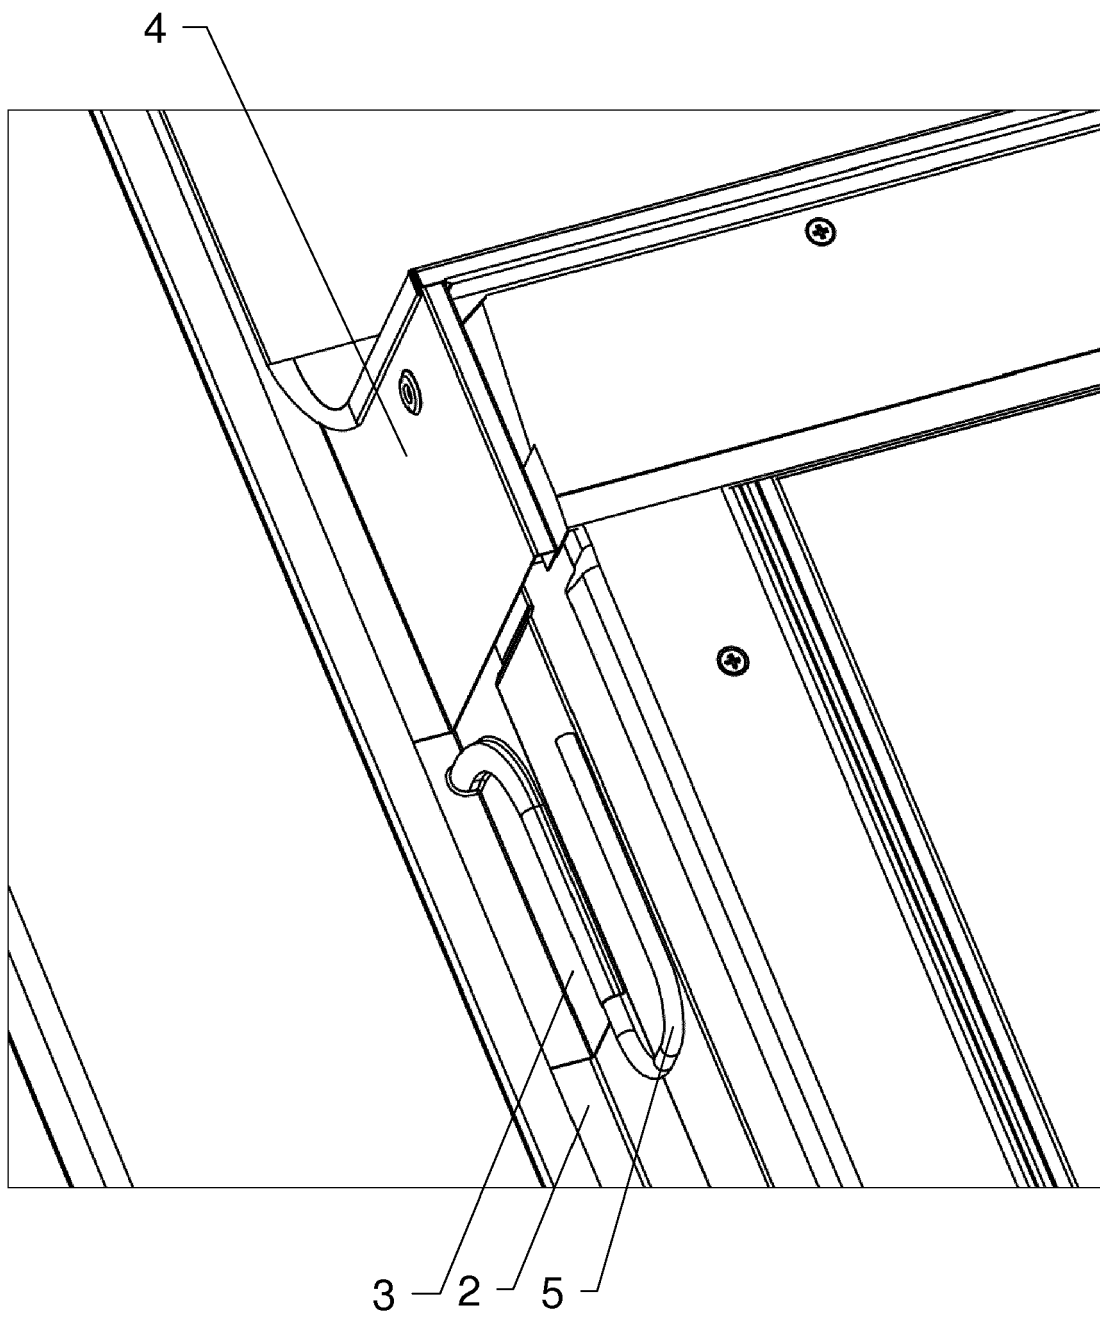


Fig. 3

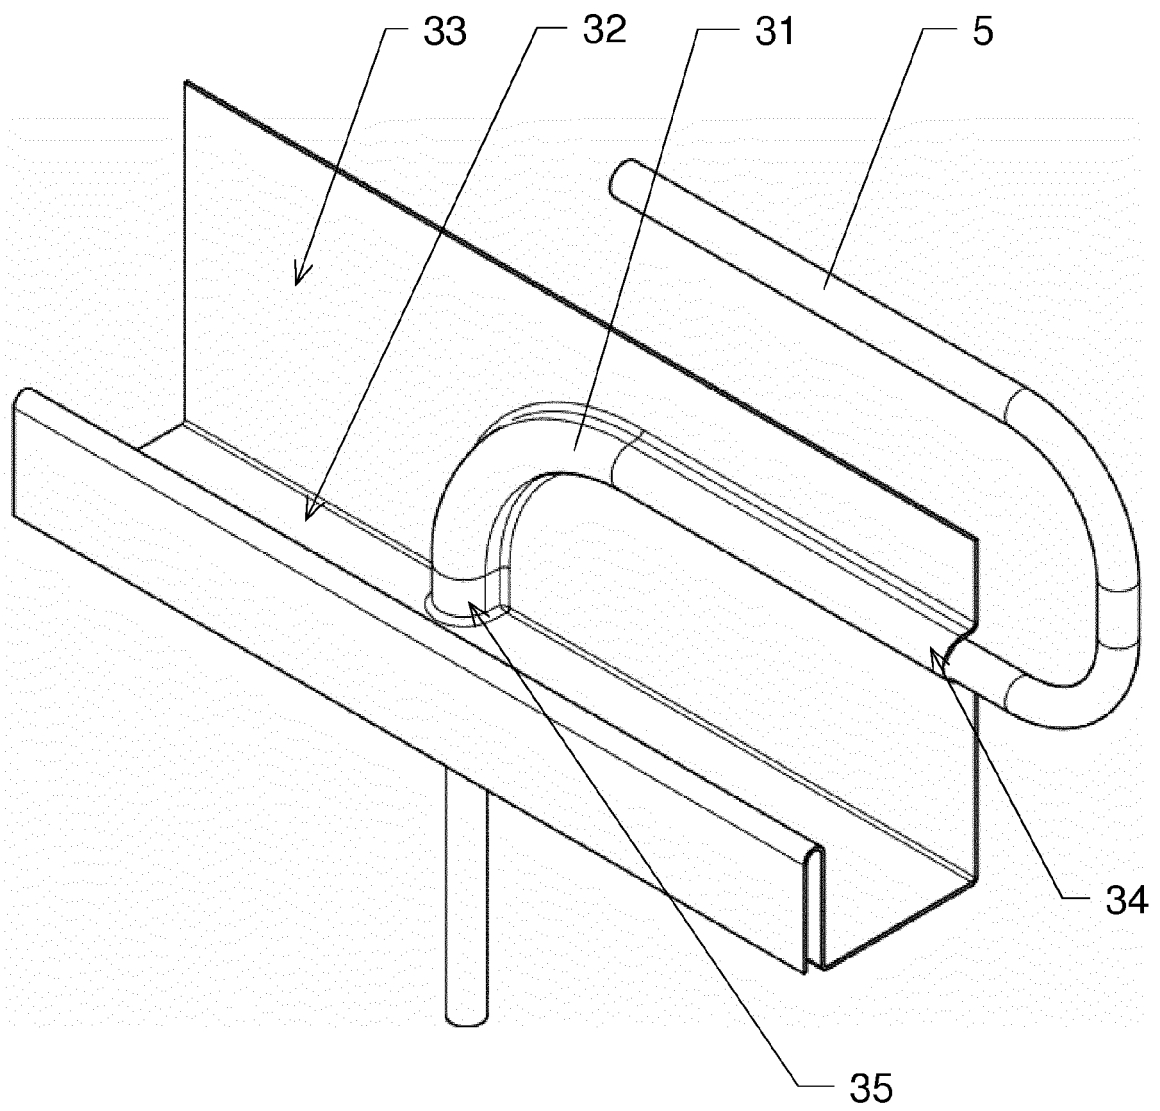


Fig. 4



EUROPEAN SEARCH REPORT

Application Number
EP 12 19 5024

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	WO 99/51835 A1 (VELUX IND AS [DK]; JACOBSEN PER [DK]; KRISTENSEN JENS TROELS PLESNER []) 14 October 1999 (1999-10-14) * figures 1-2 *	1-10	INV. E04D13/147
A	US 2004/244827 A1 (HATSUKAIWA TERUKI [JP] ET AL) 9 December 2004 (2004-12-09) * paragraph [0107]; figures 7-8 *	1-10	
A,D	DE 196 00 949 A1 (ROTO FRANK AG [DE]) 17 July 1997 (1997-07-17) * figure 8 *	1-10	
			TECHNICAL FIELDS SEARCHED (IPC)
			E04D H01L F24J E06B
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 10 April 2013	Examiner Leroux, Corentine
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

1
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 12 19 5024

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

10-04-2013

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9951835 A1	14-10-1999	AT 219198 T	15-06-2002
		AU 2827999 A	25-10-1999
		CA 2327347 A1	14-10-1999
		DE 69901823 D1	18-07-2002
		DE 69901823 T2	20-02-2003
		DK 49499 A	08-10-1999
		EP 1070182 A1	24-01-2001
		ES 2178397 T3	16-12-2002
		JP 4421775 B2	24-02-2010
		JP 2002513106 A	08-05-2002
		PL 343371 A1	13-08-2001
		US 6457279 B1	01-10-2002
		WO 9951835 A1	14-10-1999
US 2004244827 A1	09-12-2004	AT 556184 T	15-05-2012
		EP 1270842 A1	02-01-2003
		JP 4759904 B2	31-08-2011
		US 2003034064 A1	20-02-2003
		US 2004244827 A1	09-12-2004
		WO 0173241 A1	04-10-2001
DE 19600949 A1	17-07-1997	DE 19600949 A1	17-07-1997
		DE 19655108 B4	04-11-2004
		FR 2743600 A1	18-07-1997
		FR 2793516 A1	17-11-2000

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- DE 19600949 [0004]