



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
17.07.2013 Bulletin 2013/29

(51) Int Cl.:
B65B 35/40 (2006.01)

(21) Application number: **12199418.0**

(22) Date of filing: **27.12.2012**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**
Designated Extension States:
BA ME

(72) Inventor: **Monti, Giuseppe**
40065 Pianoro (Bologna)
(IT)

(74) Representative: **Dall'Olio, Christian et al**
INVENTION S.r.l.
Via delle Armi, 1
40137 Bologna (IT)

(30) Priority: **16.01.2012 IT BO20120016**

(71) Applicant: **Marchesini Group S.p.A.**
40065 Pianoro (Bologna) (IT)

(54) **An apparatus for inserting articles into boxes**

(57) An apparatus for inserting articles (3) internally of boxes (7), which apparatus (1): comprises a first thrust plate (9) for pushing at least an article internally of a box (7); comprises a first abutting blade (36) for at least partially entering the box (7) and providing an upper abutment for facilitating insertion of the article (3) in the box (7); a first straight guide (10) solidly constrained to the frame (8), which straight guide is parallel to the advancement direction; a first member (11) which can slide along the first straight guide (10) and which is provided with a second straight guide (12) that is vertical and perpendicular to the advancement direction; a first linear motor (13) which is borne by the first member (11); a first rod (14) which bears the first thrust plate (9) and which is moved by the first linear motor (13) in order to move the first thrust plate (9) in alternating motion in a horizontal and perpendicular direction to the advancement direction; a second member (15) which can slide along the second straight guide (12); a second linear motor (16) which is borne by the second member (15); a second rod (17) which bears the first abutting blade (34) and which is moved by the second linear motor (16) such as to move in alternating motion in a horizontal and perpendicular direction to the advancement direction; a third member (18) which is hinged to the frame (8); a fourth member (20) which is hinged to the third member (18) and to the second member (15); a fifth member (23) which is hinged to the frame (8); a sixth member (24) which is hinged to the fifth member (23) at a fourth hinge axis (25) and which is hinged to the first member (11); the third member (18) and the fifth member (23) being activatable in rotation such as to move the first member (11) and the second member (15) in synchrony with the first conveyor (2) and

with the second conveyor (6) and in order to enable movement of the first thrust plate (9) and the first abutting blade (34) by action respectively of the first linear motor (13) and the second linear motor (16) in order to insert at least an article internally of a box (7).

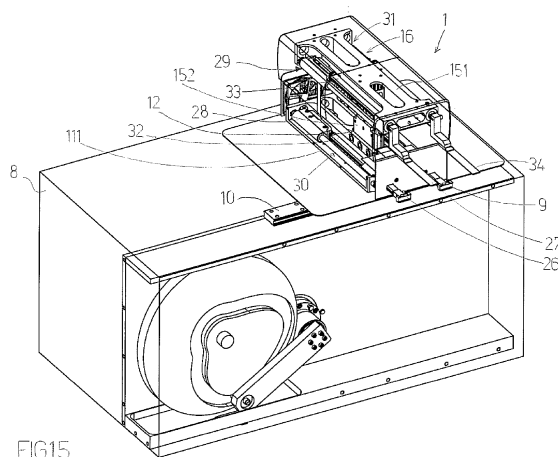


FIG 15

Description

[0001] The present invention relates to the technical sector of apparatus for inserting of articles, such as blister packs containing tablets, internally of boxes.

[0002] An apparatus of known type for introducing articles internally of boxes is arranged by a side of a first conveyor which moves articles in an advancement direction and in a horizontal advancement direction; the first conveyor is of the belt type and transports the articles on the upper branch thereof, which articles can be for example blister packs containing tablets. The belt of the first conveyor is provided with pairs of lateral walls which each define a housing compartment for one or more articles stacked on one another.

[0003] A second conveyor is arranged by a side of the first conveyor, which second conveyor moves boxes in a same sense and direction of advancement of the first conveyor; the second conveyor is of a belt type and transports, on the upper branch thereof, empty boxes destined to be filled with the articles transported on the first conveyor. The belt of the second conveyor is provided with pairs of lateral wall which define abutments each for maintaining a box to be filled in position.

[0004] The apparatus is activated in synchrony with the first conveyor and the second conveyor such as to insert an article, or a stack of articles, internally of a box.

[0005] The apparatus comprises: a thrust plate for pushing an article, arranged in the housing compartment of the belt of the first conveyor, internally of a box arranged on the belt of the second conveyor; and an abutting blade destined to at least partially enter the box and supply an upper abutment for facilitating the insertion of the article in the box. The presence of the abutting blade is necessary where the articles have a limited resistance to buckling and might arch during the action of the thrust plate: an example of articles of this type are blister packs containing tablets.

[0006] The thrust plate and the abutting blade are activated by cam mechanisms having various drawbacks: in fact they have a large number of components, are complicated to regulate and are voluminous.

[0007] The aim of the present invention is to obviate the above drawbacks.

[0008] The above aim is obtained by an apparatus for inserting articles internally of boxes, in accordance with claim 1, which apparatus comprises a frame; is positionable by a side of a first conveyor which moves articles in an advancement direction and in a horizontal advancement direction; can operate in synchrony with the first conveyor and with a second conveyor which is arranged by a side of the first conveyor and which moves boxes in a same sense and advancement direction as the first conveyor; comprises a first thrust plate for pushing at least an article internally of a box; comprises a first abutting blade for at least partially entering the box and providing an upper abutment for facilitating insertion of the article in the box; the apparatus being characterised in

that it comprises: a first straight guide solidly constrained to the frame, which straight guide is parallel to the advancement direction; a first member which can slide along the first straight guide and which is provided with a second straight guide that is vertical and perpendicular to the advancement direction; a first linear motor which is borne by the first member; a first rod which bears the first thrust plate and which is moved by the first linear motor in order to move the first thrust plate in alternating motion in a horizontal and perpendicular direction to the advancement direction; a second member which can slide along the second straight guide; a second linear motor which is borne by the second member; a second rod which bears the first abutting blade and which is moved by the second linear motor such as to move in alternating motion in a horizontal and perpendicular direction to the advancement direction; a third member which is hinged to the frame at a first hinge axis; a fourth member which is hinged to the third member at a second hinge axis and which is hinged to the second member at a third hinge axis; a fifth member which is hinged to the frame at the first hinge axis; a sixth member which is hinged to the fifth member at a fourth hinge axis and which is hinged to the first member at a fifth hinge axis; the first hinge axis, the second hinge axis, the third hinge axis, the fourth hinge axis and the fifth hinge axis being horizontal and perpendicular to the advancement direction; the apparatus being positionable with respect to the first conveyor in such a way that the fourth member is downstream of the fifth member with respect to the advancement direction; the third member and the fifth member being activatable in rotation such as to move the first member and the second member in synchrony with the first conveyor and with the second conveyor and in order to enable movement of the first thrust plate and the first abutting blade by action respectively of the first linear motor and the second linear motor in order to insert at least an article internally of a box.

[0009] The combined use of members hinged to one another and linear motors for moving the first thrust plate and the first abutting blade has been seen to be particularly advantageous and has enable attaining the predetermined aim.

[0010] Specific embodiments of the invention will be described in the following of the present invention, according to what is set down in the claims and with the aid of the appended tables of drawings, in which:

figures 1, 2, 3 are respectively a side view, a front view and a first perspective view of the apparatus of the present invention, in a first operating step;

figure 4 is a second perspective view, alike to the perspective view of figure 3, in which some parts are "transparent";

figures 5, 6, 7 are respectively a lateral view, a front view and a first perspective view of the apparatus of

the present invention, in a second operating step;

figure 8 is a second perspective view, alike to the perspective view of figure 7, in which some parts are "transparent";

figures 9, 10, 11 are respectively a lateral view, a front view and a first perspective view of the apparatus of the present invention, in a third operating step;

figures 12, 13, 14 are respectively a lateral view, a front view and a first perspective view of the apparatus of the present invention, in a fourth operating step which concludes an operating cycle of the apparatus;

figure 15 is a second perspective view alike to the perspective view of figure 14, wherein some parts are "transparent".

[0011] With reference to the accompanying tables of drawings, general reference numeral (1) denotes the apparatus for inserting articles in boxes, object of the present invention.

[0012] The apparatus (1) is positionable by a side of a first conveyor (2) which moves articles (3) in an advancement direction (A) and in a horizontal advancement direction; the first conveyor (2) can be a belt and can transport the articles (3) on a relative upper branch thereof. The belt of the first conveyor (2) can be provided with pairs of lateral walls (4) which each define a housing compartment (5) for one or more articles (3), stacked on one another (in the example two blister packs (3) of tablets). In the illustrated example each housing compartment (5) receives two blister packs (3) of tablets which are stacked on one another.

[0013] A second conveyor (6) can be arranged by a side of the first conveyor (2), which second conveyor (6) moves boxes (7) in the same sense and direction of advancement as the first conveyor (2); the second conveyor (6) can be a belt and can transport empty boxes (7) on the upper branch thereof, destined to be filled with the articles (3) transported by the first conveyor (2). The belt of the second conveyor (6) can be provided with pairs of lateral walls (4) (not illustrated) which define abutments for each maintaining in position a box (7) to be filled. A fixed abutment (not illustrated) can also be provided, positioned by a side of the second conveyor (6) such as to abut the bottom of the boxes (7), such that the boxes (7) remain in position, for example, during the insertion of the blister packs (3) internally thereof.

[0014] The apparatus (1) is activatable in synchrony with the first conveyor (2) and with the second conveyor (6) such as to insert an article, or a stack of articles (3), internally of a box (7).

[0015] The apparatus (1) comprises: a frame (8), a first thrust plate (9) for pushing at least an article internally of

a box (7); and a first abutting blade (36) for at least partially entering the box (7) and providing an upper abutment for facilitating insertion of the article (3) in the box (7).

[0016] As mentioned in the preamble, the presence of the first abutting blade (34) is necessary where the articles (3) have a limited resistance to buckling and might arch during the action of the thrust plate (9): an example of this type of article (3) is the blister pack (3) containing tablets, illustrated in the appended figures, but might also be floppy packs containing liquid or granular or powder substances.

[0017] The apparatus (1) further comprises: a first straight guide (10) solidly constrained to the frame (8), which straight guide is parallel to the advancement direction; a first member (11) which can slide along the first straight guide (10) and which is provided with a second straight guide (12) that is vertical and perpendicular to the advancement direction; a first linear motor (13) which is borne by the first member (11); a first rod (14) which bears the first thrust plate (9) and which is moved by the first linear motor (13) in order to move the first thrust plate (9) in alternating motion in a horizontal and perpendicular direction to the advancement direction; a second member (15) which can slide along the second straight guide (12); a second linear motor (16) which is borne by the second member (15); a second rod (17) which bears the first abutting blade (34) and which is moved by the second linear motor (16) such as to move in alternating motion in a horizontal and perpendicular direction to the advancement direction; a third member (18) which is hinged to the frame (8) at a first hinge axis (19); a fourth member (20) which is hinged to the third member (18) at a second hinge axis (21) and which is hinged to the second member (15) at a third hinge axis (22); a fifth member (23) which is hinged to the frame (8) at the first hinge axis (19); a sixth member (24) which is hinged to the fifth member (23) at a fourth hinge axis (25) and which is hinged to the first member (11) at a fifth hinge axis (35); the first hinge axis (19), the second hinge axis (21), the third hinge axis (22), the fourth hinge axis (25) and the fifth hinge axis (35) being horizontal and perpendicular to the advancement direction.

[0018] The apparatus (1) is positionable with respect to the first conveyor (2) in such a way that the fourth member (20) is downstream of the fifth member (23) with respect to the advancement direction (A).

[0019] The third member (18) and the fifth member (23) are activatable in rotation such as to move the first member (11) and the second member (15) in synchrony with the first conveyor (2) and with the second conveyor (6) and in order to enable movement of the first thrust plate (9) and the first abutting blade (34) by action respectively of the first linear motor (13) and the second linear motor (16) in order to insert at least an article internally of a box (7).

[0020] The first member (11) can form a first housing (30); the first linear motor (13) can thus be housed inter-

nally of the first housing (30).

[0021] The second member (15) can form a second housing (31); the second linear motor (16) can therefore be housed internally of the second housing (31).

[0022] The first member (11) can comprise: a first support structure (111) which forms a first housing (30) (figure 4) and the second straight guide (12); and a first carriage (112) which is fixed to the first support structure (111) and which can slide along the first straight guide (10) (figure 15).

[0023] The second member (15) comprises: a second support structure (151) which conforms a second housing (31); and a second carriage (152) (figure 15) which can slide along the second straight guide (12). The second carriage (152) can be hinged to the fourth member (20) at the third hinge axis (22) (figure 5).

[0024] The first housing (30) of the first member (11) can also receive the second member (15) (compare figures 4 and 15).

[0025] The second member (15) can slide along the second straight guide (12), by means of the slide carriage (152) between two end positions: in a first position (figure 4) the second member (15) is arranged in the first housing (30) of the first member (11), while in a second position (figure 15) the second member (15) is arranged above the first member (11) at a height such that the first abutting blade (34) passes over the walls (4) of the first conveyor (2).

[0026] The second support structure (151) of the second member (15) can be designed such as to bear mainly the second linear motor (16), the second rod (17) and the first abutting blade (34), with the aim of minimising the weight of the mechanical components which have to slide along a second straight guide (12) and perform vertical runs; the first linear motor (13), the first rod (14) and the first thrust plate (9) are instead solidly constrained to the first member (11) as it is not necessary for them to perform straight runs.

[0027] Thus the mechanical inertia of the second member (15) and the mechanical components borne thereby is advantageously minimised, which enables making the functioning of the apparatus (1) more rapid and reducing the energy demanded in order to activate the apparatus (1) itself.

[0028] The figures illustrate an operating cycle of the apparatus (1) of the invention, which occurs in synchrony with the functioning of the first conveyor (2) and the second conveyor (6).

[0029] Figures 1-4 show a first operating step of the apparatus (1), in which the first abutting blade (34) is interposed between a pair of lateral walls (4) of the first conveyor (2) and is arranged above a pair of stacked blister packs (3) (figure 2).

[0030] The first thrust plate (9) and the first abutting blade (34) are then activated respectively such as to push the pair of blister packs (3) internally of a corresponding empty box (7) and to provide a constant upper abutment to the pair of blister packs (3) with the aim of ensuring

introduction of the pair of blister packs (3) into the box (7), see figures 5-8 (second operating step). The first abutting blade (34) therefore prevents the pair of blister packs (3) from arching, which might prejudice the correct inserting of the pair of blister packs (3) in the box (7). A support plane is for example provided between the first conveyor (2) and the second conveyor (6), not illustrated, such as to enable the transfer of the pair of blister packs (3) from the housing compartment (5) of the first conveyor (2) to the box (7) which is on the second conveyor (6).

[0031] Once the pair of blister packs (3) has been inserted into the box (7), the first abutting blade (34) is retracted such that it exits from the box (7) while the first thrust plate (9) is maintained in position to abut the pair of blister packs (3) internally of the box (7) and prevent the exiting of first abutting blade (34) from accidentally causing also an even partial exiting of the pair of blister packs (3); see figures 9-11, third operating step.

[0032] Lastly, the apparatus (1) has to be moved in such a way as to be predisposed to transfer a further pair of blister packs (3) arranged on the first conveyor (2) internally of a box (7) arranged on the second conveyor (6): in order to do this, the first abutting blade (34) has to be raised to a higher level than the lateral walls (4) of the first conveyor (2) (and therefore the second member (15) has to slide along the second straight guide (12) upwards) and the first member (11) (which bears the second member (15) and therefore also the second linear motor (16), the second rod (17) and the first abutting blade (34)) has to be moved along the first straight guide (10) in order to displace towards a further housing compartment (5) containing a pair of blister packs (3) to be transferred (figures 12-15), fourth operating step) internally of an empty box (7). Thus a new operating cycle for the apparatus (1) starts.

[0033] In accordance with the embodiment illustrated in the figures, the apparatus (1) further comprises: a second thrust plate (26) (figure 4) for pushing at least an article internally of a box (7); a second abutting blade (27) for at least partially entering the box (7) and providing an upper abutment to facilitate entry of the article into the box (7); a third linear motor (28) which is housed in the first housing (30) of the first member (11); a fourth linear motor (29) which is housed in the second housing (31) of the second member (15); a third rod (32) which bears the second thrust plate (26) and which is moved by the third linear motor (28) such as to move alternately in a horizontal direction that is perpendicular to the advancement direction; a fourth rod (33) which bears the second abutting blade (27) and which is moved by the fourth linear motor (29) such as to move alternately in a horizontal and perpendicular direction to the advancement direction. The above considerations regarding the functioning of the apparatus (1) are valid also in reference to this embodiment, its being understood that the first housing (30) and the second housing (31) can also house a greater number of linear motors for moving abutting blades and thrust plates with the aim of contemporane-

ously introducing a plurality of pair of blister packs (3) internally of the empty boxes (7).

[0034] The above has been described by way of non-limiting example, and any eventual constructional variations are understood to fall within the protective scope of the present technical solution, as claimed in the following.

Claims

1. An apparatus for inserting articles (3) internally of boxes (7), which apparatus (1):

comprises a frame (8);
 is positionable by a side of a first conveyor (2) which moves articles (3) in an advancement direction (A) and in a horizontal advancement direction;
 can operate in synchrony with the first conveyor (2) and with a second conveyor (6) which is arranged by a side of the first conveyor (2) and which moves boxes (7) in a same sense and advancement direction as the first conveyor (2);
 comprises a first thrust plate (9) for pushing at least an article internally of a box (7);
 comprises a first abutting blade (36) for at least partially entering the box (7) and providing an upper abutment for facilitating insertion of the article (3) in the box (7);
 the apparatus (1) being **characterised in that** it comprises:

a first straight guide (10) solidly constrained to the frame (8), which straight guide is parallel to the advancement direction;
 a first member (11) which can slide along the first straight guide (10) and which is provided with a second straight guide (12) that is vertical and perpendicular to the advancement direction;
 a first linear motor (13) which is borne by the first member (11);
 a first rod (14) which bears the first thrust plate (9) and which is moved by the first linear motor (13) in order to move the first thrust plate (9) in alternating motion in a horizontal and perpendicular direction to the advancement direction;
 a second member (15) which can slide along the second straight guide (12);
 a second linear motor (16) which is borne by the second member (15);
 a second rod (17) which bears the first abutting blade (34) and which is moved by the second linear motor (16) such as to move in alternating motion in a horizontal and perpendicular direction to the advancement direction;

a third member (18) which is hinged to the frame (8) at a first hinge axis (19);
 a fourth member (20) which is hinged to the third member (18) at a second hinge axis (21) and which is hinged to the second member (15) at a third hinge axis (22);
 a fifth member (23) which is hinged to the frame (8) at the first hinge axis (19);
 a sixth member (24) which is hinged to the fifth member (23) at a fourth hinge axis (25) and which is hinged to the first member (11) at a fifth hinge axis (35);
 the first hinge axis (19), the second hinge axis (21), the third hinge axis (22), the fourth hinge axis (25) and the fifth hinge axis (35) being horizontal and perpendicular to the advancement direction;
 the apparatus (1) being positionable with respect to the first conveyor (2) in such a way that the fourth member (20) is downstream of the fifth member (23) with respect to the advancement direction (A);
 the third member (18) and the fifth member (23) being activatable in rotation such as to move the first member (11) and the second member (15) in synchrony with the first conveyor (2) and with the second conveyor (6) and in order to enable movement of the first thrust plate (9) and the first abutting blade (34) by action respectively of the first linear motor (13) and the second linear motor (16) in order to insert at least an article internally of a box (7).

2. The apparatus (1) of the preceding claim, wherein the first member (11) comprises: a first support structure (111) which forms a first housing (30) and the second straight guide (12); and a first carriage (112) which is fixed to the first support structure (111) and which can slide along the first straight guide (10).
3. The apparatus of the preceding claim, wherein the first housing (30) can receive the first linear motor (13) and the second member (15).
4. The apparatus (1) of any one of the preceding claims, wherein the second member (15) comprises: a second support structure (151) which conforms a second housing (31); and a second carriage (152) which can slide along the second straight guide (12).
5. The apparatus of the preceding claim, wherein the second housing (31) can receive the second linear motor (16).
6. The apparatus of claim 4 or 5, wherein the second carriage (152) is hinged to the fourth member (20) at the third hinge axis (22).

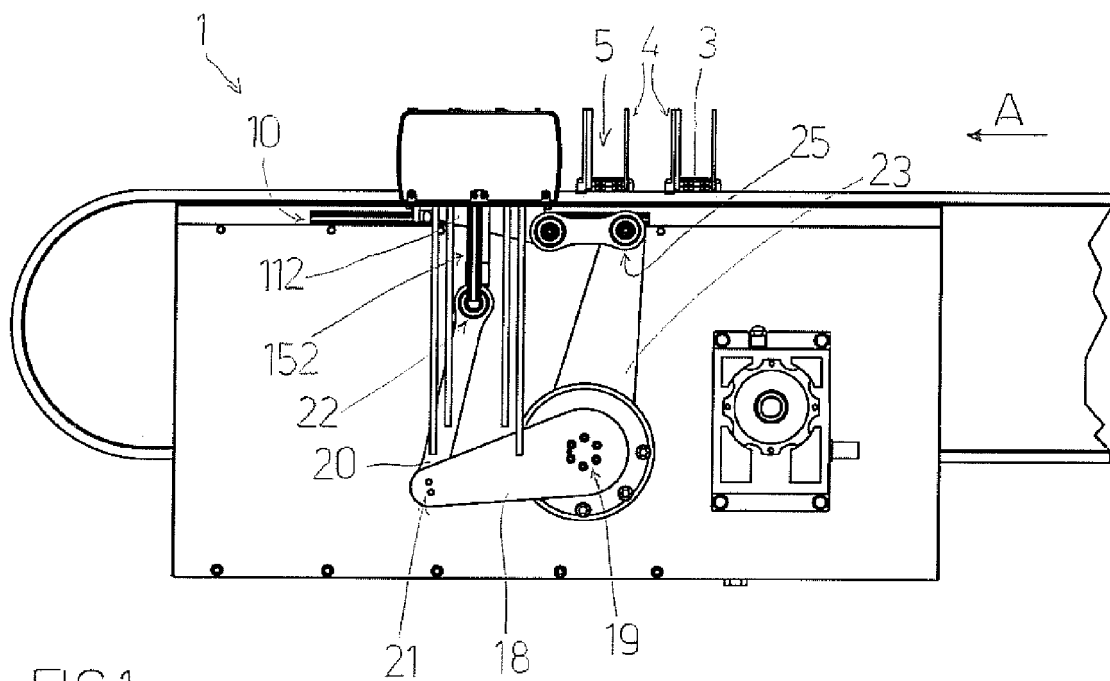


FIG 1

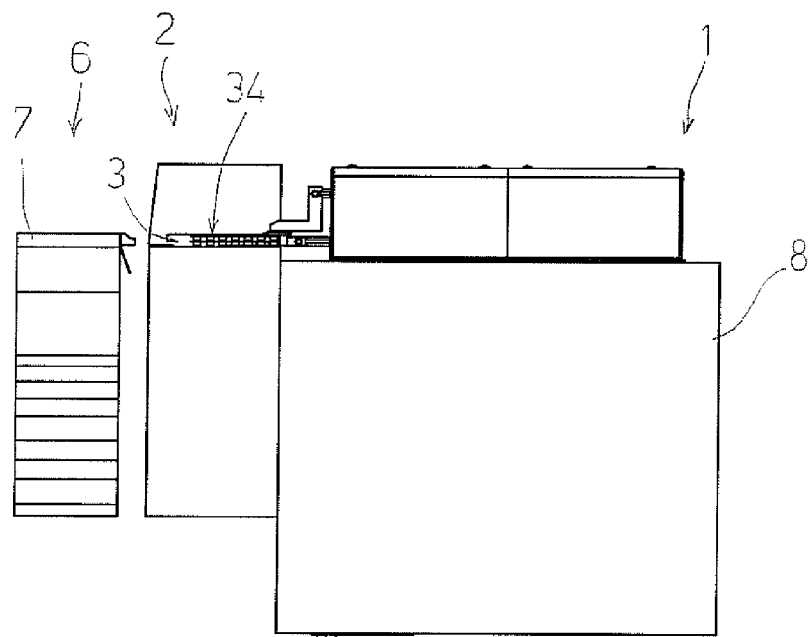
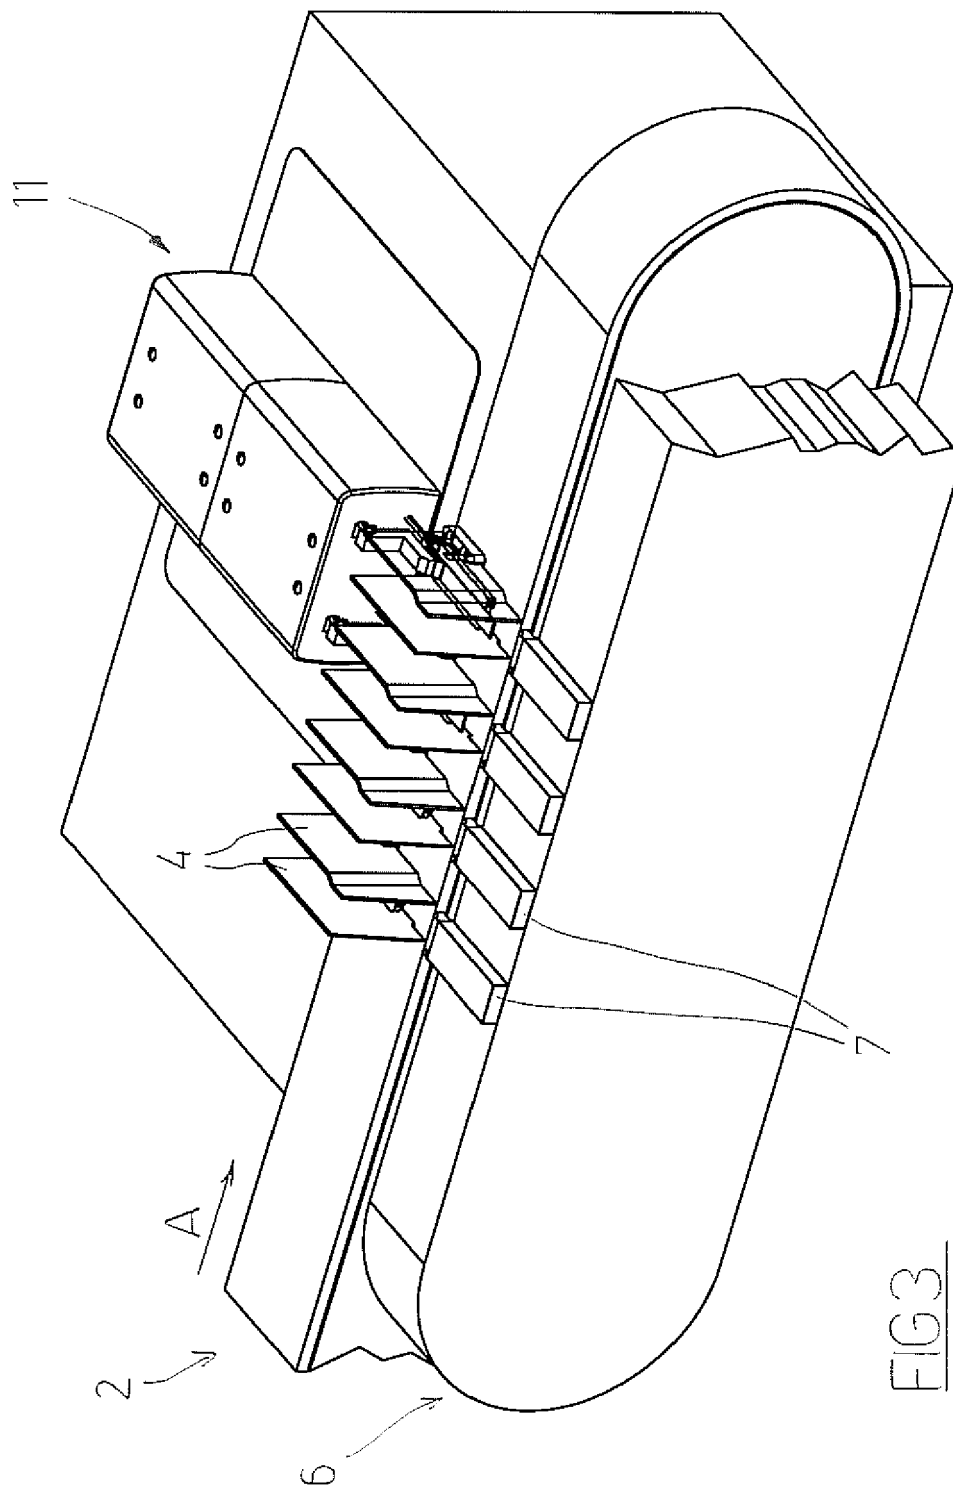


FIG 2



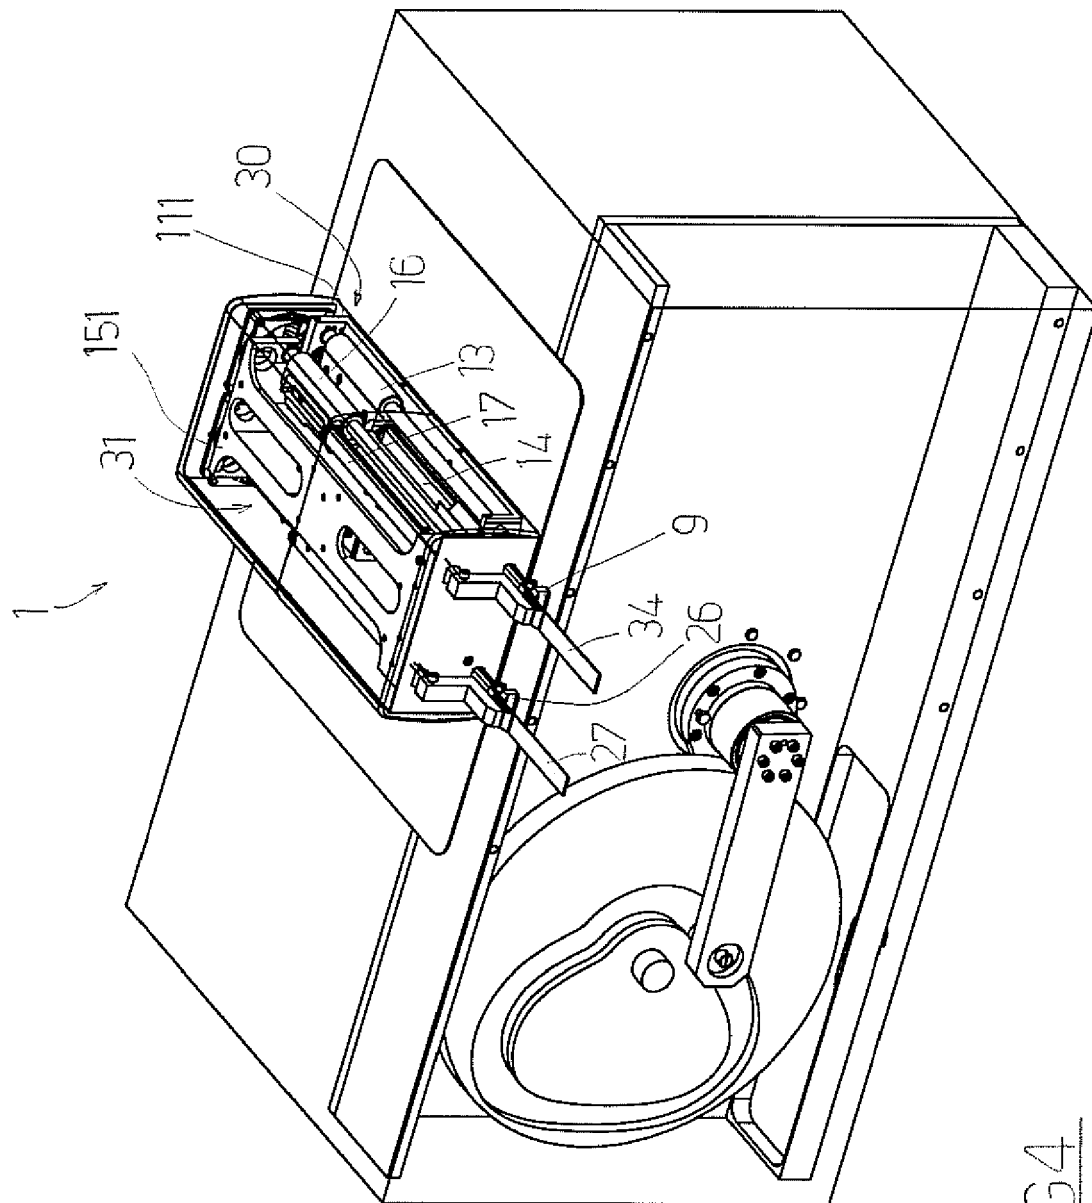


FIG 4

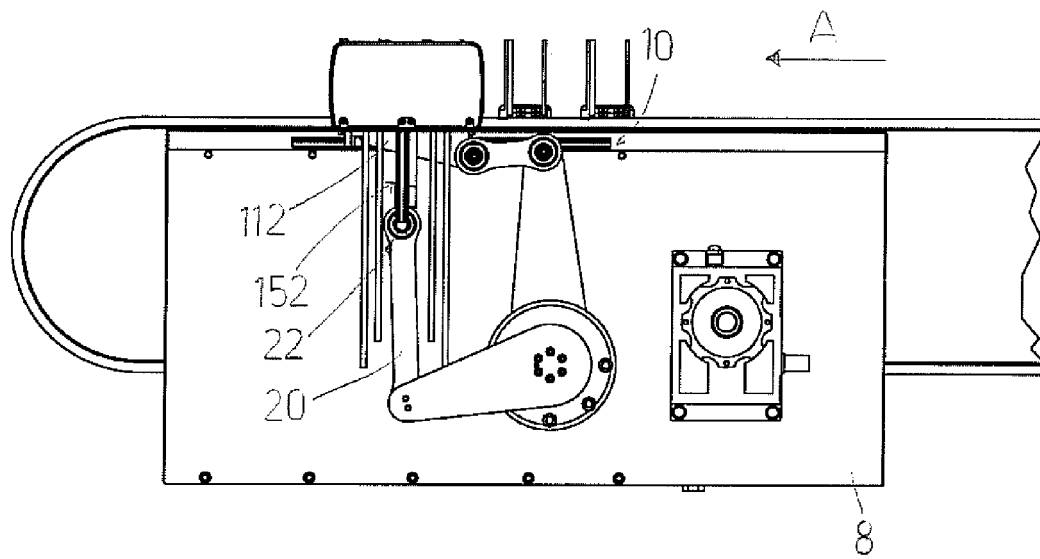


FIG 5

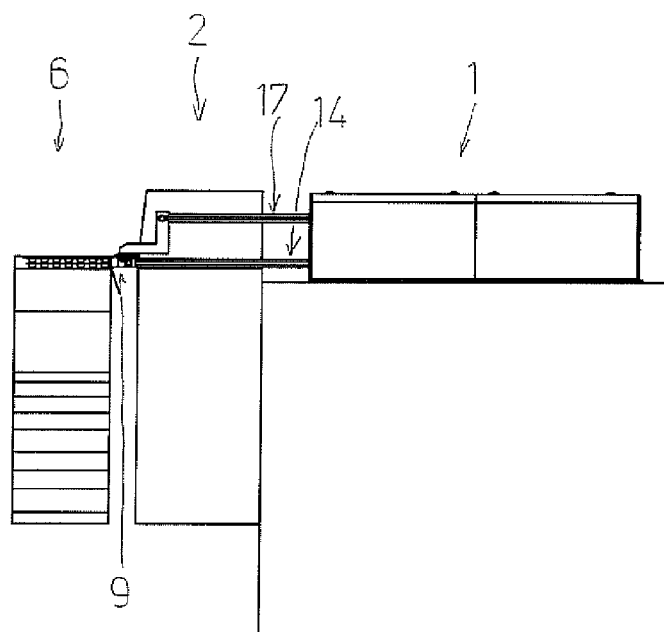
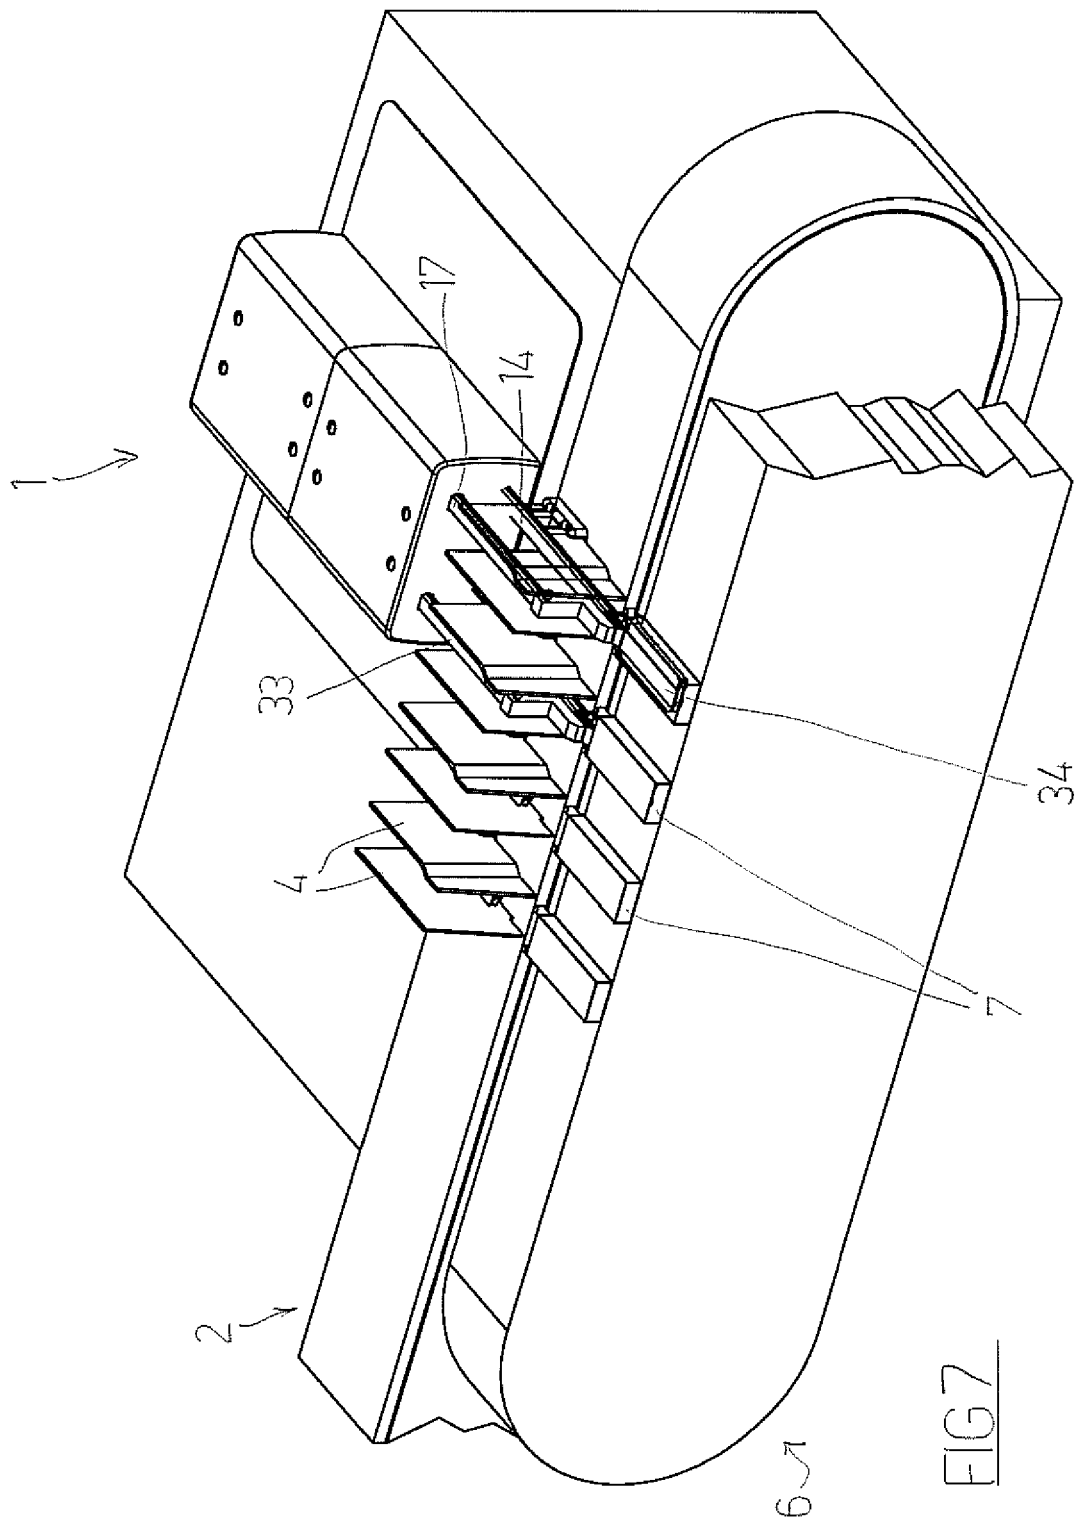
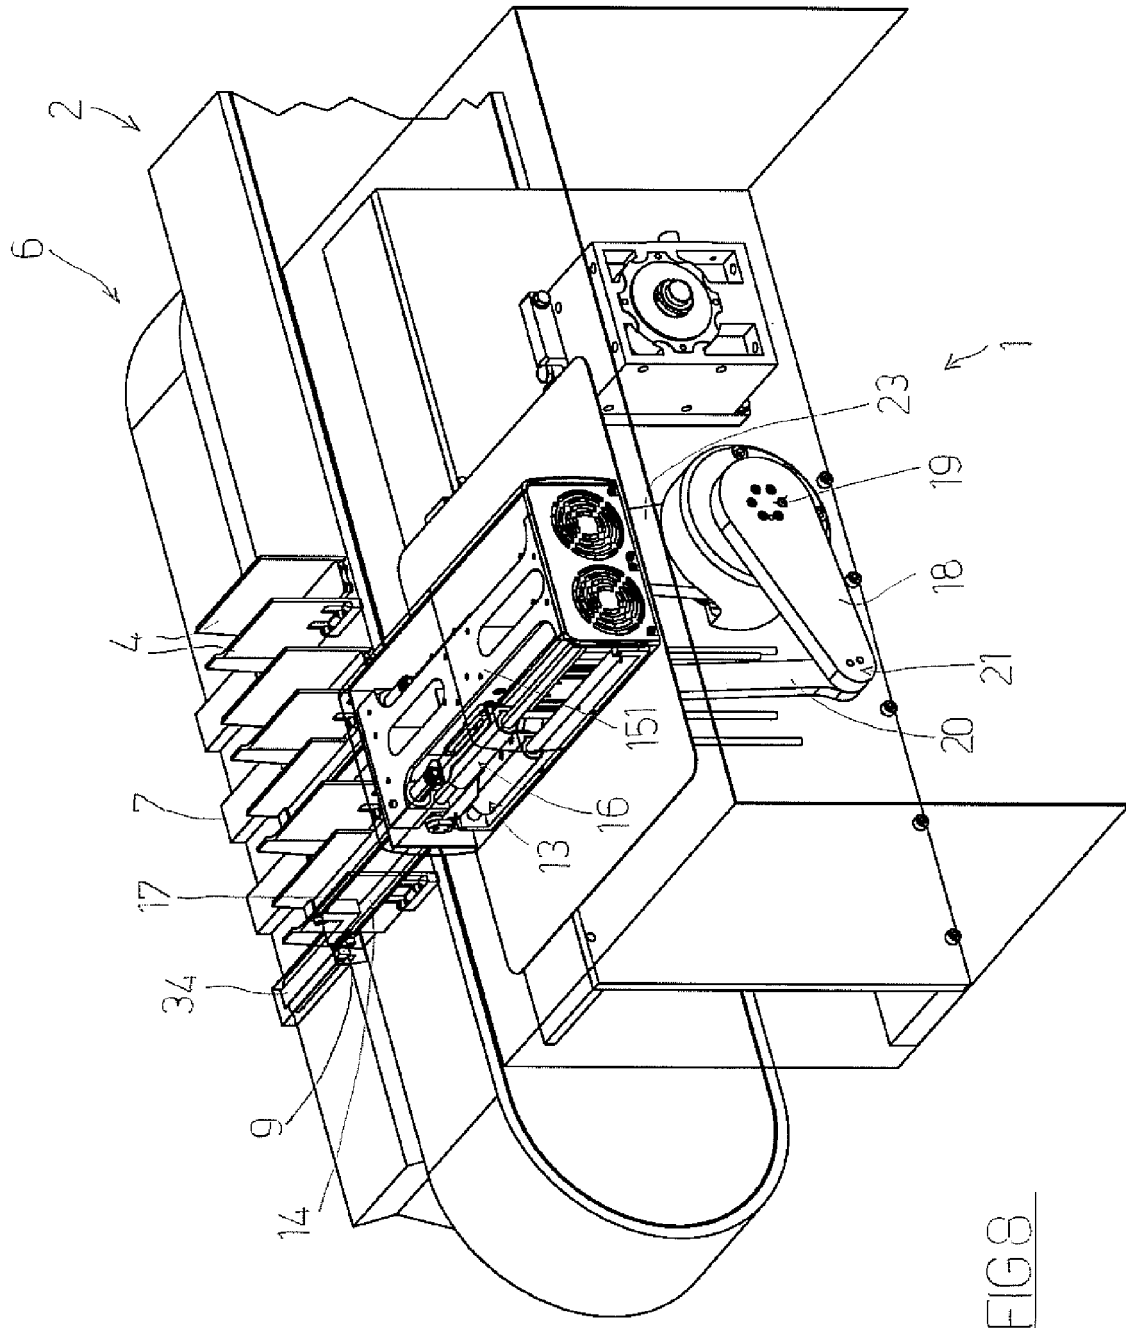


FIG 6





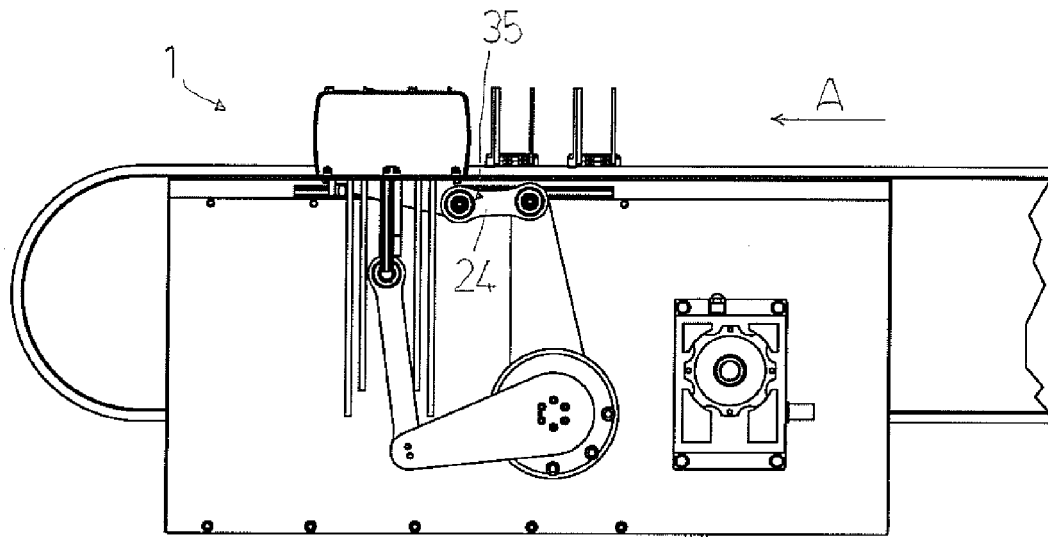


FIG 9

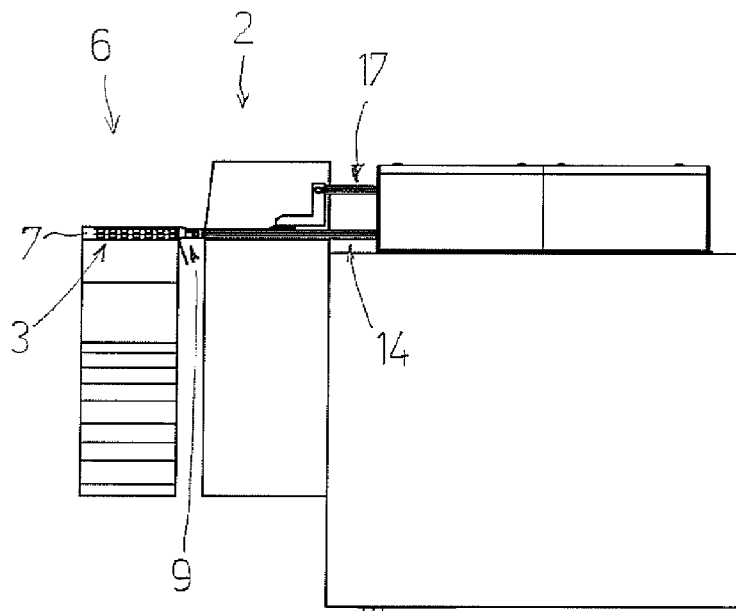
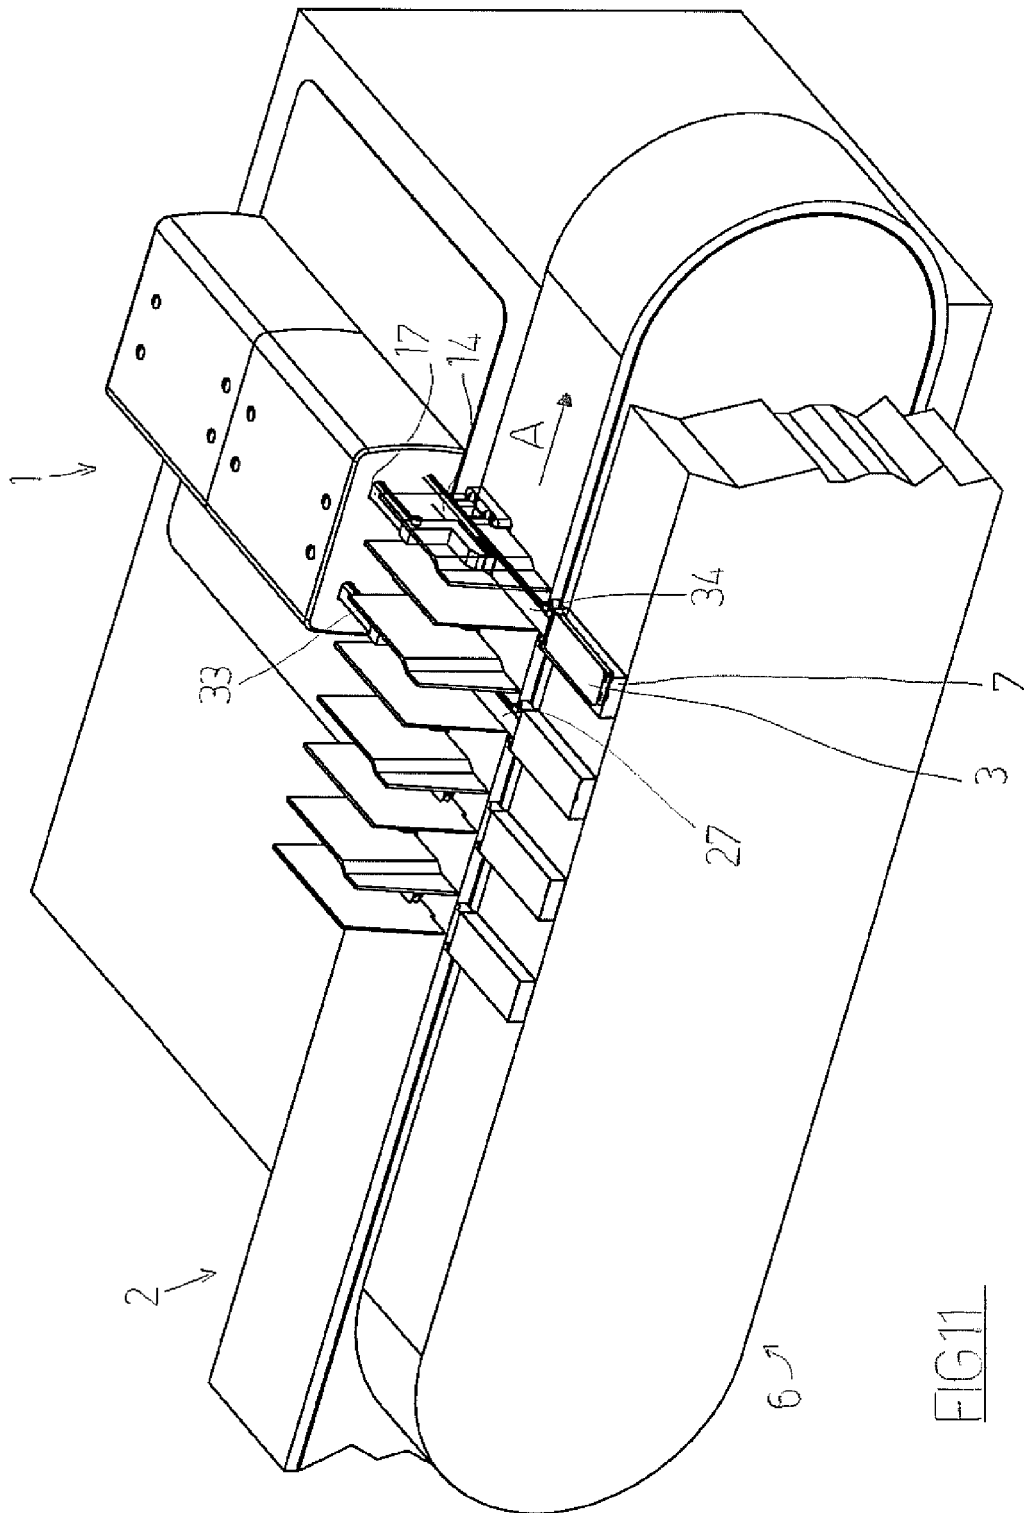


FIG 10



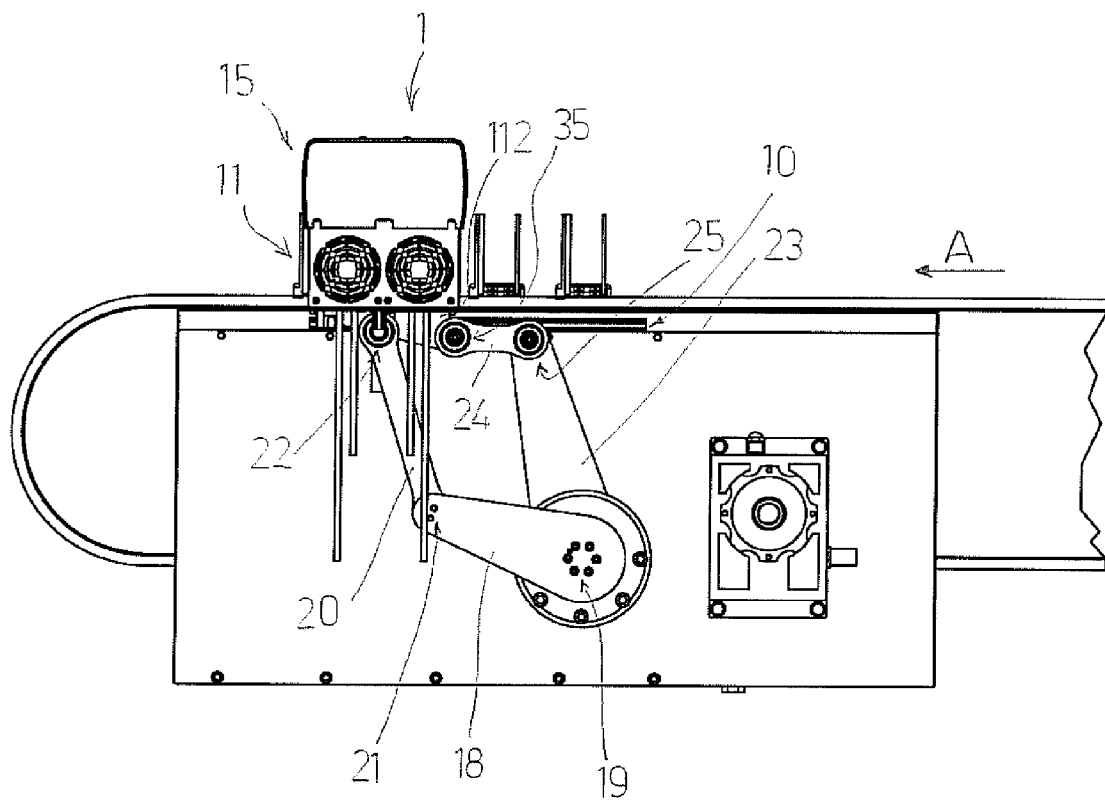


FIG 12



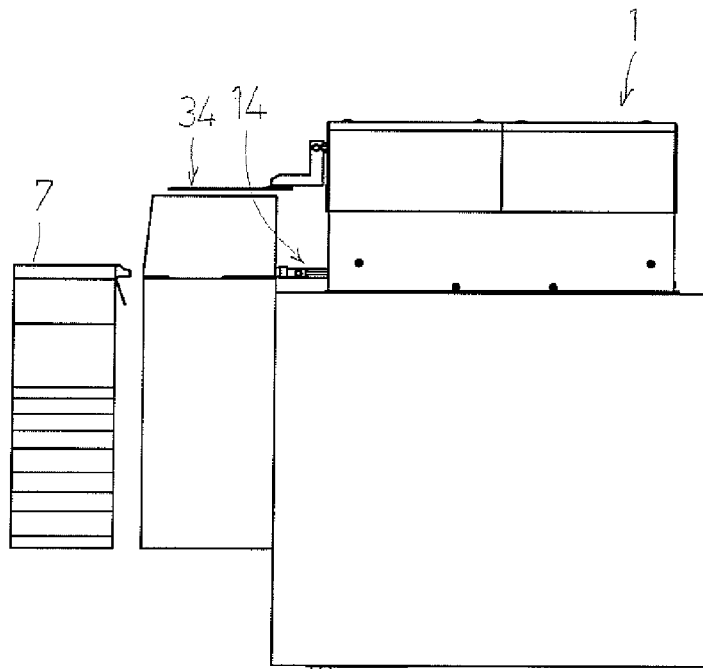


FIG 13



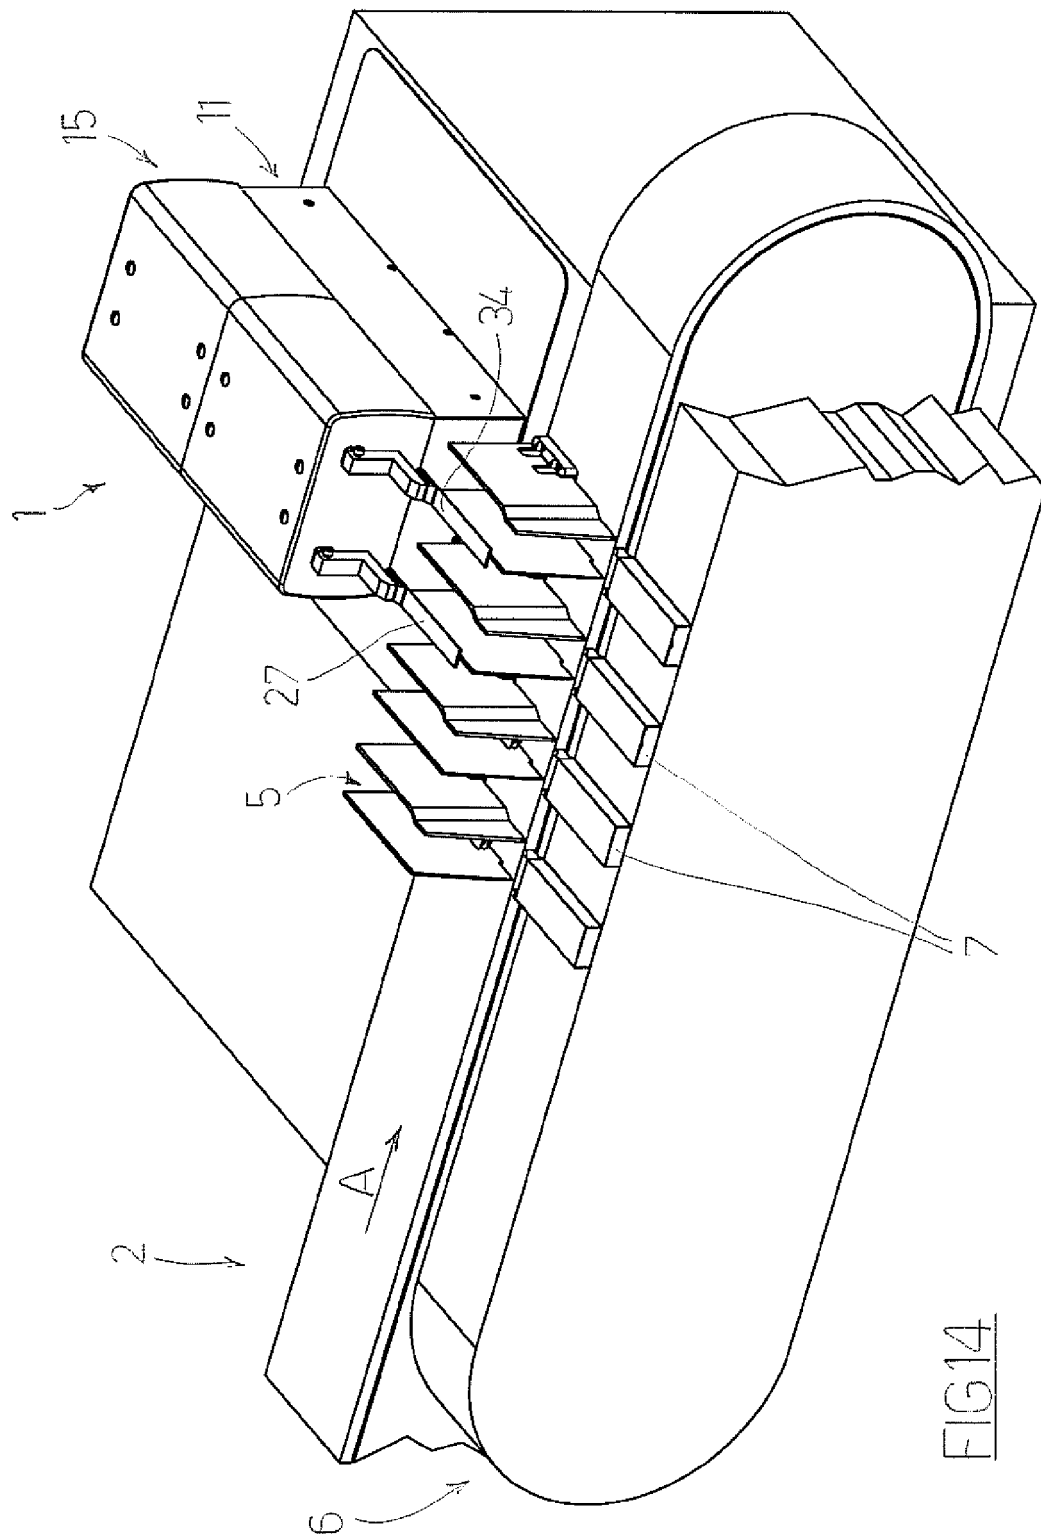

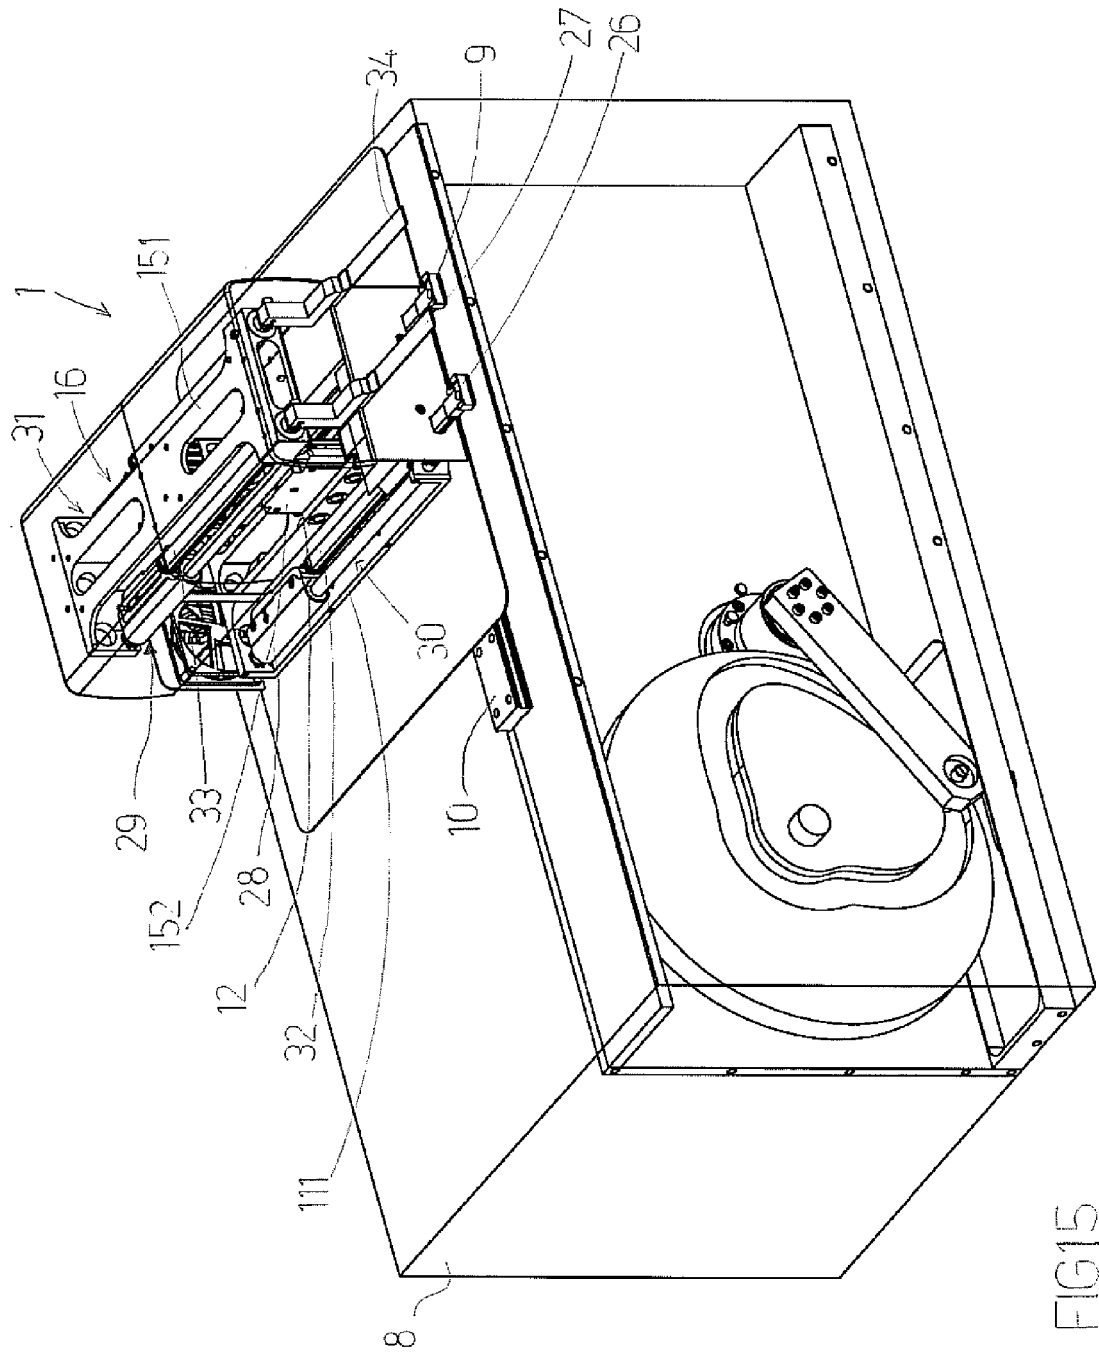

EUROPEAN SEARCH REPORT

Application Number
EP 12 19 9418

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	US 2010/307107 A1 (BEHRINGER THOMAS [DE]) 9 December 2010 (2010-12-09) * abstract * * figures 1-6 * * paragraph [0035] * * paragraph [0033] * * paragraph [0036] * -----	1-6	INV. B65B35/40
A	US 5 079 896 A (LANGEN MARINUS J M [CA] ET AL) 14 January 1992 (1992-01-14) * abstract * * figures 1-2 * -----	1-6	
			TECHNICAL FIELDS SEARCHED (IPC)
			B65B
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 4 April 2013	Examiner Damiani, Alberto
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

1
EPO FORM 1503 03 82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 12 19 9418

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

04-04-2013

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2010307107 A1	09-12-2010	DE 102008010896 A1	27-08-2009
		EP 2250092 A1	17-11-2010
		US 2010307107 A1	09-12-2010
		WO 2009103559 A1	27-08-2009

US 5079896 A	14-01-1992	NONE	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82