

(19)



(11)

EP 2 618 345 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
13.08.2014 Bulletin 2014/33

(51) Int Cl.:
H01F 27/245 ^(2006.01) **H01F 27/26** ^(2006.01)
H01F 27/30 ^(2006.01) **H01F 37/00** ^(2006.01)

(21) Application number: **12008573.3**

(22) Date of filing: **21.12.2012**

(54) Magnetic component and manufacturing method for the magnetic component

Magnetkomponente und Herstellungsverfahren für die Magnetkomponente

Composant magnétique et procédé de fabrication du composant magnétique

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **20.01.2012 JP 2012009900**

(43) Date of publication of application:
24.07.2013 Bulletin 2013/30

(73) Proprietor: **Sumida Corporation
Tokyo 103-8259 (JP)**

(72) Inventor: **Sekiguchi, Kuniyoshi
Tokyo 103-8259 (JP)**

(74) Representative: **Schäfer, Matthias W.
Schwanseestrasse 43
81549 München (DE)**

(56) References cited:
JP-A- H1 174 131 JP-A- 2005 183 885
JP-A- 2006 032 786 US-A- 2 572 457

EP 2 618 345 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0001] The present invention relates to a magnetic component and a manufacturing method for the magnetic component.

2. Description of the Related Art

[0002] In an example of a typical basic structure of a reactor, a main part includes a core formed into an oblong shape by appropriately combining with each other at least two laminated core portions each formed of a laminated body obtained by laminating a plurality of plate-like magnetic bodies, and a pair of cylindrical members (bobbins) surrounding the laminated core portions forming the core while being arranged parallel to each other (for example, refer to Japanese Utility Model Registration No. 3119580 (FIG. 4 and others), Japanese Patent Application Laid-open No. 2006-351662 (FIG. 6, paragraph [0013], and others), and Japanese Patent Application Laid-open No. 2006-13294 (FIGS. 1 to 5, and paragraphs [0007] to [0011], [0022], and others)).

[0003] Meanwhile, there has been proposed a reactor in which a conductive wire is directly wound around a laminated core portion through intermediation of a sheet-like insulator without use of the bobbin for the purpose of reducing the number of materials, man-hours, and the like (Japanese Patent Application Laid-open No. 2006-13294). According to the technology described in Japanese Patent Application Laid-open No. 2006-13294, the laminated core portion is fastened by the conductive wire directly wound through intermediation of the sheet-like insulator rolled around the laminated core portion, and hence bonding work for the plate-like magnetic bodies forming the laminated core portion can be omitted. Therefore, production man-hours can be reduced.

[0004] In order to utilize the reactor structured as described above, for example, in use of being activated with high frequency while suppressing losses through suppression of eddy current to be generated in the plate-like magnetic bodies, it is desired to use extremely thin plate-like magnetic bodies having a thickness of from approximately 30 μm to 150 μm (such as silicon steel plate). However, in such a case, the plate-like magnetic bodies are deformed by a fastening force of the wound conductive wire. As a result, designed performance of the reactor cannot be obtained.

[0005] US 2 572 457A and JP 2005 183 885 A disclose reactors with cores made of stacked plate-like magnetic bodies which are held together without bonding in the region surrounded by a bobbin.

SUMMARY OF THE INVENTION

[0006] The present invention has been made in view of the above-mentioned circumstances, and it is therefore an object of the present invention to provide a magnetic component and a manufacturing method for the magnetic component, in which, at a time of manufacture of a magnetic component, a bonding step of bonding plate-like magnetic bodies forming a laminated core portion to each other can be omitted and the plate-like magnetic bodies can be less deformed by a fastening force of a wound conductive wire.

[0007] The above-mentioned object is achieved by a magnetic component as defined in claim 1 and a manufacturing method as defined in claim 6.

[0008] Further optional features are defined in the dependent claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009]

FIGS. 1A and 1B are schematic views of an external appearance of a magnetic component according to an embodiment of the present invention. Specifically, FIG. 1A is a perspective view, and FIG. 1B is a top view.

FIG. 2 is a sectional end view taken along the line A-A of FIG. 1B, for illustrating an example of a sectional structure of a magnetic unit which forms a main part of a magnetic component body illustrated in FIGS. 1A and 1B.

FIG. 3 is a schematic view illustrating an example of a first casing and a second casing which form a bobbin of the magnetic unit illustrated in FIG. 2.

FIG. 4 is a schematic view illustrating a modification of the first casing and the second casing illustrated in FIG. 3.

FIG. 5 is a schematic sectional view illustrating an example of an arrangement relationship of laminated core portions, a first connecting core portion, and a second connecting core portion which form the magnetic component according to the embodiment of the present invention illustrated in FIGS. 1A and 1B.

FIG. 6 is a schematic sectional view illustrating another example of the arrangement relationship of the laminated core portions, the first connecting core portion, and the second connecting core portion which form the magnetic component according to the embodiment of the present invention.

FIGS. 7A and 7B are plan views each illustrating an example of a plate-like magnetic body which forms the laminated core portion. Specifically, FIG. 7A illustrates a rectangular plate-like magnetic body, and FIG. 7B illustrates an L-shaped plate-like magnetic body.

FIGS. 8A and 8B are schematic views illustrating another example of the laminated core portion. Spe-

cifically, FIG. 8A is a plan view of a laminated structure obtained by alternately laminating the rectangular plate-like magnetic bodies illustrated in FIG. 7A and the L-shaped plate-like magnetic bodies illustrated in FIG. 7B and including the laminated core portion, and FIG. 8B is a side view of the laminated structure illustrated in FIG. 8A (side view viewed from an arrow E direction in FIG. 8A).

FIG. 9 is a sectional view illustrating an example of a sectional structure of the laminated core portion. FIGS. 10A and 10B are schematic views each illustrating an example of an interface between the plate-like magnetic bodies which form the laminated core portions illustrated in FIG. 5. Specifically, FIG. 10A illustrates a state in which the plate-like magnetic bodies are held in direct contact with each other over the entire interface within a region CL inside a coil portion, and FIG. 10B illustrates a state in which varnish slightly exists in a part of the interface within the region CL inside the coil portion.

FIG. 11 is a perspective view illustrating another example of the magnetic component according to the embodiment of the present invention.

FIG. 12 is a perspective view illustrating an example of a cover member used for the magnetic component according to the embodiment of the present invention, which is illustrated in FIG. 11.

FIG. 13 is a schematic view illustrating another example of the first casing and the second casing which form the bobbin.

FIG. 14 is a schematic view illustrating still another example of the first casing and the second casing which form the bobbin.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0010] FIGS. 1A and 1B are schematic views of an external appearance of a magnetic component 10A (10) according to an embodiment of the present invention. Specifically, FIG. 1A is a perspective view, and FIG. 1B is a top view. Further, FIG. 2 is an end view illustrating an example of a sectional structure of a magnetic unit 30 which forms a main part of a magnetic component body 20 illustrated in FIGS. 1A and 1B, specifically, illustrating a sectional structure across a segment between reference symbols A-A in FIG. 1B. Still further, FIG. 3 is a schematic view illustrating an example of a first casing 110 and a second casing 120 which form a bobbin 100 of the magnetic unit 30 illustrated in FIG. 2. Note that, FIGS. 1A and 1B do not illustrate any individual one of plate-like magnetic bodies 132 which form a laminated core portion 130 and a first connecting core portion 40A (40). Further, a two-way arrow X illustrated in FIGS. 1A and 1B and other figures represents a direction parallel to a central axis direction of the bobbin 100.

[0011] The magnetic component 10A illustrated in FIGS. 1A and 1B includes the magnetic component body

20 and a varnish layer (not shown) covering an entire outer surface of the magnetic component body 20. The magnetic component body 20 includes two magnetic units 30 (30A and 30B) arranged parallel to each other. One end side (direction X1 side in FIGS. 1A and 1B) of a laminated core portion 130A (130) which forms the magnetic unit 30A and one end side (direction X1 side) of a laminated core portion 130B (130) which forms the magnetic unit 30B are connected to each other with the first connecting core portion 40A (40), and another end side (direction X2 side in FIGS. 1A and 1B) of the laminated core portion 130A and another end side (direction X2 side) of the laminated core portion 130B are connected to each other with a second connecting core portion 42A (42). Note that, the one end side/direction X1 side (or the another end side/direction X2 side) of the laminated core portion 130 includes an end surface substantially orthogonal to an X-axis and a region near the end surface of four side surfaces of the laminated core portion 130.

[0012] Further, as illustrated in FIG. 2, the magnetic unit 30 includes at least the following: the bobbin 100 including a first casing 110A (110) and a second casing 120A (120) and having a quadrangular cylindrical shape and both ends provided with opening portions (not shown in FIG. 2); the laminated core portion 130 arranged in the bobbin 100; a coil portion 140 including a conductive wire wound around an outer peripheral surface 102 of the bobbin 100; and a heat-resistant insulating sheet 150 covering an outer peripheral surface of the coil portion 140. Here, the laminated core portion 130 includes a laminated body obtained by laminating a plurality of plate-like magnetic bodies 132. In both surfaces in a lamination direction of the laminated core portion 130, a top surface 130TP is held in contact with an inner peripheral surface of the second casing 120A, and a bottom surface 130BTM is held in contact with an inner peripheral surface of the first casing 110A. Note that, FIG. 2 does not illustrate any individual one of wound rows of the conductive wire forming the coil portion 140.

[0013] Further, as illustrated in FIGS. 1A and 1B, it is preferred that, on one end side (direction X1 side) and another end side (direction X2 side) of the outer peripheral surface 102 of the bobbin 100, flange portions 104A and 104B be provided for restricting winding positions of the conductive wire.

[0014] The first casing 110A forming the bobbin 100 has a shape in which one outer peripheral surface of four outer peripheral surfaces of a quadrangular cylindrical body is formed to be an opening portion 112. Further, the second casing 120A is arranged to close at least the opening portion 112 of the first casing 110A. In the example illustrated in FIGS. 2 and 3, the first casing 110A includes a side surface portion 114R and a side surface portion 114L as two outer peripheral surfaces positioned on both horizontal sides of the opening portion 112, and a bottom surface portion 114B as one outer peripheral surface facing the opening portion 112. On outer periph-

eral surfaces of the side surface portions 114R and 114L, there are respectively formed step portions 116R and 116L in a manner that, on those outer peripheral surfaces, parts on the opening portion 112 side are recessed inward with respect to parts on the bottom surface portion 114B side. In other words, the side surface portions 114R and 114L respectively have flush inner peripheral surfaces, and each have a thickness smaller on the opening portion 112 side than on the bottom surface portion 114B side.

[0015] Further, in the example illustrated in FIGS. 2 and 3, the second casing 120A also has a shape in which one outer peripheral surface of four outer peripheral surfaces of a quadrangular cylindrical body is formed to be an opening portion 122. The second casing 120A includes a side surface portion 124R and a side surface portion 124L as two outer peripheral surfaces positioned on both horizontal sides of the opening portion 122, and a top surface portion 124T as one outer peripheral surface facing the opening portion 122. A width W of the opening portion 122 is set to be substantially equal to or somewhat larger than a shortest distance between the outer peripheral surface on the opening portion 112 side of the side surface portion 114R and the outer peripheral surface on the opening portion 112 side of the side surface portion 114L of the first casing 110A. Thus, in order to form the bobbin 100 as illustrated in FIG. 2, the second casing 120A is arranged to close at least the opening portion 112 of the first casing 110A.

[0016] Note that, when the first casing 110A and the second casing 120A are assembled into the bobbin 100 as illustrated in FIGS. 1A and 1B, members serving as the flange portions 104A and 104B for restricting the winding positions of the conductive wire may be provided near the one end side (direction X1 side) and near the another end side (direction X2 side) of the outer peripheral surface 102 in a longitudinal direction of the bobbin 100.

[0017] FIG. 4 is a schematic view illustrating a modification of the first casing 110A and the second casing 120A illustrated in FIG. 3. Here, a first casing 110B (110) illustrated in FIG. 4 is obtained by additionally providing plate-like flange portions 118A and 118B upright with respect to the outer peripheral surface respectively on one end side and another end side in a longitudinal direction of the first casing 110A illustrated in FIG. 3. Further, a second casing 120B (120) illustrated in FIG. 4 is obtained by additionally providing plate-like flange portions 128A and 128B upright with respect to the outer peripheral surface respectively on one end side and another end side in a longitudinal direction of the second casing 120A illustrated in FIG. 3. When the first casing 110B and the second casing 120B are combined with each other to form the bobbin 100, the flange portion 104A is formed of the flange portion 118A and the flange portion 128A, and the flange portion 104B is formed of the flange portion 118B and the flange portion 128B.

[0018] Note that, when the first casing 110A and the

second casing 120A as exemplified in FIG. 3, which are not provided with the flange portions, are used to form the bobbin 100, after the first casing 110A and the second casing 120A are combined with each other to form the quadrangular cylindrical bobbin 100, for example, ring-shaped plates corresponding to the flange portions 104A and 104B may be fitted respectively to one end side and another end side of the bobbin 100.

[0019] Further, ends on one side (direction X1 side) of the laminated core portions 130 respectively forming the magnetic units 30A and 30B arranged parallel to each other are connected to each other with the first connecting core portion 40A formed of a magnetic body, and ends on another side (direction X2 side) of the laminated core portions 130 respectively forming the magnetic units 30A and 30B are connected to each other with the second connecting core portion 42A formed of a magnetic body. The first connecting core portion 40A and the second connecting core portion 42A are not particularly limited as long as being formed of a magnetic body. For example, similarly to the laminated core portion 130, the first connecting core portion 40A and the second connecting core portion 42A may be formed of a laminated body obtained by laminating a plurality of plate-like magnetic bodies.

[0020] FIG. 5 is a schematic sectional view illustrating an example of an arrangement relationship of the laminated core portions 130, the first connecting core portion 40, and the second connecting core portion 42B which form the magnetic component 10A illustrated in FIGS. 1A and 1B. FIG. 5 does not illustrate the heat-resistant insulating sheet 150, or any individual one of the wound rows of the conductive wire forming the coil portion 140.

[0021] As illustrated in FIG. 5, the laminated core portions 130A and 130B are arranged respectively in the bobbins 100 respectively forming the magnetic units 30A and 30B, and the laminated core portions 130A and 130B are each divided by a gap portion 160 provided at a substantially central portion in the longitudinal direction of the bobbin 100. The first connecting core portion 40A is provided between a part of a laminated core portion 130A1 (130A), which is projected from the one end side (direction X1 side) of the bobbin 100, and a part of a laminated core portion 130B1 (130B), which is projected also from the one end side (direction X1 side) of the bobbin 100. Similarly, the second connecting core portion 42A is provided between a part of a laminated core portion 130A2 (130A), which is projected from the another end side (direction X2 side) of the bobbin 100, and a part of a laminated core portion 130B2 (130B), which is projected from the another end side (direction X2 side) of the bobbin 100. In other words, the laminated core portions 130A, the laminated core portions 130B, the first connecting core portion 40A, and the second connecting core portion 42A are arranged to form an annular core having an annular shape. In still other words, the one end side and the another end side of each of the laminated core portions 130A and 130B respectively forming the magnetic units 30A and 30B are projected respectively

from the one end and the another end of the bobbin 100. In addition, the first connecting core portion 40A is provided between the parts on one end side of the laminated core portions 130A and 130B respectively forming the magnetic units 30A and 30B, and the second connecting core portion 42A is provided between the parts another end side of the laminated core portions 130A and 130B respectively forming the magnetic units 30A and 30B.

[0022] Note that, in the example illustrated in FIG. 5, in each of the gap portions 160, there is arranged a partition plate (not shown in FIG. 5) for substantially perfectly partitioning each of the laminated core portions 130A and 130B in the longitudinal direction of the bobbin 100. In other words, the laminated core portions 130A and 130B positioned in the respective bobbins 100 each include the gap portion 160 provided to divide the longitudinal direction of corresponding one of the bobbins 100 (to divide the laminated core portions 130A and 130B with respect to the longitudinal direction of corresponding one of the bobbins 100), and the partition plate for substantially perfectly partitioning a space on an inner peripheral side of corresponding one of the bobbins 100 in the longitudinal direction of the bobbin 100 is provided at a position corresponding to the gap portion 160 in the bobbin 100. This partition plate may be formed in advance, for example, on the inner peripheral surface of at least one of the first casing 110 and the second casing 120, or may be arranged and fixed in the bobbin 100 at the time of assembly of the bobbin 100.

[0023] Further, as long as the laminated core portions 130, the first connecting core portion 40A, and the second connecting core portion 42A are annularly arranged, and the at least one gap portion 160 is provided to partition the annular core including those core portions in a circumferential direction, the laminated core portions 130, the first connecting core portion 40A, and the second connecting core portion 42A may be arranged in other appropriate combinations than that exemplified in FIG. 5.

[0024] FIG. 6 is a schematic sectional view illustrating another example of the arrangement relationship of the laminated core portions 130, the first connecting core portion 40, and the second connecting core portion 42. Note that, FIG. 6 does not illustrate the heat-resistant insulating sheet 150, or any individual one of the wound rows of the conductive wire forming the coil portion 140. In the example illustrated in FIG. 6, lengths of laminated core portions 130A3 (130A) and 130B3 (130B) are each set to be substantially equal to a length of the bobbin 100. Further, a first connecting core portion 40B (40) and a second connecting core portion 42B (42) have a shape vertically longer than that of the first connecting core portion 40A and the second connecting core portion 42A in the example illustrated in FIG. 5. Further, the gap portions 160 are formed correspondingly to a connection interface between the laminated core portion 130A3 and the first connecting core portion 40B, a connection interface between the laminated core portion 130A3 and the second connecting core portion 42B, a connection interface be-

tween the laminated core portion 130B3 and the first connecting core portion 40B, and a connection interface between the laminated core portion 130B3 and the second connecting core portion 42B.

[0025] Further, a laminated body obtained by simply laminating plate-like magnetic bodies having the same planar shape may be utilized as the first connecting core portions 40 and the second connecting core portions 42 exemplified, for example, in FIGS. 5 and 6. However, a part of the plate-like magnetic bodies 132 forming the laminated core portion 130A and the laminated core portion 130B may be utilized as the first connecting core portions 40 and the second connecting core portions 42.

[0026] FIGS. 7A and 7B are plan views each illustrating an example of the plate-like magnetic body 132 which forms the laminated core portion 130. Note that, a region S indicated by shading in FIG. 7B is a part having the same shape and size as those of a plate-like magnetic body 132S illustrated in FIG. 7A. With regard to the shape of the plate-like magnetic body 132, for example, the rectangular plate-like magnetic body 132S (FIG. 7A), an L-shaped plate-like magnetic body 132L (FIG. 7B), and the like may be employed. Then, in order to form the laminated core portion 130, normally, the plate-like magnetic bodies 132 having the same planar shape are laminated in an overlapping manner in a planar direction.

[0027] However, a part of a laminated structure obtained by alternately laminating plate-like magnetic bodies 132 of two types, which are different from each other in planar shape, may be utilized as the laminated core portion 130. For example, a part of a laminated structure obtained by alternately laminating the plate-like magnetic bodies 132S and the plate-like magnetic bodies 132L in an overlapping manner in the region S may be utilized as the laminated core portion 130. FIGS. 8A and 8B are schematic views illustrating another example of the laminated core portion 130. Specifically, FIG. 8A is a plan view of a laminated structure 170 obtained by alternately laminating the plate-like magnetic bodies 132S and the plate-like magnetic bodies 132L and including a laminated core portion 130X (130), and FIG. 8B is a side view of the laminated structure 170 illustrated in FIG. 8A (side view viewed from an arrow E direction in FIG. 8A). In the laminated structure 170 illustrated in FIGS. 8A and 8B, a part of the plate-like magnetic body 132L, which overlaps the plate-like magnetic body 132S in the region S, forms the laminated core portion 130X. Meanwhile, a region NS of the plate-like magnetic body 132L, in which the plate-like magnetic body 132L cannot overlap the plate-like magnetic body 132S in the region S, forms a comb-shaped comb portion 134. Thus, when comb portions 134 of two laminated structures 170 are fitted to each other, a part at which those comb portions 134 are fitted to each other can be utilized as at least one of the first connecting core portion 40 and the second connecting core portion 42. In such a case, bonding processing on both the plate-like magnetic bodies 132L may be omitted at the part formed by fitting the comb portions 134 to

each other.

[0028] Further, the entire outer surface of the magnetic component body 20 of the magnetic component 10 according to the embodiment of the present invention is covered with the varnish layer. However, in the magnetic component 10 according to the embodiment of the present invention, at a part of the laminated body (laminated core portion 130), which is positioned on an inner peripheral side of the coil portion 140, one surface of one plate-like magnetic body 132A (132) and one surface of another plate-like magnetic body 132B arranged adjacent to the one plate-like magnetic body 132A, which form the laminated body (laminated core portion 130), are held in direct contact with each other over the entire surfaces. In other words, as exemplified in FIG. 9, at the part of the laminated core portion 130, which is positioned on the inner peripheral side of the coil portion 140, in the lamination direction of the laminated core portion 130, none of an adhesive agent and even varnish covering the entire outer surface of the magnetic component body 20 substantially exists in an interface 136 between the one plate-like magnetic body 132A and the another plate-like magnetic body 132B adjacent to each other.

[0029] The description "part of the laminated body (laminated core portion 130), which is positioned on the inner peripheral side of the coil portion 140" means a part of the laminated core portion 130, which is positioned in a region CL indicated by the two-way arrow in the example illustrated in FIGS. 5 and 6. Therefore, in the example illustrated in FIG. 5, other parts of the laminated core portion 130, which are positioned outside both the ends of the bobbin 100, are excluded from the "part of the laminated body (laminated core portion 130), which is positioned on the inner peripheral side of the coil portion 140." Further, in the example illustrated in FIG. 6, the laminated core portion 130 is housed and arranged in the bobbin 100 so as not to protrude from opening portions at both the ends of the bobbin 100. Therefore, in the example illustrated in FIG. 6, the laminated core portion 130 is substantially entirely positioned on the inner peripheral side of the coil portion 140 except parts provided with the flange portions 104A and 104B.

[0030] Further, the description "in direct contact with each other over the substantially entire surfaces" means a state in which, at the part of the laminated core portion 130 (region CL), which is positioned on the inner peripheral side of the coil portion 140, the one plate-like magnetic body 132A and the another plate-like magnetic body 132B are held in direct contact with each other over 70% or more of the entire area of the interface 136. Note that, a rate of direct contact of those plate-like magnetic bodies 132A and 132B with each other is preferably 80% or more, more preferably 90% or more, most preferably 100% of the entire area of the interface 136.

[0031] In the following, description is made of the features described above in more detail with reference to the drawings. FIGS. 10A and 10B are schematic plan views each illustrating an example of the interface 136

between any two plate-like magnetic bodies 132 of the plurality of plate-like magnetic bodies 132, which form the laminated core portion 130A illustrated in FIG. 5. In FIGS. 10A and 10B, at least one of hollow parts and solid parts indicates the part positioned on the inner peripheral side of the coil portion 140 (region CL), and shaded parts indicate parts out of the inner peripheral side of the coil portion 140. Further, the hollow parts indicate parts at which the surface of the one plate-like magnetic body 132A and the surface of the another plate-like magnetic body 132B are held in direct contact with each other, and the solid parts indicate parts at which varnish 138 exists. As illustrated in FIG. 10A, in the magnetic component 10 according to the embodiment of the present invention, the adhesive agent and the varnish 138 may be perfectly eliminated over the entire interface 136 within the region CL. However, as illustrated in FIG. 10B, the varnish 138 may slightly exist at some parts of the interface 136 within the region CL. Further, as exemplified in FIG. 10B, the varnish 138 existing in regions near end portions of the interface 136 within the region CL is not arranged at the time of assembly of the laminated core portion 130, but is derived from varnish that has somewhat intruded from the end portion side of the interface 136 into the interface 136 at the time when the varnish is applied through immersion treatment or the like with respect to the entire outer surface of the assembled magnetic component body 20.

[0032] Note that, in the example illustrated in FIGS. 1 and 5, on an outside of the region between the two flange portions 104A and 104B or on an outside of the bobbin 100, the projecting parts of the laminated core portions 130A and 130B, the first connecting core portion 40A, and the second connecting core portion 42A exist. In such a case, the magnetic component 10 may further include cover members for covering those parts.

[0033] FIG. 11 is a perspective view illustrating another example of the magnetic component 10 according to the embodiment of the present invention, and FIG. 12 is a perspective view illustrating an example of a cover member used for the magnetic component 10 according to the embodiment of the present invention, which is illustrated in FIG. 11. A magnetic component 10B (10) illustrated in FIG. 11 is obtained by further providing two cover members 50A (50) and 50B (50) to the magnetic component 10A illustrated in FIGS. 1A and 1B.

[0034] As illustrated in FIG. 12, the cover member 50 has a bottomed quadrangular cylindrical shape. When the part of the laminated core portion 130A and the first connecting core portion 40A which are positioned outside the region between the two flange portions 104A and 104B (or part of the laminated core portion 130B and the second connecting core portion 42A which are positioned outside the region between the two flange portions 104A and 104B) are inserted into an opening portion 52 of the cover member 50, the cover member 50 substantially entirely covers the part of the laminated core portion 130A and the first connecting core portion 40A which are po-

sitioned outside the region between the two flange portions 104A and 104B (or part of the laminated core portion 130B and the second connecting core portion 42A which are positioned outside the region between the two flange portions 104A and 104B). Note that, as illustrated in FIG. 12, it is preferred that the cover member 50 include fixation portions 54 as appropriate for ease of fixation of the magnetic component 10B with respect, for example, to various devices and members.

[0035] Next, description is made of a manufacturing method for the magnetic component 10 according to the embodiment of the present invention. Normally, the magnetic component 10 according to the embodiment of the present invention is prepared by the following procedure. Specifically, first, at least two magnetic units 30 are prepared through a laminated body arranging step, a coil portion forming step, and a coil portion covering step. Next, the magnetic component body 20 is prepared through a connecting core portion forming step of arranging the magnetic units 30 parallel to each other, forming the first connecting core portion 40 for connecting the ends on one side (direction X1 side) of the laminated core portions 130 of the magnetic units 30 respectively to each other, and forming the second connecting core portion 42 for connecting the ends on another side (direction X2 side) of the laminated core portions 130 of the magnetic units 30 respectively to each other. Lastly, the magnetic component 10 according to the embodiment of the present invention is obtained further through a varnish layer forming step of forming the varnish layer by applying varnish to the outer surface of the magnetic component body 20. In the following, detailed description is made of each of the above-mentioned steps.

(1) Laminated body arranging step

[0036] In the laminated body arranging step, at least a laminated body obtained by laminating the plurality of plate-like magnetic bodies 132 in a manner that the surfaces of those plate-like magnetic bodies 132 are held in direct contact with each other is arranged in the quadrangular cylindrical bobbin 100. In other words, in the laminated body arranging step, at the time of formation or arrangement of the laminated body, the plate-like magnetic bodies 132 are not bonded to each other with use of an adhesive component which may cause solid matters to remain finally in the interface 136, such as an adhesive agent. Therefore, at the time of manufacturing the magnetic component 10 according to the embodiment of the present invention, a bonding step of bonding the plate-like magnetic bodies 132 forming the laminated core portion 130 to each other can be omitted.

[0037] In this laminated body arranging step, as exemplified in FIG. 5, the laminated body (to be formed as the laminated core portion 130) may be arranged in a manner that a part of the laminated body is projected from the one end side of the bobbin 100. Alternatively, the laminated body (to be formed as the laminated core portion

130) may be arranged in the bobbin 100 in a manner that, substantially as in FIG. 5, both ends of the laminated body are projected from both the end sides of the bobbin 100. Still alternatively, as exemplified in FIG. 6, the laminated body (to be formed as the laminated core portion 130) may be arranged in a manner that the laminated body is housed in the bobbin 100. Further, in the case where the gap portions 160 are provided within the bobbin 100, when the partition plate forming the gap portions 160 is formed separately from the components of the bobbin 100 (for example, at least one of the first casing 110 and the second casing 120 exemplified in FIG. 3), the laminated body is arranged after the partition plate is arranged in advance in the bobbin 100 or the component of the bobbin prior to assembly of the bobbin. Note that, when the magnetic component 10A exemplified in FIG. 5 is prepared, the laminated body (to be formed as the laminated core portion 130) includes the gap portion 160 provided to divide the longitudinal direction of the bobbin 100. Further, the partition plate for substantially perfectly partitioning the space on the inner peripheral side of the bobbin 100 in the longitudinal direction of the bobbin 100 is provided at the position corresponding to the gap portion 160 in the bobbin 100.

(2) Coil portion forming step

[0038] After the laminated body arranging step is completed, the coil portion forming step is performed. In this coil portion forming step, in order that a pressing force is applied at least in the lamination direction of the laminated body arranged within the bobbin 100, the coil portion 140 is formed on the outer peripheral surface 102 of the bobbin 100 by winding a conductive wire around the outer peripheral surface 102 of the bobbin 100. How to wind the conductive wire is not particularly limited, and, for example, regular winding may be employed. On the outer peripheral surface 102 of the bobbin 100, the coil portion 140 may be formed in any region in the longitudinal direction of the bobbin 100. However, normally, the coil portion 140 is formed to cover substantially the entire outer peripheral surface 102 from the one opening portion side to the another opening portion side of the bobbin 100. Further, as exemplified, for example, in FIGS. 1A and 1B, when the bobbin 100 includes the pair of flange portions 104A and 104B for restricting a position of the coil portion 140, the coil portion 140 is formed to cover the entire outer peripheral surface 102 between the flange portion 104A and the flange portion 104B.

[0039] Further, in the coil portion forming step, the laminated body (laminated core portion 130) is at least pressed in the lamination direction through intermeditation of the bobbin 100, and hence the plate-like magnetic bodies 132 existing in the region CL inside the coil portion 140 are held firmly in contact with each other. Therefore, after the magnetic component 10 is completed, the individual ones of plate-like magnetic bodies 132 forming the laminated core portion 130 are not separated from each

other. Also for this reason, the bonding step of bonding the plate-like magnetic bodies 132 forming the laminated core portion 130 to each other can be omitted.

[0040] In addition, the laminated body (laminated core portion 130) is held in press-contact with the inner peripheral surface of the bobbin 100 on at least both surfaces in the lamination direction (for example, the top surface 130TP and the bottom surface 130BTM illustrated in FIG. 2). Thus, formation of unnecessary spaces between the laminated core portion 130 and the bobbin 100 can be suppressed. As a result, in comparison with conventional magnetic components including a bobbin in which the laminated core portion obtained by bonding the plate-like magnetic bodies to each other with an adhesive agent is arranged, the magnetic component 10 according to the embodiment of the present invention can be downsized further and more easily.

[0041] Still further, in subsequent steps, after the varnish layer forming step is performed, varnish in a molten state is much less liable to intrude into the interface 136 positioned in the region CL inside the coil portion 140 in the laminated core portion 130. Therefore, in the interface 136 positioned within the region CL inside the coil portion 140 in the laminated core portion 130, as exemplified in FIGS. 10A and 10B, it is also possible to maintain the state in which substantially the entire surfaces of the plate-like magnetic bodies 132 are held in direct contact with each other.

[0042] Yet further, in the coil portion forming step, a high fastening force (pressing force) of the wound conductive wire is applied to the laminated body (laminated core portion 130). This pressing force is indirectly transmitted through intermediation of the bobbin 100. In this context, in a case where the pressing force is transmitted to the laminated body under a state in which the conductive wire and the laminated body are held in direct contact with each other, the conductive wire and the laminated body are held in "linear contact" with each other, and hence the pressing force significantly and locally increases. Therefore, the conductive wire is liable to bite into the laminated body, with the result that it is difficult to prevent deformation of the plate-like magnetic bodies 132 forming the laminated body. Meanwhile, in the magnetic component 10 according to the embodiment of the present invention, at the time of manufacture, such a pressing force is indirectly transmitted to the laminated body through intermediation of the bobbin 100. In this case, the bobbin 100 and the laminated body are held in "surface contact" with each other. Thus, the pressing force is not transmitted in a significantly and locally biased state to the laminated body. As a result, deformation of the plate-like magnetic bodies 132 forming the laminated body is significantly easily suppressed. Therefore, plate-like magnetic bodies 132 reduced in thickness can be employed, and hence losses caused by generation of eddy current can be suppressed. As a result, higher efficiency and energy saving in a case where the magnetic component 10 according to the embodiment of the

present invention is used in a high-frequency range are easily achieved.

(3) Coil portion covering step

[0043] In the coil portion covering step, the outer peripheral surface of the coil portion 140 is covered with the heat-resistant insulating sheet 150. Normally, heat-resistant insulating paper is used as the heat-resistant insulating sheet 150. However, the present invention is not limited thereto, and there may be appropriately utilized publicly known sheet-like members having heat resistance and insulating properties (such as heat-resistant resin film).

[0044] The magnetic unit 30 is obtained through the laminated body arranging step, the coil portion forming step, and the coil portion covering step. At least two magnetic units 30 are prepared in this way at the time of preparation of one magnetic component 10. However, normally, two magnetic units 30 are prepared.

(4) Connecting core portion forming step

[0045] After the magnetic units 30 are prepared, the connecting core portion forming step is performed. In this connecting core portion forming step, the magnetic units 30 are arranged parallel to each other, and the first connecting core portion 40 for connecting the ends on one side (direction X1 side) of the laminated core portions 130 respectively to each other is formed, and the second connecting core portion 42 for connecting the ends on another side (direction X2 side) of the laminated core portions 130 respectively to each other is formed, the laminated core portions 130 respectively forming the magnetic units 30 and each being formed of the laminated body described above. When the connecting core portion forming step is performed using the two magnetic units 30, the magnetic component body 20 as exemplified in FIGS. 1A and 1B is obtained, which includes at least the two magnetic units 30 and the two connecting core portions 40 and 42 in total for connecting the ends on one side (direction X1 side) of the laminated core portions 130 of the two magnetic units 30 respectively to each other and the ends on another side (direction X2 side) of the laminated core portions 130 of the two magnetic units 30 respectively to each other. Note that, in a case where at least three magnetic units 30 are used in this connecting core portion forming step, on a premise that the number of used magnetic units 30 is N, there are formed (N-1) annular cores each having an annular shape and formed of the laminated core portions 130 and the connecting core portions 40 and 42 as exemplified in FIGS. 5 and 6.

(5) Varnish layer forming step

[0046] Subsequently, the varnish layer forming step of forming the varnish layer by applying varnish to the outer

surface of the magnetic component body 20 is performed. Through this varnish layer forming step, the magnetic component 10 according to the embodiment of the present invention is obtained. Note that, although how to apply varnish is not particularly limited, normally, there may be utilized a method of subjecting the magnetic component body 20 to immersion treatment of immersing the magnetic component body 20 into a tub filled with dissolved varnish.

[0047] At the time of the manufacture of the magnetic component 10 according to the embodiment of the present invention, steps other than the steps (1) to (5) described above may be appropriately performed when necessary. For example, when the magnetic component 10B including the cover members 50 exemplified in FIG. 11 is manufactured, a step of fixing the cover member 50 may be performed after the connecting core portion forming step or the varnish layer forming step. In this case, at the time of fixation of the cover members 50, the cover members 50 may be fixed in a press-fitting manner, may be bonded with an adhesive agent such as an epoxy-based adhesive agent, or may be fixed by combination of the press-fitting manner and the adhesive agent. Note that, the magnetic component 10A illustrated in FIGS. 1A and 1B is obtained by performing the varnish layer forming step with respect to the magnetic component body 20. In other words, the magnetic component 10A and the magnetic component body 20 have the same structure except whether to perform the varnish treatment. Further, in a case where the varnish layer forming step is performed with respect to the magnetic component 10B illustrated in FIG. 11 prior to fixation of the cover members 50, a half-finished product that has not yet been subjected to the varnish layer forming step corresponds to the magnetic component body 20. Meanwhile, in a case where the varnish layer forming step is performed after fixation of the cover members 50, a half-finished product to which the cover members 50 have been fixed corresponds to the magnetic component body 20.

[0048] Note that, as long as the bobbin 100 forming the magnetic component 10 according to the embodiment of the present invention has the quadrangular cylindrical shape, the bobbin 100 may be formed of one component, two components as exemplified, for example, in FIG. 3, or at least three components. Note that, the bobbin 100 is shaped not with a sheet-like member (for example, insulating member which is soft and easily deformable, such as silicone rubber and paper) which is soft and easily deformable to an extent that the sheet-like member can be rolled around an outer periphery of a laminated core portion as exemplified in Japanese Patent Application Laid-open No. 2006-13294, but with a member for forming normal general bobbins, specifically, a rigid member processed in advance into a predetermined shape (such as insulating member formed of a hard resin or the like). For example, the quadrangular cylindrical part of the bobbin 100 is formed of a hard resin having a thickness of from approximately 1 mm to 5 mm.

Note that, examples of resins that can be utilized as such hard resins include a phenol-formaldehyde (PF) resin, a diallyl phthalate (DAP) resin, a polypropylene (PP) resin, a polyvinyl chloride (PVC) resin, a polystyrene (PS) resin, an acrylonitrile butadiene styrene (ABS) resin, and a liquid crystal polymer (LCP) resin. Otherwise, shapes, sizes, dimensions, and raw materials of components of the bobbin 100 are appropriately selected in accordance with shapes, sizes, and dimensions of the laminated core portion 130 including a laminated body obtained by laminating the plurality of plate-like magnetic bodies 132 so that the laminated body has a quadrangular shape in cross-section. Specifically, those properties are appropriately selected so that the laminated body can be housed in the bobbin 100 and held in press-contact with the inner peripheral surface of the bobbin 100 on at least both the top surface 130TP side and the bottom surface 130BTM side in the lamination direction of the laminated core portion 130 when the conductive wire is wound around the outer peripheral surface 102.

[0049] For example, on a premise of the embodiment illustrated in FIG. 6, the bobbin 100 could be formed also by arranging four rectangular plate-like members having substantially the same sizes as those of four surfaces except both end surfaces in the direction of the two-way arrow X of the laminated core portion 130 in a manner that the four rectangular plate-like members are held in close contact respectively with the four surfaces. However, in consideration, for example, of productivity of the magnetic unit 30, the bobbin 100 formed of at least two components of the first casing 110 and the second casing 120 as exemplified in FIGS. 3 and 4.

[0050] In this context, shapes other than those exemplified in FIGS. 3 and 4 may be appropriately employed as the shape of the first casing 110 as long as one outer peripheral surface of the four outer peripheral surfaces of the quadrangular cylindrical body is formed to be the opening portion 112. Further, shapes other than those exemplified in FIGS. 3 and 4 may be appropriately employed as the shape of the second casing 120 as long as the second casing 120 can be arranged to at least close the opening portion 112 of the first casing 110.

[0051] FIG. 13 is a schematic view illustrating another example of the first casing 110 and the second casing 120 which form the bobbin 100. A first casing 110C (110) illustrated in FIG. 13 has substantially the same structure as that of the first casing 110A illustrated in FIG. 3 except that the step portions 116R and 116L are not provided on the outer peripheral surfaces of the side surface portions 114R and 114L. Further, a second casing 120C (120) illustrated in FIG. 13 includes a rectangular plate-like member having substantially the same size and shape as those of the opening portion 112. Note that, the flange portions as exemplified in FIG. 4 and the partition plates for forming the gap portions 160 may be fixed also to at least one of the first casing 110C and the second casing 120C illustrated in FIG. 13.

[0052] FIG. 14 is a schematic view illustrating still an-

other example of the first casing 110 and the second casing 120 which form the bobbin 100. Specifically, FIG. 14 illustrates a modification of the first casing 110B and the second casing 120B illustrated in FIG. 4. A first casing 110D (110) illustrated in FIG. 14 has basically the same structure as that of the first casing 110B illustrated in FIG. 4, and has a feature in that the side surface portion 114R and the bottom surface portion 114B are provided to project to the outside of an interval between the flange portion 118A and the flange portion 118B. Further, a second casing 120D (120) illustrated in FIG. 14 has basically the same structure as that of the second casing 120B illustrated in FIG. 4, and has a feature in that the top surface portion 124T is provided to project to the outside of an interval between the flange portion 128A and the flange portion 128B.

[0053] When the parts of the laminated core portion 130 are projected from the opening portions at both the ends of the bobbin 100 as exemplified in FIGS. 1 and 5, it is preferred that the first casing 110D and the second casing 120D illustrated in FIG. 14 be used for the bobbin 100. In this case, the projecting parts (projecting portions 114RP and 114BP) of the side surface portion 114R and the bottom surface portion 114B, which are projected with respect to the flange portions 118A and 118B, and the projecting parts (projecting portions 124TP) of the top surface portion 124T, which are projected with respect to the flange portions 128A and 128B, can cover and support surfaces except the end surfaces in the direction of the two-way arrow X and surfaces (or parts) adjacent to the connecting core portions 40 and 42 of the projecting parts of the laminated core portion 130, which are projected from the opening portions at both the ends of the bobbin 100. Further, as exemplified in FIG. 6, also when the first connecting core portion 40B and the second connecting core portion 42B are arranged to respectively close the opening portions at both the ends of the bobbin 100, it is preferred that the first casing 110D and the second casing 120D illustrated in FIG. 14 be used for the bobbin 100. In this case, projecting portions 114RP, 114BP, 124TP, and 124RP can cover and support both end sides of the first connecting core portion 40B and the second connecting core portion 42B.

[0054] Note that, the plate-like magnetic bodies 132 forming the laminated core portion 130 are not particularly limited in thickness. However, when the magnetic component 10 is utilized in use of being activated with high frequency, the thickness is preferred to fall within a range of from 30 μm to 350 μm , and more preferred to fall within a range of from 30 μm to 150 μm . When the thickness of the plate-like magnetic bodies 132 is set to fall within the above-mentioned ranges, the magnetic component 10 can be easily utilized in use with high frequency while preventing deformation of the plate-like magnetic bodies 132 at the time of manufacture of the magnetic component 10, in particular, at the time of performing the coil portion forming step. Further, any material appropriately selected from publicly known materials

that can be used as a core member can be utilized as a material for the plate-like magnetic bodies 132. However, it is preferred to utilize silicon steel when the magnetic component 10 is utilized in use of being activated with high frequency. Note that, it is preferred that the same thicknesses and materials as those of the plate-like magnetic bodies 132 be employed as those of the plate-like magnetic bodies forming the first connecting core portion 40 and the second connecting core portion 42.

[0055] Note that, the magnetic component 10 according to the embodiment of the present invention is desired to be used in an inverter and a converter for automobile devices, medical devices, industrial devices, domestic power generators, solar photovoltaic power generators, and the like, and the inverter and the converter are each rated preferably at less than 50 kW, more preferably at 15 kW or less.

Claims

1. A magnetic component (10), comprising a magnetic component body (20) comprising at least:

at least two magnetic units (30) each comprising:

a bobbin (100) having a quadrangular cylindrical shape;
a laminated core portion (130) arranged at least in the bobbin (100) and comprising a laminated body obtained by laminating a plurality of plate-like magnetic bodies (132);
a coil portion (140) comprising a conductive wire wound around an outer peripheral surface (102) of the bobbin (100); and
a heat-resistant insulating sheet (150) covering an outer peripheral surface of the coil portion (140);

a first connecting core portion (40) comprising a magnetic body and connecting to each other ends on one side of the laminated core portions (130) respectively forming the at least two magnetic units (30) arranged parallel to each other; and

a second connecting core portion (42) comprising a magnetic body and connecting to each other ends on another side of the laminated core portions (130) respectively forming the at least two magnetic units (30) arranged parallel to each other,

wherein an outer surface of the magnetic component body (20) is entirely covered with a varnish layer, and

wherein, in each of the at least two magnetic units (30), one surface of one plate-like magnetic body (132A) and one surface of another plate-

- like magnetic body (132B) arranged adjacent to the one plate-like magnetic body (132A) are substantially entirely held in direct contact with each other in a region (CL) of the laminated body, the region (CL) being positioned on an inner peripheral side of the coil portion (140), the one plate-like magnetic body (132A) and the another plate-like magnetic body (132B) forming the laminated body,
- characterized in that** the bobbin (100) includes a first casing (110) and a second casing (120) and the first casing (110) and the second casing (120) are combined with each other to form the quadrangular cylindrical bobbin (100).
2. A magnetic component (10) according to claim 1, wherein a thickness of each of the plurality of plate-like magnetic bodies (132) falls within a range of from 30 μm to 350 μm .
 3. A magnetic component (10) according to claim 1 or 2, wherein the ends on the one side of the laminated core portions (130) respectively forming the at least two magnetic units (30) and the ends on the another side of the laminated core portions (130) respectively forming the at least two magnetic units (30) are projected from the bobbin (100), wherein the first connecting core portion (40) is provided at a part between the ends on the one side of the laminated core portions (130) respectively forming the at least two magnetic units (30), and wherein the second connecting core portion (42) is provided at a part between the ends on the another side of the laminated core portions (130) respectively forming the at least two magnetic units (30).
 4. A magnetic component (10) according to any one of claims 1 to 3, wherein the laminated core portion (130) positioned in the bobbin (100) comprises a gap portion (160) provided to divide a longitudinal direction of the bobbin (100), and wherein a partition plate for substantially perfectly partitioning a space on an inner peripheral side of the bobbin (100) in the longitudinal direction of the bobbin (100) is provided at a position corresponding to the gap portion (160) in the bobbin (100).
 5. A magnetic component (10) according to any one of claims 1 to 4, wherein a material for the each of the plurality of plate-like magnetic bodies (132) comprises silicon steel.
 6. A manufacturing method for magnetic component (10), comprising:
 - a laminated body arranging step of arranging, in a bobbin (100) having a quadrangular cylindrical

drical shape, and including a first casing (110) and a second casing (120) the first casing (110) and the second casing (120) being combined with each other to form the quadrangular cylindrical bobbin (100), at least a laminated body obtained by laminating a plurality of plate-like magnetic bodies (132) in a manner that surfaces of the plurality of plate-like magnetic bodies (132) are held in direct contact with each other; a coil portion forming step of forming a coil portion (140) on an outer peripheral surface (102) of the bobbin (100) by winding a conductive wire around the outer peripheral surface (102) of the bobbin (100) so that a pressing force is applied at least in a lamination direction of the laminated body arranged in the bobbin (100); a coil portion covering step of covering an outer peripheral surface of the coil portion (140) with a heat-resistant insulating sheet (150),

the laminated body arranging step, the coil portion forming step, and the coil portion covering step being performed to prepare at least two magnetic units (30);

a connecting core portion forming step of:

arranging the at least two magnetic units (30) parallel to each other; forming a first connecting core portion (40) for connecting to each other ends on one side of laminated core portions (130) respectively forming the at least two magnetic units (30) and each comprising the laminated body; and forming a second connecting core portion (42) for connecting to each other ends on another side of the laminated core portions (130) respectively forming the at least two magnetic units (30) and each comprising the laminated body, the connecting core portion forming step being performed to prepare a magnetic component body (20); and

a varnish layer forming step of forming a varnish layer by applying varnish to an outer surface of the magnetic component body (20),

the varnish layer forming step being performed to obtain the magnetic component (10).

7. A manufacturing method for a magnetic component (10) according to claim 6, wherein the laminated body arranging step comprises arranging the laminated body in the bobbin (100) in a manner that both ends of the laminated body

are projected from both end sides of the bobbin (100).

8. A manufacturing method for a magnetic component (10) according to claim 6 or 7, wherein the laminated body comprises a gap portion (160) provided to divide a longitudinal direction of the bobbin (100), and wherein a partition plate for substantially perfectly partitioning a space on an inner peripheral side of the bobbin (100) in the longitudinal direction of the bobbin (100) is provided at a position corresponding to the gap portion (160) in the bobbin (100). 5
9. A manufacturing method for a magnetic component (10) according to any one of claims 6 to 8, wherein a thickness of each of the plurality of plate-like magnetic bodies (132) falls within a range of from 30 μm to 350 μm . 10
10. A manufacturing method for a magnetic component (10) according to any one of claims 6 to 9, wherein the each of the plurality of plate-like magnetic bodies (132) comprises a silicon steel plate. 15

Patentansprüche

1. Eine Magnetkomponente (10), die eine Magnetkörperkomponente (20) aufweist, die zumindest aufweist: 20
 - mindestens zwei Magneteinheiten (30) von denen jede jeweils aufweist:
 - eine Spule (100) mit einer viereckigen zylindrischen Form;
 - einen Laminatkernabschnitt (130), der zumindest in der Spule (100) angeordnet ist und einen Laminatkörper aufweist, der durch Laminieren einer Vielzahl von plattenartigen Magnetkörpern (132) erhalten wird;
 - einen Spulenabschnitt (140), der einen leitfähigen Draht aufweist, der um eine Außenumfangsfläche (102) der Spule (100) gewunden ist; und
 - eine hitzebeständige Isolierfolie (150), die eine Außenumfangsfläche des Spulenabschnitts (140) bedeckt;
 - einen ersten Verbindungskernabschnitt (40), der einen Magnetkörper aufweist und mit jedem der weiteren Enden auf einer Seite der Laminatkernabschnitte (130) verbunden ist, jeweils die zumindest zwei Magneteinheiten (30) bildend, die parallel zueinander angeordnet sind; und
 - einen zweiten Verbindungskernabschnitt (42),

der einen Magnetkörper aufweist und mit jedem der weiteren Enden auf einer anderen Seite der Laminatkernabschnitte (130) verbunden ist, jeweils die zumindest zwei Magneteinheiten (30) bildend, die parallel zueinander angeordnet sind; und
wobei eine Außenfläche der Magnetkörperkomponente (20) vollständig mit einer Lackschicht bedeckt ist, und
wobei in jeder der mindestens zwei Magneteinheiten (30) eine Oberfläche eines plattenartigen Magnetkörpers (132A) und eine Oberfläche eines anderen plattenartigen Magnetkörpers (132B), die benachbart zu dem einen plattenartigen Magnetkörper (132A) angeordnet sind, im Wesentlichen vollständig in direktem Kontakt miteinander in einem Bereich (CL) des Laminatkörpers gehalten sind, wobei der Bereich (CL) auf einer inneren Umfangsseite des Spulenabschnitts (140) angeordnet ist, wobei der eine plattenartige Magnetkörper (132A) und der andere plattenartige Magnetkörper (132B) den Laminatkörper ausbilden,

dadurch gekennzeichnet, dass die Spule (100) ein erstes Gehäuse (110) und ein zweites Gehäuse (120) einschließt, und das erste Gehäuse (110) und das zweite Gehäuse (120) miteinander kombiniert sind, um die viereckige zylindrische Spule (100) zu bilden,

2. Die Magnetkomponente (10) nach Anspruch 1, wobei eine Dicke der mehreren plattenartigen Magnetkörper (132) in einem Bereich von 30 μm bis 350 μm liegt. 30
3. Die Magnetkomponente (10) nach Anspruch 1 oder 2, wobei die Enden auf der einen Seite der Laminatkernabschnitte (130), die jeweils zumindest die zwei Magneteinheiten (30) ausbilden, und die Enden auf der anderen Seite der Laminatkernabschnitte (130), die jeweils zumindest die zwei Magneteinheiten (30) ausbilden, von der Spule (100) hervorstehen, wobei der erste Verbindungskernabschnitt (40) als ein Teil zwischen den Enden auf der einen Seite der Laminatkernabschnitte (130) vorgesehen ist, die jeweils die zumindest zwei der Magneteinheiten (30) ausbilden und
wobei der zweite Verbindungskernabschnitt (42) als ein Teil zwischen den Enden auf der anderen Seite der Laminatkernabschnitte (130) vorgesehen ist, die jeweils die zumindest zwei der Magneteinheiten (30) ausbilden. 35
4. Die Magnetkomponente (10) nach einem der Ansprüche 1 bis 3, wobei der in der Spule (100) angeordnete Laminat-

kernabschnitt (130) einen Spaltabschnitt (160) aufweist, der zum Teilen in einer Längsrichtung der Spule (100) vorgesehen ist, und
wobei eine Trennplatte zum im Wesentlichen perfekten Aufteilen eines Raums an einer Innenumfangsseite der Spule (100) in Längsrichtung der Spule (100) an einer Position entsprechend dem Spaltabschnitt (160) in der Spule (100) vorgesehen ist.

5. Die Magnetkomponente (10) nach einem der Ansprüche 1 bis 4, wobei ein Material für jeden der mehreren plattenartigen Magnetkörper (132) Siliziumstahl aufweist.

6. Ein Herstellungsverfahren für eine Magnetkomponente (10), das folgendes aufweist:

einen Laminatkörper Anordnungsschritt zum Anordnen zumindest einen Laminatkörper, der durch Laminieren einer Vielzahl von plattenartigen Magnetkörpern (132) in einer Weise erhalten wird, dass Oberflächen der mehreren plattenartigen Magnetkörper (132) in direktem Kontakt miteinander gehalten werden, in einer Spule (100) mit einer viereckigen zylindrischen Form und einem ersten Gehäuse (110) und einem zweiten Gehäuse (120), wobei das erste Gehäuse (110) und das zweite Gehäuse (120) miteinander kombiniert sind, um die viereckige zylindrische Spule (100) zu bilden;
einen Spulenabschnitt Ausbildungsschritt zum Ausbilden eines Spulenabschnitts (140) mit einem leitfähigen Draht um eine Außenumfangsfläche (102) der Spule (100), so dass eine Druckkraft zumindest in einer Laminierichtung des in der Spule (100) angeordneten laminierten Körpers ausgeübt wird;
einen Spulenabschnitt Abdeckschritt zum Abdecken einer Außenumfangsfläche des Spulenabschnitts (140) mit einer hitzebeständigen Isolierfolie (150),
wobei der Laminatkörper Anordnungsschritt, der Spulenabschnitt Ausbildungsschritt und der Spulenabschnitt Abdeckschritt durchgeführt werden, um zumindest zwei Magneteinheiten (30) herzustellen;
einen Verbindungskernabschnitt Ausbildungsschritt mit:

Anordnen der zumindest zwei Magneteinheiten (30) parallel zueinander;
Ausbilden eines ersten Verbindungskernabschnitts (42) zum Verbinden mit jedem der weiteren Enden auf einer Seite der Laminatkernabschnitte (130), die jeweils die zumindest zwei Magneteinheiten (30) ausbilden und von denen jede den Laminatkörper aufweist; und

Ausbilden eines zweiten Verbindungskernabschnitts (42) zum Verbinden mit jedem der weiteren Enden auf einer anderen Seite der Laminatkernabschnitte (130), die jeweils die zumindest zwei Magneteinheiten (30) ausbilden und von denen jede den Laminatkörper aufweist;
wobei der Verbindungskernabschnitt Ausbildungsschritt ausgeführt wird, um eine Magnetkörperkomponente (20) zur Verfügung zu stellen; und

einen Lackschicht-Ausbildungsschritt zum Ausbilden einer Lackschicht durch Aufbringen von Lack auf einer Außenfläche der Magnetkörperkomponente (20),

wobei der Lackschicht-Ausbildungsschritt ausgeführt wird, um die Magnetkomponente (10) zur Verfügung zu stellen.

7. Das Herstellungsverfahren für eine Magnetkomponente (10) nach Anspruch 6, wobei der Laminatkörper Anordnungsschritt das Anordnen des Laminatkörpers in der Spule (100) in einer Weise aufweist, dass die beiden Enden des laminierten Körpers von beiden Endseiten der Spule (100) hervorstehen.
8. Das Herstellungsverfahren für eine Magnetkomponente (10) nach Anspruch 6 oder 7, wobei der Laminatkörper einen Spaltabschnitt (160) zum Teilen in einer Längsrichtung der Spule (100) aufweist, und
wobei eine Trennplatte, zum im Wesentlichen perfekten Aufteilen eines Raums an einer Innenumfangsseite der Spule (100) in Längsrichtung der Spule (100) an einer Position entsprechend dem Spaltabschnitt (160) in der Spule (100) vorgesehen ist.
9. Das Herstellungsverfahren für eine Magnetkomponente (10) nach einem der Ansprüche 6 oder 8, wobei jeder der mehreren plattenartigen Magnetkörper (132) eine Dicke in einem Bereich von 30 µm bis 350 µm aufweist.
10. Das Herstellungsverfahren für eine Magnetkomponente (10) nach einem der Ansprüche 6 bis 9, wobei jeder der mehreren plattenartigen Magnetkörper (132) eine Siliziumstahlplatte aufweist.

Revendications

1. Un composant magnétique (10) comprenant un corps de composant magnétique (20) comprenant au moins :

deux unités magnétiques (30), chacune d'entre

elle comprenant :

une bobine (100) présentant une forme cylindrique quadrangulaire ;
une section de noyau laminée (130) disposée au moins dans la bobine (100) et comprenant un corps laminé obtenu par la lamination d'une pluralité de corps magnétiques semblables à des plaques (132) ;
une section spiralée (140) comprenant un fil conducteur enroulé autour d'une surface périphérique externe (102) de la bobine (100) ; et
une feuille isolante thermorésistante (150) couvrant une surface périphérique externe de la bobine (100) ;

une première section de noyau de connexion (40) comprenant un corps magnétique et reliant les deux autres extrémités à une face des sections de noyau laminées (130) respectivement, formant au moins deux unités magnétiques (30) disposées parallèlement l'une par rapport à l'autre, et

une seconde section de noyau de connexion (42) comprenant un corps magnétique et reliant les deux autres extrémités à une face des sections de noyau laminées (130) respectivement, formant au moins deux unités magnétiques (30) disposées parallèlement l'une par rapport à l'autre,

dans lequel une surface extérieure du corps de composant magnétique (20) est entièrement couverte par une couche de vernis, et
dans lequel dans chacune des au moins deux unités magnétiques (30), une surface d'un corps magnétique semblable à une plaque (132A) et une autre surface d'un corps magnétique semblable à une plaque (132B) disposées de manière adjacente à une surface d'un corps magnétique semblable à une plaque (132A) sont sensiblement entièrement placées en contact direct les unes avec les autres dans une région (CL) du corps laminé, la région (CL) étant positionnée sur une surface périphérique interne de la section spiralée (140), une surface d'un corps magnétique semblable à une plaque (132A) et une autre surface d'un corps magnétique semblable à une plaque (132B) formant le corps laminé,

caractérisé en ce que la bobine (100) comprend une premier boîtier (110) et un second boîtier (120), le premier boîtier (110) et le second boîtier (120) étant combinés l'un avec l'autre de sorte à former la bobine cylindrique quadrangulaire (100).

2. Un composant magnétique (10) selon la Revendica-

tion 1, dans lequel une épaisseur de chacun des corps magnétiques semblables à des plaques (132) se situe entre 30 µm et 350 µm.

3. Un composant magnétique (10) selon la Revendication 1 ou 2, dans lequel les extrémités d'un côté des sections de noyau laminées (130) respectivement, formant au moins deux unités magnétiques (30) et les extrémités de l'autre côté des sections de noyau laminées (130) respectivement, formant au moins deux unités magnétiques (30), s'étendent à partir de la bobine (100), dans lequel la première section de noyau de connexion (40) est positionnée en un endroit entre les extrémités d'un côté des sections de noyau laminées (130) respectivement, formant au moins deux unités magnétiques (30), et dans lequel la seconde section de noyau de connexion (42) est positionnée en un endroit entre les extrémités d'un autre côté des sections de noyau laminées (130) respectivement, formant au moins deux unités magnétiques (30).

4. Un composant magnétique (10) selon l'une quelconque des Revendications 1 à 3, dans lequel la section de noyau laminée (130) positionnée dans la bobine (100) comprend une section d'écartement (160) destinée à diviser une direction longitudinale de la bobine (100), et dans lequel une plaque de séparation pour séparer de manière sensiblement parfaite un espace sur une face périphérique interne de la bobine (100) dans la direction longitudinale de la bobine (100) est positionnée en un endroit correspondant à la section d'écartement (160) de la bobine (100).

5. Un composant magnétique (10) selon l'une quelconque des Revendications 1 à 4, dans lequel un matériau pour chacun de la pluralité de corps magnétiques semblables à des plaques (132) comprend de l'acier au silicium.

6. Un procédé de fabrication pour la fabrication d'un composant magnétique (10) comprenant :

une étape d'agencement du corps laminé consistant en l'agencement, dans une bobine (100) présentant une forme cylindrique quadrangulaire et comprenant un premier boîtier (110) et un second boîtier (120), le premier boîtier (110) et le second boîtier (120) étant combinés l'un avec l'autre de sorte à former la bobine cylindrique quadrangulaire (100), d'au moins un corps laminé obtenu par la lamination d'une pluralité de corps magnétiques semblables à des plaques (132) de sorte que les surfaces de la pluralité de corps magnétiques semblables à des pla-

ques (132) sont placées en contact direct les unes avec les autres ;

une étape de création de la section spiralée consistant en la création de la section spiralée (140) sur une surface périphérique externe (102) de la bobine (100) en enroulant un fil conducteur autour de la surface périphérique externe (102) de la bobine (100) de sorte qu'une pression soit appliquée au moins dans une direction de lamination du corps laminé disposé dans la bobine (100) ;

une étape de recouvrement de la section spiralée consistant en le recouvrement d'une surface périphérique externe de la section spiralée (140) par une feuille isolante thermorésistante (150), l'étape d'agencement du corps laminé, l'étape de création de la section spiralée et l'étape de recouvrement de la section spiralée étant effectuées de sorte à préparer au moins deux unités magnétiques (30) ;

une étape de réalisation des sections de noyau de connexion consistant en :

l'agencement parallèle des au moins deux unités magnétiques (30) ;

la formation d'une première section de noyau de connexion (40) pour relier les extrémités à une face des sections de noyau laminées (130) respectivement, formant au moins deux unités magnétiques (30) et comprenant, chacune, le corps laminé ; et la formation d'une seconde section de noyau de connexion (42) pour relier les extrémités à une autre face des sections de noyau laminées (130) respectivement, formant au moins deux unités magnétiques (30) et comprenant, chacune, le corps laminé,

l'étape de formation des sections de noyau de connexion étant réalisée afin de préparer un corps de composant magnétique (20) ; et

une étape de formation de la couche de vernis consistant en la formation d'une couche de vernis par l'application de vernis sur une surface externe du corps de composant magnétique (20),

l'étape de formation de la couche de vernis étant réalisée afin d'obtenir le composant magnétique (10).

7. Un procédé de fabrication pour la fabrication d'un composant magnétique (10) selon la Revendication 6, dans lequel l'étape d'agencement du corps laminé comprend l'arrangement du corps laminé dans la bobine (100) de sorte que les deux extrémités du corps laminé s'étendent à partir des deux extrémités de la

bobine (100).

8. Un procédé de fabrication pour la fabrication d'un composant magnétique (10) selon la Revendication 6 ou 7, dans lequel le corps laminé comprend une section d'écartement (160) destinée à diviser une direction longitudinale de la bobine (100), et dans lequel une plaque de séparation pour séparer de manière sensiblement parfaite un espace sur une face périphérique interne de la bobine (100) dans la direction longitudinale de la bobine (100) est positionnée en un endroit correspondant à la section d'écartement (160) de la bobine.
9. Un procédé de fabrication pour la fabrication d'un composant magnétique (10) selon l'une quelconque des Revendications 6 à 8, dans lequel une épaisseur de chacun des corps magnétiques semblables à des plaques (132) se situe entre 30 μm et 350 μm .
10. Un procédé de fabrication pour la fabrication d'un composant magnétique (10) selon l'une quelconque des Revendications 6 à 9 dans lequel un matériau pour chacun de la pluralité de corps magnétiques semblables à des plaques (132) comprend de l'acier au silicium.

Fig.1A

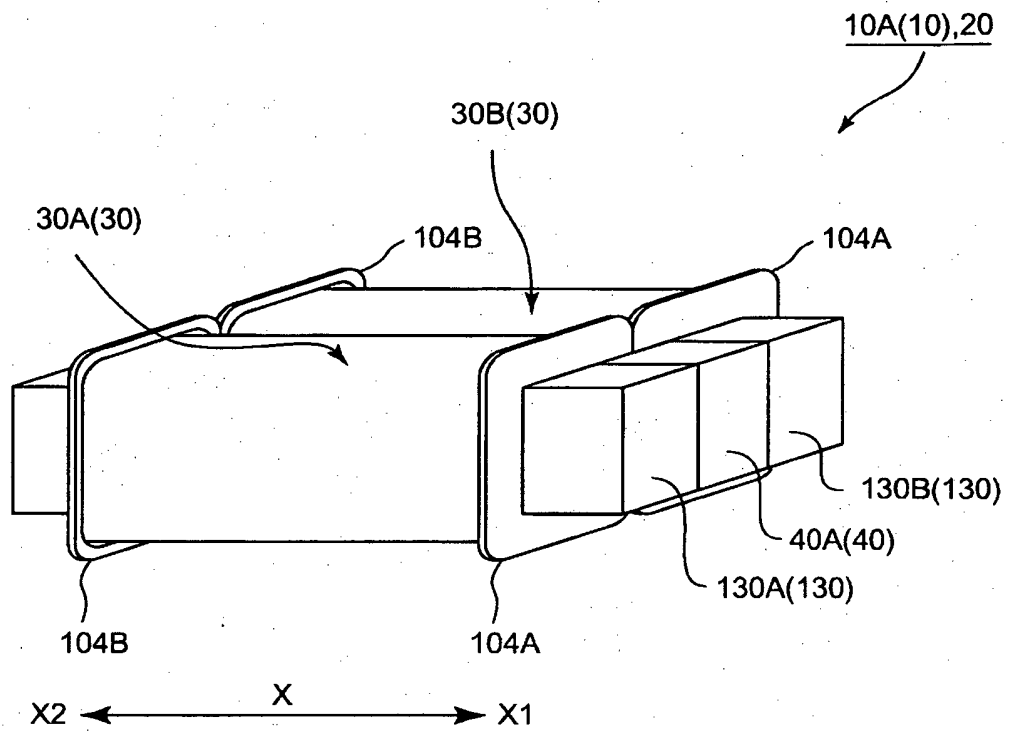
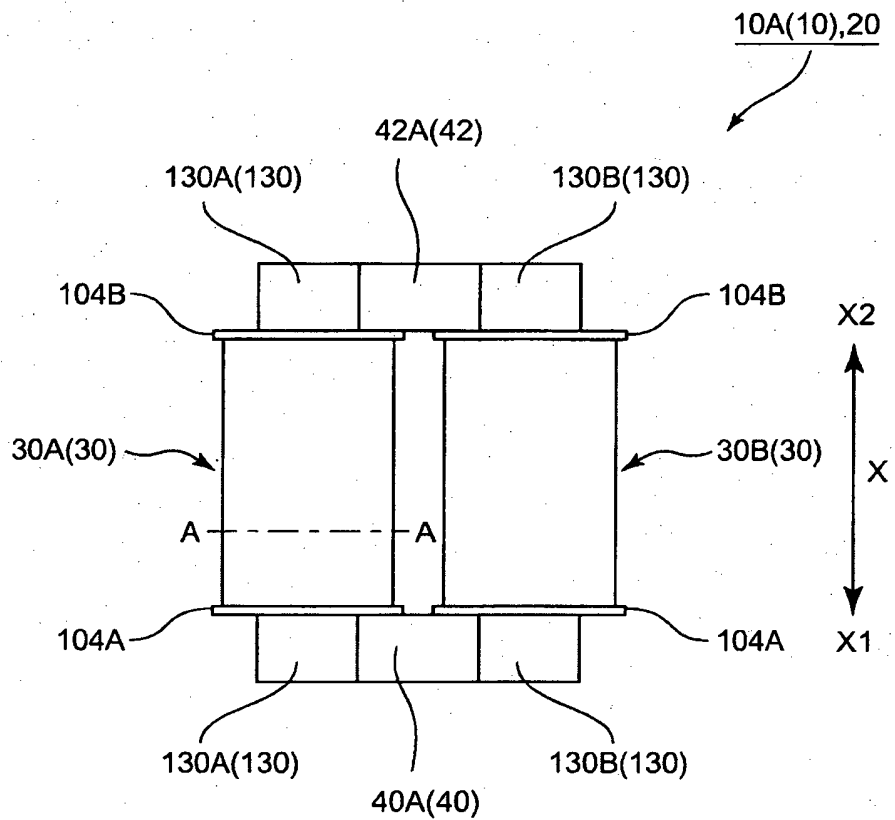


Fig.1B



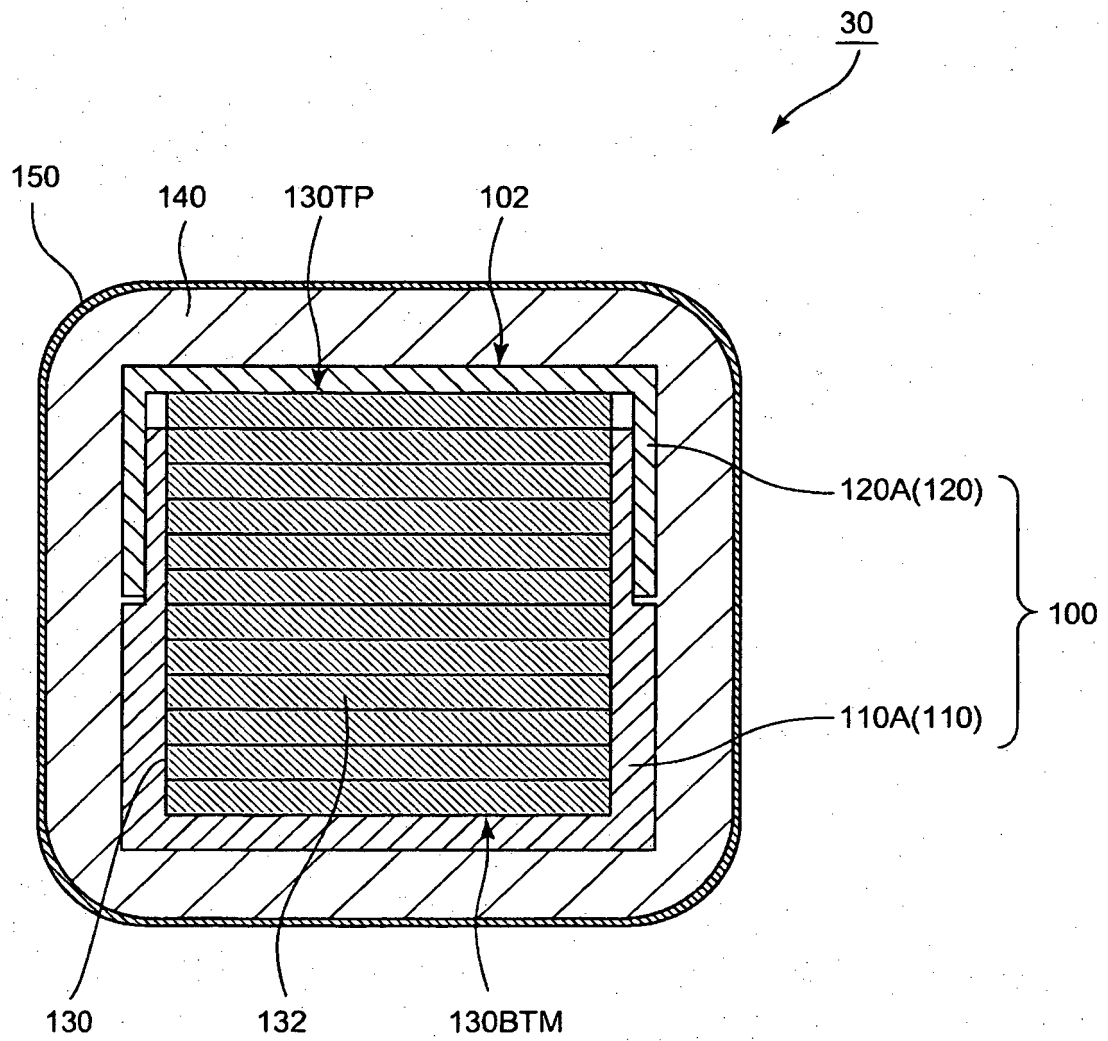


Fig.2

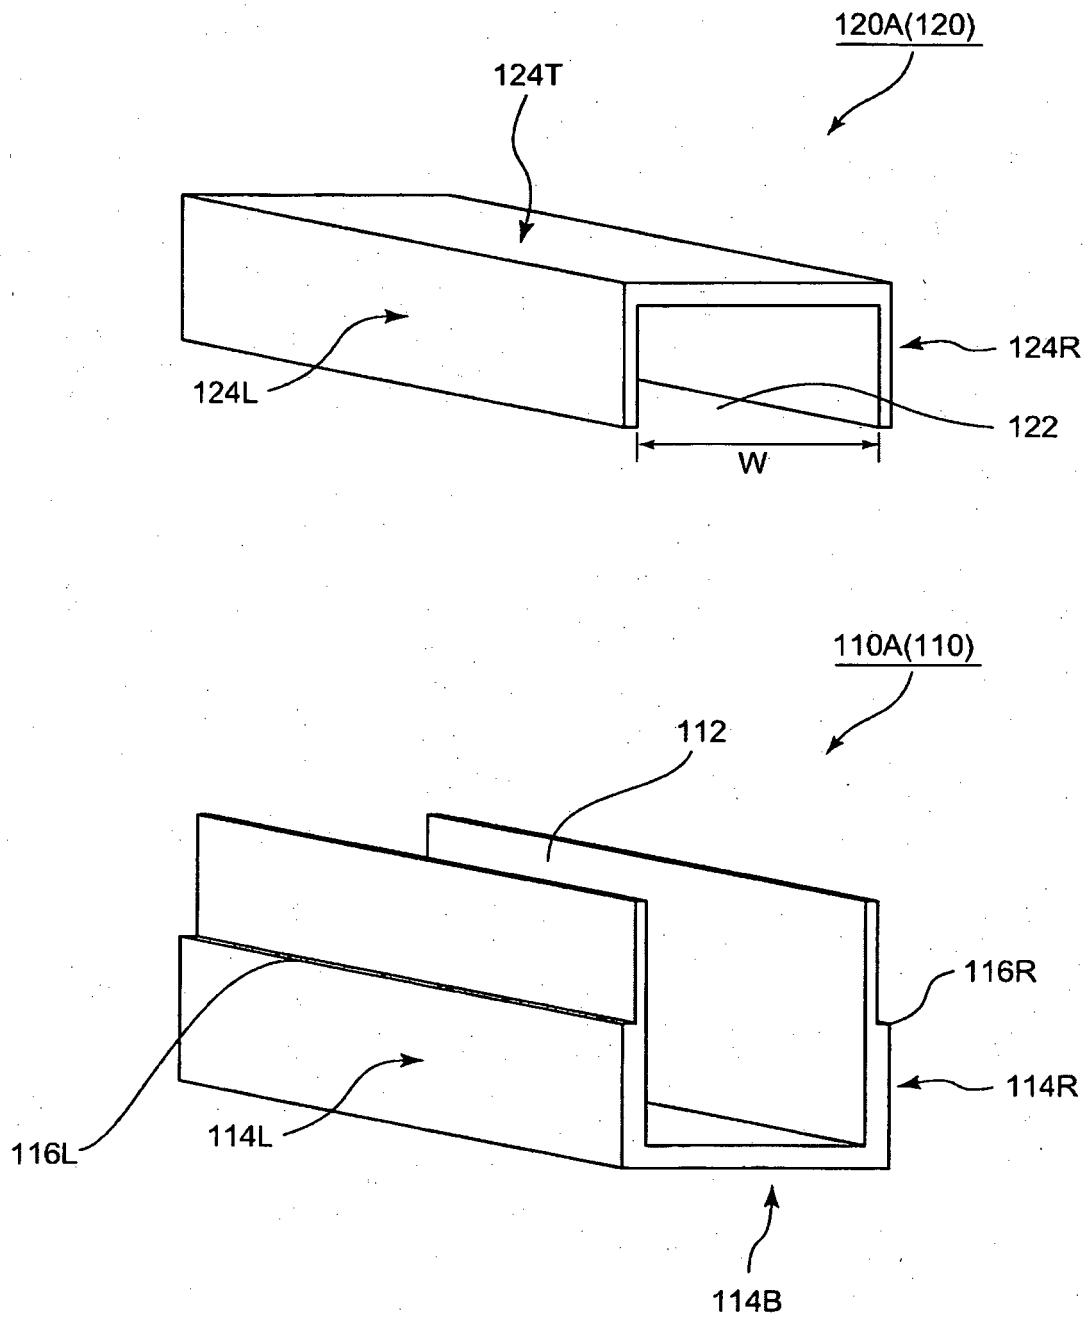


Fig.3

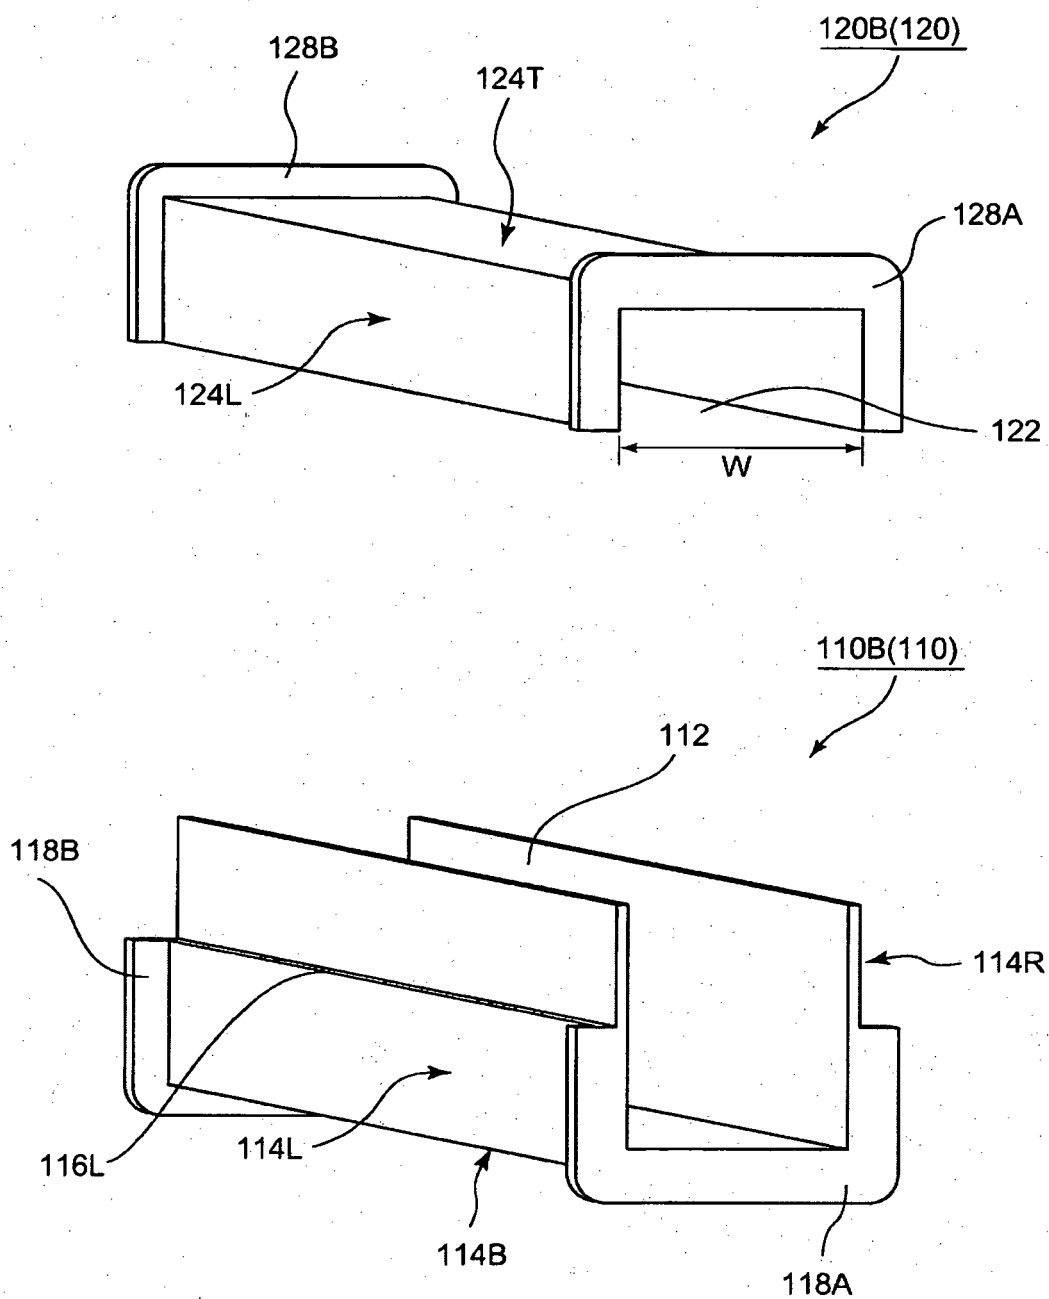


Fig.4

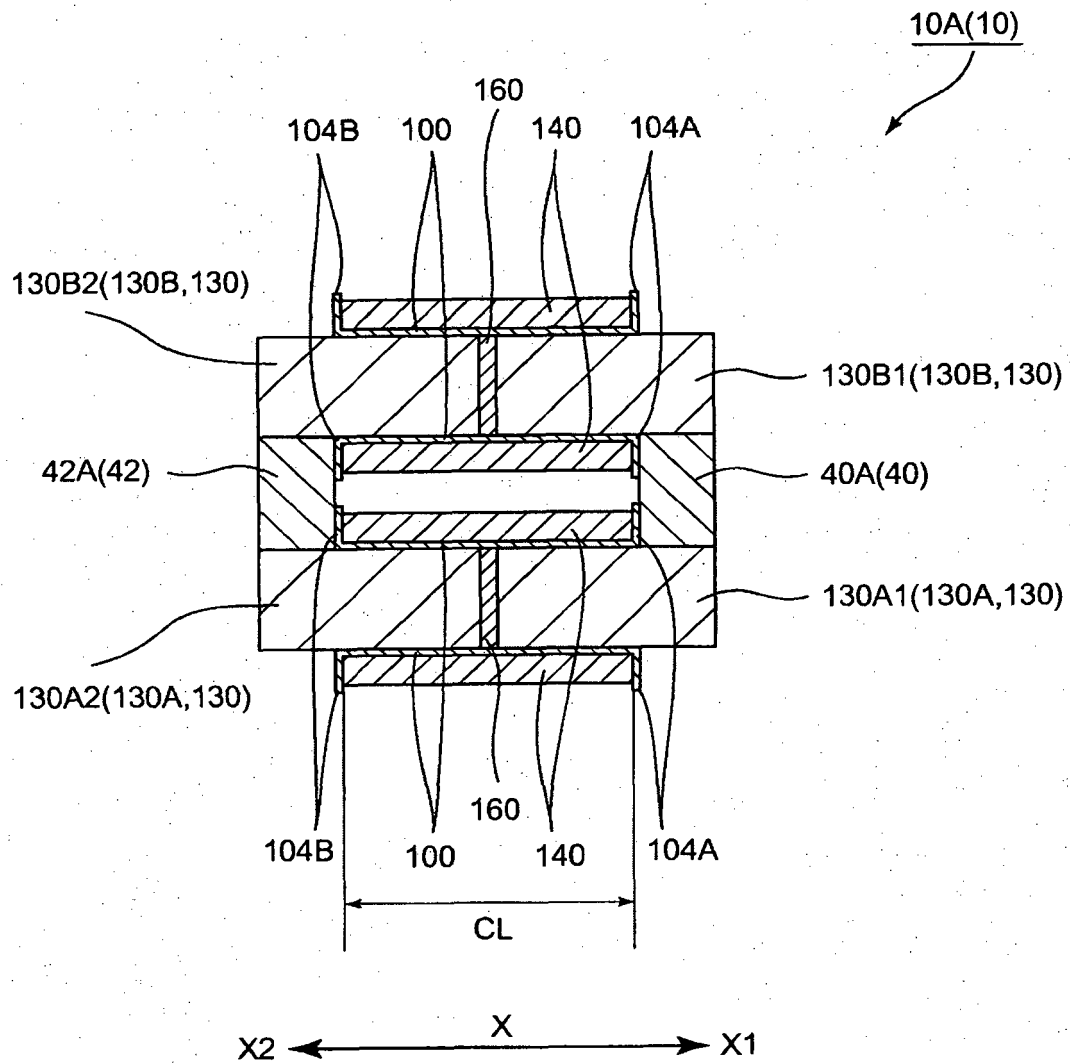


Fig.5

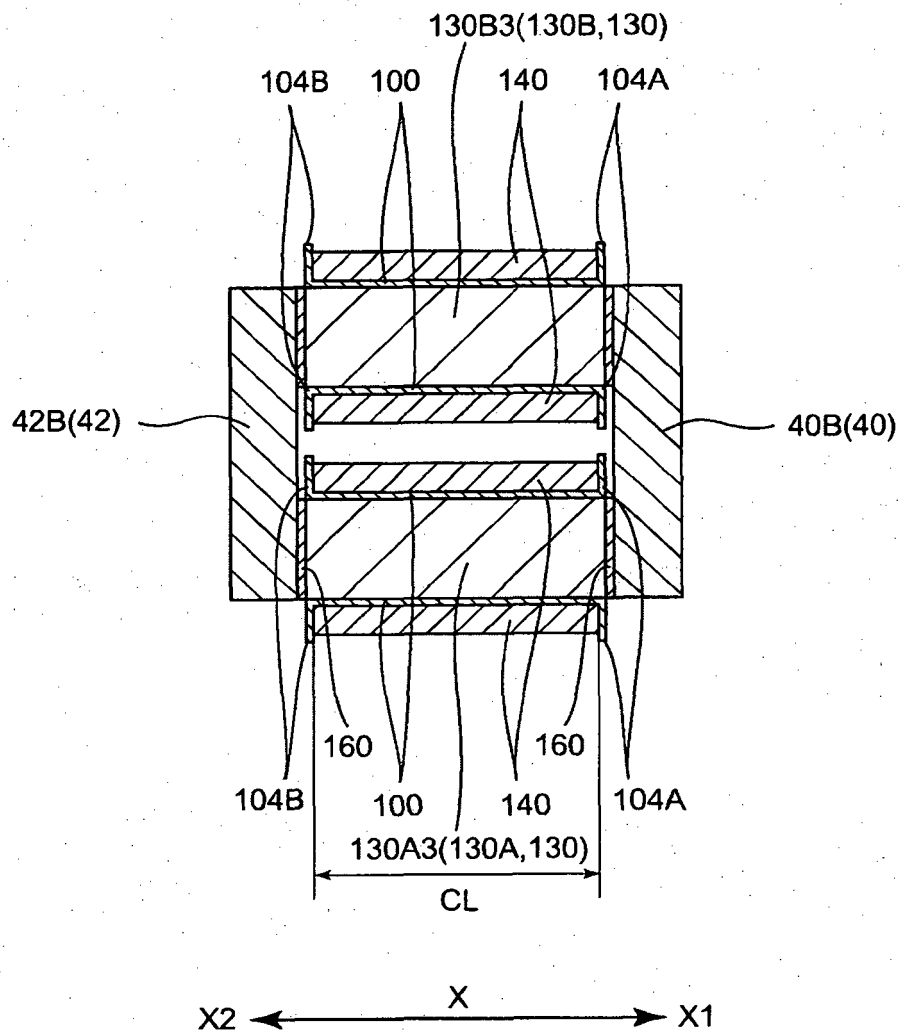


Fig.6


Fig.7A



132S(132)



Fig.7B

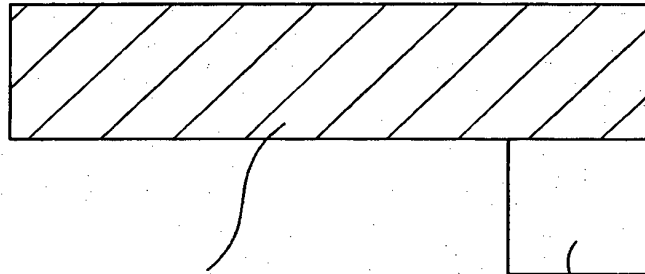

132L(132)



S

NS

Fig.8A

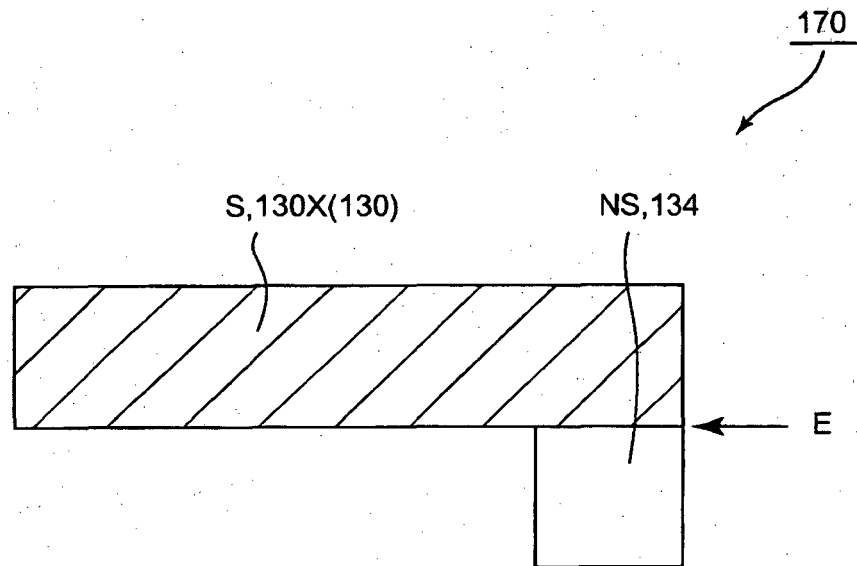
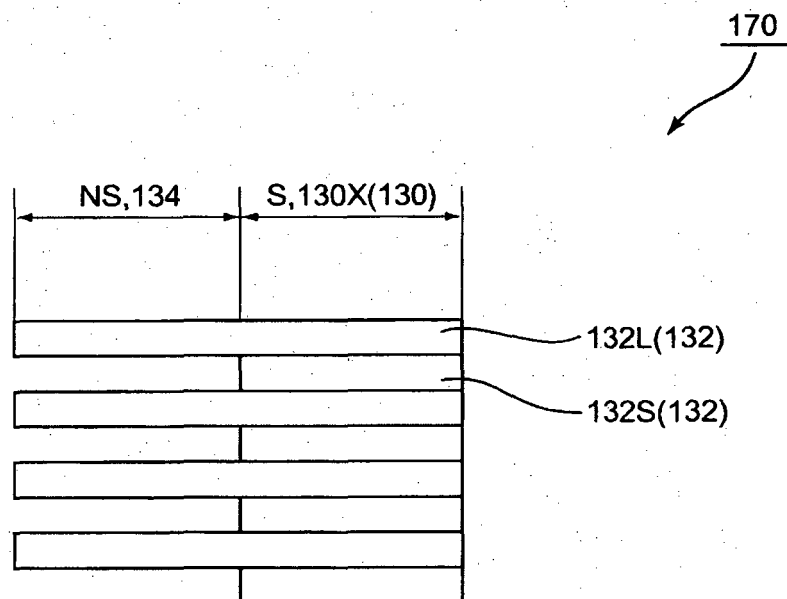


Fig.8B



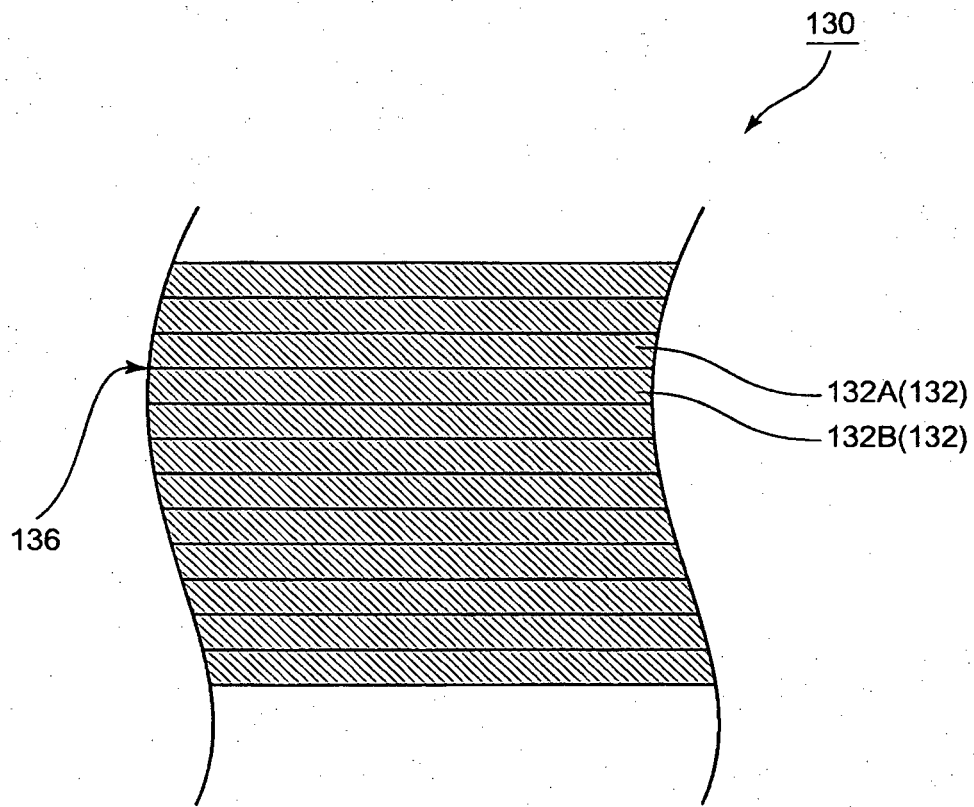


Fig.9

Fig.10A

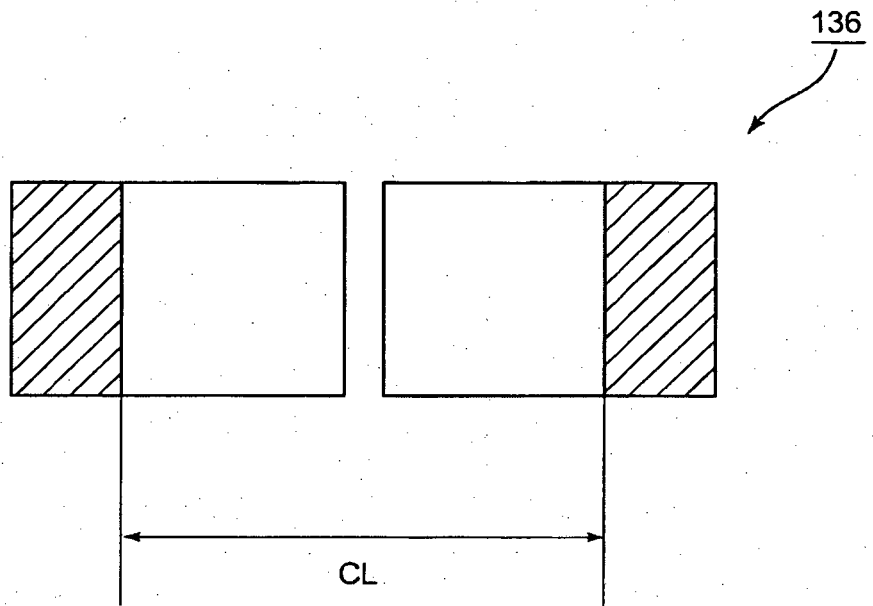
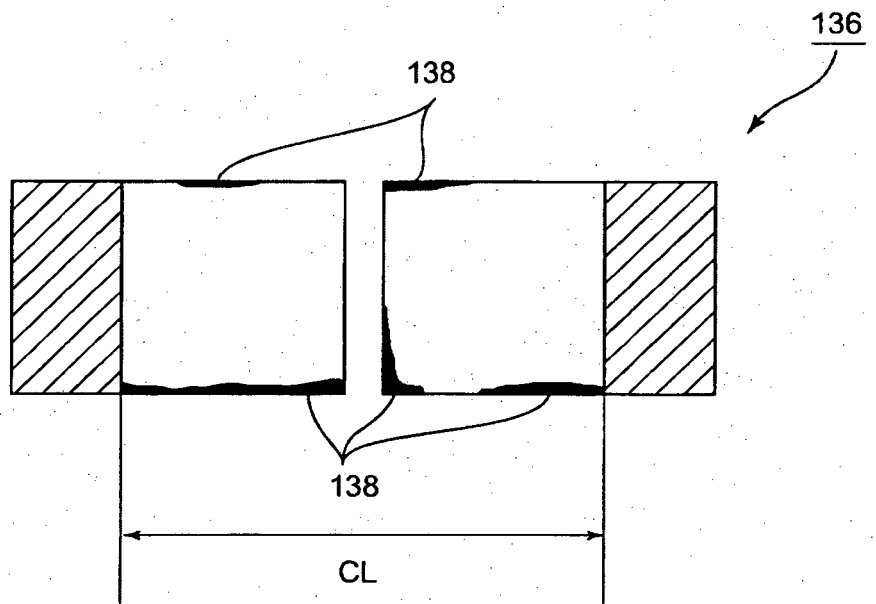


Fig.10B



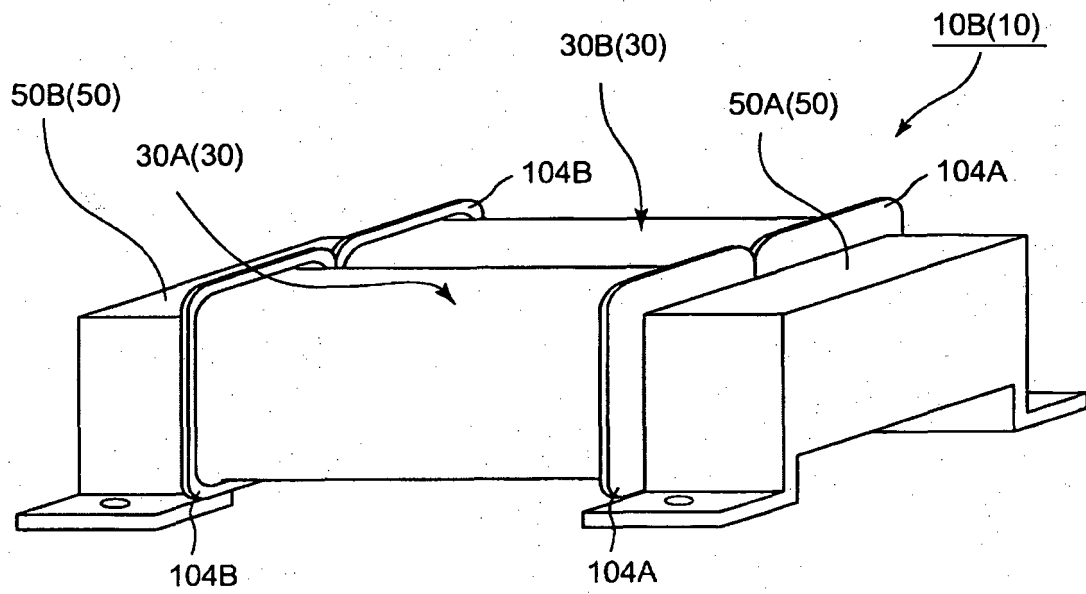


Fig.11

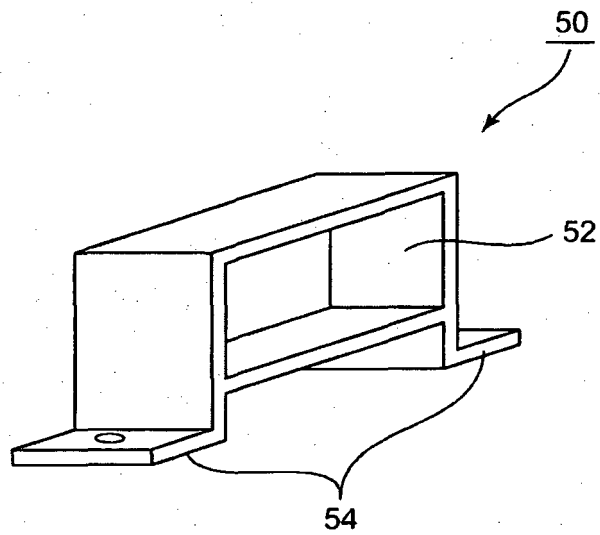


Fig.12

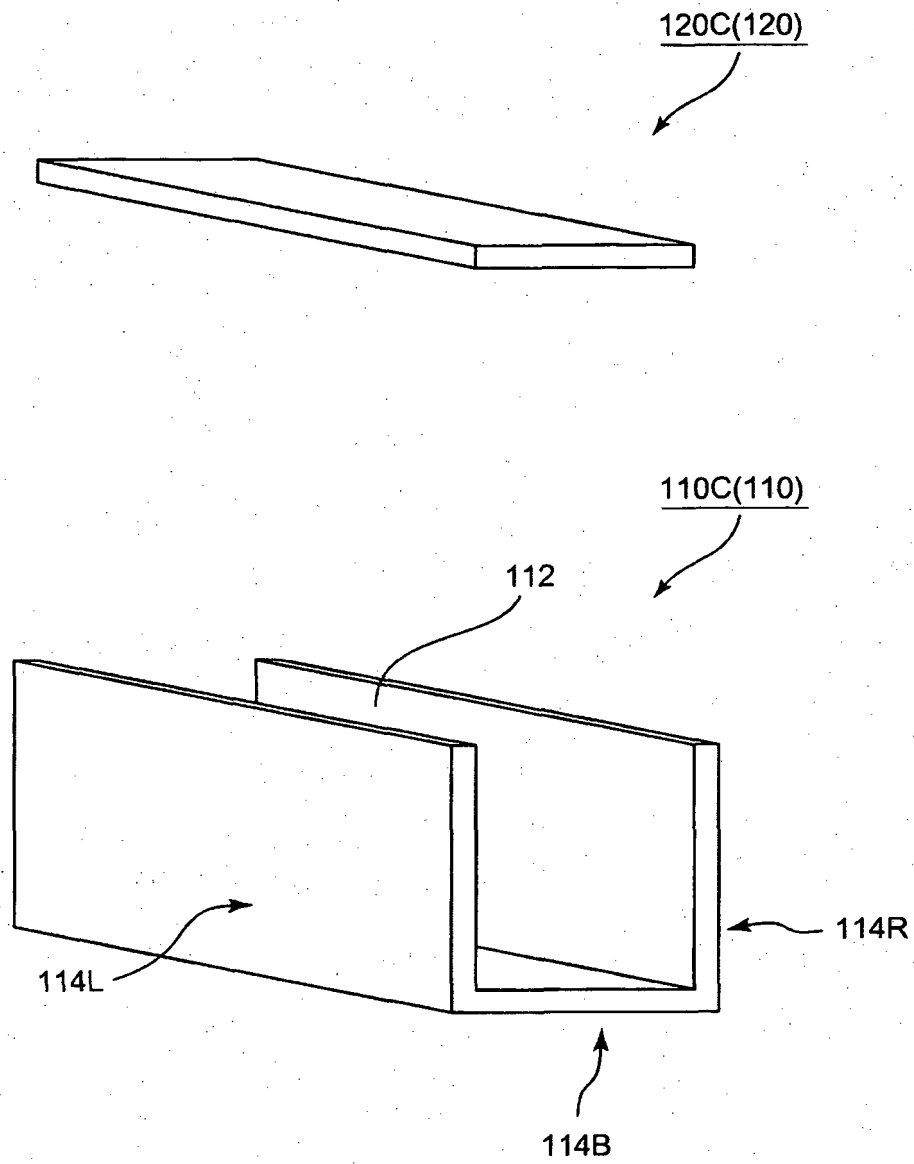


Fig.13

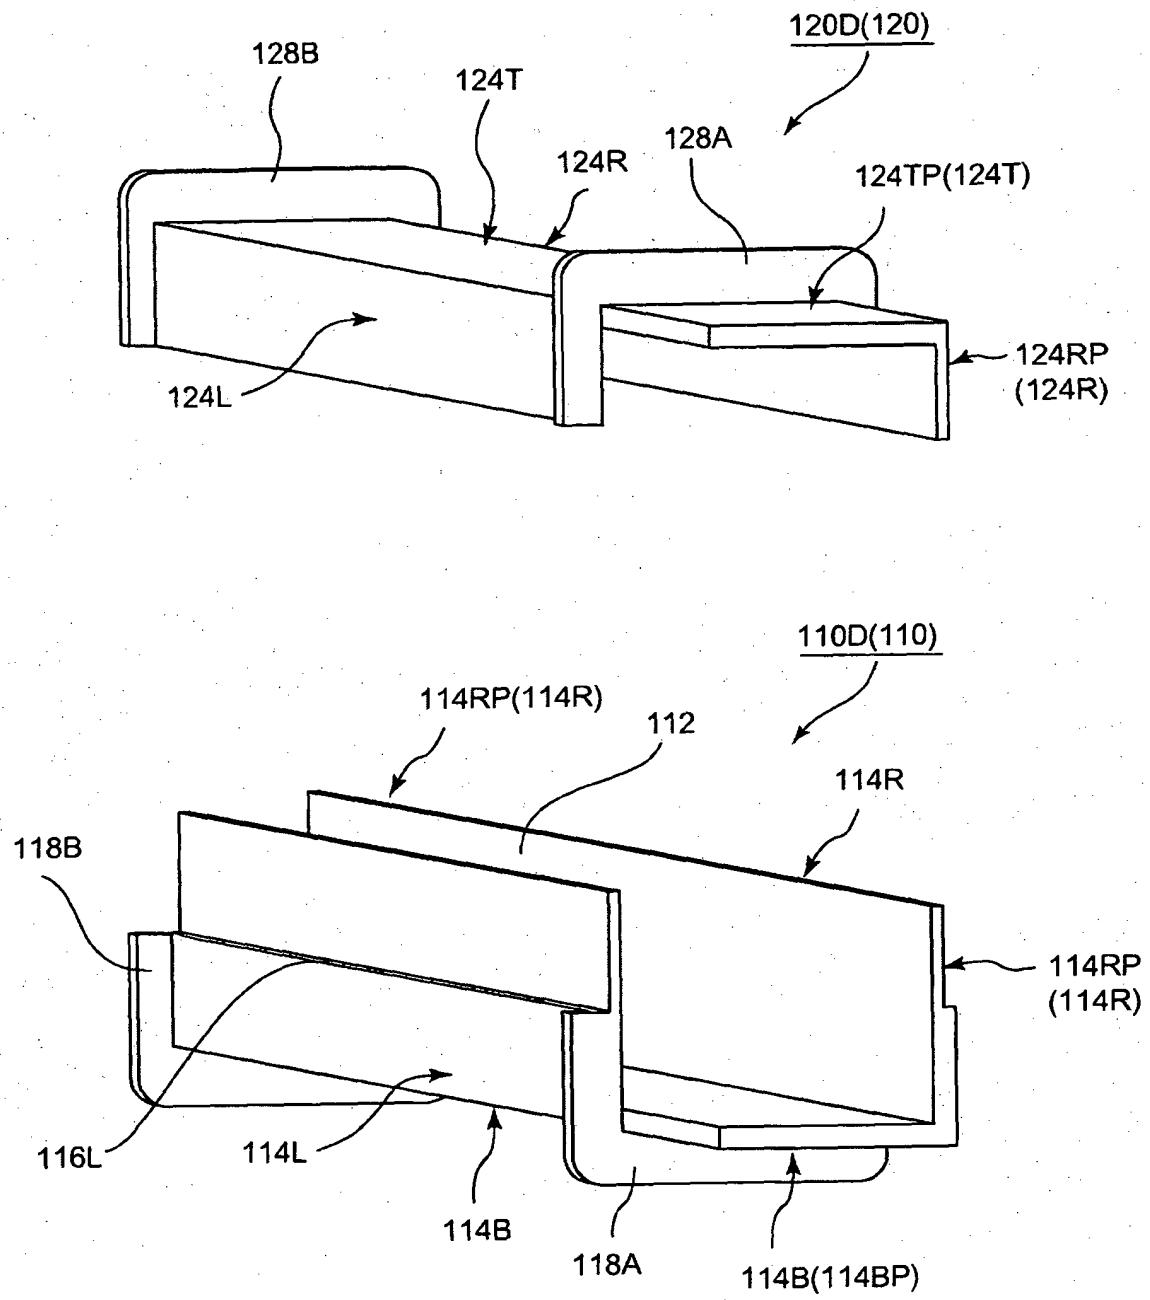


Fig.14

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 3119580 B [0002]
- JP 2006351662 A [0002]
- JP 2006013294 A [0002] [0003] [0048]
- US 2572457 A [0005]
- JP 2005183885 A [0005]