



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
31.07.2013 Bulletin 2013/31

(51) Int Cl.:
H01Q 7/00 (2006.01) **H01Q 21/30** (2006.01)
H01Q 21/29 (2006.01) **H01Q 1/38** (2006.01)
H01Q 1/24 (2006.01) **H01Q 1/22** (2006.01)
G06K 19/067 (2006.01)

(21) Application number: **12152962.2**

(22) Date of filing: **27.01.2012**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME

(72) Inventor: **Behin, Rayhan**
Kanata, Ontario K2K 3K1 (CA)

(74) Representative: **Greenaway, Martin William et al**
Kilburn & Strode LLP
20 Red Lion Street
London WC1R 4PJ (GB)

(71) Applicant: **Research In Motion Limited**
Waterloo, ON N2L 3W8 (CA)

Remarks:

Amended claims in accordance with Rule 137(2) EPC.

(54) **Mobile wireless communications device including parallel nfc loop antennas and associated methods**

(57) A mobile wireless communications device includes a portable housing, an NFC transceiver carried by the portable housing, and an antenna assembly coupled to the NFC transceiver and comprising a plurality of loop antennas connected in parallel, and progressively increasing in size from an innermost loop antenna to an outermost loop antenna.

pled to the NFC transceiver and comprising a plurality of loop antennas connected in parallel, and progressively increasing in size from an innermost loop antenna to an outermost loop antenna.

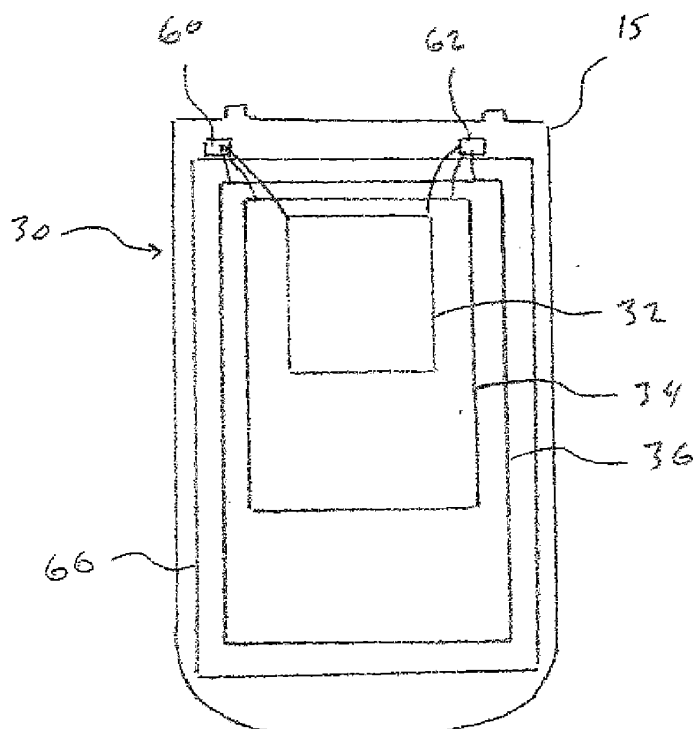


FIG. 2

Description**Technical Field**

5 **[0001]** This application relates to the field of communications, and more particularly, to wireless communications systems and related methods.

Background

10 **[0002]** Mobile communication systems continue to grow in popularity and have become an integral part of both personal and business communications. Various mobile devices now incorporate Personal Digital Assistant (PDA) features such as calendars, address books, task lists, calculators, memo and writing programs, media players, games, etc. These multi-function devices usually allow electronic mail (email) messages to be sent and received wirelessly, as well as access the internet via a cellular network and/or a wireless local area network (WLAN), for example.

15 **[0003]** Some mobile devices incorporate contactless card technology and/or near field communication (NFC) chips. NFC technology is commonly used for contactless short-range communications based on radio frequency identification (RFID) standards, using magnetic field induction to enable communication between electronic devices, including mobile wireless communications devices. This short-range high frequency wireless communications technology exchanges data between devices over a short distance, such as only a few centimeters.

20

Brief Description of the Drawings

[0004] FIG. 1 is a schematic block diagram of a wireless mobile communications system in accordance with an example embodiment.

25 **[0005]** FIG. 2 is a schematic diagram of the antenna assembly illustrated in FIG. 1.

[0006] FIG. 3 is a schematic block diagram illustrating example mobile wireless communications device components that may be used with the system and devices of FIGS. 1 and 2.

Detailed Description

30

[0007] The present description is made with reference to the accompanying drawings, in which various embodiments are shown. However, many different embodiments may be used, and thus the description should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete. Like numbers refer to like elements throughout.

35 **[0008]** In accordance with one exemplary aspect, a mobile wireless communications device comprises a portable housing, an NFC transceiver carried by the portable housing, and an antenna assembly carried by the portable housing and coupled to the NFC transceiver. The antenna assembly may comprise a plurality of nested loop antennas coupled in parallel, and progressively increasing in size from an innermost loop antenna to an outermost loop antenna.

40 **[0009]** As will be explained in greater detail below, the antenna assembly maintains payment certification requirements (as defined by EMVCo) for large tags, while also increasing performance for small tags. Small tags may be used for Bluetooth pairing and interfacing with docking stations, for example. The plurality of nested loop antennas may be non-concentric. This further helps to increase magnetic flux coverage for the small tags.

[0010] The plurality of nested loop antennas may comprise three loop antennas. Each loop antenna may have a rectangular shape with opposing ends and opposing sides coupled thereto.

45 **[0011]** The mobile wireless communications device may further comprise a pair of antenna feed points, and wherein the plurality of nested loop antennas each have respective ends adjacent one another, and adjacent the pair of antenna feed points and coupled thereto. The antenna assembly may further comprise a dielectric substrate, and wherein each loop antenna may comprise at least one loop conductor carried by the dielectric substrate.

50 **[0012]** The portable housing may comprise a removable battery cover, and wherein the antenna assembly may be carried by the removable battery cover. The innermost loop antenna may be about 15 mm by 15 mm, and the outermost loop antenna may be about 85 mm by 54 mm.

[0013] The mobile wireless communications device may further comprise a cellular transceiver carried by the portable housing, and a cellular antenna coupled to the cellular transceiver.

55 **[0014]** A method aspect is directed to making a mobile wireless communications as described above. The method may comprise positioning an NFC transceiver within a portable housing, and coupling an antenna assembly to the NFC transceiver within the portable housing. The antenna assembly may comprise a plurality of nested loop antennas connected in parallel, and progressively increasing in size from an innermost loop antenna to an outermost loop antenna.

[0015] Referring initially to FIG. 1, the mobile wireless communications device **10** includes a portable housing **12** and

an NFC transceiver **20** carried by the portable housing, and an antenna assembly **30** coupled to the NFC transceiver. The antenna assembly **30** includes a plurality of loop antennas connected in parallel, as will be discussed in greater detail below. The NFC transceiver **20** may communicate with an NFC terminal **40**, and may operate in either a device reader mode and a device card emulation mode.

[0016] The mobile wireless communications device **10** also includes wireless transceiver circuitry **50** carried by the portable housing **12**, and an antenna **52** coupled to the wireless transceiver circuitry **50**. The wireless transceiver circuitry **50** may be cellular transceiver circuitry or other types of wireless communications circuitry, and may communicate any combination of voice and data, such as email, via a wireless network **14**.

[0017] Example mobile wireless communications devices **10** include portable or personal media players, such as music or MP3 players, and video players. Mobile wireless communications devices **10** may also include portable gaming devices, portable or mobile telephones, smartphones, tablet computers, and digital cameras, for example.

[0018] The mobile wireless communications device **10** includes a display **54** carried by a front exterior surface of the portable housing **12**. The display **54** may be a liquid crystal display (LCD) and may be configured to display information relating to a data or voice communications.

[0019] A processor **56** is carried by the portable housing **12** and is coupled to the wireless transceiver circuitry **50**, the NFC transceiver **20** and the display **54**. The processor **56** may be implemented using hardware and software components for causing the mobile wireless communications device **10** to perform the various functions or operations described herein.

[0020] The mobile wireless communications device **10** also includes a power source **58**. For example, the power source **58** may be a rechargeable battery. Nonetheless, other types of power sources may be used.

[0021] The mobile wireless communications device **10** is particularly advantageous with respect to NFC communications, as will now be discussed in greater detail. The antenna assembly **30** maintains payment certification requirements (as defined by EMVCo) for large tags, while also increasing performance for small tags.

[0022] By way of background, NFC is a short-range wireless communications technology in which NFC-enabled devices are "swiped," "bumped" or otherwise moved in close proximity to communicate. NFC enables exchange of data between two or more wireless devices, generally by inductive coupling. Inductive coupling may be used for completing payment card transactions, for interfacing with smart posters, for Bluetooth pairing and interfacing with docking stations, for example. Payment cards include credit cards, gift cards and bank cards, for example.

[0023] Inductive coupling refers to the generation of voltage/current in one loop or coil due to (and proportional to) a change in voltage/current (and hence the corresponding magnetic field) in another loop or coil. The two loops are termed as being "inductively coupled" to each other, and which may thus be viewed as antennas. Currently, NFC communications is standardized and designed to operate within the globally available and unlicensed radio frequency ISM band of 13.56 MHz.

[0024] The antenna assembly **30** includes a plurality of nested loop antennas **32**, **34**, **36** connected in parallel, as best illustrated in FIG. 2. Although three loop antennas **32**, **34**, **36** are connected in parallel, the actual number may be more or less depending on the intended applications or the amount of space available within the mobile wireless communications device **10**.

[0025] The selected number of loop antennas to be connected in parallel still needs to support a quality (Q) factor of less than 35, as readily appreciated by those skilled in the art. The Q factor is determined by dividing the inductive reactance (ohms) by the resistive losses in the loops (ohms) at the operating frequency.

[0026] The loop antennas **32**, **34**, **36** that are connected in parallel progressively increase in size from an innermost loop antenna **32** to an outermost loop antenna **36**. The loop antennas **32**, **34**, **36** are connected to feed points **60**, **62** that are coupled to the NFC transceiver **20**. The loop antennas **32**, **34**, **36** each have respective ends adjacent one another, and adjacent the pair of antenna feed points **60**, **62**.

[0027] In addition, the loop antennas **32**, **34**, **36** are non-concentric, and have a rectangular shape with opposing ends and opposing sides coupled thereto. The antenna assembly **30** may include a dielectric substrate **66**, with each loop antenna **32**, **34**, **36** comprising at least one loop conductor carried by the dielectric substrate.

[0028] As discussed above, the mobile wireless communications device **10** includes a power source **58** that may be configured as a rechargeable battery carried by a back exterior surface of the portable housing **12**. The rechargeable battery **58** is removable from the portable housing **12**. For this particular configuration of a mobile wireless communications device **10**, the portable housing **12** comprises a removable battery cover **15**, and wherein the antenna assembly **30** is carried by the removable battery cover, as illustrated in FIG. 2.

[0029] Performance of the antenna assembly **30** will now be discussed in reference to TABLE 1. Antenna performance will be compared against a single antenna. Performance of the single antenna and the antenna assembly **30** are directed towards 4 different tag sizes that conform to industry standards.

[0030] The smallest tag size is 15x15 mm, the middle tag sizes are circular shaped and have a diameter of 30

TABLE 1

DEVICE READER MODE PERFORMANCE		
Tag Size	Single Loop Antenna (Max 'Z' Distance)	Triple Loop Antenna (Max 'Z' Distance)
15x15 mm	15 mm	21 mm
30 mm dia.	24.5 mm	28.5 mm
38 mm dia.	27 mm	30 mm
85x54 mm	35 mm	36 mm
DEVICE CARD EMULATION MODE PERFORMANCE		
Modulation Type	Single Loop Antenna (Max 'Z' Distance)	Triple Loop Antenna (Max 'Z' Distance)
A	53.5 mm	55 mm
B	51 mm	52.5 mm

mm and 38 mm, respectively. The largest tag size is 85x54 mm.

[0031] The smallest tag size may be used for Bluetooth pairing and interfacing with docking stations, for example. The circular shaped tags may be used to receive web site information, for example, from smart posters.

[0032] The largest tag size meets EMVCo contactless specifications for payment systems. EMVCo, owned by American Express, JCB, MasterCard and Visa, ensures global interoperability of chip-based payment cards with acceptance devices, including point of sale terminals and ATMs.

[0033] Operation of the NFC transceiver **20** in a device reader mode will be discussed first. The max "z" distance for each antenna configuration corresponds to a height or separation distance from the NFC terminal **40**. For the smallest tag size, the single antenna has a separation distance of 15 mm, and the antenna assembly **30** has a separation distance of 21 mm. For the circular shaped tag having the 30 mm diameter, the single antenna has a separation distance of 24.5 mm, and the antenna assembly **30** has a separation distance of 28.5 mm. For the circular shaped tag having the 38 mm diameter, the single antenna has a separation distance of 27 mm, and the antenna assembly **30** has a separation distance of 30 mm. For the largest tag size, the single antenna has a separation distance of 35 mm, and the antenna assembly **30** has a separation distance of 36 mm.

[0034] The increased separation distances provided by the antenna assembly **30** flattens out as antenna sizes increase. However, the antenna assembly **30** advantageously increases small tag reading distances. The loop antennas **32**, **34**, **36** in the antenna assembly **30** are coupled to antenna feed points **60** and **62**, which provide a voltage generated by the NFC transceiver **20**. The voltage provided by the feed points **60**, **62** generate current that travels around each loop antenna **32**, **34**, **36** to generate magnetic fields. The magnetic fields are at a constant level and are evenly distributed in the loop areas, i.e., x and y.

[0035] The loop antennas **32**, **34**, **36** pick up magnetic fields within their loop areas. Since the small loop antenna **32** is about 1/5 the size of the large loop antenna **36**, it only picks up about 1/5 of the magnetic field as compared to that of the larger loop antenna **36**. Similar analysis applies to the middle loop antenna **34**.

[0036] Since the loop antennas **32**, **34**, **36** are nested and non-concentric, and the smaller size loop antennas **32**, **34** are positioned within the larger size loop antenna **36** toward the top of the mobile wireless communications device **10**, the field patterns are directed toward the top. The inductive coupling from the larger loop antenna **36** helps to increase the inductive coupling of the middle loop antenna **34**, and the inductive coupling from the middle and larger loop antennas **36**, **34** help to increase the inductive coupling of the small loop antenna **32**.

[0037] Operation of the NFC transceiver **20** in a device card emulation mode will be now discussed. The max "z" distance for each antenna configuration corresponds to a height or separation distance from the NFC terminal **40**. Based on ISO standards, there is a modulation type A and a modulation type B. For the single antenna, the separation distances correspond to 53.5 mm and 51 mm, respectively. For the antenna assembly **30**, the separation distances correspond to 55 mm and 52.5 mm, respectively. There is a slight increase in performance with the antenna assembly **30**.

[0038] As noted above, antenna assembly **30** needs to support a quality (Q) factor of less than 35. Another definition of the Q factor corresponds to bandwidth. The wider the bandwidth the lower the Q factor. With a single antenna configuration, resistances are typically added to drop the Q factor to meet the data rate requirement. In lieu of adding resistances, additional loop antennas can be connected in parallel to maintain the same Q factor. In other words, the headroom associated with the single antenna can be applied to parallel antennas while increasing NFC performance for smaller size tags.

[0039] Example components of a mobile wireless communications device **1000** that may be used in accordance with the above-described embodiments are further described below with reference to FIG. 3. The device **1000** illustratively

includes a housing **1200**, a keyboard or keypad **1400** and an output device **1600**. The output device shown is a display **1600**, which may comprise a full graphic LCD. Other types of output devices may alternatively be utilized. A processing device **1800** is contained within the housing **1200** and is coupled between the keypad **1400** and the display **1600**. The processing device **1800** controls the operation of the display **1600**, as well as the overall operation of the mobile device **1000**, in response to actuation of keys on the keypad **1400**.

[0040] The housing **1200** may be elongated vertically, or may take on other sizes and shapes (including clamshell housing structures). The keypad may include a mode selection key, or other hardware or software for switching between text entry and telephony entry.

[0041] In addition to the processing device **1800**, other parts of the mobile device **1000** are shown schematically in FIG. 4. These include a communications subsystem **1001**; a short-range communications subsystem **1020**; the keypad **1400** and the display **1600**, along with other input/output devices **1060**, **1080**, **1100** and **1120**; as well as memory devices **1160**, **1180** and various other device subsystems **1201**. The mobile device **1000** may comprise a two-way RF communications device having data and, optionally, voice communications capabilities. In addition, the mobile device **1000** may have the capability to communicate with other computer systems via the Internet.

[0042] Operating system software executed by the processing device **1800** is stored in a persistent store, such as the flash memory **1160**, but may be stored in other types of memory devices, such as a read only memory (ROM) or similar storage element. In addition, system software, specific device applications, or parts thereof, may be temporarily loaded into a volatile store, such as the random access memory (RAM) **1180**. Communications signals received by the mobile device may also be stored in the RAM **1180**.

[0043] The processing device **1800**, in addition to its operating system functions, enables execution of software applications **1300A-1300N** on the device **1000**. A predetermined set of applications that control basic device operations, such as data and voice communications **1300A** and **1300B**, may be installed on the device **1000** during manufacture. In addition, a personal information manager (PIM) application may be installed during manufacture. The PIM may be capable of organizing and managing data items, such as e-mail, calendar events, voice mails, appointments, and task items. The PIM application may also be capable of sending and receiving data items via a wireless network **1401**. The PIM data items may be seamlessly integrated, synchronized and updated via the wireless network **1401** with corresponding data items stored or associated with a host computer system.

[0044] Communication functions, including data and voice communications, are performed through the communications subsystem **1001**, and possibly through the short-range communications subsystem. The communications subsystem **1001** includes a receiver **1500**, a transmitter **1520**, and one or more antennas **1540** and **1560**. In addition, the communications subsystem **1001** also includes a processing module, such as a digital signal processor (DSP) **1580**, and local oscillators (LOs) **1601**. The specific design and implementation of the communications subsystem **1001** is dependent upon the communications network in which the mobile device **1000** is intended to operate. For example, a mobile device **1000** may include a communications subsystem **1001** designed to operate with the Mobitex™, Data TAC™ or General Packet Radio Service (GPRS) mobile data communications networks, and also designed to operate with any of a variety of voice communications networks, such as AMPS, TDMA, CDMA, WCDMA, PCS, GSM, EDGE, etc. Other types of data and voice networks, both separate and integrated, may also be utilized with the mobile device **1000**. The mobile device **1000** may also be compliant with other communications standards such as 3GSM, 3GPP, UMTS, 4G, etc.

[0045] Network access requirements vary depending upon the type of communication system. For example, in the Mobitex and DataTAC networks, mobile devices are registered on the network using a unique personal identification number or PIN associated with each device. In GPRS networks, however, network access is associated with a subscriber or user of a device. A GPRS device therefore typically involves use of a subscriber identity module, commonly referred to as a SIM card, in order to operate on a GPRS network.

[0046] When required network registration or activation procedures have been completed, the mobile device **1000** may send and receive communications signals over the communication network **1401**. Signals received from the communications network **1401** by the antenna **1540** are routed to the receiver **1500**, which provides for signal amplification, frequency down conversion, filtering, channel selection, etc., and may also provide analog to digital conversion. Analog-to-digital conversion of the received signal allows the DSP **1580** to perform more complex communications functions, such as demodulation and decoding. In a similar manner, signals to be transmitted to the network **1401** are processed (e.g. modulated and encoded) by the DSP **1580** and are then provided to the transmitter **1520** for digital to analog conversion, frequency up conversion, filtering, amplification and transmission to the communication network **1401** (or networks) via the antenna **1560**.

[0047] In addition to processing communications signals, the DSP **1580** provides for control of the receiver **1500** and the transmitter **1520**. For example, gains applied to communications signals in the receiver **1500** and transmitter **1520** may be adaptively controlled through automatic gain control algorithms implemented in the DSP **1580**.

[0048] In a data communications mode, a received signal, such as a text message or web page download, is processed by the communications subsystem **1001** and is input to the processing device **1800**. The received signal is then further processed by the processing device **1800** for an output to the display **1600**, or alternatively to some other auxiliary I/O

device **1060**. A device may also be used to compose data items, such as e-mail messages, using the keypad **1400** and/or some other auxiliary I/O device **1060**, such as a touchpad, a rocker switch, a thumb-wheel, or some other type of input device. The composed data items may then be transmitted over the communications network **1401** via the communications subsystem **1001**.

[0049] In a voice communications mode, overall operation of the device is substantially similar to the data communications mode, except that received signals are output to a speaker **1100**, and signals for transmission are generated by a microphone **1120**. Alternative voice or audio I/O subsystems, such as a voice message recording subsystem, may also be implemented on the device **1000**. In addition, the display **1600** may also be utilized in voice communications mode, for example to display the identity of a calling party, the duration of a voice call, or other voice call related information.

[0050] The short-range communications subsystem enables communication between the mobile device **1000** and other proximate systems or devices, which need not necessarily be similar devices. For example, the short-range communications subsystem may include an infrared device and associated circuits and components, a Bluetooth™ communications module to provide for communication with similarly-enabled systems and devices, or a near field communications (NFC) sensor for communicating with an NFC device or NFC tag via NFC communications.

[0051] Many modifications and other embodiments will come to the mind of one skilled in the art having the benefit of the teachings presented in the foregoing descriptions and the associated drawings. Therefore, it is understood that various modifications and embodiments are intended to be included within the scope of the appended claims.

Claims

1. A mobile wireless communications device comprising:

a portable housing;

an NFC transceiver carried by said portable housing; and

an antenna assembly carried by said portable housing and coupled to said NFC transceiver, and comprising a plurality of nested loop antennas coupled in parallel and progressively increasing in size from an innermost loop antenna to an outermost loop antenna.

2. The mobile wireless communications device of Claim 1, wherein said plurality of nested loop antennas is non-concentric.

3. The mobile wireless communications device of Claim 1, wherein said plurality of nested loop antennas comprises three loop antennas.

4. The mobile wireless communications device of Claim 1, wherein each loop antenna has a rectangular shape with opposing ends and opposing sides coupled thereto.

5. The mobile wireless communications device of Claim 4, further comprising a pair of antenna feed points; and wherein said plurality of nested loop antennas each have respective ends adjacent one another, and adjacent said pair of antenna feed points and coupled thereto.

6. The mobile wireless communications device of Claim 1, wherein said antenna assembly further comprises a dielectric substrate, and wherein each loop antenna comprises at least one loop conductor carried by said dielectric substrate.

7. The mobile wireless communications device of Claim 1, wherein said portable housing comprises a removable battery cover, and wherein said antenna assembly is carried by said removable battery cover.

8. The mobile wireless communications device of Claim 1, wherein said innermost loop antenna is about 15 mm by 15 mm, and wherein said outermost loop antenna is about 85 mm by 54 mm.

9. The mobile wireless communications device of Claim 1, further comprising a cellular transceiver carried by said portable housing, and a cellular antenna coupled to said cellular transceiver.

10. A method for making a mobile wireless communications device comprising:

positioning an NFC transceiver within a portable housing; and

coupling an antenna assembly to the NFC transceiver within the portable housing, the antenna assembly com-

prising a plurality of nested loop antennas connected in parallel and progressively increasing in size from an innermost loop antenna to an outermost loop antenna.

11. The method of Claim 10, wherein the plurality of nested loop antennas is non-concentric.

12. The method of Claim 10, wherein the plurality of nested loop antennas comprises three loop antennas.

13. The method of Claim 10, wherein each loop antenna has a rectangular shape with opposing ends and opposing sides coupled thereto.

14. The method of Claim 10, wherein the antenna assembly further comprises a dielectric substrate, and wherein each loop antenna comprises at least one loop conductor carried by the dielectric substrate.

15. The method of Claim 10, wherein the portable housing comprises a removable battery cover, and wherein the antenna assembly is carried by the removable battery cover.

Amended claims in accordance with Rule 137(2) EPC.

1. A mobile wireless communications device (10) comprising:

a portable housing (12) ;
an NFC transceiver (20) carried by said portable housing (12); and
an antenna assembly (30) carried by said portable housing (12) and coupled to said NFC transceiver (20), and comprising

a plurality of nested loop antennas (32, 34, 36) coupled in parallel and being non-concentric and progressively increasing in size from an innermost loop antenna to an outermost loop antenna, with each loop antenna having a rectangular shape with opposing ends and opposing sides coupled thereto, and
a pair of antenna feed points (60, 62),
said plurality of nested loop antennas each having respective ends adjacent one another, and adjacent said pair of antenna feed points and coupled thereto.

2. The mobile wireless communications device of Claim 1, wherein said plurality of nested loop antennas comprises three loop antennas.

3. The mobile wireless communications device of Claim 1, wherein said antenna assembly further comprises a dielectric substrate (66), and wherein each loop antenna comprises at least one loop conductor carried by said dielectric substrate.

4. The mobile wireless communications device of Claim 1, wherein said portable housing comprises a removable battery cover (15), and wherein said antenna assembly is carried by said removable battery cover.

5. The mobile wireless communications device of Claim 1, wherein said innermost loop antenna is about 15 mm by 15 mm, and wherein said outermost loop antenna is about 85 mm by 54 mm.

6. The mobile wireless communications device of Claim 1, further comprising a cellular transceiver (50) carried by said portable housing, and a cellular antenna (52) coupled to said cellular transceiver.

7. A method for making a mobile wireless communications device (10) comprising:

positioning an NFC transceiver (20) within a portable housing (12); and
coupling an antenna assembly (30) to the NFC transceiver (20) within the portable housing (12), the antenna assembly (30) comprising

a plurality of nested loop antennas (32, 34, 36) connected in parallel and being non-concentric and progressively increasing in size from an innermost loop antenna to an outermost loop antenna, with each loop antenna having a rectangular shape with opposing ends and opposing sides coupled thereto, and

a pair of antenna feed points (60, 62),
the plurality of nested loop antennas each having respective ends adjacent one another, and adjacent said
pair of antenna feed points and coupled thereto.

- 5 **8.** The method of Claim 7, wherein the plurality of nested loop antennas comprises three loop antennas.
- 9.** The method of Claim 7, wherein the antenna assembly further comprises a dielectric substrate (66), and wherein
each loop antenna comprises at least one loop conductor carried by the dielectric substrate.
- 10 **10.** The method of Claim 7, wherein the portable housing comprises a removable battery cover (15), and wherein
the antenna assembly is carried by the removable battery cover.

15

20

25

30

35

40

45

50

55

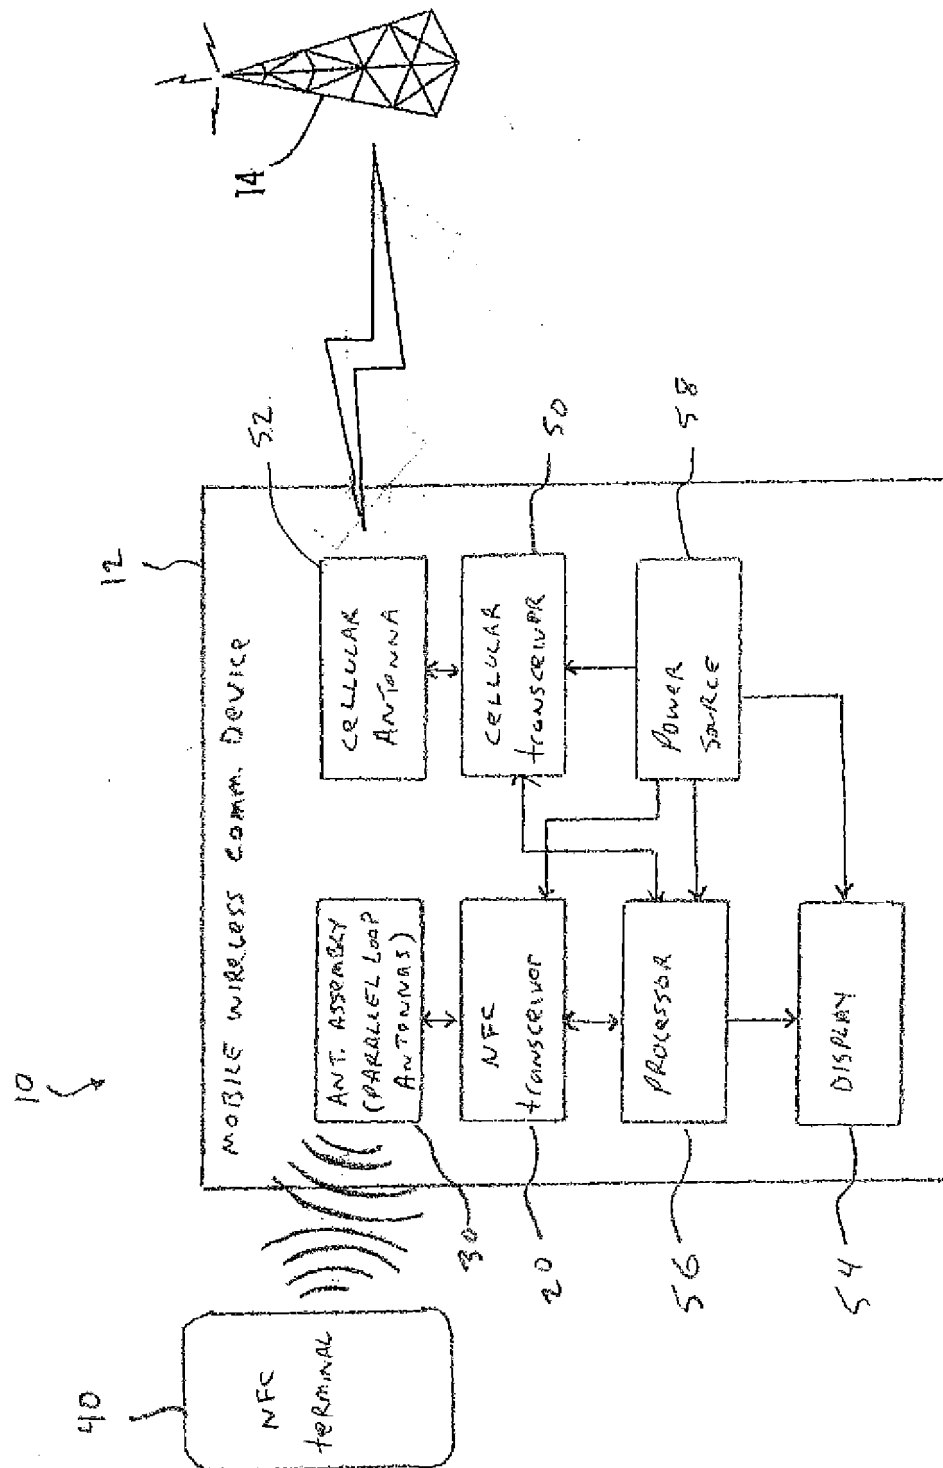


FIG. 1

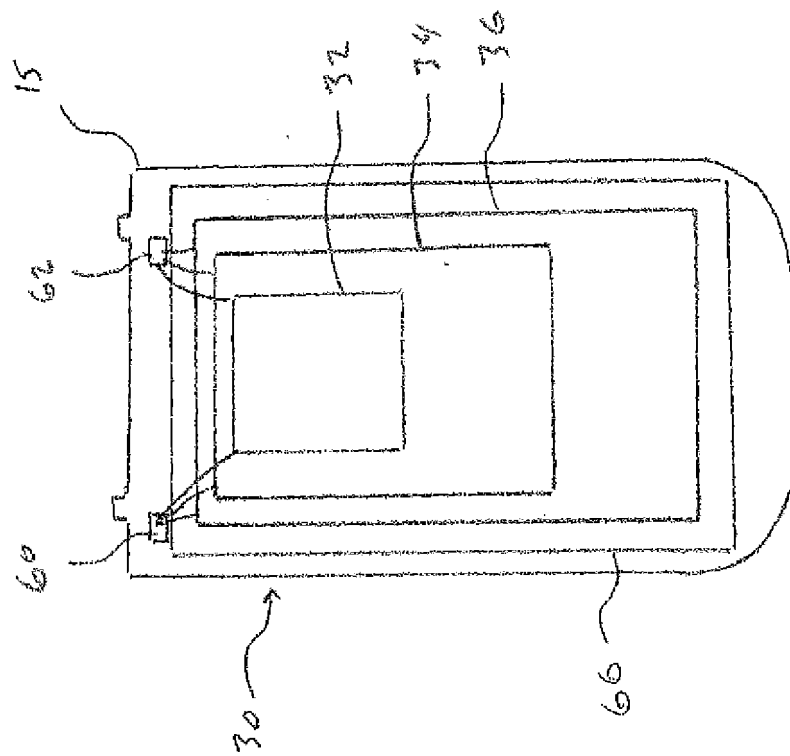


FIG. 2

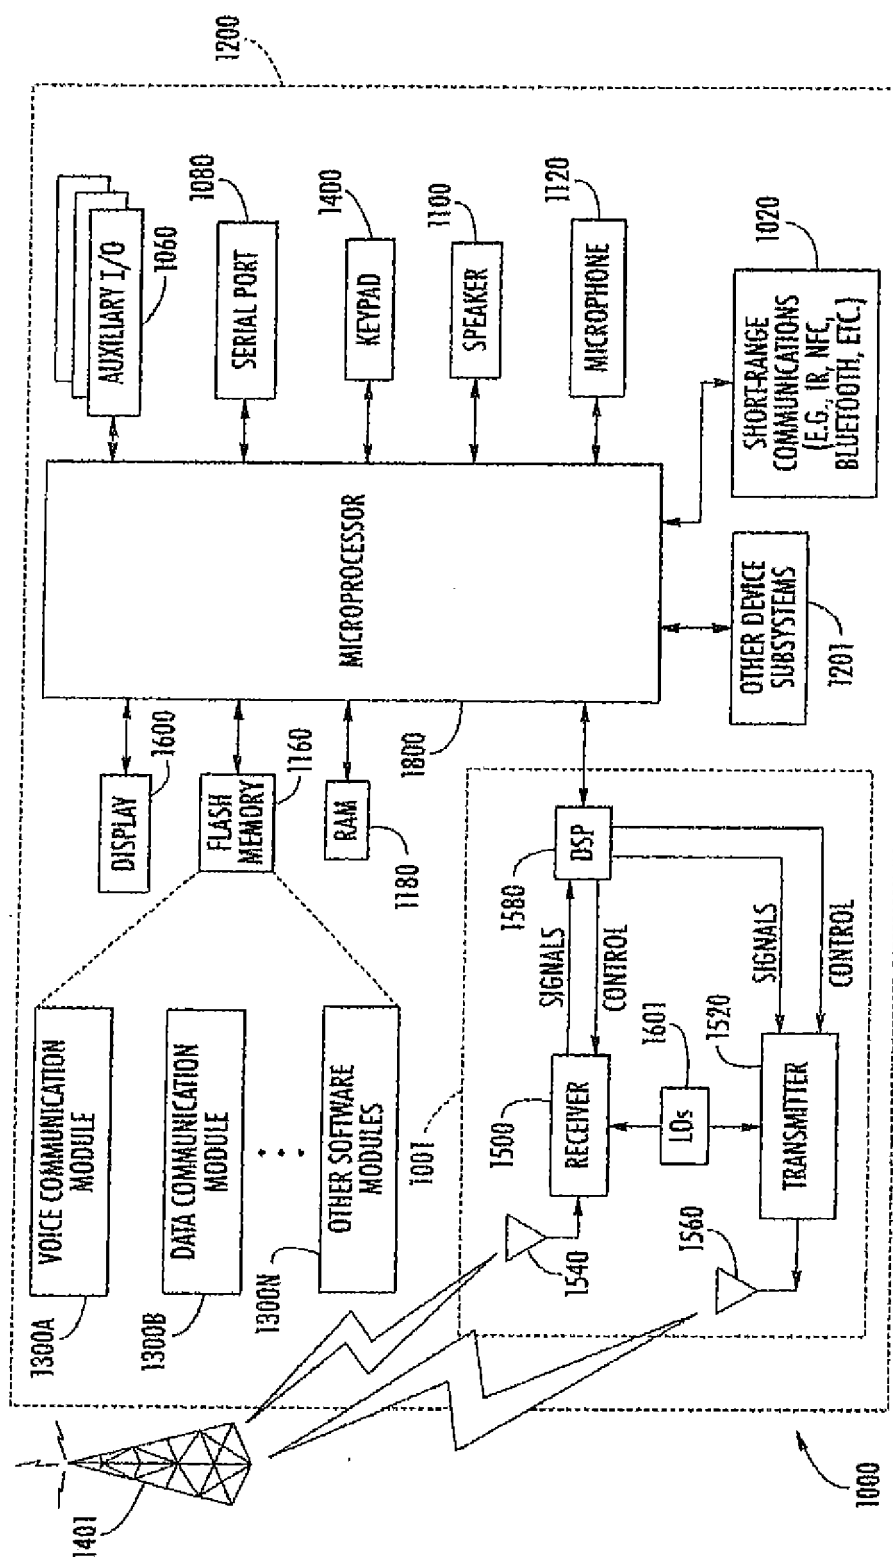


FIG. 3



EUROPEAN SEARCH REPORT

Application Number
EP 12 15 2962

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	WO 2011/076582 A1 (LITE ON MOBILE OYJ [FI]; BLOM CARL-GUSTAF [SE]; HEDLUND THOMAS [SE]; B) 30 June 2011 (2011-06-30) * the whole document *	1-15	INV. H01Q7/00 H01Q21/30 H01Q21/29 H01Q1/38 H01Q1/24 H01Q1/22 G06K19/067
X	US 2009/179812 A1 (NAKAMURA KOUICHI [JP] ET AL) 16 July 2009 (2009-07-16) * the whole document *	1-15	
Y	WO 2010/143849 A2 (LG INNOTEK CO LTD [KR]; CHO YOUNGBIN [KR]) 16 December 2010 (2010-12-16) * the whole document *	1-15	
Y	US 2007/182658 A1 (OZDEN SINASI [DK]) 9 August 2007 (2007-08-09) * paragraph [0005]; figure 3 *	1-15	
Y	US 5 198 826 A (ITO MICHIAKI [JP]) 30 March 1993 (1993-03-30) * the whole document *	1-15	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (IPC)
			H01Q G06K
Place of search		Date of completion of the search	Examiner
The Hague		23 July 2012	Fredj, Aziz
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

1
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 12 15 2962

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

23-07-2012

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2011076582 A1	30-06-2011	SE 0951001 A1 WO 2011076582 A1	22-06-2011 30-06-2011
US 2009179812 A1	16-07-2009	CN 201402855 Y JP 2009164923 A US 2009179812 A1	10-02-2010 23-07-2009 16-07-2009
WO 2010143849 A2	16-12-2010	EP 2441115 A2 KR 20100132724 A US 2012075148 A1 WO 2010143849 A2	18-04-2012 20-12-2010 29-03-2012 16-12-2010
US 2007182658 A1	09-08-2007	NONE	
US 5198826 A	30-03-1993	NONE	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82