

(11) EP 2 622 981 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

07.08.2013 Bulletin 2013/32

(51) Int Cl.: **A44B** 13/00 (2006.01)

(21) Application number: 12250019.2

(22) Date of filing: 03.02.2012

(84) Designated Contracting States:

AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

Designated Extension States:

BA ME

(71) Applicant: Texco Hook & Eye Tape Ltd Hong Kong (CN)

(72) Inventor: Fung, Wing Leung Cheung Sha Wan Kowloon, Hong Kong (CN)


(74) Representative: Ward, David Ian

Marks & Clerk LLP Alpha Tower Suffolk Street Queensway Birmingham B1 1TT (GB)

(54) An eye fastener

(57) An eye fastener (100, 200) is disclosed as including two anchor portions (102, 202) defining a base plane, and an eye (106, 206) extending from the anchor

portions (102, 202), each eye (106, 206) defining a plane of opening which is displaced relative to the base plane. A tape (116, 216) including an array of eye fasteners (100, 200) is also disclosed.

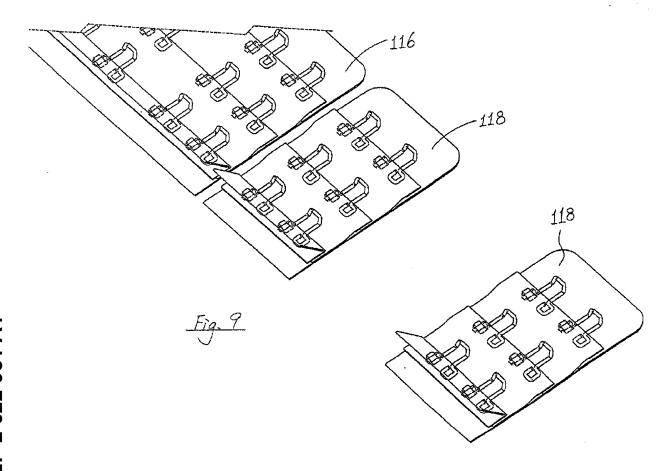

15

20

40

[0001] This invention relates to an eye fastener, in particular such a fastener suitable for forming an eye connector for use (but not exclusively) in garments items.

1

[0002] Many garment items, in particular lingerie (including brassieres), include connectors having hook and eye fasteners for providing flexible but firm coupling. In general, an array of hook fasteners (in rows and columns) is sewn onto a first tape, and a complementary array of eye fasteners is sewn into a second tape, and by engaging different hook fasteners and eye fasteners, a degree of lengthwise adjustment is allowed.

[0003] In such conventional hook and eye fasteners, both the eye fasteners and hook fasteners are typically formed of a stiff metal wire. The eye fasteners are generally C-shaped with two free ends sewn and received within the tape to form an opening, in which the plane defined by the opening of each eye fastener lies against the tape. It is found that when a user seeks to engage the eye fastener with a hook fastener, one has to slightly pivot the eye fastener away from the tape to further expose the plane of opening, to facilitate engagement with the hook fastener. This is relatively difficult, in particular in the case of brassieres, where the hook and eye fasteners are at the back of the user.

[0004] It is thus an object of the present invention to provide an eye fastener and a tape including at least one such eye fastener in which the above shortcoming is mitigated, or at least to provide a useful alternative to the trade and public.

[0005] According to a first aspect of the present invention, there is provided an eye fastener including a base defining a base plane, and at least an eye extending from the base and defining a plane of opening, characterized in that the plane of opening is displaced relative to the base plane.

[0006] According to a second aspect of the present invention, there is provided a tape including at least one eye fastener, the eye fastener including a base defining a base plane, and at least an eye extending from the base and defining a plane of opening, characterized in that the plane of opening is displaced relative to the base plane.

[0007] Embodiments of eye fasteners and tapes including at least one fastener according to the present invention will now be described, by way of examples only, with reference to the present invention, in which:

Fig. 1 is a top perspective view of an eye fastener according to a first embodiment of the present inven-

Fig. 2 is a bottom view of the eye fastener shown in Fig. 1;

Fig. 3 is a side view of the eye fastener shown in Fig.

Fig. 4 is an end view of the eye fastener shown in Fig. 2;

Fig. 5 shows a row of eye fasteners shown in Fig. 1

Fig. 6 shows two rows of eye fasteners shown in Fig. 1 sewn to the tape in Fig. 5;

Fig. 1 sewn to the tape in Fig. 6;

Fig. 8 is an enlarged side sectional view of the tape

Fig. 9 shows eye connectors formed out of the tape shown in Fig. 7;

according to a second embodiment of the present

in Fig. 10;

Fig. 12 is a side view of the eye fastener shown in

Fig. 13 is an end view of the eye fastener shown in

Fig. 14 shows a row of eye fasteners shown in Fig. 10 sewn to a tape;

Fig. 15 shows two rows of eye fasteners shown in

Fig. 17 is an enlarged side sectional view of the tape

Fig. 18 shows eye connectors formed out of the tape shown in Fig. 16.

[0008] An eye fastener according to a first embodiment of the present invention is shown in Figs. 1 to 4, and generally designated as 100. The eye fastener 100 is formed integrally of a wire (such as a metal wire), e.g. by bending. The eye fastener 100 has two anchor portions 102 (each being a free end of the eye fastener 100), two parallel leg portions 104 each extending from a respective of the anchor portions 102, and a generally C-shaped portion 106 joining, extending from and bent relative to the two leg portions 104.

[0009] The anchor portions 102 form a base, defining a base plane P-P, on which the leg portions 104 also lie. The C-shaped portion 106, which extends from the base, forms an opening ("eye") through which a hook fastener may be releasably engaged. It can be seen from Fig. 3 that the plane Q-Q defined by the C-shaped portion 106 ("plane of opening") is displaced relative to the plane P-P defined by the anchor portions 102 and leg portions 104 ("base plane"), and the two planes P-P, Q-Q are joined via bent portions 120. Although the angle α between the plane of opening Q-Q and the base plane P-P is shown in Fig. 3 as being an obtuse angle, such may alternatively be a right angle or an acute angle. The distance d between the uppermost end of the C-shaped portion 106 and the leg portions 104 (and the anchor portions 102) is from 0.5mn to 5mm.

[0010] As shown in Fig. 5, to produce a tape with an array of eye fasteners 100, a first row of eye fasteners

2

sewn to a tape;

Fig. 7 shows three rows of eye fasteners shown in

shown in Fig. 7;

Fig. 11 is a bottom view of the eye fastener shown

Fig. 11;

Fig. 10 sewn to the tape in Fig. 14;

Fig. 16 shows three rows of eye fasteners shown in Fig. 10 sewn to the tape in Fig. 15;

shown in Fig. 16; and

15

25

35

40

45

100 are assembled between a backing sheet 108 and a first layer of padding material 110. In particular, the first row of eye fasteners 100 are arranged along a straight line, with their anchor portions 102 fixed (e.g. by sewing) between the backing sheet 108 and the first layer of padding material 110, and with their leg portions 104 and C-shaped portions 106 exposed to the outside environment

3

[0011] As shown in Fig. 6, a second row of eye fasteners 100 are assembled between the backing sheet 108 and a second layer of padding material 112. In particular, the second row of eye fasteners 100 are arranged along a straight line which is parallel to the straight line along which the first row of eyes 100 are arranged. Again, the anchor portions 102 of the second row of eye fasteners 100 are fixed between the backing sheet 108 and the second layer of padding material 112. The leg portions 104 and C-shaped portions 106 of the second row of eye fasteners 100 are also exposed to the outside environment.

[0012] Finally, as shown in Fig. 7, a third row of eye fasteners 100 are assembled between the backing sheet 108 and a third layer of padding material 114. In particular, the third row of eye fasteners 100 are arranged along a straight line which is parallel to the straight lines along which the first and second rows of eye fasteners 100 are arranged. Again, the anchor portions 102 of the third row of eye fasteners 100 are fixed between the backing sheet 108 and the third layer of padding material 114. The leg portions 104 and C-shaped portions 106 of the third row of eye fasteners 100 are also exposed to the outside environment.

[0013] A tape 116 with three rows of eye fasteners 100 fixed thereto is thus formed. There is of course no definite restriction on the number of rows of eye fasteners 100 which may be carried by the tape 116. A manufacturer may decide on the number of rows of eye fasteners 100 for the tape 116 according to the use to which eye connectors formed from the tape 116 are to be put.

[0014] As shown in Fig. 8, the plane of the backing sheet 108 is parallel to the base plane P-P of the eye fasteners 100, and is displaced relative to the plane of opening Q-Q of the eye fasteners 100.

[0015] Turning to Fig. 9, it can be seen that eye connectors 118 each with an array of two-by-three eye fasteners 100 are formed from the tape 116, Such eye connectors 118 may be formed by cutting the continuous tape 116 transversely by a cutter vibrated ultrasonically at intervals. The eye connectors 118 so formed may then be sewn onto semi-finished brassieres for forming final products.

[0016] An eye fastener according to a second embodiment of the present invention is shown in Figs. 10 to 13, and generally designated as 200. The eye fastener 200 is formed integrally of a wire (such as a metal wire), e.g, by bending. In particular, the eye fastener 200 has two anchor portions 202 (each being a free end of the eye fastener 200), two parallel leg portions 204 extending

from and bent relative to the anchor portions 202, and a generally C-shaped portion 206 joining, extending from and bent relative to the two leg portions 204.

[0017] The anchor portions 202 form a base, defining a base plane R-R. The leg portions 204 and the C-shaped portion collectively form an opening ("eye") through which a hook fastener may be releasably engaged. The leg portions 204 define a first plane S-S and the C-shaped portion 206 defines a second plane T-T. The first plane S-S and the second plane T-T collectively form a plane of opening. It can be seen from Fig. 12 that the plane S-S defined by the leg portions 204 (i.e. the first plane) is displaced relative to the base plane R-R, and the plane T-T defined by the C-shaped portion 206 (i.e. the second plane) is displaced relative to the first plane S-S and is parallel to the base plane R-R. The base plane R-R and the first plane S-S are joined with each other via first bent portions 220a; and the first plane S-S and the second plane T-T are joined with each other via second bent portions 220b. Although the angle β between the first plane S-S and the base plane R-R is shown in Fig. 12 as being an obtuse angle, such may alternatively be a right angle or an acute angle. The distance e between the uppermost end of the C-shaped portion 206 and the anchor portions 202 is from 0.5mm to 5mm.

[0018] As shown in Fig. 14, to produce a tape with an array of eye fasteners 200, a first row of eye fasteners 200 are assembled between a backing sheet 208 and a first layer of padding material 210. In particular, the first row of eye fasteners 200 are arranged along a straight line, with their anchor portions 202 fixed (e.g, by sewing) between the backing sheet 208 and the first layer of padding material 210, and with their leg portions 204 and C-shaped portions 206 exposed to the outside environment.

[0019] As shown in Fig. 15, a second row of eye fasteners 200 are assembled between the backing sheet 208 and a second layer of padding material 212. In particular, the second row of eye fasteners 200 are arranged along a straight line which is parallel to the straight line along which the first row of eyes 200 are arranged. Again, the anchor portions 202 of the second row of eye fasteners 200 are fixed between the backing sheet 208 and the second layer of padding material 212. The leg portions 204 and C-shaped portions 206 of the second row of eye fasteners 200 are also exposed to the outside environment

[0020] Finally, as shown in Fig. 16, a third row of eye fasteners 200 are assembled between the backing sheet 208 and a third layer of padding material 214. In particular, the third row of eye fasteners 200 are arranged along a straight line which is parallel to the straight lines along which the first and second rows of eye fasteners 200 are arranged. Again, the anchor portions 202 of the third row of eye fasteners 200 are fixed between the backing sheet 208 and the third layer of padding material 214. The leg portions 204 and C-shaped portions 206 of the third row of eye fasteners 200 are also exposed to the outside

55

5

10

15

30

35

40

45

environment.

[0021] A tape 216 with three rows of eye fasteners 200 fixed thereto is thus formed. It should of course be understood that a manufacturer may decide on the number of rows of eye fasteners 200 for the tape 216 according to the use to which eye connectors formed from the tape 216 are to be put.

5

[0022] As shown in Fig. 17, the plane of the backing sheet 208 is:

- parallel to the base plane R-R of each eye fastener
 200
- displaced relative to the first plane S-S of the plane of opening as defined by the leg portions 204 of each eye fastener 200, and
- parallel to the second plane T-T of the plane of opening as defined by the C-shaped portion 206 of each eye fastener 200.

[0023] Turning to Fig. 18, it can be seen that eye connectors 218 each with an array of two-by-three eye fasteners 200 are formed from the tape 216. Such eye connectors 218 may be formed by cutting the continuous tape 216 transversely by a cutter vibrated ultrasonically at intervals. The eye connectors 218 so formed may then be sewn onto semi-finished brassieres for forming final products.

[0024] It can be seen from the foregoing discussion and the accompanying drawings that as the plane of opening of the respective eye fasteners 100, 200 according to this invention is displaced relative to the respective base plane P-P, R-R (which lie against the respective backing sheet 108, 208), such allows easy engagement between eye connectors 118, 218 and complementary hook connectors.

[0025] It should be understood that the above only illustrates examples whereby the present invention may be carried out, and that various modifications and/or alterations may be made thereto without departing from the spirit of the invention.

[0026] It should also be understood that certain features of the invention, which are, for clarity, described in the context of separate embodiments, may be provided in combination in a single embodiment. Conversely, various features of the invention which are, for brevity, described in the context of a single embodiment, may also be provided separately or in any appropriate sub-combinations.

Claims


1. An eye fastener (100, 200) including:


a base (102, 202) defining a base plane, and at least an eye (106, 206) extending from the base and defining a plane of opening, **characterized in that** the plane of opening is displaced relative to the base plane.

- 2. The eye fastener as claimed in claim 1, further **characterized in that** the plane of opening is connected to the base plane *via* a bent (120, 220a, 220b).
- 3. The eye fastener as claimed in any of the preceding claims, further characterized in that the plane of opening includes a first plane and a second plane displaced relative to the first plane.
- 4. The eye fastener as claimed in any of the preceding claims, further characterized in that the plane of opening is substantially perpendicular to the base plane.
- 5. The eye fastener as claimed in claim 3, further characterized in that the first plane is substantially perpendicular to the base plane.
- **6.** The eye fastener as claimed in claim 3, further **characterized in that** the second plane is substantially parallel to the base plane.
- ²⁵ **7.** A tape (116, 216) including at least one eye fastener as claimed in any of the preceding claims.
 - 8. The tape as claimed in claim 7, further characterized in including a backing sheet (108, 208) and at least one layer of padding material (110, 210) on the backing sheet.
 - 9. The tape as claimed in claim 8, further characterized in that the base of the eye fastener is between the backing sheet and the layer of padding material.
 - **10.** The tape as claimed in one of claims 7 to 9, further **characterized in that** the base plane of the eye fastener is substantially parallel to the backing sheet.


50

55

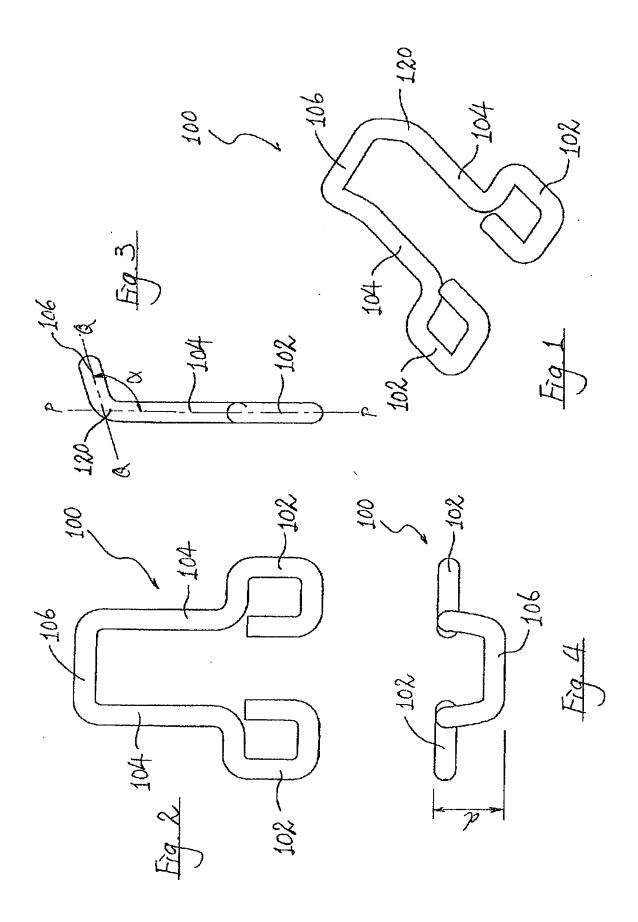


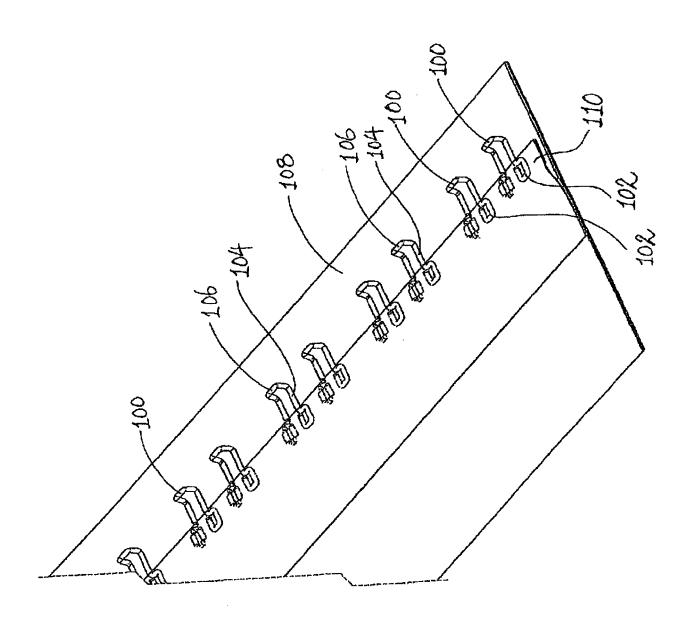





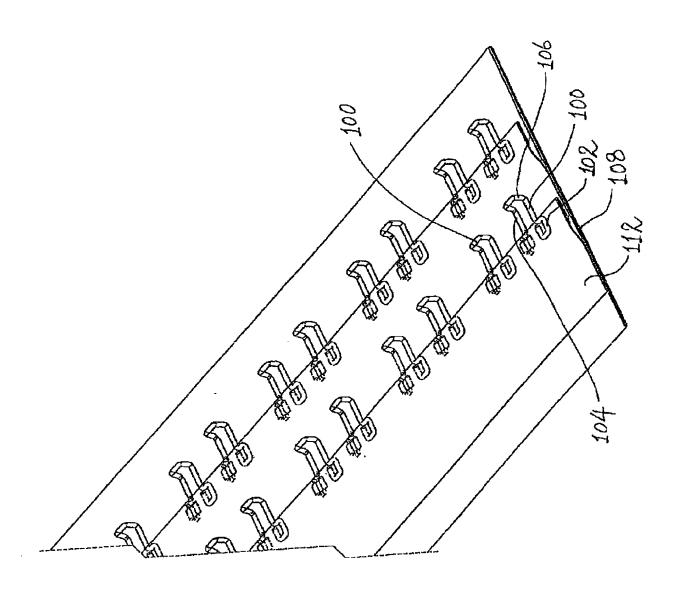





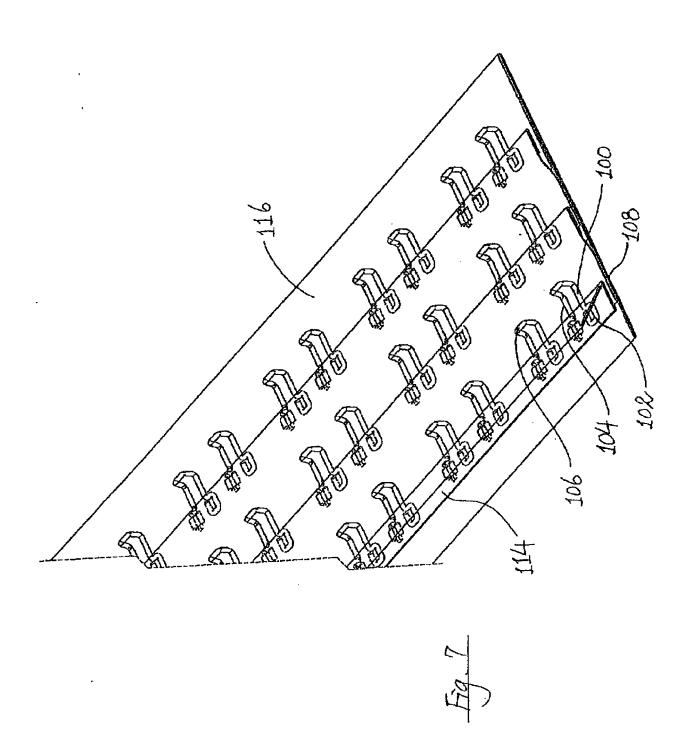


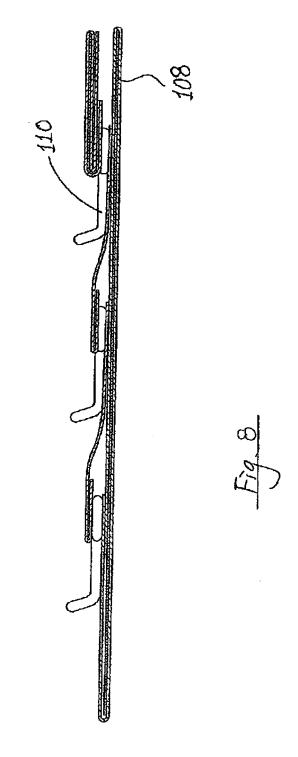


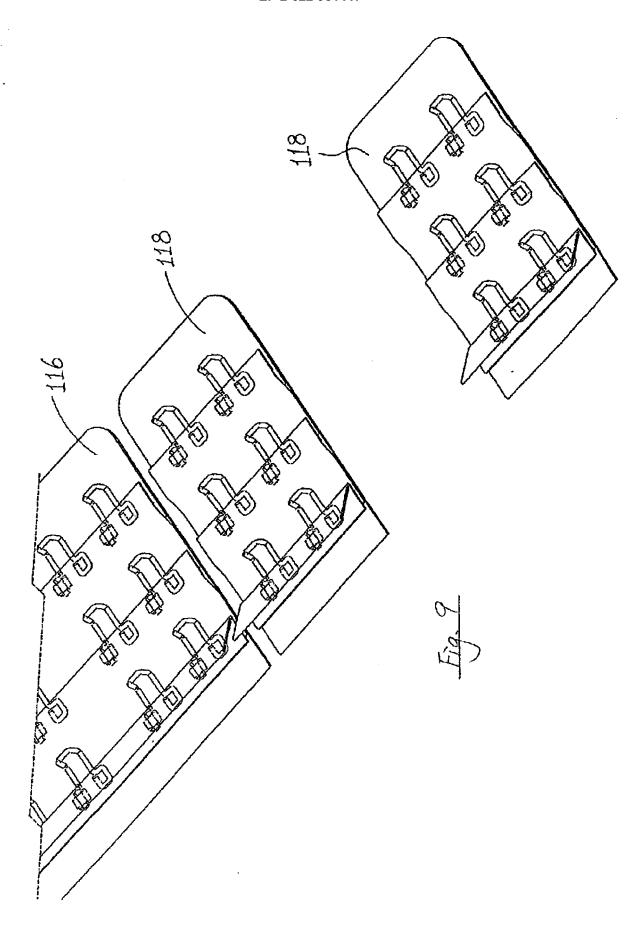


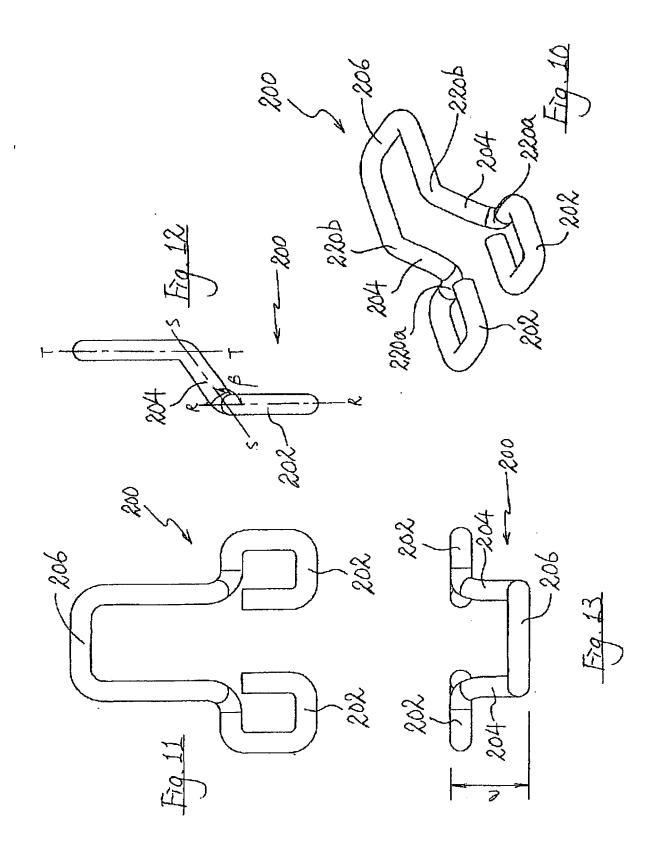


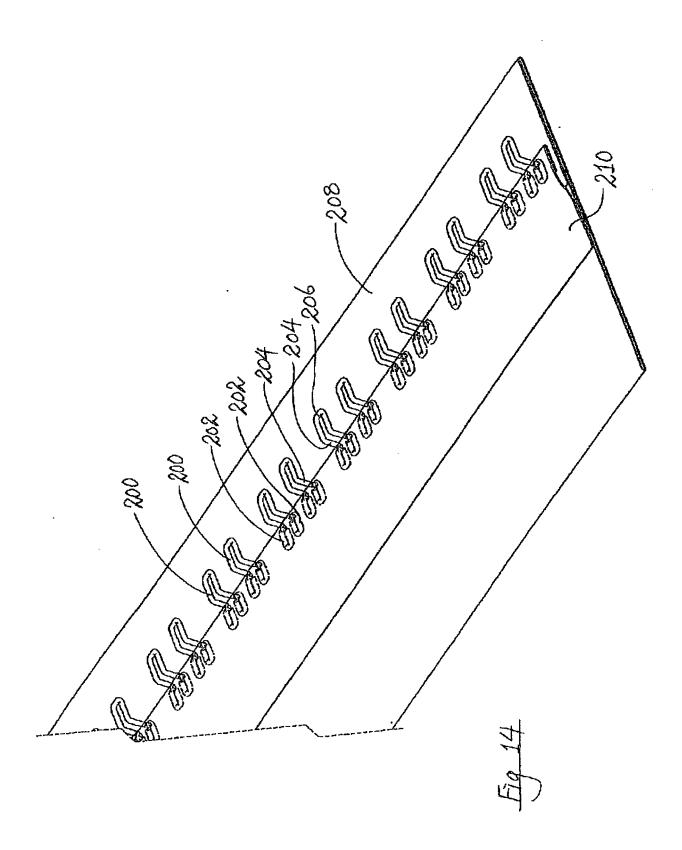

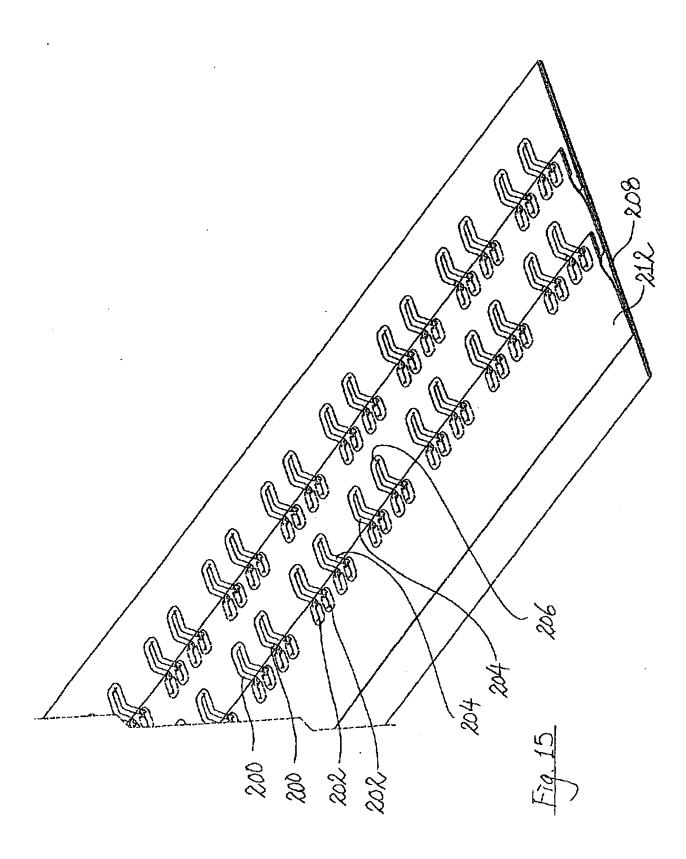

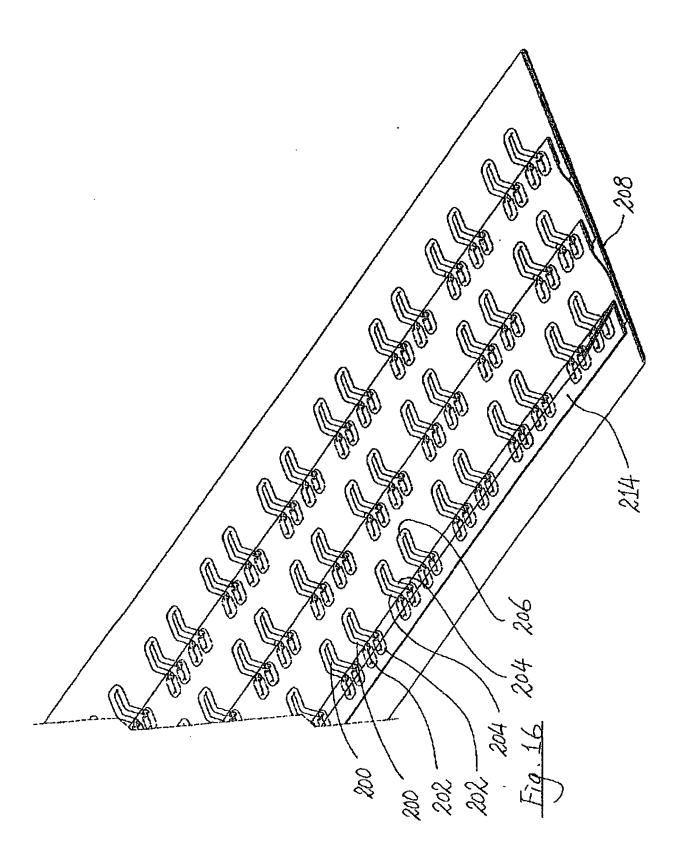

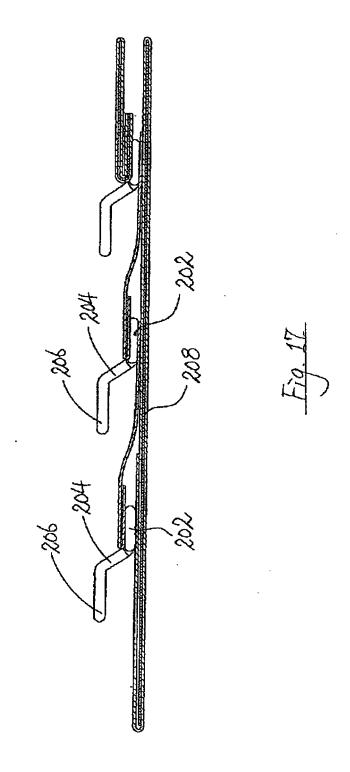

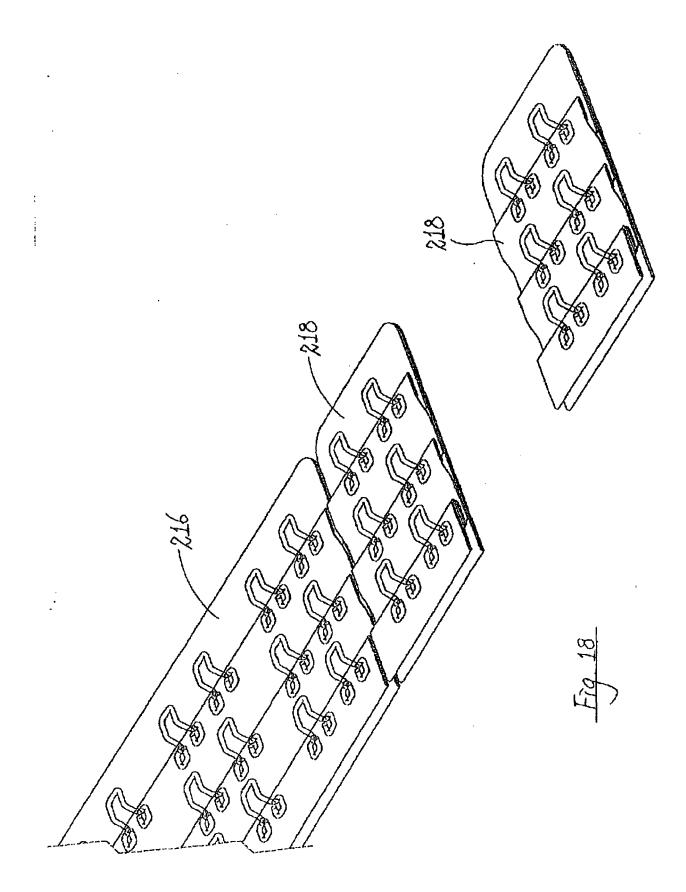



EUROPEAN SEARCH REPORT

Application Number EP 12 25 0019

	Citation of desument with its dis-	tion where engrappists	Dalassaut	CLASSISION OF THE	
Category	Citation of document with indica of relevant passages		Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)	
Х	DE 153 833 C (ELSE MÜI 19 April 1903 (1903-04 * the whole document	1-19)	1-6	INV. A44B13/00	
Х	FR 341 677 A (JAMES HI 17 August 1904 (1904-0 * the whole document	98-17)	1,2,4		
Χ	FR 362 473 A (LESLIE I 25 June 1906 (1906-06- * the whole document	-25)	1-3,5-7		
Х	US 2008/295304 A1 (GAI 4 December 2008 (2008 * the whole document	-12-04)	1,2,7		
Х	US 3 577 609 A (GOTTFI 4 May 1971 (1971-05-04		1,2,7,10		
Υ	* the whole document		8,9		
Υ	US 2008/214090 A1 (GU ² 4 September 2008 (2008 * the whole document	3-09-04)	8,9	TECHNICAL FIELDS SEARCHED (IPC) A44B A41F	
	The present search report has been	drawn up for all claims Date of completion of the searc		Examiner	
	The Hague	25 June 2012		pard, Michel	
CATEGORY OF CITED DOCUMENTS X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background		E : earlier paten after the filin D : document ci L : document cit	ted in the application ed for other reasons	nvention	
O:non	-written disclosure rmediate document		he same patent family		

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 12 25 0019

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

25-06-2012

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
DE 153833	С	19-04-1903	NONE			
FR 341677	Α	17-08-1904	NONE			
FR 362473	Α	25-06-1906	NONE			
US 2008295304	A1	04-12-2008	NONE			
US 3577609	A	04-05-1971	BE CH ES FR GB US	729106 483804 146326 2003459 1220666 3577609	A Y A1 A	01-08-19 15-01-19 01-03-19 07-11-19 27-01-19 04-05-19
US 2008214090	A1	04-09-2008	EP US WO	2170113 2008214090 2008108896	A1	07-04-20 04-09-20 12-09-20

© For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

FORM P0459