

(19)



(11)

EP 2 628 892 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

07.06.2017 Bulletin 2017/23

(51) Int Cl.:

E21B 33/037 ^(2006.01)

(21) Application number: **12155550.2**

(22) Date of filing: **15.02.2012**

(54) **Subsea wellhead protection structure, canopy and installation**

Unterwasserbohrkopfschutzstruktur, Haube und Installation

Structure de protection de puits sous-marin, auvent et installation

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(43) Date of publication of application:

21.08.2013 Bulletin 2013/34

(73) Proprietor: **Vetco Gray Inc.**

Houston, TX 77041 (US)

(72) Inventor: **Ude, Nnamdi Cyril**

Aberdeen AB23 8GD (GB)

(74) Representative: **Page Hargrave**

Whitefriars

Lewins Mead

Bristol BS1 2NT (GB)

(56) References cited:

WO-A1-01/63088

WO-A1-98/04805

WO-A1-02/075103

US-A1- 2005 186 033

EP 2 628 892 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Field of the Invention

[0001] This invention relates to a subsea wellhead protection structure ("WPS") including a canopy adapted to be locked and unlocked from above a subsea wellhead.

Background to the Invention

[0002] In order to protect subsea wellheads from potential snagging and damage, for example, from trawlers pulling nets or boats dragging anchors, it is common practice to install a defensive WPS frame around the subsea wellhead and to place a canopy over the wellhead itself. The WPS canopy needs to be able to resist accidental detachment, but must allow for access for servicing of the wellhead Christmas tree fittings and must be removable for workover purposes. Typically, heretofore, a WPS canopy requires divers or a remotely operated vehicle ("ROV") for installation and removal.

[0003] WO 98/04805 A1 discloses a subsea WPS having the pre-characterising features of claim 1.

Summary of the Invention

[0004] According to the invention, there is provided a subsea wellhead protection structure (WPS) comprising a base frame and a removable canopy, the base frame defining a protected space for a subsea wellhead when in use, the canopy being adapted to engage the base frame and to provide cover over the protected space, wherein the base frame and the canopy incorporate a plurality of locking means, each locking means comprising a locking pin and a corresponding locking sleeve, characterised in that the locking pins have first and second differential taper sections to engage corresponding locking sleeves, the first taper section tapering in towards the tip of the locking pin at a first taper angle relative to the plane normal to the pin axis and the second taper section tapering in towards the base of the locking pin at a second taper angle, lower than the said first taper angle, relative to the plane normal to the pin axis, and the locking sleeves include engagement means to engage the taper sections of the locking pins, so that the locking pins and locking sleeves engage and disengage under opposite loading, and require a lower load for a locking sleeve to lock on to a locking pin than to disengage therefrom. Typically, at least two sets of locking means are used to lock the canopy to the base frame across the protected space. Providing locking means adapted to have differential loading levels for engagement and disengagement facilitates the ease of installation of the canopy and the design of the canopy to meet desired performance standards against accidental detachment of the canopy in circumstances such as overtrawling. The locking pins may be provided on the base frame, with the corresponding locking sleeves being located on the canopy, or vice-versa.

Alternatively, the base frame may have one or more locking pins and one or more locking sleeves with the canopy having one or more corresponding locking sleeves and corresponding locking pins. Such a mixed arrangement may be used, for example, to ensure the canopy can only be locked to the base frame in a specific orientation.

[0005] The locking pins have first and second differential taper sections to engage the corresponding locking sleeves, the first taper section tapers in towards the tip of the locking pin and the second taper section tapers in towards the base of the pin. The first taper section is at first taper angle and the second taper section is at a second taper angle relative to the plane normal to the pin axis. The first taper angle is higher than the second taper angle. The locking sleeves are provided with engagement means to engage the taper sections of the locking pins. Having the respective taper sections effectively reversed (the first tapering in towards the tip and the second tapering in towards the base of the pin, and with differential taper angles, means that desired differential loading levels for engagement and disengagement can be achieved by appropriately selecting the respective taper angles.

[0006] Further, the engagement means conveniently comprise one or more spring-loaded latching-dogs, which are forced against the taper sections of the locking pins in use. The spring-loading of these dogs may be provided by a C-spring, which can be conveniently positioned around part of the circumference of the locking sleeve and adapted to spring-load one, two or more dogs against an inserted locking pin in use.

[0007] For a typical subsea WPS, the first taper angle may be in the range from 60° to 80° for a steel on steel pin and sleeve locking system and the second taper angle may be in the range from 24° to 30° to require a suitably high loading for disengaging the canopy from the base frame. Preferably, the first taper angle is approximately 75° and the second taper angle is approximately 25°.

[0008] Preferably, the base frame which incorporates at least one leg housing for a telescopic leg having a mechanical release mechanism which is actuated by the weight of the canopy being transmitted onto the mechanism, thereby to allow the telescopic leg to extend under its own weight. Telescopic legs are useful on a WPS as they can automatically adapt to differences in levels of the seabed around the WPS when installed.

[0009] Providing an automated mechanism to deploy supporting legs on a WPS has the significant advantage of avoiding the need for diver or ROV intervention to release the telescopic legs. Conveniently, the release mechanism may comprise a retaining pin which holds the telescopic leg in the housing, the retaining pin being connected to a lever crank, which is actuated to disengage the retaining pin when the weight of the canopy is transmitted onto the lever crank. Typically, the weight of the canopy can be transmitted through a landing arm provided on the canopy and positioned to engage a leg housing and the respective release mechanism.

[0010] Preferably, the canopy incorporates a door latching mechanism for an access door hinged to a WPS canopy frame along one edge of the door. The door latching mechanism comprises a handle bar with two arms, the bar being hinged at the junction of the two arms, about a hinge point on the edge of the door opposite the hinged edge, the first arm being longer and heavier than the second arm, a handle is attached to the end of the first arm away from the hinge point, and a first latching element is provided at the end of the second arm, the first latching element being adapted to engage a corresponding second latching element provided on the canopy frame.

[0011] Providing a door latching mechanism with a handle bar with differential arm lengths and weights has an advantage that the mechanism is thereby biased into the locked position and is resistant to accidental release. Conversely, when intentionally operated via the handle the leverage provided by the longer arm makes it relatively easier and quicker for a diver to release the door latching mechanism when required.

[0012] Conveniently, the first latching element may comprise a locking bar extending perpendicular to the axis of the handle bar and the second latching element is a corresponding slot in the canopy frame, adapted to receive the locking bar. Alternatively, the first latching element may comprise a hook and the second latching element a corresponding eye on the canopy frame to receive the hook. Other suitable adaptations will be apparent to those skilled in the art.

Brief Description of the Drawings

[0013]

Fig. 1 is a perspective view of a WPS base frame adapted according to the invention;
 Fig. 2 is a plan view of the same WPS base frame;
 Fig. 3 is a side elevational view of a canopy for the WPS;
 Fig. 4 is a corresponding side elevational view (partially in section) of the WPS base frame;
 Fig. 5 is a partial cross-sectional view of a locking sleeve on the canopy engaging with a guide post on the WPS base frame;
 Fig. 6 is a partial horizontal cross-sectional view illustrating the locking mechanism;
 Fig. 7 is a perspective view of a canopy for a WPS according to the invention;
 Fig. 8 is a plan view of the WPS canopy of Fig. 7;
 Fig. 9 is a partial cutaway view of one corner of the WPS base frame of Fig. 1;
 Fig. 10 is a cross-sectional view of the leg housing along D-D of Fig. 2;
 Fig. 11 is a perspective view of the WPS canopy landed on the corresponding WPS base frame;
 Fig. 12 is a plan view of the assembly of Fig. 11;
 Fig. 13 is a side elevational view (partially in section)

of the same assembly;

Fig. 14 is a side elevational view (partially in section) of the WPS canopy, showing one of the access doors in open position, with a small plan view of the door latching mechanism in Fig. 14a; and

Fig. 15 is a perspective view of the WPS canopy, with one of the access doors likewise shown in open position.

Detailed Description of the Invention

[0014] Figure 1 shows a perspective view of a WPS base frame 1 adapted according to the invention.

[0015] Figure 2 is a plan view of the same base frame 1. The frame comprises a cylindrical, central support element 11 with a flared skirt 12. This central support element is located around the subsea wellhead (not shown) at seafloor level. Four arms 13 extend radially from the central support 11, each arm being set at right angles with respect to each adjacent arm. The arms 13 are each connected to a corner frame 14, each comprising a leg housing 15 for an extensible telescopic leg 16. The corner frames 14 are designed to be set at an adjustable radial distance from the central support element 11 and are each provided with an inner arm 13a which can be slid in or out of the arms 13 to the desired extent, and fixed during construction of the base frame 1, so that the overall width of the base frame can thereby be adapted to accommodate wellhead Christmas tree structures. The four corner frames 14 are then connected by bumper bars 17 of appropriate length for the desired overall frame size.

[0016] As shown, the base frame includes four guide posts 18, one extending vertically upwards from each of the arms 13. Each corner frame 14 has an upwardly tapering locking pin 19, with a biased profile (see Figure 5), which is adapted to engage a corresponding locking sleeve 21 on the WPS canopy 2 of Figure 3.

[0017] Figure 3 shows a side elevational view of a canopy 2 for a WPS, aligned in conjunction with a corresponding side elevational view in Figure 4 of the base frame 1, with a partial sectional view along V-V from Figure 2. In deployment, the canopy 2 is conveniently lowered on to the WPS base frame using a conventional, positive-locking J-tool as a running tool for this purpose. In operation, the locking sleeves 21 engage the locking pins 19. As shown in partial cross-section in Figures 5 and 6, the biased (or differential) taper profile of the top of each locking pin 19, means that there is a substantial difference between the load required to lock on each locking pin and that required to unlock, or disengage, from each locking pin.

[0018] The locking sleeve 21 incorporates latching-dogs 22, which are biased against the locking pin 19 by C-spring 23 and held in place by latch-dog screws 24. Override screws 25 are provided at either end of the C-spring 23. These screws 25 provide means for manually releasing the locking sleeve 21 from the locking pin 19 if necessary. An eye bolt 26 is shown on the top of the

guide post 19. This may be used for assembly onto the base frame 1. On engagement of the locking sleeve 21, the detaching-dogs 22 follow the steeper taper 19a until they latch over the circumferential rib 20, where the guide post 19 is of maximum diameter. Theoretically, for a 75° taper angle 19a relative to the plane normal to the pin axis (as illustrated), the calculated load required to overcome the friction arising from the C-spring 23 forcing the latching-dogs 22 against a guide post, is about 0.6 tonnes for the illustrated design. As the total weight of the canopy 2 is around 3.5 tonnes, this would allow the canopy to provide sufficient locking load under its own weight to achieve locking on the four locking pins 19 shown. Conversely, the lower reverse taper 19b means that a considerably greater force is required to disengage the locking sleeve by forcing the latching-dogs 22 back over the rib 20. For a 25° reverse taper angle 19b relative to the plane normal to the pin axis, a calculated force of approximately 5 tonnes would be required to disengage from each locking pin 19. This would mean an overpull of up to 20 tonnes would be needed to disengage the canopy, which exceeds the specified minimum specific fishing net snag load capacity of 10 tonnes.

[0019] Figure 7 shows a WPS canopy 2 according to the invention in perspective view and Figure 8 shows the same canopy in plan view. The canopy 2 comprises a tubular framework supporting a central annulus 36, upwardly flared for running tool access. A central cover plate 40 is located within the annulus 36 and, as shown, has four equally spaced apertures on the rim where a J-tool can be latched to deploy the canopy 2. Protective rectangular panels 33 are provided on opposite sites of the annulus 36 and two access doors 30 are mounted opposite each other and between the panels 33. The access doors 30 are hinged about end frame members 32 to open outwardly away from the annulus 36. Each door has a single door latch mechanism 31 for unlocking and lifting the door open.

[0020] Guide pods 34 are disposed towards each corner of the canopy 2. These pods have flared conical lower openings, which receive the tops of the guide posts 18. When the canopy 2 is installed on the base frame 1, the pods 34 engage the tops of the guide posts 18 and ensure that the canopy is correctly located as it is lowered onto the base. The locking sleeves 21 operate to latch the canopy 2 onto the base frame 1 (as previously described), but do not have to transfer the entire weight of the canopy onto the locking pins 19.

[0021] Extending outwards from each support pod 34 towards the corners of the canopy 2 are landing arms 35, which are configured to engage the upper ends of each respective leg housing 15. The weight of the canopy 2 is borne by the leg housings 15 supporting each landing arm 35. When each landing arm 35 engages the respective leg housing 15 it activates a leg release mechanism to allow the telescopic legs 16 to be automatically deployed under their own weight. The WPS base frame 1 has four telescopic legs 16, one at each corner, which

are designed to extend and to dig into the seabed to stabilise the WPS and provide deflection, and resistance to damage, and to prevent dislodging of the WPS in the event of overtrawling by a fishing net.

[0022] The provision of an automated release mechanism for deployment of the legs has the advantage of avoiding any need for diver or ROV intervention on installation.

[0023] Figures 9, 10 and 11 illustrate the release mechanism and how it operates. Figure 9 is a cutaway view of one corner of the WPS base frame 1. Figure 10 is a sectional view along D-D of Figure 2. Figure 11 is a perspective view showing canopy 2 when landed on the WPS base frame 1. As shown in Figures 9 and 10, the upper end of the leg housing 15 is open and the telescopic legs 16 are initially held inside the housing by a retaining pin 41, which is fitted through one side of the housing and, which is engaged by a lever crank 42, hinged at point 43 at the upper end of the housing. The lever crank 42 has an actuating arm 42a extending into the upper open end of the leg housing 15. This actuating arm 42a is forced down when the corresponding landing arm 35 on the canopy engages the upper end of the leg housing (see Figure 11). This forces the release arm 42b outwards, pulling the retaining pin away and thereby releasing the telescopic legs 16 to deploy themselves under their own weight.

[0024] Figure 12 provides a plan view of the canopy 2 in position on the WPS base frame 1 (with the telescopic legs shown unextended) and Figure 13 is a side elevational view with a partial sectional view along X-X of Figure 12.

[0025] Figure 14 is a side-elevational view, in partial section, and Figure 15 is a perspective view, of the WPS canopy 2 showing one access door 30 hinged into an open position. The access door 30 is hinged about a cross-member 32 of the canopy frame. As shown in side view, the door is shaped like a bent arm. The weight of the door thereby exerts a moment about the hinge, which acts to hold the door closed when it is in the closed position and conversely to hold the door open when it is in the open position. The door latching mechanism 31 is shown in side view in partial section in the main Figure 14 and in partial plan view in Figure 14a. The door latch mechanism 31 comprises a handle 31a (which may be operated by a diver or ROV), attached to one end of a handle bar 31b, 31c, which is hinged to one edge of the door at point 31e. The handle bar is biased, with one longer and heavier arm 31b attached to the handle 31a and one shorter arm 31c on the opposite side of the hinge point 31e. A short locking bar 31d is fixed to the end of the short arm 31c and set perpendicular to the length of the handle bar. This locking bar 31d engages a latching slot 37 (see Figure 15) in the canopy frame to hold the door locked when in the closed position. The upper panel 39 of the door frame has a cutaway portion to allow access to the handle. A cover 38 on the underside of the door frame protects the door latch mechanism on that

side. As shown, the door panel (and other panels on the canopy) can be made of lightweight GRP (glass reinforced plastic) to reduce the overall canopy weight.

[0026] When the door is closed, the differential weights of the handle bar arms 31 b, 31 c will act to hold the door latched closed. If pressure is applied to the underside of the door frame (e.g. in the splash zone when the canopy is being deployed) the locking bar will also be held in the latched position, ensuring the door can only be released when the handle 31a is raised in normal operation.

[0027] The invention has been particularly described with reference to the substantially square design of WPS base shown in the figures. However, it will be apparent to those skilled in the art that there is no limitation to use of the various aspects of the invention in relation to such square bases. A base frame may be circular in place, for example, or of an alternative geometric shape such as a triangle, rectangle or hexagon. The locking pins may all be provided on the corresponding locking sleeves on the base frame and the canopy as shown in the Figures, or vice versa; or alternatively the base frame may have a combination of one or more locking pins and one or more locking sleeves and the canopy have corresponding locking sleeves and locking pins. Such a configuration may be used to ensure that the canopy and the base frame can only be connected in one orientation (e.g. not be rotatable through 180° as with the designs illustrated in the figures). So long as at least two locking pins (and corresponding locking sleeves) are deployed on opposite sides of the wellhead across the frame and canopy, then the automatic canopy locking mechanism of the invention can be conveniently employed.

[0028] Further, supporting legs capable of being automatically deployed in the manner of the present invention can be positioned at any desired point around the base frame if the canopy is provided with corresponding landing arms to operate the release mechanisms for the legs when the canopy is landed on the base frame.

[0029] Further also, use of the canopy door latch mechanism herein is not limited to the particular canopy door design illustrated in the figures.

Claims

1. A subsea wellhead protection structure (WPS) comprising a base frame (1) and a removable canopy (2), the base frame defining a protected space for a subsea wellhead when in use, the canopy being adapted to engage the base frame and to provide cover over the protected space, wherein the base frame and the canopy incorporate a plurality of locking means, each locking means comprising a locking pin (19) and a corresponding locking sleeve (21), **characterised in that** the locking pins (19) have first (19a) and second (19b) differential taper sections to engage corresponding locking sleeves (21), the first taper section (19a) tapering in towards the tip of the

locking pin at a first taper angle relative to the plane normal to the pin axis and the second taper section (19b) tapering in towards the base of the locking pin at a second taper angle, lower than the said first taper angle, relative to the plane normal to the pin axis, and the locking sleeves (21) include engagement means (22) to engage the taper sections (19a, 19b) of the locking pins (19), so that the locking pins (19) and locking sleeves (21) engage and disengage under opposite loading, and require a lower load for a locking sleeve (21) to lock on to a locking pin (19) than to disengage therefrom.

2. A WPS according to claim 1, in which the engagement means comprise one or more spring-loaded latching-dogs (22) in a locking sleeve (21).
3. A WPS according to claim 2, in which the latching-dogs (22) are sprung-loaded by a C-spring (23), which acts to force the latching-dogs against the locking pin taper sections in use.
4. A WPS according to any preceding claim, in which the first taper angle is in the range from 60° to 80°, and the second taper angle is in the range from 24° to 30°.
5. A WPS according to claim 4, in which the first taper angle is approximately 75° and the second taper angle is approximately 25°.
6. A WPS according to any preceding claim, in which the base frame (1) incorporates at least one leg housing (15) for a telescopic leg (16) provided with a mechanical release mechanism (41, 42a, 42b, 43) adapted to be actuated by the weight of canopy on the mechanism, to allow the telescopic leg (16) to extend under its own weight.
7. A WPS according to claim 6, in which the mechanical release mechanism comprises a retaining pin (41) to hold the telescopic leg (16) in the leg housing (15), the retaining pin (41) being connected to a lever crank (42), which is actuated to disengage the retaining pin when the weight of the canopy is transmitted on to the lever crank.
8. A WPS according to claim 7, in which the canopy (2) is provided with a landing arm (35) to engage each leg housing (15) and the mechanical release mechanism in each leg housing (15) is actuated by the weight transmitted by each respective landing arm (35).
9. A WPS according to any preceding claim, the canopy incorporating an access door hinged to the canopy frame along one edge of the door and with a door latching mechanism (31) to engage the canopy

frame when the door is closed and to disengage therefrom when the door is opened, the door latching mechanism comprising a handle bar having two arms (31b, 31c) hinged at the junction of the two arms about a point (31e) on the edge of the door opposite the hinged edge, the first arm (31b) being longer and heavier than the second arm (31c), a handle (31a) attached to the end of the first arm away from the hinge point (31e) and a first latching element (31d) provided at the end of the second arm (31c), the first latching element (31d) being adapted to engage a corresponding second latching element (37) on the canopy frame.

10. A WPS according to claim 9, in which the first latching element is a locking bar (31d) and the second latching element is a corresponding slot (37) in the canopy frame, adapted to receive the locking bar (31d).

Patentansprüche

1. Unterwasser-Bohrlochkopfschutzanordnung (well-head protection structure - WPS), umfassend einen Grundrahmen (1) und eine entfernbare Abdeckung (2), wobei der Grundrahmen im Gebrauch einen geschützten Raum für einen Unterwasser-Bohrlochkopf definiert, wobei die Abdeckung angepasst ist, den Grundrahmen in Eingriff zu nehmen und einen Schutz oberhalb des geschützten Raums bereitzustellen, wobei der Grundrahmen und die Abdeckung mehrere Verriegelungsmittel enthalten, wobei jedes Verriegelungsmittel einen Verriegelungsstift (19) und eine entsprechende Verriegelungshülse (21) umfasst, **dadurch gekennzeichnet, dass** die Verriegelungsstifte (19) einen ersten (19a) und einen zweiten (19b) konischen Differentialabschnitt aufweisen, um entsprechende Verriegelungshülsen (21) in Eingriff zu nehmen, wobei der erste konische Abschnitt (19a) in einem ersten Konuswinkel mit Bezug auf die senkrecht zu der Stiftachse angeordnete Ebene konisch zu der Spitze des Verriegelungsstifts zuläuft und der zweite konische Abschnitt (19b) in einem zweiten Konuswinkel, der kleiner ist als der erste Konuswinkel, mit Bezug auf die senkrecht zu der Stiftachse angeordnete Ebene konisch zu der Basis des Verriegelungsstifts zuläuft, und die Verriegelungshülsen (21) Eingriffsmittel (22) enthalten, um die konischen Abschnitte (19a, 19b) der Verriegelungsstifte (19) in Eingriff zu nehmen, sodass die Verriegelungsstifte (19) und die Verriegelungshülsen (21) unter abwechselnder Last eingreifen und freigeben und eine niedrigere Last erfordern, damit eine Verriegelungshülse (21) einen Verriegelungsstift (19) in Eingriff nimmt, als erforderlich ist, um diesen freizugeben.

2. WPS nach Anspruch 1, wobei die Eingriffsmittel eine

oder mehrere federbelastete Rastklauen (22) in einer Verriegelungshülse (21) umfassen.

3. WPS nach Anspruch 2, wobei die Rastklauen (22) mit einer C-Feder (23) federbelastet sind, die wirkt, um die Rastklauen im Gebrauch gegen die konischen Verriegelungsstiftabschnitte zu drängen.
4. WPS nach einem der vorhergehenden Ansprüche, wobei der erste Konuswinkel im Bereich von 60° bis 80° liegt und der zweite Konuswinkel im Bereich von 24° bis 30° liegt.
5. WPS nach Anspruch 4, wobei der erste Konuswinkel etwa 75° beträgt und der zweite Konuswinkel etwa 25° beträgt.
6. WPS nach einem der vorhergehenden Ansprüche, wobei der Grundrahmen (1) Folgendes enthält: wenigstens ein Beingehäuse (15) für ein Teleskopbein (16), versehen mit einem mechanischen Freigabemechanismus (41, 42a, 42b, 43), angepasst, durch das Gewicht einer Abdeckung auf den Mechanismus betätigt zu werden, um zu ermöglichen, dass das Teleskopbein (16) unter seinem Eigengewicht ausfährt.
7. WPS nach Anspruch 6, wobei der mechanische Freigabemechanismus einen Haltestift (41) zum Halten des Teleskopbeins (16) in dem Beingehäuse (15) umfasst, wobei der Haltestift (41) mit einem Hebelarm (42) verbunden ist, der betätigt wird, um den Haltestift zu lösen, wenn das Gewicht der Abdeckung auf den Hebelarm übertragen wird.
8. WPS nach Anspruch 7, wobei die Abdeckung (2) mit einem Aufliegerarm (35) versehen ist, um mit jedem Beingehäuse (15) in Eingriff zu treten, und der mechanische Freigabemechanismus in jedem Beingehäuse (15) durch das von jedem jeweiligen Aufliegerarm (35) übertragene Gewicht betätigt wird.
9. WPS nach einem der vorhergehenden Ansprüche, wobei die Abdeckung eine Zugangsklappe enthält, an dem Abdeckungsrahmen entlang einer Kante der Klappe angelenkt und mit einem Klappenrastmechanismus (31), um den Abdeckungsrahmen in Eingriff zu nehmen, wenn die Klappe geschlossen ist, und ihn freizugeben, wenn die Klappe geöffnet wird, wobei der Klappenrastmechanismus Folgendes umfasst: eine Griffstange mit zwei Armen (31b, 31c), angelenkt an der Verbindung der zwei Arme um einen Punkt (31e) an der Kante der Klappe gegenüber der angelenkten Kante, wobei der erste Arm (31b) länger und schwerer ist als der zweite Arm (31c), einen Griff (31a), befestigt an dem Ende des ersten Arms, das von dem Anlenkungspunkt (31e) weg weist, und ein erstes Rastelement (31d), bereitge-

stellt am Ende des zweiten Arms (31c), wobei das erste Rastelement (31d) angepasst ist, ein entsprechendes zweites Rastelement (37) am Abdeckungsrahmen in Eingriff zu nehmen.

10. WPS nach Anspruch 9, wobei das erste Rastelement eine Verriegelungsstange (31 d) ist und das zweite Rastelement ein entsprechender Schlitz (37) im Abdeckungsrahmen ist, der angepasst ist, die Verriegelungsstange (31d) aufzunehmen.

Revendications

1. Structure de protection de tête de puits (WPS) sous-marine comprenant une ossature de base (1) et un toit amovible (2), l'ossature de base définissant un espace protégé pour une tête de puits sous-marine lors d'une utilisation, le toit étant adapté pour venir en prise avec l'ossature de base et pour fournir une couverture sur l'espace protégé, dans laquelle l'ossature de base et le toit incorporent une pluralité de moyens de verrouillage, chaque moyen de verrouillage comprenant une goupille de verrouillage (19) et un manchon de verrouillage (21) correspondant, **caractérisée en ce que** les goupilles de verrouillage (19) ont des première (19a) et seconde (19b) sections de cône différentielles pour venir en prise avec des manchons de verrouillage (21) correspondants, la première section de cône (19a) s'effilant vers la pointe de la goupille de verrouillage selon un premier angle de cône par rapport au plan normal à l'axe de goupille et la seconde section de cône (19b) s'effilant vers la base de la goupille de verrouillage selon un second angle de cône, qui est inférieur audit premier angle de cône, par rapport au plan normal à l'axe de goupille, et les manchons de verrouillage (21) comportent des moyens de mise en prise (22) pour mettre en prise les sections de cône (19a, 19b) des goupilles de verrouillage (19), de sorte que les goupilles de verrouillage (19) et les manchons de verrouillage (21) viennent en prise et hors de prise lors d'une charge opposée, et nécessitent une charge inférieure pour le verrouillage du manchon de verrouillage (21) sur une goupille de verrouillage (19) par rapport à sa mise hors de prise.
2. WPS selon la revendication 1, dans laquelle les moyens de mise en prise comprennent un ou plusieurs crochets de blocage à ressort de rappel (22) dans un manchon de verrouillage (21).
3. WPS selon la revendication 2, dans laquelle les crochets de blocage (22) sont à ressort de rappel par un ressort en C (23), qui agit pour forcer les crochets de blocage contre les sections de cône de goupille de verrouillage lors d'une utilisation.

4. WPS selon l'une quelconque des revendications précédentes, dans laquelle le premier angle de cône est dans la plage de 60° à 80°, et le second angle de cône est dans la plage de 24° à 30°.

5. WPS selon la revendication 4, dans laquelle le premier angle de cône est d'approximativement 75° et le second angle de cône est d'approximativement 25°.

6. WPS selon l'une quelconque des revendications précédentes, dans laquelle l'ossature de base (1) incorpore au moins un logement de patte (15) pour une patte télescopique (16) dotée d'un mécanisme de libération mécanique (41, 42a, 42b, 43) adapté pour être actionné par le poids du toit sur le mécanisme, afin de permettre à la patte télescopique (16) de s'étendre sous son propre poids.

7. WPS selon la revendication 6, dans laquelle le mécanisme de libération mécanique comprend une goupille de retenue (41) pour maintenir la patte télescopique (16) dans le logement de patte (15), la goupille de retenue (41) étant raccordée à une manivelle de levier (42), qui est actionnée pour mettre hors de prise la goupille de retenue lorsque le poids du toit est transmis sur la manivelle de levier.

8. WPS selon la revendication 7, dans laquelle le toit (2) est doté d'un bras de réception (35) pour mettre en prise chaque logement de patte (15) et le mécanisme de libération mécanique dans chaque logement de patte (15) est actionné par le poids transmis par chaque bras de réception (35) respectif.

9. WPS selon l'une quelconque des revendications précédentes, le toit incorporant une porte d'accès articulée sur l'ossature du toit le long d'un bord de la porte et avec un mécanisme de blocage de porte (31) pour mettre en prise l'ossature du toit lorsque la porte est fermée et pour le mettre hors de prise lorsque la porte est ouverte, le mécanisme de blocage de porte comprenant une barre de poignée ayant deux bras (31b, 31c) articulés au niveau de la jonction des deux bras autour d'un point (31e) sur le bord de la porte opposé au bord articulé, le premier bras (31b) étant plus long et plus lourd que le second bras (31c), une poignée (31a) attachée à l'extrémité du premier bras à distance du point d'articulation (31e) et un premier élément de blocage (31d) prévu au niveau de l'extrémité du second bras (31c), le premier élément de blocage (31d) étant adapté pour mettre en prise un second élément de blocage (37) correspondant de l'ossature du toit.

10. WPS selon la revendication 9, dans laquelle le premier élément de blocage est une barre de verrouillage (31d) et le second élément de blocage est une

fente (37) correspondante dans l'ossature du toit,
adaptée pour recevoir la barre de verrouillage (31d).

5

10

15

20

25

30

35

40

45

50

55

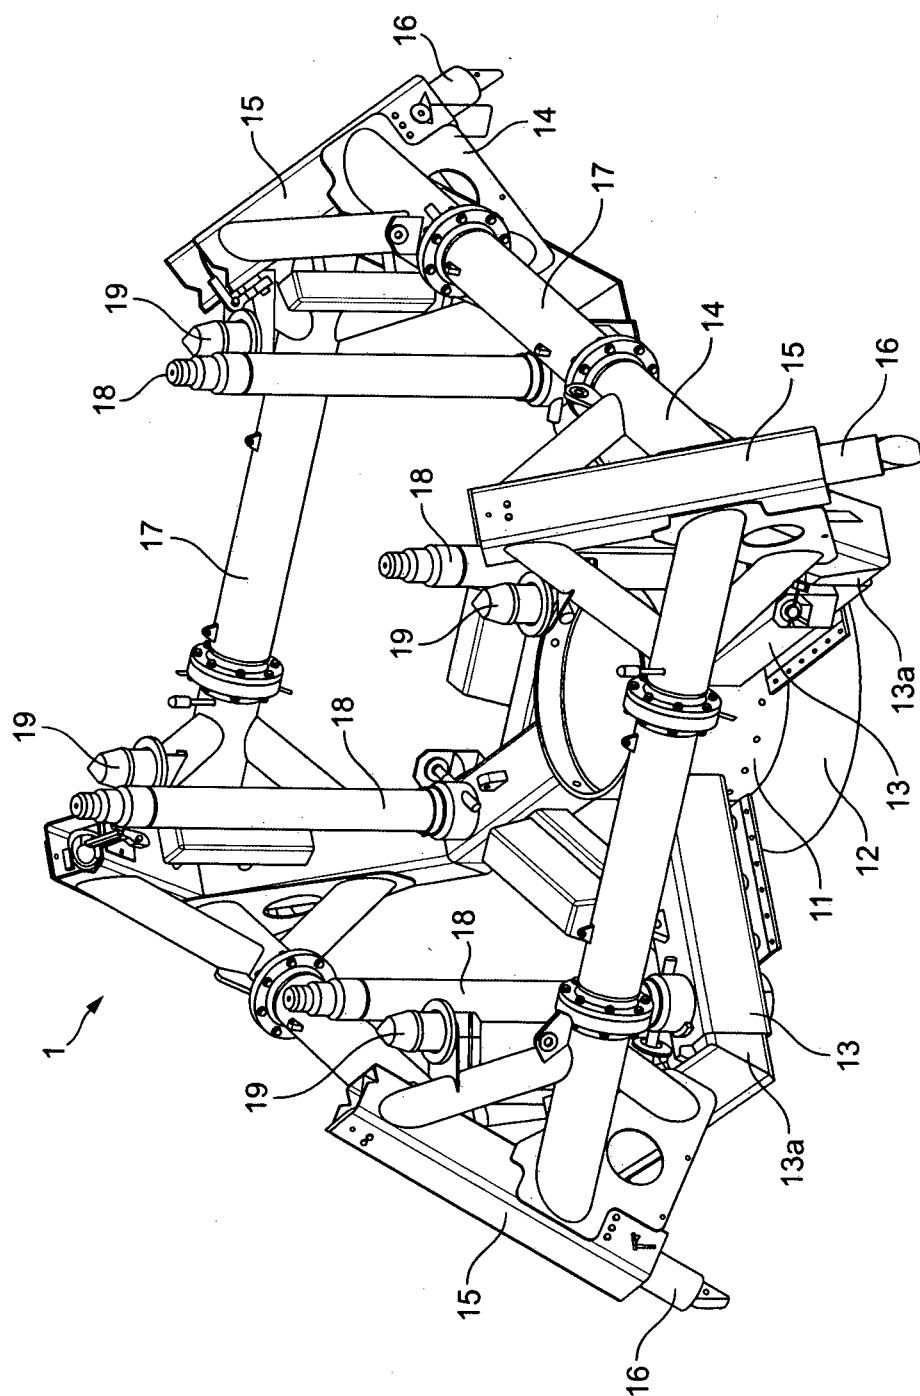


FIG. 1

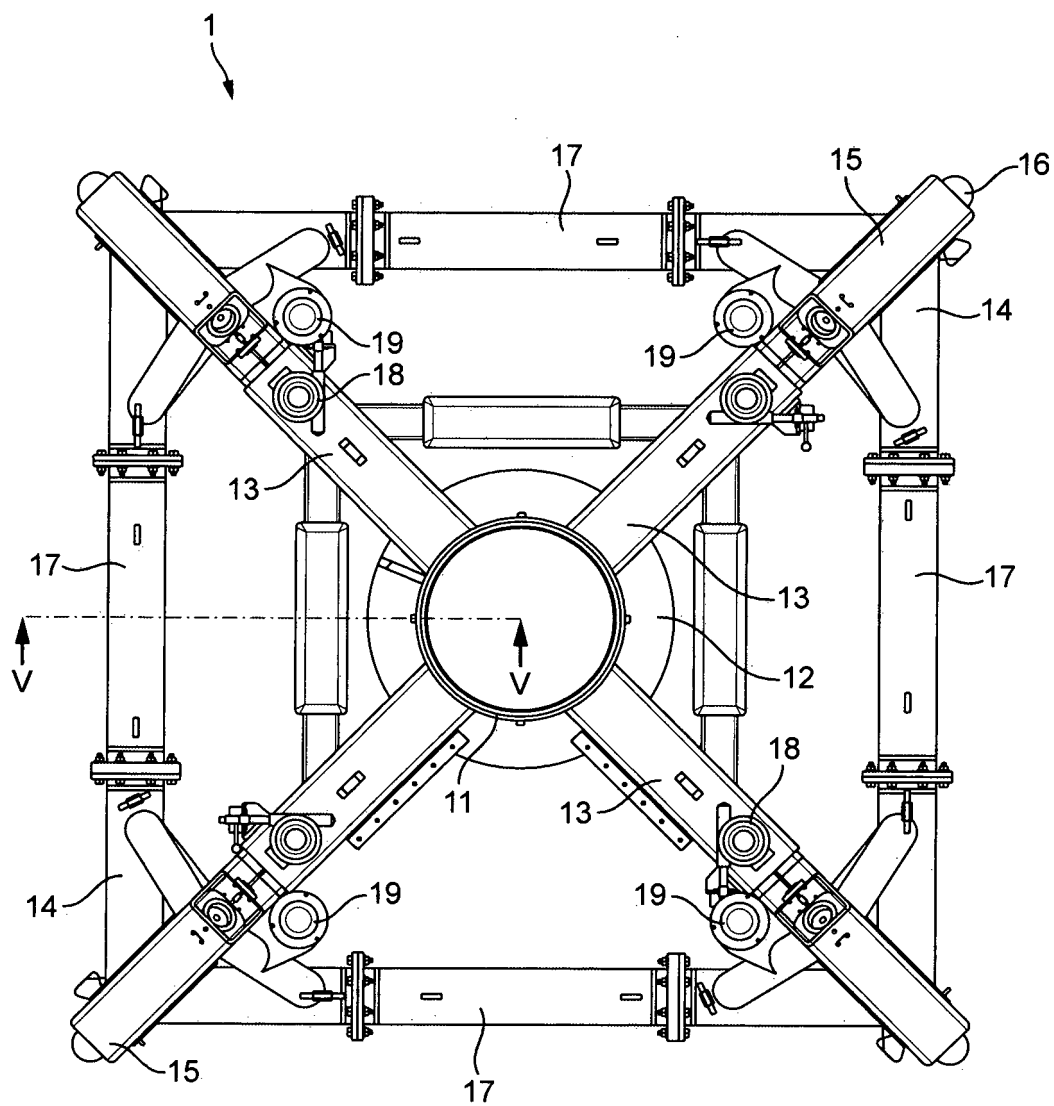


FIG. 2

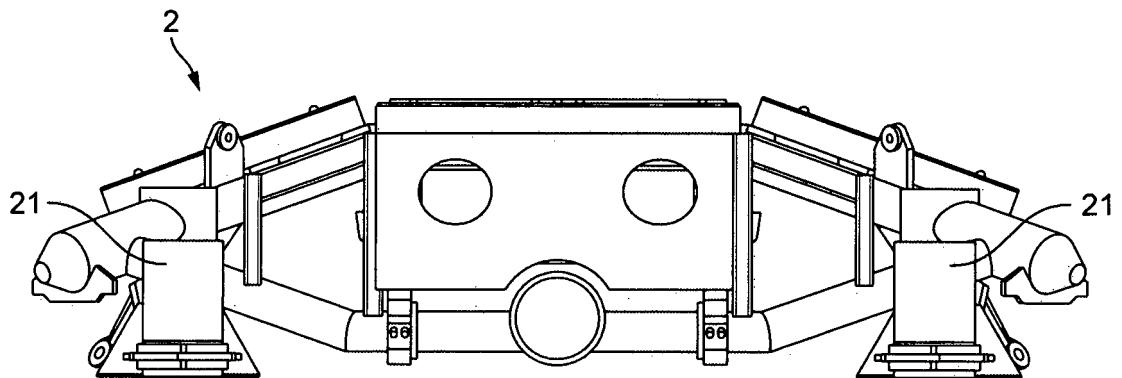


FIG. 3

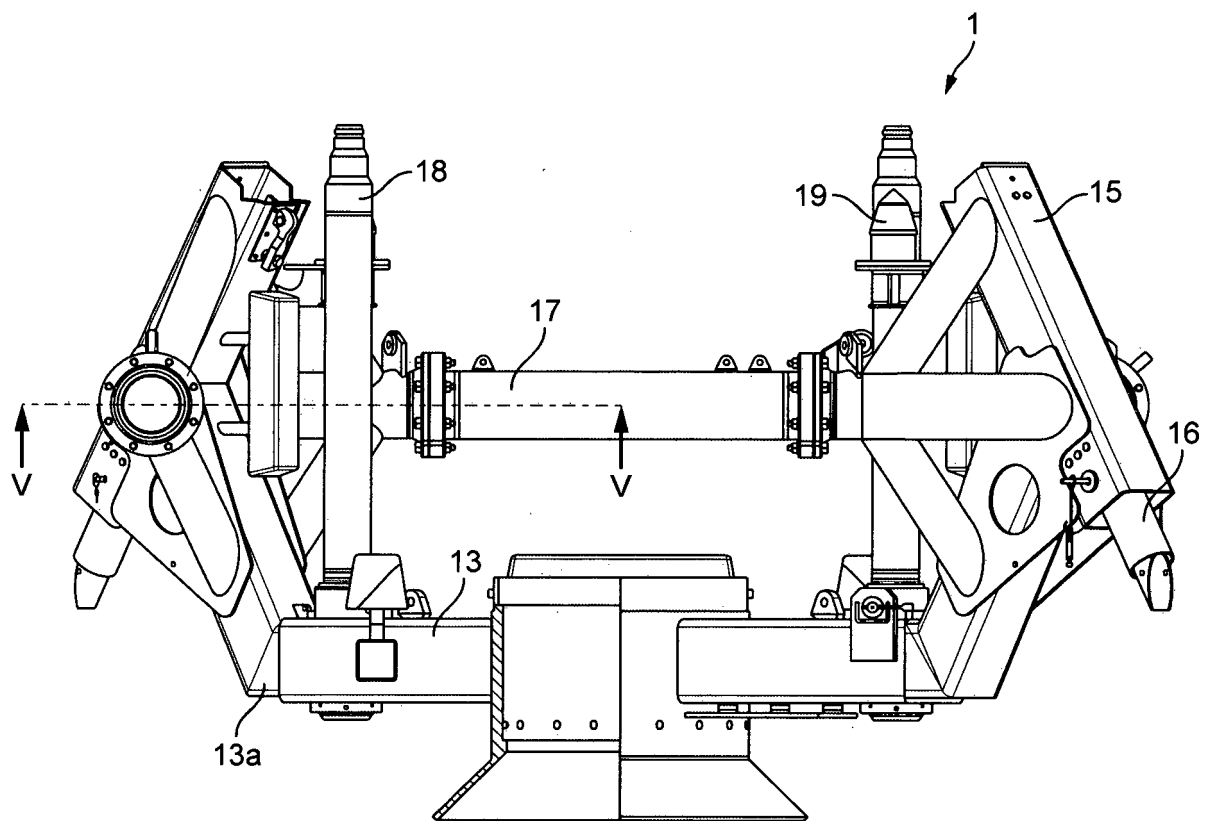


FIG. 4

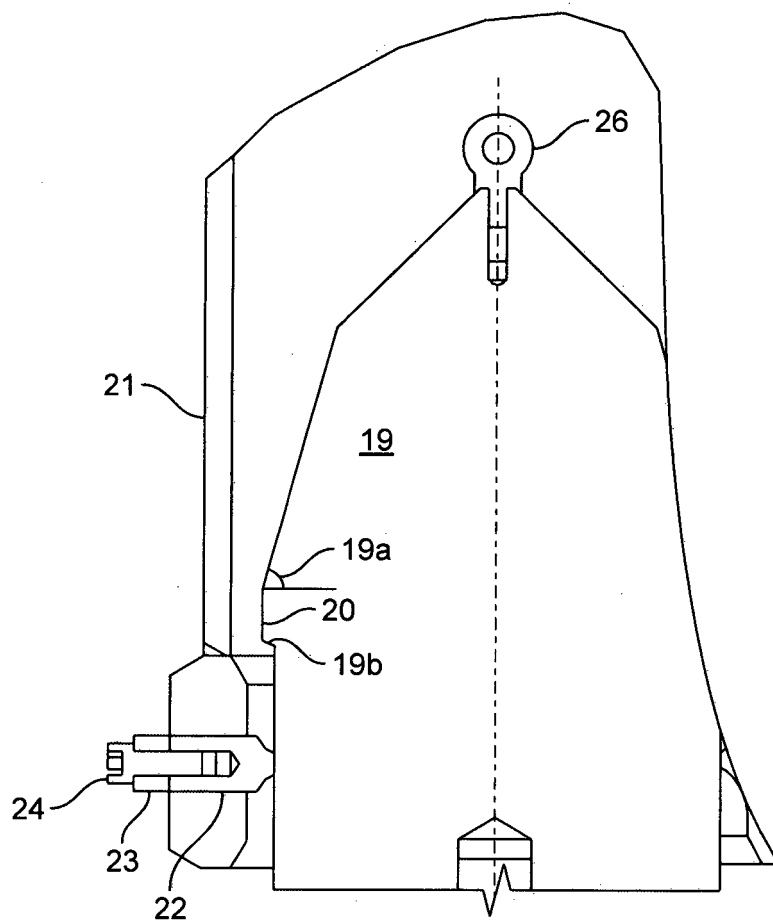


FIG. 5

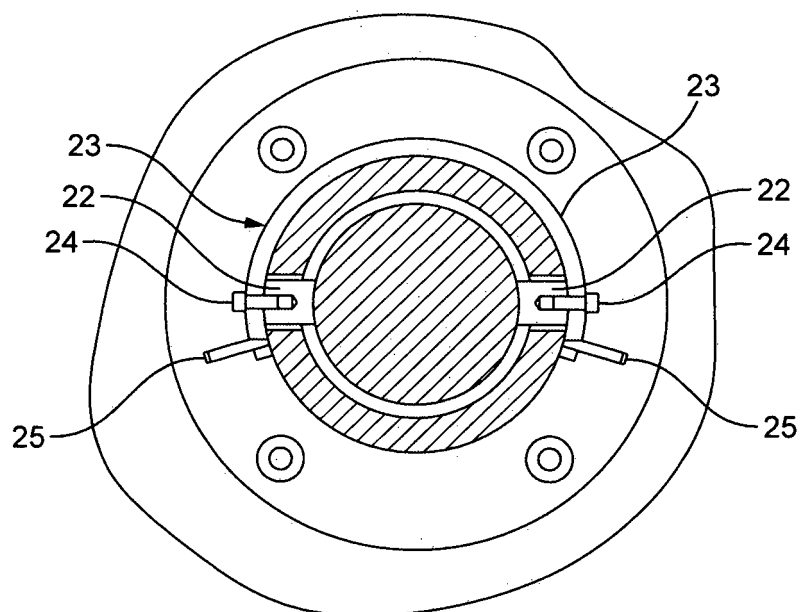


FIG. 6

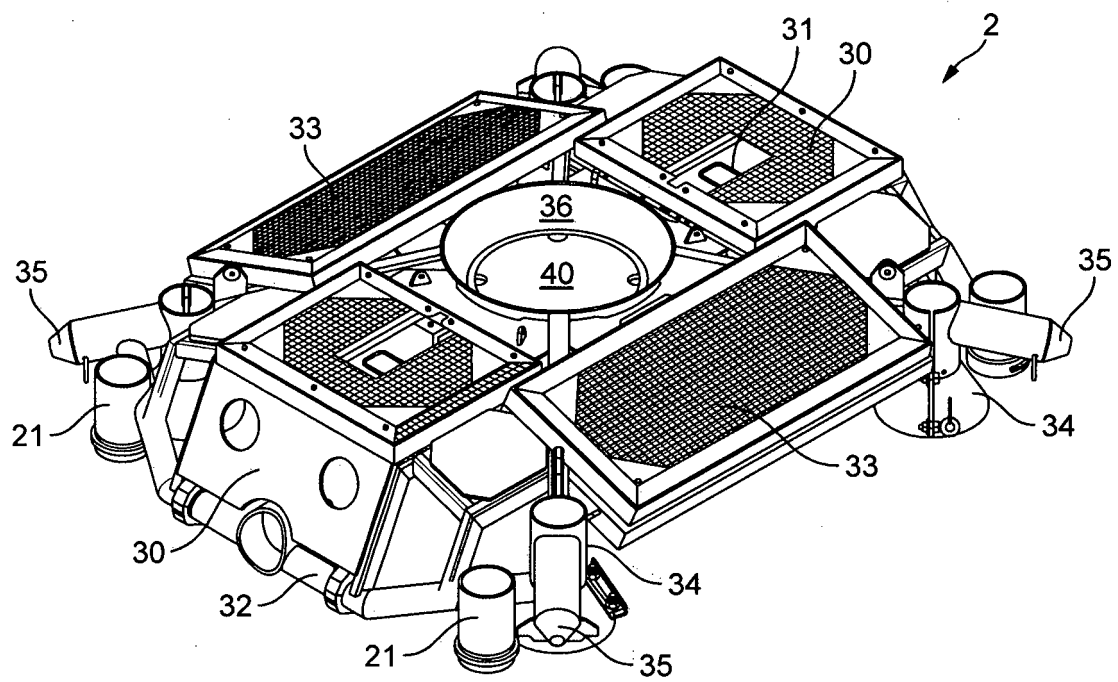


FIG. 7

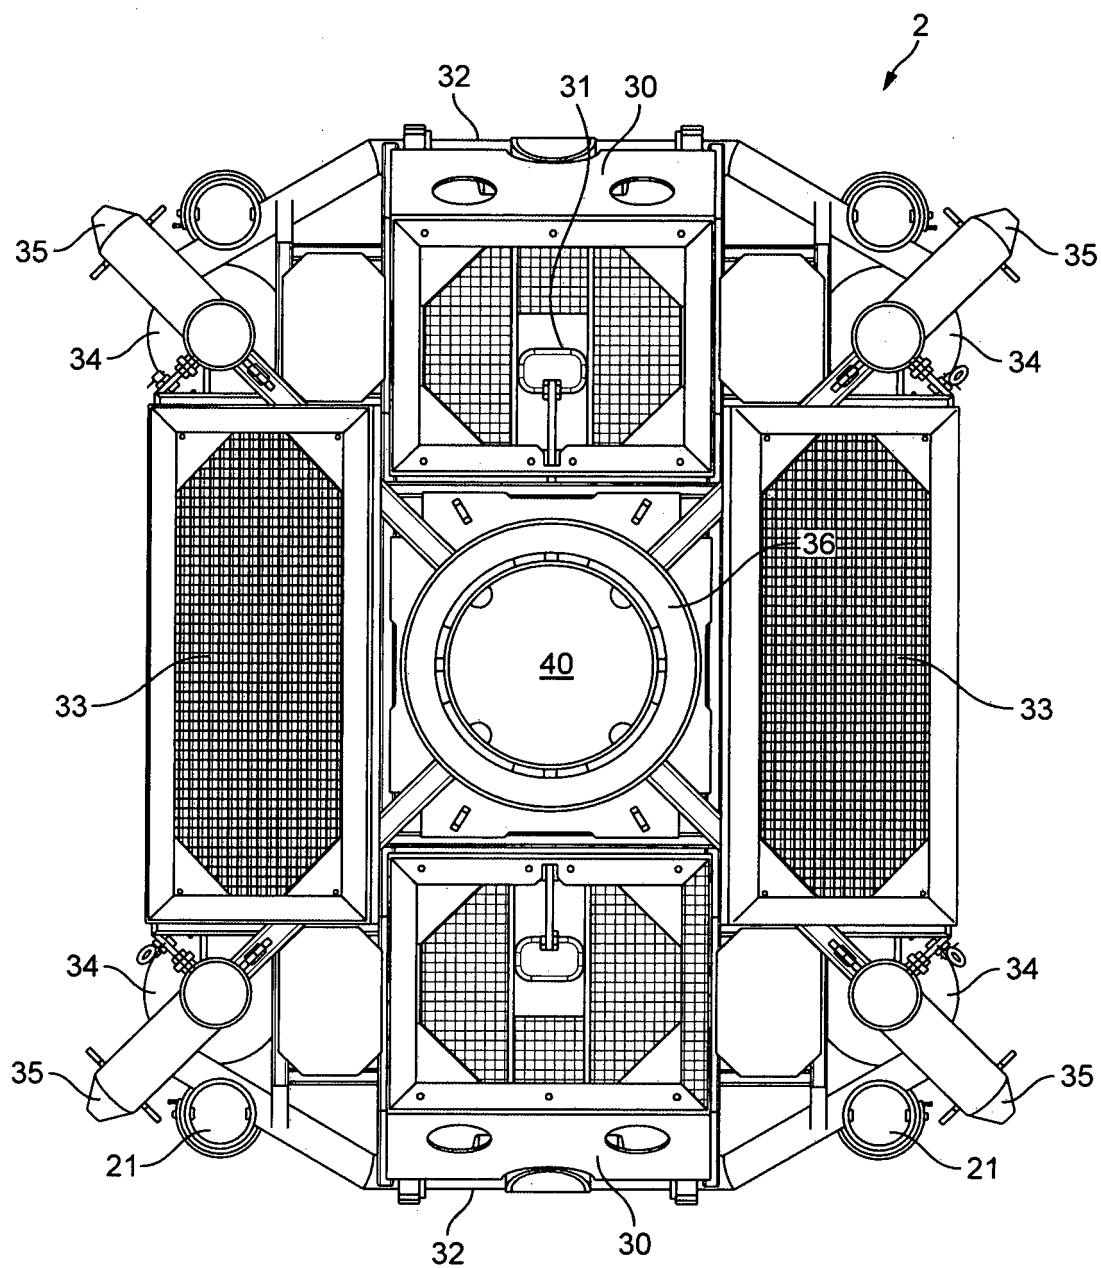


FIG. 8

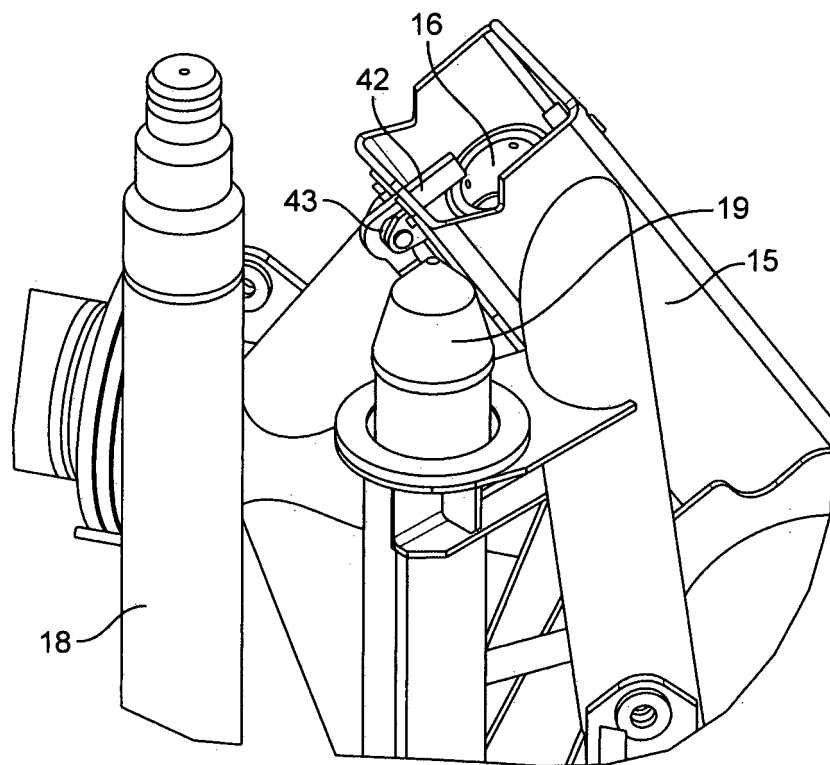


FIG. 9

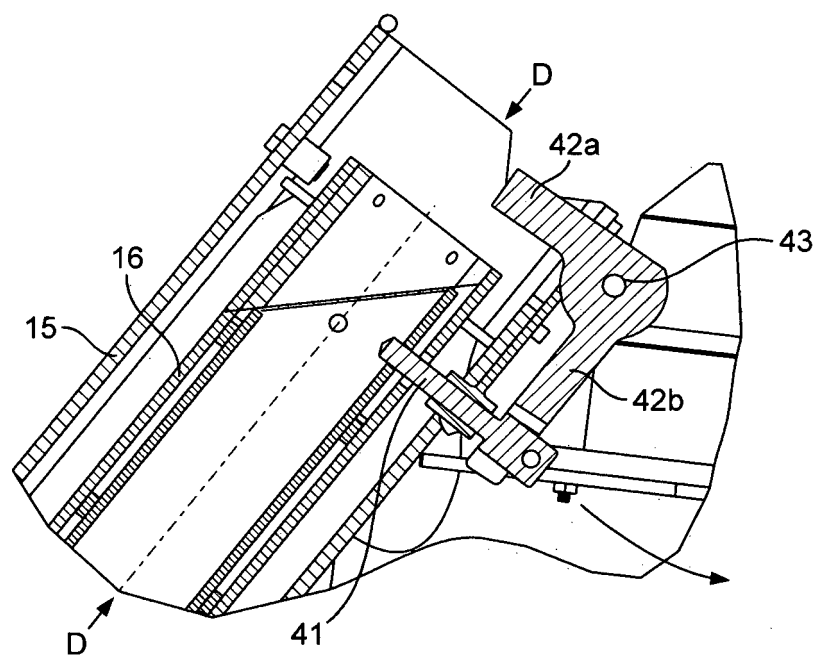


FIG. 10

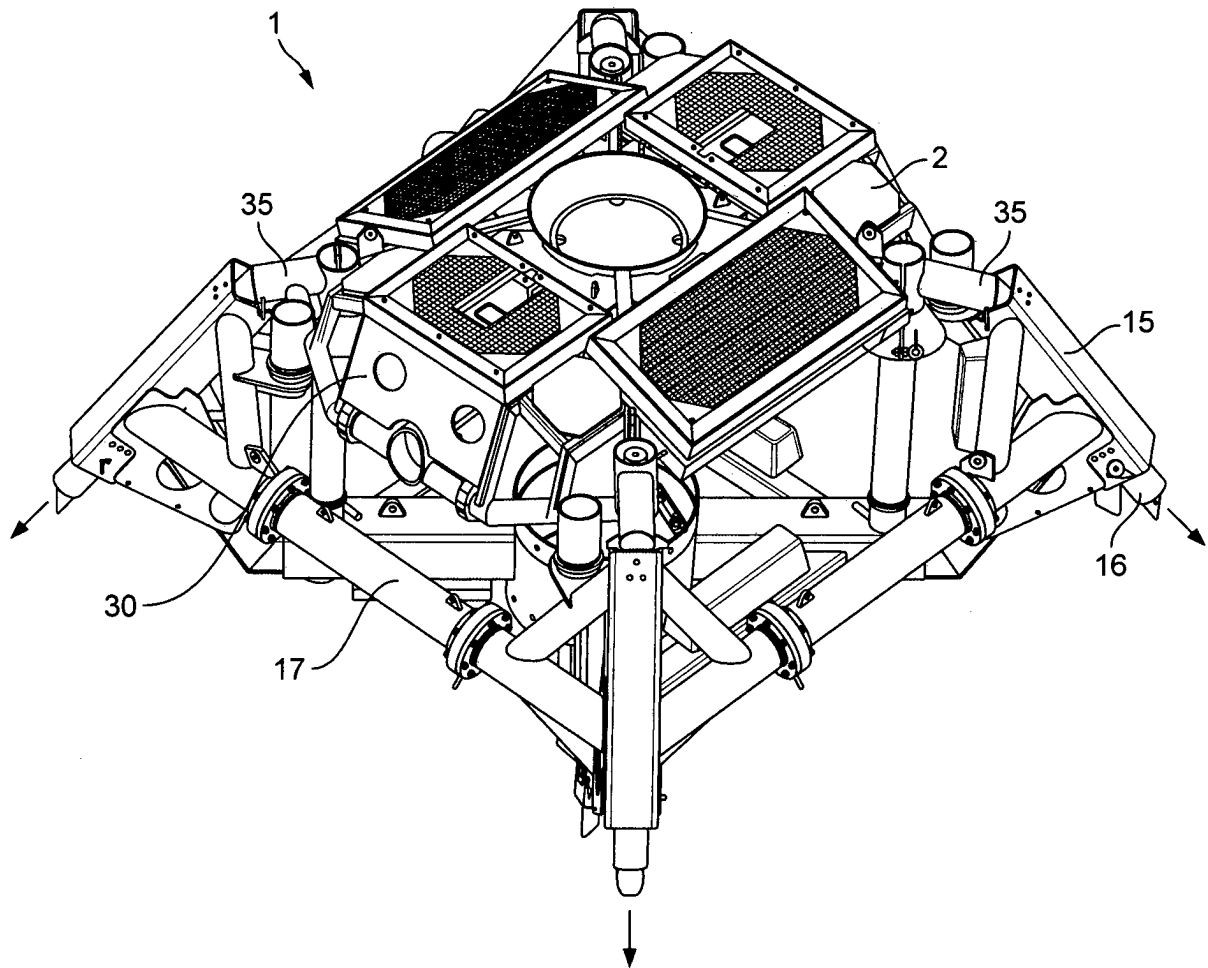


FIG. 11

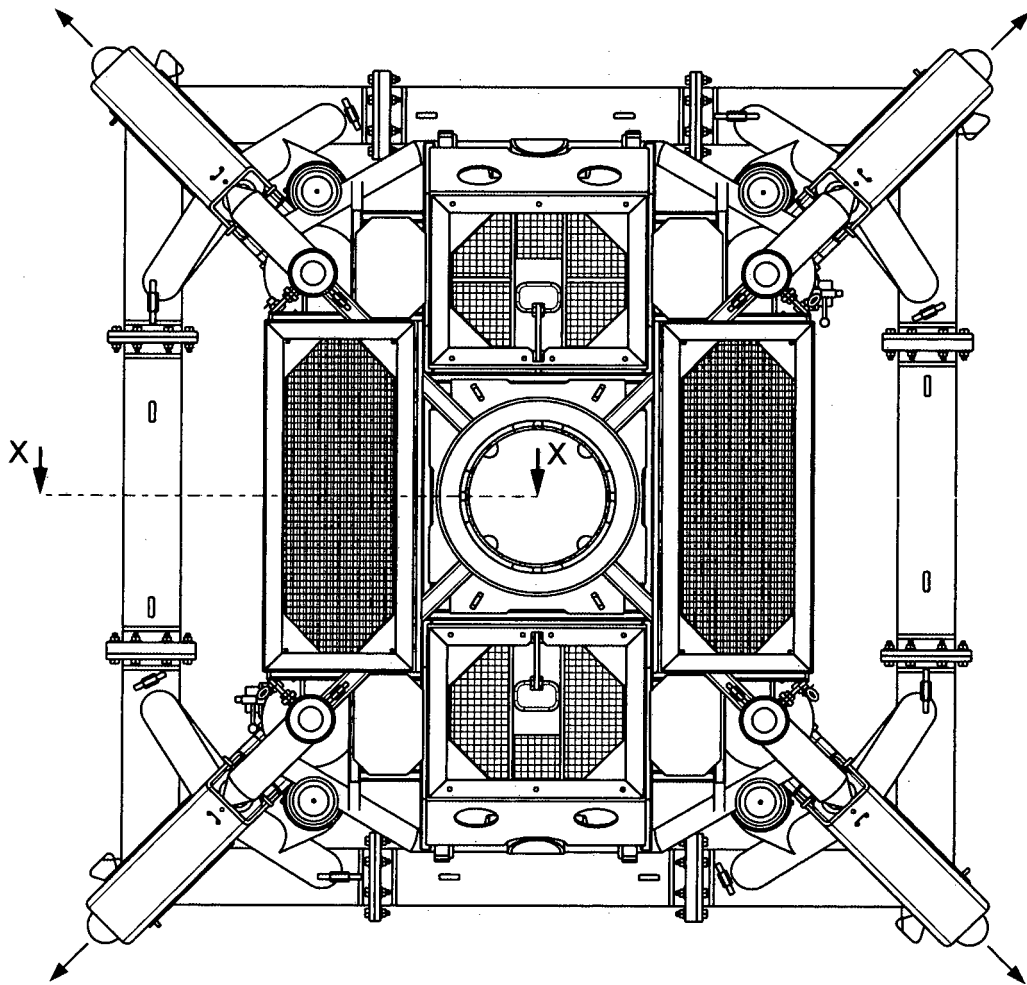


FIG. 12

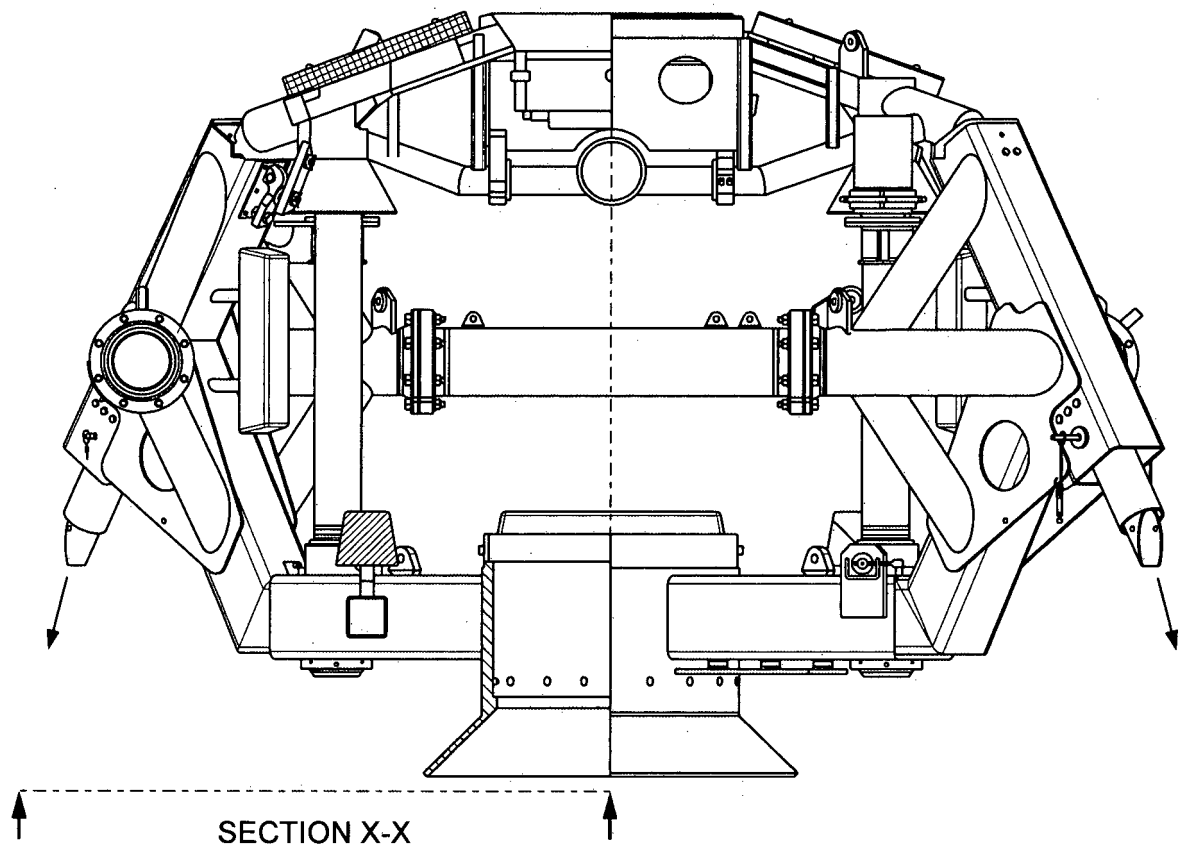
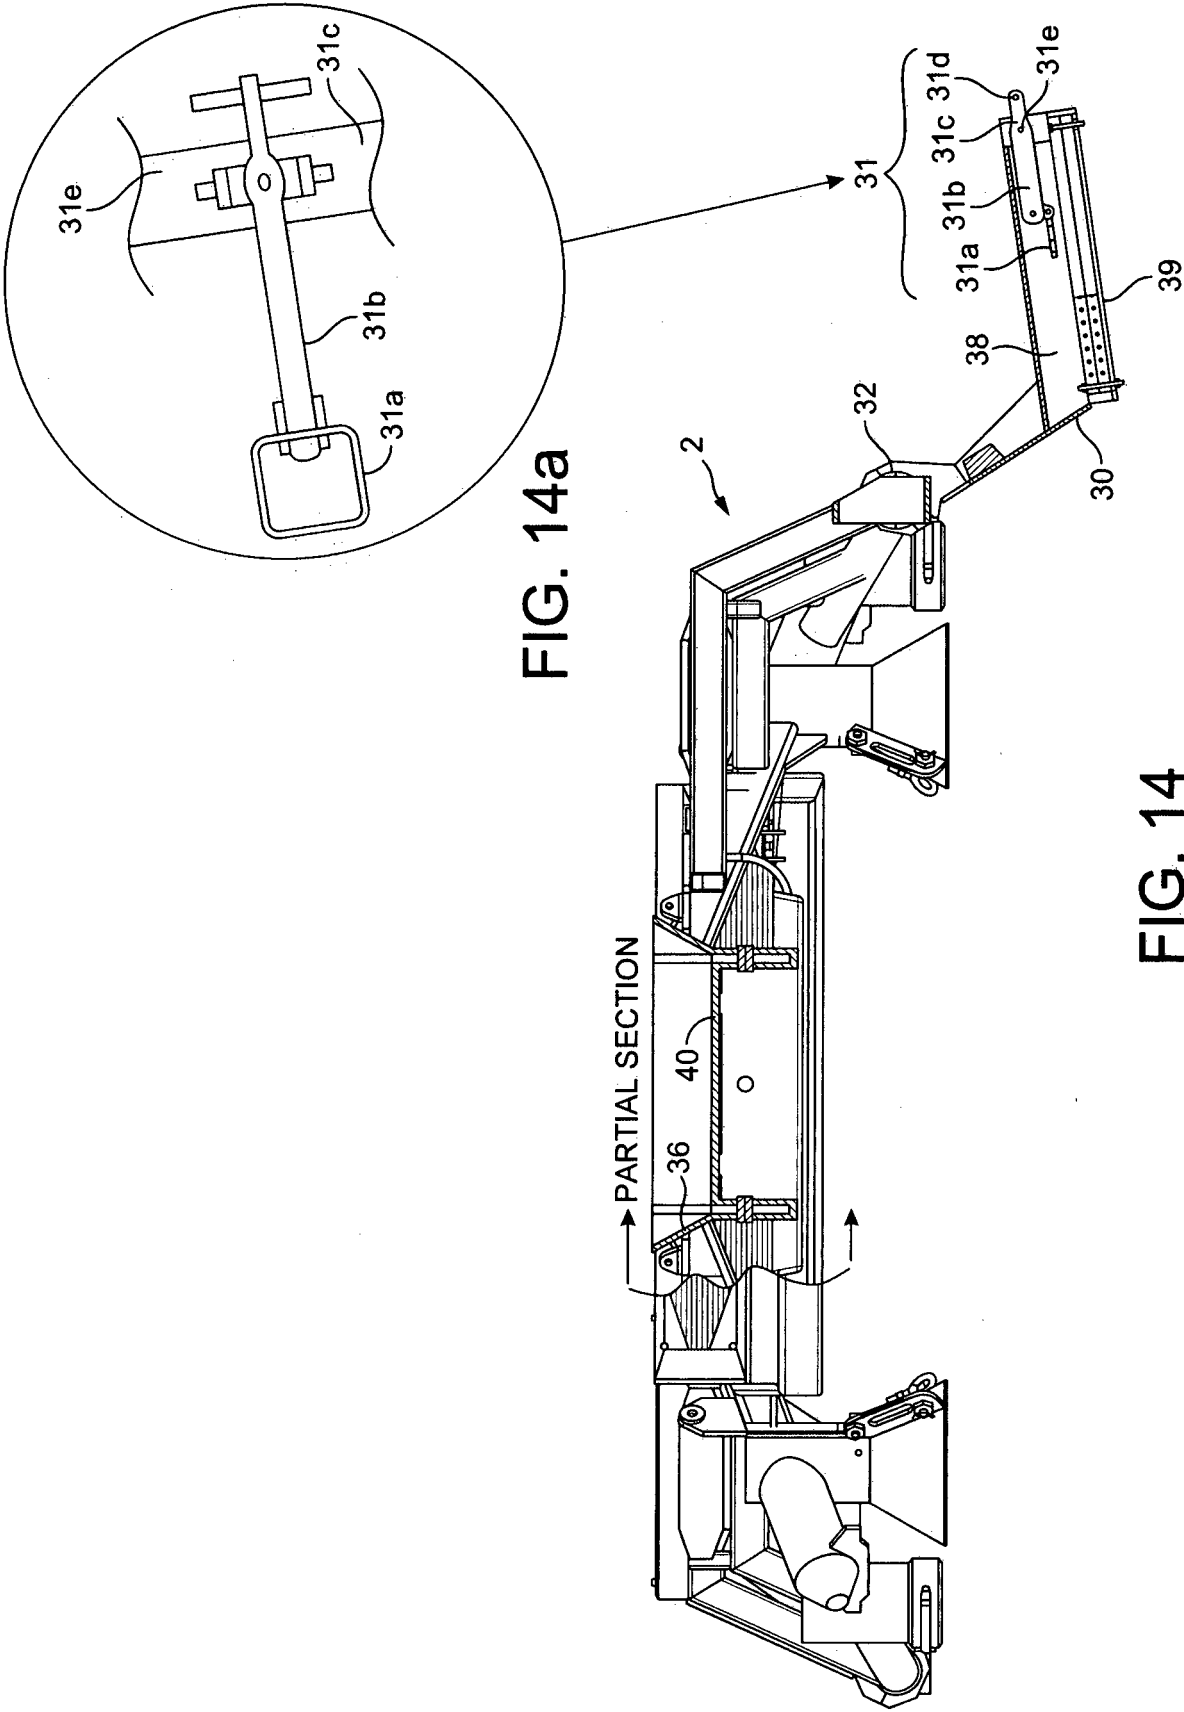


FIG. 13



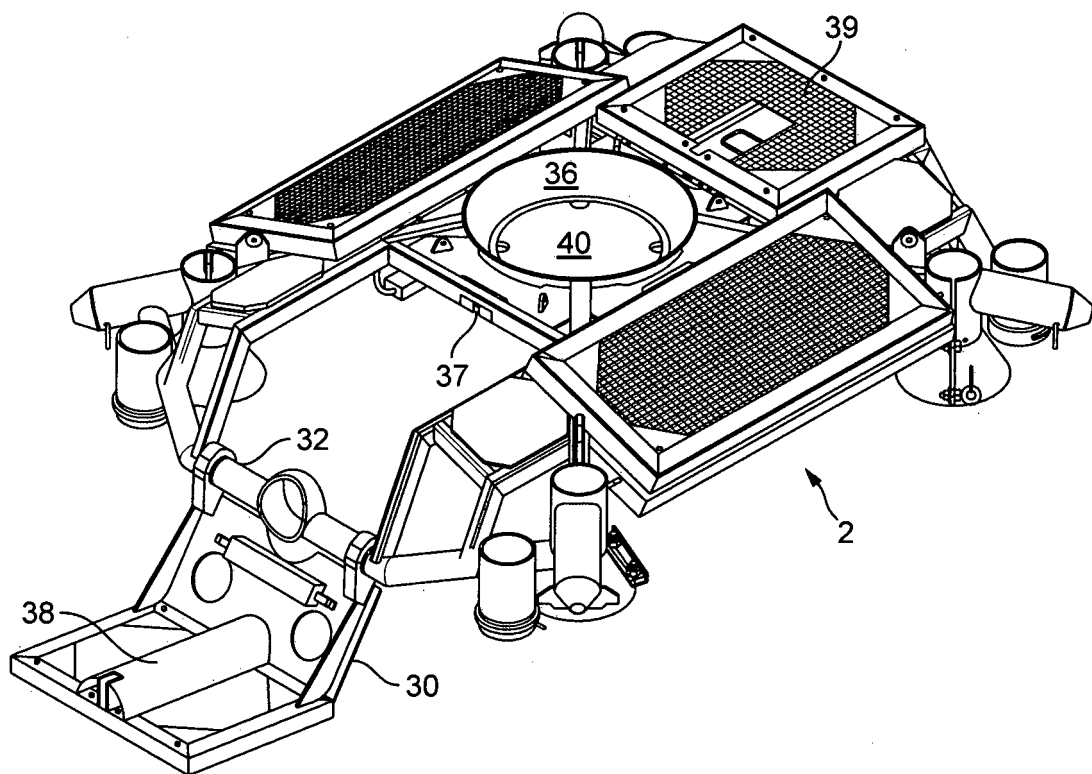


FIG. 15

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 9804805 A1 [0003]