

(19)



(11)

EP 2 632 755 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
13.07.2016 Bulletin 2016/28

(51) Int Cl.:
B60K 6/365 (2007.10) **B60K 6/48** (2007.10)
B60K 6/547 (2007.10) **F16H 3/66** (2006.01)

(21) Application number: **11779532.8**

(86) International application number:
PCT/US2011/058034

(22) Date of filing: **27.10.2011**

(87) International publication number:
WO 2012/058399 (03.05.2012 Gazette 2012/18)

(54) **HYBRID TRANSMISSION**

HYBRIDGETRIEBE

TRANSMISSION HYBRIDE

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **28.10.2010 US 914466**

(43) Date of publication of application:
04.09.2013 Bulletin 2013/36

(73) Proprietor: **FCA US LLC**
Auburn Hills, MI 48326-2766 (US)

(72) Inventors:
• **GRADU, Mircea**
Auburn Hills
MI 48326 (US)
• **MARTIN, Berthold**
Shelby Twp
MI 48316 (US)

(74) Representative: **Studio Torta S.p.A.**
Via Viotti, 9
10121 Torino (IT)

(56) References cited:
US-A1- 2007 034 427 US-A1- 2007 105 678
US-A1- 2007 117 668

EP 2 632 755 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

FIELD

[0001] The present disclosure relates to vehicle transmissions, and more particularly to hybrid vehicle transmissions.

BACKGROUND

[0002] Conventional automatic transmissions include a torque converter that receives torque from an engine and planetary gearsets that receive torque from the torque converter. The planetary gearsets provide various gear ratios of torque and thus, various drive speeds. Transmissions also typically include fluid pressure-operated, multi-plate drive or brake clutches and/or brake bands that are connected to the individual elements of the planetary gearsets to allow shifts between the various gear ratios. In addition, automatic transmissions may also include one-way clutches (i.e., overrunning clutches) that cooperate with the multi-plate clutches to optimize power shift control. Moreover, typical transmissions include a controller for selectively applying and releasing elements to shift the gears.

[0003] An example of an advanced, modular six-speed transmission is disclosed in U.S. Patent Application Publication 2008/031 2022.

[0004] The transmission disclosed in Publication 2008/0312022 improved vehicle performance and fuel economy with a less complex and low cost solution compared to other transmissions known in the art at that time.

[0005] US2007/105678 A1 discloses a hybrid transmission having the features of the preamble of claim 1.

[0006] The present inventors, however, have realized that an improved transmission is desirable to further improve vehicle performance and increase fuel economy.

SUMMARY

[0007] In various example embodiments, the technology described herein provides a multi-speed hybrid transmission for a vehicle as claimed in claim 1. The multi-speed hybrid transmission includes a main gearset connected to a gas combustible engine and providing a first set of torque to an output shaft. The transmission also includes an electric drive unit comprising an electric motor that is selectably connectable to the output shaft to provide additional torque to the output shaft. When connected to the output shaft, the electric drive unit improves vehicle performance under certain driving conditions while also improving fuel efficiency.

[0008] In one form, the present disclosure provides a hybrid transmission that includes a main gearset, an electric drive unit and a controller. The main gearset is connected to an engine via an input shaft. The main gearset includes a plurality of planetary gears and a plurality of shift elements configured to provide torque to an output

shaft. The electric drive unit includes an electric motor that is selectably coupled to the output shaft to provide additional torque to the output shaft. The controller is operably associated with the main gearset and the electric drive unit to cause the transmission to transfer the torque in a first mode of operation and to couple the electric motor to the output shaft to transfer the torque plus the additional torque in a second mode of operation.

[0009] In another form, the present disclosure provides a vehicle powertrain that includes a gas combustible engine and a transmission connected to the engine via an input shaft. The transmission includes a main gearset, an electric drive unit and a controller. The main gearset is connected to the engine via the input shaft and includes a plurality of planetary gears and a plurality of shift elements configured to provide torque to an output shaft. The electric drive unit includes an electric motor that is selectably coupled to the output shaft to provide additional torque to the output shaft. The controller is operably associated with the main gearset and the electric drive unit to cause the transmission to transfer the torque in a first mode of operation and to couple the electric motor to the output shaft to transfer the torque plus the additional torque in a second mode of operation.

[0010] Further areas of applicability of the present disclosure will become apparent from the detailed description provided hereinafter. It should be understood that the detailed description, including disclosed embodiments and drawings, are merely exemplary in nature intended for purposes of illustration only and are not intended to limit the scope of the invention as defined by the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011]

Figure 1 illustrates a vehicle powertrain comprising a hybrid transmission according to the principles of the present disclosure;

Figure 2 is a table illustrating example shift sequences for the hybrid transmission disclosed herein;

Figure 3 illustrates a vehicle powertrain comprising a hybrid transmission according to the principles of the present disclosure;

Figure 4 illustrates a portion of a vehicle hybrid transmission according to the principles of the present disclosure;

Figure 5 illustrates a portion of a vehicle hybrid transmission according to the principles of the present disclosure; and

Figure 6 illustrates a portion of a vehicle hybrid transmission according to the principles of the present disclosure.

DETAILED DESCRIPTION

[0012] Figure 1 illustrates an example vehicle power-

train 10 including a hybrid automatic transmission 12 according to an embodiment described herein. The powertrain 10 also comprises a differential gear 13 operably connected to the transmission 12 through a gearset 15. The transmission 12 includes a torque converter 18 and an input shaft 16 operably connected to a gas combustible engine 14 via the torque converter 18. Torque is transferred from the engine 14 to the input shaft 16 through the torque converter 18.

[0013] The transmission 12 also includes a main box 20 having a main gearset 22 operably associated with the input shaft 16. The main box 20 may be the main box disclosed in U.S. Patent Application Publication 2008/0312022. The illustrated main gearset 22 includes first and second planetary gearsets 30, 32 having an identical number of teeth with respect to each other. The first planetary gearset 30 is a conventional planetary gearset as would be readily understood by one of ordinary skill in the art and includes an annulus gear 30a, at least one planetary gear 30p and a sun gear 30s. The second planetary gearset 32 is also a conventional planetary gearset and includes an annulus gear 32a, at least one planetary gear 32p and a sun gear 32s.

[0014] The main gearset 22 may also have a plurality of hydraulically-actuated engagement or shift elements. These shift elements may include three drive clutches 23, 24, 25, and two brake clutches 26, 27, which may be used to ground one or more gears of the planetary gearsets 30, 32 to the main box 20 housing. The first drive clutch 23 is often referred to as an underdrive (UD) clutch. The second drive clutch 24 is often referred to as an overdrive (OD) clutch. The third drive clutch 25 is often referred to as a reverse (R) clutch. The first brake clutch 26 is often referred to as 2-4 (2-4) clutch. The second brake clutch 27 is often referred to as low-reverse (LR) clutch.

[0015] The vehicle may also include a controller 36 in operable communication with the transmission 12. Although not shown, the transmission 12 could also include a pump operably associated with the controller 36 and a plurality of lines communicated from the pump to the drive and/or braking clutches 23, 24, 25, 26, 27. Other components associated with a conventional transmission may also be included (e.g., transducer, solenoid, etc.), but are not shown or described as they are not necessary to understand the inventive features of the illustrated embodiment. The controller 36 is connected to receive signals generated by an input shaft speed sensor 38, a transfer speed sensor 40 that monitors a speed of rotation of an output of the main gearset 22, and vehicle sensors 44 that monitor other vehicle operating information including vehicle speed and operator input, such as braking and accelerator pedal position. The controller 36 may also be connected to an output shaft speed sensor (not shown), if desired.

[0016] It should be appreciated that the controller 36 can selectively activate the drive and/or braking clutches 23, 24, 25, 26, 27 in any manner. One particular control

scheme is illustrated in Figure 2 and is discussed below in more detail. As is disclosed in U.S. Patent Application Publication 2008/0312022, the controller 36 may apply a given clutch 23, 24, 25, 26, 27 by supplying a signal (e.g., a pulse-width modulated energizing signal) to a solenoid-operated hydraulic fluid supply valve, which in turn controls the amount of torque that can be carried by a given one of the clutches 23, 24, 25, 26, 27. It will be appreciated that the controller chooses the proper gear depending on vehicle conditions such as the shift-program selected by the driver (i.e., Drive, Reverse, Neutral, etc.), the accelerator position, the engine condition, and the vehicle speed. It should also be appreciated that the transmission 12 can have any suitable configuration of shift elements, such as drive clutches and brake clutches, to define the main gearset 22 and selectively achieve a plurality of desired gear ratios with which to drive an output shaft 28 of the transmission.

[0017] The main gearset 22 is connected to the output shaft 28 via gear shaft 52, helical output gear 53, transfer gear 54 and transfer shaft 55. The helical output gear 53 and transfer gear 54 are continuously meshed with each other.

[0018] To further improve vehicle performance under certain circumstances (e.g., high boost in low gear) and to increase fuel economy, an electric drive unit 60 may be coupled to the output shaft 28 to form a hybrid electric/gas transmission. The electric drive unit 60 includes an electric motor 62, which can be a synchronous motor of 20 kW maximum power for 10 seconds and 10 kW continuous power. The field in the synchronous motor is turned off when the motor is not in use to prevent brake torque from reducing fuel economy. The motor 62 is connected, via shaft 72, to a first reduction stage comprising planetary gearset 64. Planetary gearset 64 is a conventional planetary gearset and includes an annulus gear 64a, at least one planetary gear 64p and a sun gear 64s. The sun gear 64s is connected to shaft 72, the annulus gear 64a is grounded and the planetary gear 64p is connected to a second reduction stage via shaft 74.

[0019] The second reduction stage comprises planetary gearset 66, which is a conventional planetary gearset and includes an annulus gear 66a, at least one planetary gear 66p and a sun gear 66s. The sun gear 66s is connected to shaft 74, the annulus gear 66a is grounded and the planetary gear 66p is connected to a high speed coupling device 68 via shaft 76. In Figure 1, a high speed coupling device 68 is illustrated in an engaged position, whereby the output shaft 28 is engaged with shaft 76; in this configuration, the electric drive unit 60 contributes torque to the output shaft 28 as is described below in more detail. When the high speed coupling device 68 is in a disengaged position, the output shaft 28 is decoupled from shaft 76; in this configuration, the electric drive unit 60 does not contribute torque to the output shaft 28.

[0020] Referring also to Figure 2, an example of how the controller 36 automatically controls the transmission 12 is now described. A first gear, having a gear ratio of

2.842 in this example, is achieved when the controller 36 applies the first drive clutch 23 (UD) and the second brake clutch 27 (LR). To switch from first to second gear, having a gear ratio of 1.573 in this example, the controller 36 applies the first brake clutch 26 (2-4) while releasing the second brake clutch 27 (LR) and maintaining the application of the first drive clutch 23 (UD). To switch from second to third gear, having a gear ratio of 1.000 in this example, the controller 36 applies the second drive clutch 24 (OD) while releasing the first brake clutch 26 (2-4) and maintaining the application of the first drive clutch 23 (UD). To switch from third to fourth gear, having a gear ratio of 0.689 in this example, the controller 36 releases the first drive clutch 23 (UD) and applies the first brake clutch 26 (2-4) while maintaining the application of the second drive clutch 24 (OD). To put the transmission in reverse, having a gear ratio of -2.214, the controller 36 applies the third drive clutch 25 (R) and the second brake clutch 27 (LR).

[0021] In a gas mode of operation, the high speed coupling device 68 is disengaged, meaning only torque generated from the engine 14 is provided to the output shaft 28. It should be noted that the controller 36 can engage the high speed coupling device 68 to connect the output shaft 28 to shaft 76 to allow the electric drive unit 60 to contribute torque to the output shaft 28. This results in an electric/gas hybrid mode of operation. In the illustrated embodiment, the engagement of the high speed coupling device 68 will occur in low gear (i.e., gear 1 with ratio 2.842 as illustrated in Figure 2) to provide a boost during this gear. In the illustrated example, power from the engine 14 to the differential 13 is distributed throughout the powertrain 10 as follows. There is 222 Nm output from the engine 14, which is applied to the torque converter 18. The torque on shaft 16 leaving the torque converter 18 is 443 Nm, which is applied through the main box 20. Torque on the gear shaft 52 is 1258 Nm, which becomes 1190 Nm at the transfer shaft 55 (due to the gearing of output gear 53 and transfer gear 54). In the electric drive unit 60, shaft 72 has a torque of 50 Nm, shaft 74 has a torque of 175 Nm and shaft 76 has a torque of 350 Nm. The torque contributions are summed at point A and multiplied by 3.16, which is the ratio of gearset 15. Final torque from the powertrain 10 is 4896 Nm.

[0022] The transmission 12 illustrated in Figure 1 provides several advantages over conventional automatic transmissions. For example, in the electric/gas hybrid mode of operation, the illustrated embodiment combines the torque provided from the electric motor with the input torque maximized by the main box 20 main gearset 22. This combination provides a high boost when the transmission is in low gear. In addition, the electric motor 62 of the electric drive unit 60 increases fuel efficiency by about 15% to about 20% because electric power is being used in certain gears.

[0023] Figure 3 illustrates an example vehicle powertrain 110 including a hybrid automatic transmission 112. according to another embodiment described herein. Sim-

ilar to the Figure 1 powertrain 10, powertrain 110 also comprises a differential gear 13 operably connected to the hybrid automatic transmission 112. In the illustrated embodiment, powertrain 110 components such as the engine 14, input shaft 16, torque converter 18, main box 20, input shaft speed sensor 38, transfer speed sensor 40, and vehicle sensors 44 are substantially the same as the components contained in powertrain 10 (Figure 1). Thus, a description of these components is not provided. The powertrain 110 includes a controller 136, which may be similar to controller 36 of powertrain 10 with the exception that the gearing of the illustrated embodiment is controlled as discussed below.

[0024] The main gearset 22 is connected to an output shaft 128 via a gear shaft 52, helical output gear 53, transfer gear 54 and transfer shaft 55. The helical output gear 53 and transfer gear 54 are continuously meshed with each other.

[0025] To further improve vehicle performance under certain circumstances (e.g., high boost in upper gears) and to increase fuel economy, an electric drive unit 160 is connected the output shaft 128 to form a hybrid electric/gas transmission according to the second embodiment. The electric drive unit 160 includes an electric motor 62, which can be a synchronous motor of 20 kW maximum power for 10 seconds and 10 kW continuous power. The field in the synchronous motor is turned off when the motor is not in use to prevent brake torque from reducing fuel economy. The motor 62 is connected to a reduction stage comprising planetary gearset 164 via shaft 172. Planetary gearset 164 is a conventional planetary gearset and includes an annulus gear 164a, at least one planetary gear 164p and a sun gear 164s. The sun gear 164s is connected to shaft 172, the annulus gear 164a is grounded and the planetary gear 164p is connected to a high speed coupling device 168 via shaft 176.

[0026] In Figure 3, the high speed coupling device 168 is illustrated in an engaged position, whereby the output shaft 128 is engaged with shaft 176; in this configuration, the electric drive unit 160 contributes torque to the output shaft 128 as is described below in more detail. This is the hybrid electric/gas mode of operation. When the high speed coupling device 168 is in a disengaged position, the output shaft 128 is decoupled from shaft 176; in this configuration, the electric drive unit 160 does not contribute torque to the output shaft 128. This is the gas mode of operation.

[0027] It should be noted that the controller 136 can engage the high speed coupling device 168 to connect the output shaft 128 to shaft 176 to allow the electric drive unit 160 to contribute torque to the output shaft 128. In the illustrated embodiment, the engagement of the high speed coupling device 168 will occur in high gears (i.e., gears 3 and 4 with ratios 1.000 and 0.689, respectively, as illustrated in Figure 2) to provide a boost during these gears. In the illustrated example, power from the engine 14 to the differential 13 is distributed throughout the powertrain 110 as follows. There is 100 Nm output from the

engine 14, which is applied to the torque converter 18. Because the torque converter is locked up in this embodiment, the torque on shaft 16 leaving the torque converter 18 is 100 Nm, which is applied through the main box 20. Torque on the gear shaft 52 is 69 Nm, which becomes 65 Nm at the transfer shaft 55 (due to the gearing of output gear 53 and transfer gear 54). In the electric drive unit 160, shaft 172 has a torque of 25 Nm and shaft 176 has a torque of 80 Nm. The torque contributions are summed at point B and multiplied by 3.16, which is the ratio of gearset 15. Final torque from the powertrain 110 is 551 Nm.

[0028] The Figure 3 transmission 112 provides several advantages over conventional automatic transmissions. For example, in the hybrid electric/gas mode, the illustrated embodiment combines the torque provided from an electric motor with the input torque provided by the main box 20 main gearset 22. This combination provides a high boost when the transmission is in higher gears. In addition, the electric motor 162 of the electric drive unit 160 increases fuel efficiency by about 15% to 20% because electric power is being used in certain gears.

[0029] Figure 4 illustrates a portion of a vehicle hybrid transmission 212 in accordance with another embodiment disclosed herein. The transmission 212 includes and electric drive unit 260 connected to an output shaft 228. Output shaft 228 is connected to a transfer shaft 55. Although not shown, a coupling device is also included to selectably couple an electric motor 262 of the electric drive unit 260 to the output shaft 228 when a controller determines that it is beneficial to do so. It should be noted that the other portions of a vehicle powertrain would also be included (such as e.g., differential gear 13, engine 14, gearset 15, input shaft 16, torque converter 18, main box 20, controller 36/136, and sensors 36, 38, 40), but are not shown or described for convenience purposes.

[0030] In the illustrated embodiment, the electric motor 262 is connected, via shaft 272, to a reduction stage comprising planetary gearset 264. Planetary gearset 264 is a conventional planetary gearset and includes an annulus gear 264a, at least one planetary gear 264p and a sun gear 264s. The sun gear 264s is connected to the motor 262 via shaft 272, the annulus gear 264a is connected to output shaft 228 and the planetary gear 264p is connected to a shaft 274, which is connected to the differential gear (not shown).

[0031] Figure 5 illustrates a portion of a vehicle hybrid transmission 312 in accordance with another embodiment disclosed herein. The transmission 312 includes and electric drive unit 360 connected to an output shaft 328. Output shaft 328 is connected to a transfer shaft 55. Although not shown, a coupling device is also included to selectably couple an electric motor 362 of the electric drive unit 360 to the output shaft 328 when a controller determines that it is beneficial to do so. It should be noted that the other portions of a vehicle powertrain would also be included (such as e.g., differential gear 13, engine 14, gearset 15, input shaft 16, torque converter 18, main box

20, controller 36/136, and sensors 36, 38, 40), but are not shown or described for convenience purposes.

[0032] In the illustrated embodiment, the electric motor 362 is connected, via shaft 372, to a reduction stage comprising planetary gearset 364. Planetary gearset 364 is a conventional planetary gearset and includes an annulus gear 364a, at least one planetary gear 364p and a sun gear 364s. The sun gear 364s is connected to output shaft 328, the annulus gear 364a is connected to the motor 362 via shaft 372 and the planetary gear 364p is connected to a shaft 374, which is connected to the differential gear (not shown).

[0033] Figure 6 illustrates a portion of a vehicle hybrid transmission 412 in accordance with another embodiment disclosed herein. The transmission 412 includes and electric drive unit 460 connected to an output shaft 428. Output shaft 428 is connected to a transfer shaft 55. Although not shown, a coupling device is also included to selectably couple an electric motor 462 of the electric drive unit 460 to the output shaft 428 when a controller determines that it is beneficial to do so. It should be noted that the other portions of a vehicle powertrain would also be included (such as e.g., differential gear 13, engine 14, gearset 15, input shaft 16, torque converter 18, main box 20, controller 36/136, and sensors 36, 38, 40), but are not shown or described for convenience purposes. In the illustrated embodiment, the electric motor 462 is directly connected to the output shaft (when the coupling device is engaged). There is no reduction gearset in this embodiment. Output shaft 428 is connected to the differential gear (not shown).

[0034] It should be appreciated that the electric motors 62, 262, 362, 462 can be any electric motor desirable to achieve boost in low gears or desirable to achieve a boost during high gears. All that would be required is for the controller to be programmed/setup appropriately for the motor used and the desired boost scenario.

Claims

1. A hybrid transmission comprising:

a main gearset (22) connected to an engine (14) via an input shaft (16), said main gearset (22) comprising a plurality of planetary gears (30, 32) and a plurality of shift elements (23, 24, 25, 26, 27) configured to provide torque to an output shaft (28; 128; 228; 328);
an electric drive unit (60; 160; 260; 360) comprising an electric motor (62; 262; 362) that is selectably coupled to the output shaft (28; 128; 228; 328) to provide additional torque to the output shaft (28; 128; 228; 328); and
a controller (36; 136) operably associated with the main gearset (22) and the electric drive unit (60; 160; 260; 360) to cause the transmission (12) to transfer the torque in a first mode of op-

eration and to couple the electric motor (62) to the output shaft (28; 128; 228; 328) to transfer the torque plus the additional torque in a second mode of operation,

characterized in that the first mode of operation is a gas mode and the second mode of operation is a hybrid electric/gas mode.

2. The transmission of Claim 1, wherein the electric drive unit (60; 160; 260; 360) comprises at least one gearset (64, 66; 164; 264; 364) and the motor is coupled to the output shaft (28; 128; 228; 328) through the at least one gearset (64, 66; 164; 264; 364).

3. The transmission of Claim 1, wherein the electric drive unit (60) comprises:

a coupling device (68) connected to the output shaft (28);

a first gearset (64) comprising a first sun gear (64s), first planetary gear (64p) and a first annulus gear (64a), the first sun gear (64s) being coupled to the motor (62); and

a second gearset (66) comprising a second sun gear (66s), second planetary gear (66p) and a second annulus gear (66a), the second sun gear (66s) being coupled to the first planetary gear (64p) of the first gearset (64), and the second planetary gear (66p) being coupled to the coupling device (68).

4. The transmission of Claim 3, wherein the controller (36) couples the electric motor (62) to the output shaft (28) when the main gearset (22) is in a low gear.

5. The transmission of Claim 1, wherein the electric drive unit (160) comprises:

a coupling device (168) connected to the output shaft (128); and

a first gearset (164) comprising a first sun gear (164s), first planetary gear (164p) and a first annulus gear (164a), the first sun gear (164s) being coupled to the motor (62) and the first planetary gear (164p) being coupled to the coupling device (168).

6. The transmission of Claim 5, wherein the controller (136) couples the electric motor (62) to the output shaft (128) when the main gearset is in a high gear.

7. The transmission of Claim 1, wherein the electric drive unit (260) comprises:

a first gearset (264) comprising a first sun gear (264s), first planetary gear (264p) and a first annulus gear (264a), the first sun gear (264s) being coupled to the motor (262) and the first annulus

gear (264a) being coupled to the output shaft (228) via a coupling device.

8. The transmission of Claim 1, wherein the electric drive unit (360) comprises:

a first gearset (364) comprising a first sun gear (364s), first planetary gear (364p) and a first annulus gear (364a), the first annulus gear (364a) being coupled to the motor and the first sun gear (364s) being coupled to the output shaft (228) via a coupling device.

Patentansprüche

1. Hybridgetriebe, das Folgendes umfasst:

einen Hauptzahnradatz (22), der mit einer Maschine (14) über eine Eingangswelle (16) verbunden ist, wobei der Hauptzahnradatz (22) eine Mehrzahl von Planetenrädern (30, 32) und eine Mehrzahl von Schaltelementen (23, 24, 25, 26, 27) umfasst, die ausgelegt ist, um Drehmoment zu einer Ausgangswelle (28; 128; 228; 328) bereitzustellen,

eine elektrische Antriebseinheit (60; 160; 260; 360), die einen Elektromotor (62; 262; 362) umfasst, der auswählbar mit der Ausgangswelle (28; 128; 228; 328) gekoppelt ist, um zusätzliches Drehmoment zu der Ausgangswelle (28; 128; 228; 328) bereitzustellen, und

eine Steuervorrichtung (63; 136), die betrieblich mit dem Hauptzahnradatz (22) und der elektrischen Antriebseinheit (60; 160; 260; 360) assoziiert ist, um das Getriebe (12) zu veranlassen, das Drehmoment in einem ersten Betriebsmodus zu übertragen und den Elektromotor (62) mit der Ausgangswelle (28; 128; 228; 328) zu koppeln, um das Drehmoment plus das zusätzliche Drehmoment in einem zweiten Betriebsmodus zu übertragen,

dadurch gekennzeichnet, dass der erste Betriebsmodus ein Gasmodus ist, und dass der zweite Betriebsmodus ein hybrider Elektrisch-/Gasmodus ist.

2. Getriebe nach Anspruch 1, wobei die elektrische Antriebseinheit (60; 160; 260; 360) mindestens einen Zahnradatz (64, 66; 164; 264; 364) umfasst, und dass der Motor mit der Ausgangswelle (28; 128; 228; 328) durch den mindestens einen Zahnradatz (64, 66; 164; 264; 364) gekoppelt ist.

3. Getriebe nach Anspruch 1, wobei die elektrische Antriebseinheit (60) Folgendes umfasst:

- eine Kopplungsvorrichtung (68), die mit der Ausgangswelle (28) verbunden ist,
einen ersten Zahnradsatz (64), der ein erstes Sonnenrad (64s), ein erstes Planetenrad (64p) und ein erstes innenverzahntes Rad (64a) umfasst, wobei das erste Sonnenrad (64s) mit dem Motor (62) gekoppelt ist, und
einen zweiten Zahnradsatz (66), der ein zweites Sonnenrad (66s), ein zweites Planetenrad (66p) und ein zweites innenverzahntes Rad (66a) umfasst, wobei das zweite Sonnenrad (66s) mit dem ersten Planetenrad (64p) des ersten Zahnradsatzes (64) gekoppelt ist, und das zweite Planetenrad (66p) mit der Kopplungsvorrichtung (68) gekoppelt ist.
4. Getriebe nach Anspruch 3, wobei die Steuervorrichtung (36) den Elektromotor (62) mit der Ausgangswelle (28) koppelt, wenn der Hauptzahnradsatz (22) in einem niedrigen Gang ist.
5. Getriebe nach Anspruch 1, wobei die elektrische Antriebseinheit (160) Folgendes umfasst:
- eine Kopplungsvorrichtung (168), die mit der Ausgangswelle (128) verbunden ist, und
einen ersten Zahnradsatz (164), der ein erstes Sonnenrad (164s), ein erstes Planetenrad (164p) und ein erstes innenverzahntes Rad (164a) umfasst, wobei das erste Sonnenrad (164s) mit dem Motor (62) gekoppelt ist und das erste Planetenrad (164p) mit der Kopplungsvorrichtung (168) gekoppelt ist.
6. Getriebe nach Anspruch 5, wobei die Steuervorrichtung (136) den Elektromotor (62) mit der Ausgangswelle (128) koppelt, wenn der Hauptgetriebebesatz in einem höheren Gang ist.
7. Getriebe nach Anspruch 1, wobei die elektrische Antriebseinheit (260) Folgendes umfasst:
- einen ersten Zahnradsatz (264), der ein erstes Sonnenrad (264s), ein erstes Planetenrad (264p) und ein erstes innenverzahntes Rad (264a) umfasst, wobei das erste Sonnenrad (264s) mit dem Motor (262) gekoppelt ist, und das erste innenverzahnte Rad (264a) mit der Ausgangswelle (228) über eine Kopplungsvorrichtung gekoppelt ist.
8. Getriebe nach Anspruch 1, wobei die elektrische Antriebseinheit (360) Folgendes umfasst:
- einen ersten Zahnradsatz (364), der ein erstes Sonnenrad (364s), ein erstes Planetenrad (364p) und ein erstes innenverzahntes Rad (364a) umfasst, wobei das erste innenverzahnte

Rad (364a) mit dem Motor gekoppelt ist, und das erste Sonnenrad (364s) mit der Ausgangswelle (228) über eine Kopplungsvorrichtung gekoppelt ist.

Revendications

1. Transmission hybride, comprenant :

un jeu d'engrenages principal (22) relié à un moteur à combustion (14) par l'intermédiaire d'un arbre d'entrée (16), ledit jeu d'engrenages principal (22) comprenant une pluralité d'engrenages planétaires (30, 32) et une pluralité d'éléments de changement de vitesses (23, 24, 25, 26, 27) configurés de façon à délivrer un couple à un arbre de sortie (28 ; 128 ; 228 ; 328) ;
une unité d'entraînement électrique (60 ; 160 ; 260 ; 360) comprenant un moteur électrique (62 ; 262 ; 362) qui est couplé d'une façon pouvant être sélectionnée à l'arbre de sortie (28 ; 128 ; 228 ; 328) de façon à délivrer un couple additionnel à l'arbre de sortie (28 ; 128 ; 228 ; 328) ; et
un dispositif de commande (36 ; 136) associé de façon opérationnelle au jeu d'engrenages principal (22) et à l'unité d'entraînement électrique (60 ; 160 ; 260 ; 360) de façon à faire transférer le couple par la transmission (12) dans un premier mode de fonctionnement, et à coupler le moteur électrique (62) à l'arbre de sortie (28 ; 128 ; 228 ; 328) pour transférer le couple plus le couple additionnel dans un deuxième mode de fonctionnement,
caractérisée en ce que le premier mode de fonctionnement est un mode à essence et **en ce que** le deuxième mode de fonctionnement est un mode électrique/à essence hybride.

2. Transmission selon la revendication 1, dans laquelle l'unité d'entraînement électrique (60 ; 160 ; 260 ; 360) comprend au moins un jeu d'engrenages (64, 66 ; 164 ; 264 ; 364) et le moteur est couplé à l'arbre de sortie (28 ; 128 ; 228 ; 328) par l'intermédiaire de l'au moins un jeu d'engrenages (64, 66 ; 164 ; 264 ; 364).

3. Transmission selon la revendication 1, dans laquelle l'unité d'entraînement électrique (60) comprend :

un dispositif de couplage (68) relié à l'arbre de sortie (28) ;
un premier jeu d'engrenages (64) comprenant une première roue solaire (64s), un premier engrenage planétaire (64p) et une première couronne dentée (64a), la première roue solaire (64s) étant couplée au moteur (62) ; et

un deuxième jeu d'engrenages (66) comprenant une deuxième roue solaire (66s), un deuxième engrenage planétaire (66p) et une deuxième couronne dentée (66a), la deuxième roue solaire (66s) étant couplée au premier engrenage planétaire (64p) du premier jeu d'engrenages (64), et le deuxième engrenage planétaire (66p) étant couplé au dispositif de couplage (68).

5

4. Transmission selon la revendication 3, dans laquelle le dispositif de commande (36) couple le moteur électrique (62) à l'arbre de sortie (28) lorsque le jeu d'engrenages principal (22) est dans une vitesse basse.

10

15

5. Transmission selon la revendication 1, dans laquelle l'unité d'entraînement électrique (160) comprend :

un dispositif de couplage (168) relié à l'arbre de sortie (128) ; et
un premier jeu d'engrenages (164) comprenant une première roue solaire (164s), un premier engrenage planétaire (164p) et une première couronne dentée (164a), la première roue solaire (164s) étant couplée au moteur (62) et le premier engrenage planétaire (164p) étant couplé au dispositif de couplage (168).

20

25

6. Transmission selon la revendication 5, dans laquelle le dispositif de commande (136) couple le moteur électrique (62) à l'arbre de sortie (128) lorsque le jeu d'engrenages principal est dans une vitesse haute.

30

7. Transmission selon la revendication 1, dans laquelle l'unité d'entraînement électrique (260) comprend :

35

un premier jeu d'engrenages (264) comprenant une première roue solaire (264s), un premier engrenage planétaire (264p) et une première couronne dentée (264a), la première roue solaire (264s) étant couplée au moteur (262) et la première couronne dentée (264a) étant couplée à l'arbre de sortie (228) par l'intermédiaire d'un dispositif de couplage.

40


45

8. Transmission selon la revendication 1, dans laquelle l'unité d'entraînement électrique (360) comprend :

un premier jeu d'engrenages (364) comprenant une première roue solaire (364s), un premier engrenage planétaire (364p) et une première couronne dentée (364a), la première couronne dentée (364a) étant couplée au moteur et la première roue solaire (364s) étant couplée à l'arbre de sortie (228) par l'intermédiaire d'un dispositif de couplage.


50

55

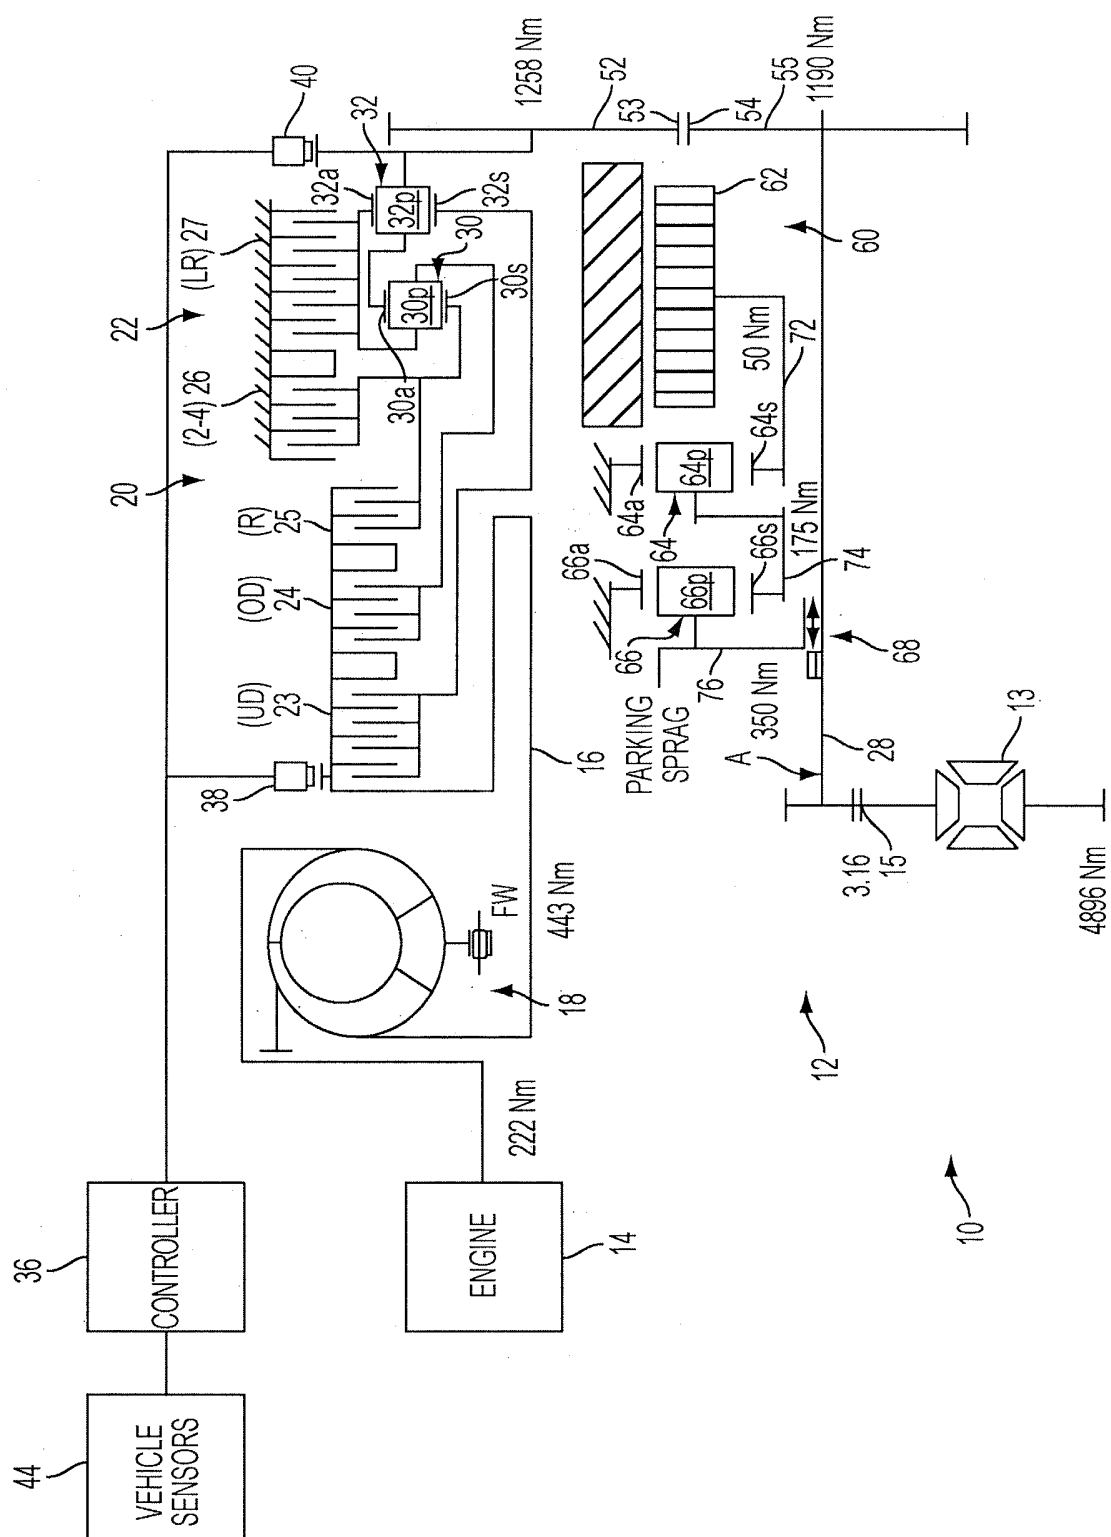

GEAR	RATIO	CLUTCHES APPLIED				
		UD	OD	R	2-4	LR
1	2.842	X				X
2	1.573	X			X	
3	1.000	X	X			
4	0.689		X		X	
R	-2.214			X		X

FIG. 2

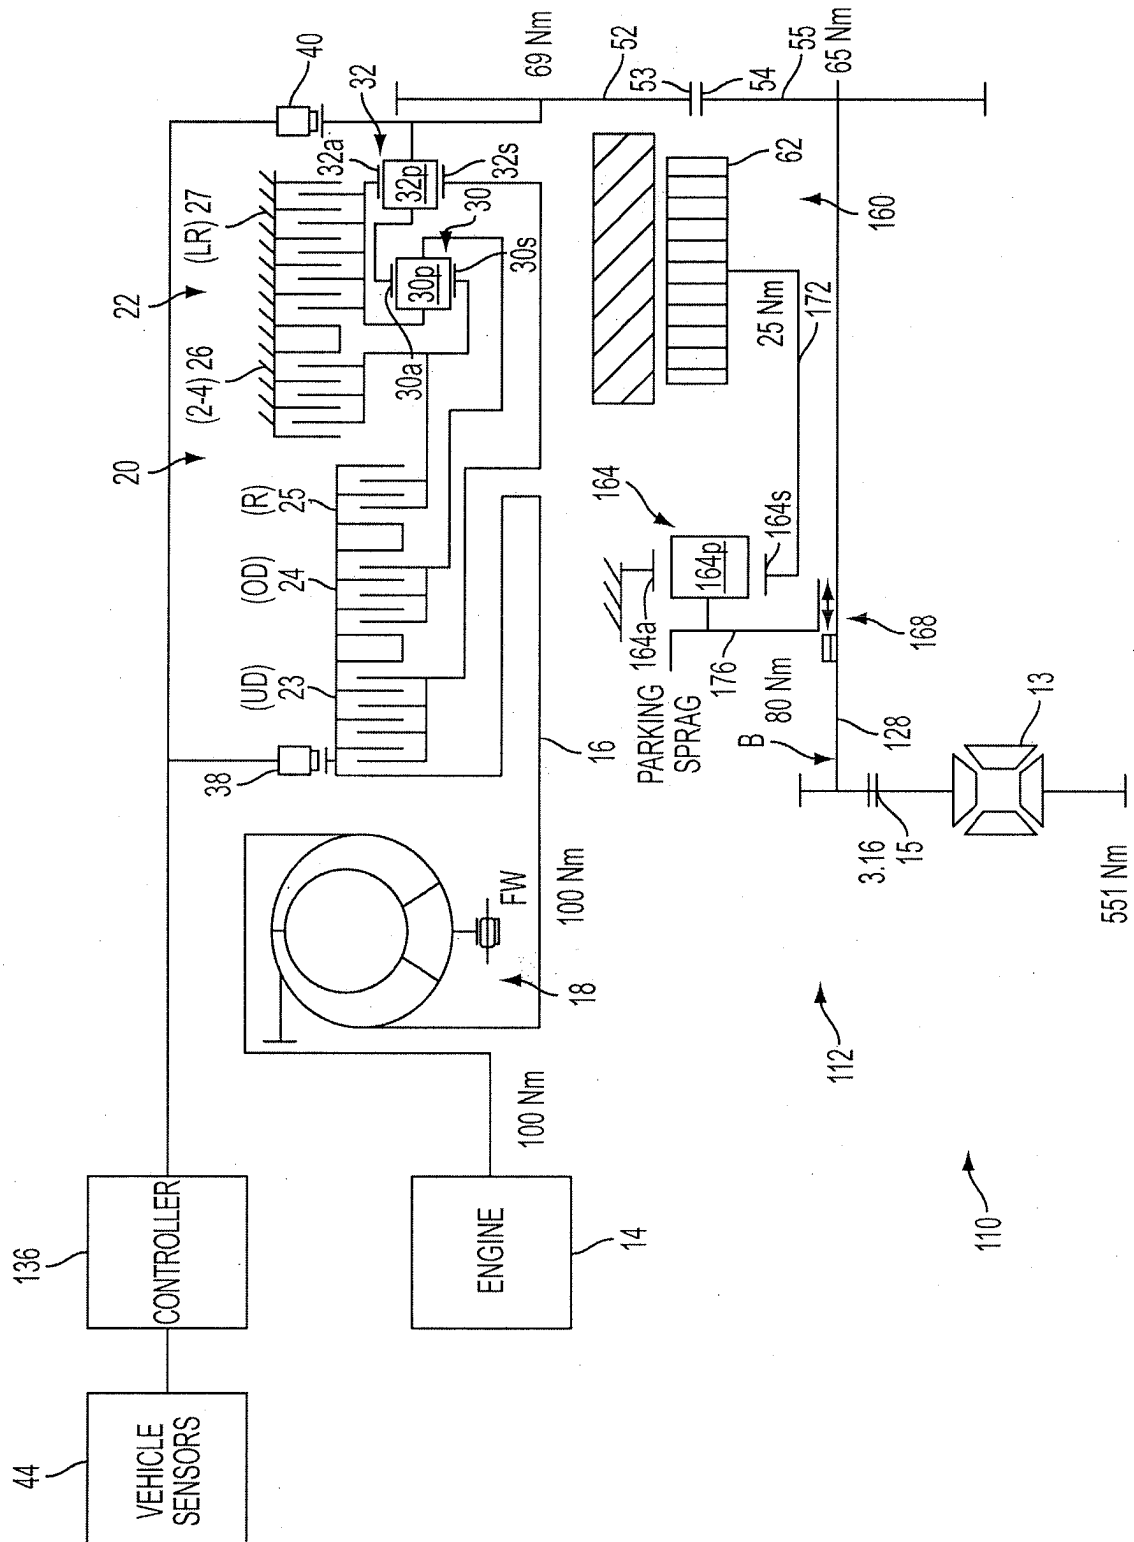

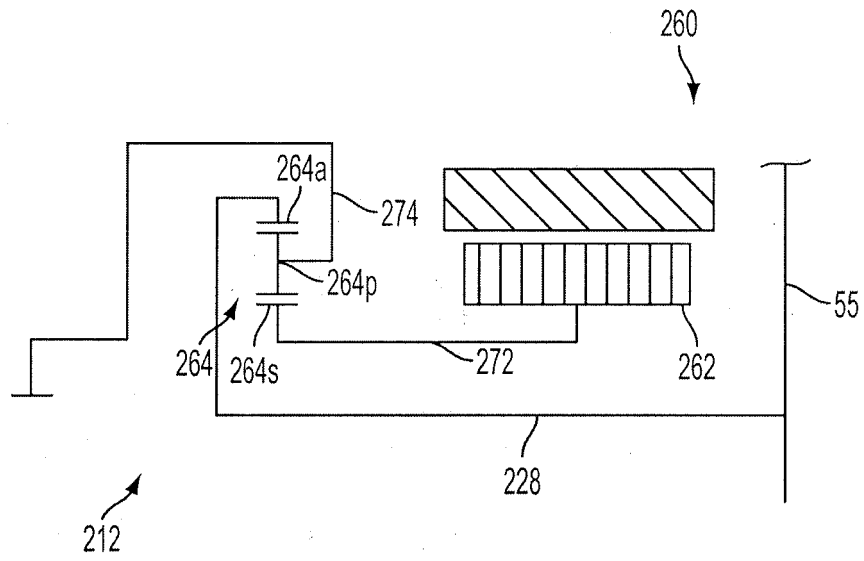


FIG. 4

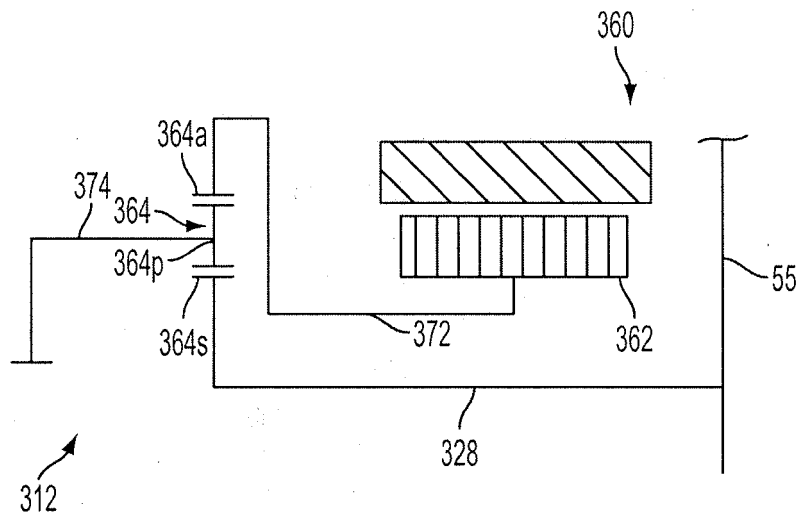


FIG. 5

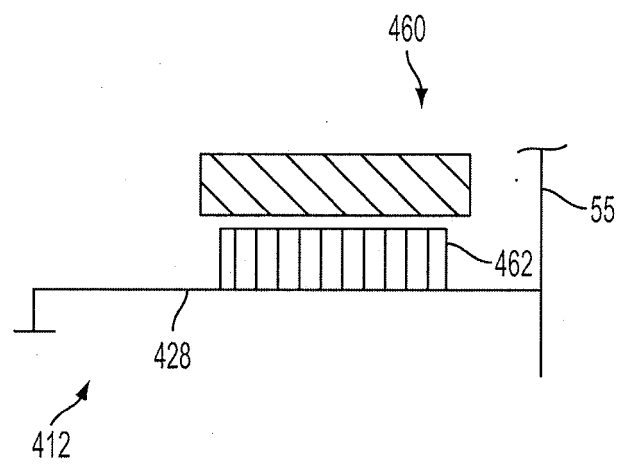


FIG. 6

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20080312022 A [0003] [0004] [0013] [0016]
- US 2007105678 A1 [0005]