



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**02.10.2013 Bulletin 2013/40**

(51) Int Cl.:  
**F21S 9/03** (2006.01) **F21V 23/04** (2006.01)  
**F21K 99/00** (2010.01) **F21Y 101/02** (2006.01)  
**F21Y 103/02** (2006.01)

(21) Application number: **12161411.9**

(22) Date of filing: **27.03.2012**

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**  
Designated Extension States:  
**BA ME**

• **Wang, Yu-Nan**  
**Bade City, Taoyuan County 334 (TW)**


(72) Inventor: **Wang, Yu-Nan**  
**Taoyuan County 334 (TW)**

(74) Representative: **Bonvicini, Davide et al**  
**Perani & Partners**  
**Patent**  
**Piazza San Babila, 5**  
**20122 Milano (MI) (IT)**

(71) Applicants:  
• **Chang, Jacky**  
**Taoyuan City, Taoyuan County 330 (TW)**

(54) **Omni-directional light radiation lamp and illumination system**

(57) An omni-directional light radiation lamp (10) and an omni-directional light radiation illumination system are applied in a standard lamp socket that supplies standard utility power. The omni-directional light radiation lamp (10) includes a base (12), a circular lamp body (14), a support module (16) and an annular lamp cover (18). The base (12) has a plurality of electrode plates (122), and the circular lamp body (14) has a plurality of omni-directional light emitting diodes (142), and the omni-directional light emitting diodes (142) are coupled to the electrode plate (122), and the support module (16) is disposed on the base (12) for carrying the circular lamp body (14), and the annular lamp cover (18) is covered on the circular lamp body (14). Several omni-directional light radiation lamps can be stacked and connected in series with one another to selectively adjust the illumination brightness, or further combined with a power controller to perform a smart illumination control of the lamp.

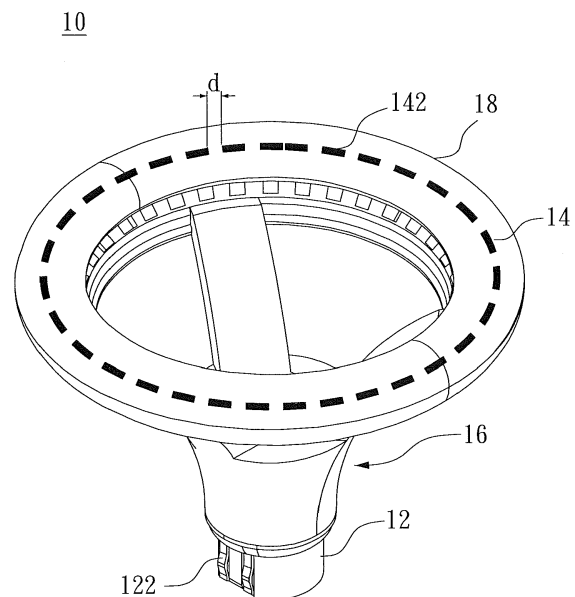

**FIG. 1**

## Description

### FIELD OF THE INVENTION

[0001] The present invention relates to a lamp and an illumination system, in particular to the omni-directional light radiation lamp and the omni-directional light radiation illumination system that can stack and combine the omni-directional light radiation lamps to meet a user's requirement of illumination brightness and perform a smart brightness adjustment of the lamp by using a power controller.

### BACKGROUND OF THE INVENTION

[0002] In recent years, green optoelectronic industry blooms. As the light emitting performance of light emitting diodes is enhanced significantly, the light emitting diodes gradually replace conventional light bulbs and serve as novel green illumination lamps. Particularly, high-directionality and high-power light emitting diodes become increasingly popular and are used extensively in different areas.

[0003] However, the light emitting diodes generate a large quantity of heat in the high-power light emission, so that the green illumination lamps with the light emitting diodes require a large-area heat dissipation structure to dissipate the generated heat, but such large heat dissipation structure imposes a substantial limitation on the design of the green illumination lamp.

[0004] Therefore, the present invention provides an omni-directional light radiation lamp and an omni-directional light radiation illumination system to overcome the drawbacks of the prior art.

### SUMMARY OF THE INVENTION

[0005] It is a primary objective of the present invention to provide an omni-directional light radiation lamp connectable to a standard lamp socket that supplies standard utility power.

[0006] Another objective of the present invention is to stack several of the aforementioned lamps to achieve the effect of adjusting the brightness by a user according to the user's illumination requirement.

[0007] Another objective of the present invention is to add a control unit and a wireless communication unit to the aforementioned lamp, wherein the power controller is provided for performing a wireless smart brightness control of the lamp.

[0008] Another objective of the present invention is to add a thermoelectric conversion layer and/or a solar conversion layer to the aforementioned lamp for converting heat energy and light energy produced by the lamp into electric energy for the use by the lamp.

[0009] Another objective of the present invention is to stack and combine a plurality of omni-directional radiation illumination systems by users to achieve the effect

of adjusting the required illumination brightness flexibly.

[0010] To achieve the aforementioned and other objectives, the present invention provides an omni-directional radiation lamp applied to a standard lamp socket that supplies standard utility power. The omni-directional radiation lamp comprises a base, a circular lamp body, a support module and an annular lamp cover. Wherein, the base has a plurality of electrode plates; the circular lamp body has a plurality of omni-directional light emitting diodes electrically coupled to one another by a series circuit and separated with a distance apart from one another, and the omni-directional light emitting diodes are coupled to the electrode plate; the support module is comprised of a plurality of support pillars, a support ring and a carrying platform, and an end of each of the support pillars is disposed at the base, and the other end of each of the support pillars is disposed at the support ring, and the support pillars are separated by an angle through the base and the support ring; the carrying platform is disposed at the external periphery of the support ring for carrying the circular lamp body; and the annular lamp cover forms a containing space and is installed at the support ring for disposing the carrying platform in the containing space.

[0011] To achieve the aforementioned and other objectives, the present invention further provides an omni-directional radiation illumination system comprising a plurality of omni-directional light radiation lamps and power supply modules. Wherein, each of the omni-directional light radiation lamps comprises a base, a circular lamp body, a support module and an annular lamp cover. Wherein, the base has a plurality of electrode plates; the circular lamp body has a plurality of omni-directional light emitting diodes electrically coupled to one another by a series circuit, and the omni-directional light emitting diodes are separated with a distance apart from one another, and the omni-directional light emitting diodes are coupled to the electrode plate; the support module is comprised of a plurality of support pillars, a support ring and a carrying platform, and an end of each of the support pillars is disposed at the base, and the other end of each of the support pillars is disposed at the support ring, and the support pillars are separated from each other by an angle through the base and the support ring, and the carrying platform is disposed at the external periphery of the support ring for carrying the circular lamp body; and the annular lamp cover forms a containing space and is installed at the support ring for disposing the carrying platform in the containing space; the power supply module is electrically coupled to the omni-directional light radiation lamps, and the power supply module is coupled to a standard lamp socket that supplies standard utility power in order to supply electric energy required by the omni-directional light radiation lamps. The power supply module further includes an electric connection unit and a voltage conversion unit, and the power supply module is coupled to the base, and the electric connection unit is coupled to the standard lamp socket, and the voltage

conversion unit is coupled to the electrode plates.

**[0012]** Compared with the prior art, the omni-directional light radiation lamp and illumination system of the present invention assemble the low-power omni-directional packaged light emitting diodes into a 3D light emitting source with low heat source and omni-directionality, and then transparent support module and annular lamp cover are combined to produce a light radiation with an angle coverage of 360 degrees. In addition, the present invention converts the heat energy and light energy produced by the lamp body and/or an external light source into electric energy by the thermoelectric conversion layer and the solar conversion layer so as to drive another omni-directional light radiation lamp to increase its light intensity. The present invention further provides a power controller to control the lamp body in order to achieve a smart illumination control and a power saving effect of the lamp. The electric power required by the power controller can come from a power source with the electric energy converted by the thermoelectric conversion layer and the solar conversion layer.

#### BRIEF DESCRIPTION OF THE DRAWINGS

**[0013]** FIG. 1 is a schematic structural view of an omni-directional light radiation lamp in accordance with a first preferred embodiment of the present invention;

**[0014]** FIG. 2 is a schematic structural view of a circular lamp body as depicted in FIG. 1;

**[0015]** FIG. 3 is a schematic structural view of a support pillar as depicted in FIG. 1;

**[0016]** FIG. 4 is a schematic structural view of an omni-directional light radiation lamp in accordance with a second preferred embodiment of the present invention;

**[0017]** FIG. 5 is a schematic structural view of an omni-directional light radiation lamp in accordance with a third preferred embodiment of the present invention; and

**[0018]** FIG. 6 is a schematic system view of an omni-directional radiation illumination system in accordance with a preferred embodiment of the present invention.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

**[0019]** The objects, characteristics and effects of the present invention will become apparent with the detailed description of the preferred embodiments and the illustration of related drawings as follows.

**[0020]** With reference to FIG. 1 for a schematic structural view of an omni-directional light radiation lamp in accordance with the first preferred embodiment of the present invention, the omni-directional light radiation lamp 10 is applied to a standard lamp socket that supplies standard utility power. Wherein, the omni-directional light radiation lamp 10 comprises a base 12, a circular lamp body 14, a support module 16 and an annular lamp cover 18.

**[0021]** The base 12 has a plurality of electrode plates

122, wherein the base 12 of this preferred embodiment is a hollow cone, and the hollow cone is provided for stacking and combining a plurality of omni-directional light radiation lamps. When the omni-directional light radiation lamps are stacked and combined, the electrode plates 122 of the omni-directional light radiation lamps in the base are electrically coupled to one another.

**[0022]** The circular lamp body 14 is comprised of a plurality of omni-directional light emitting diodes 142. Wherein, the omni-directional light emitting diodes 142 are electrically connected by a series circuit, and the omni-directional light emitting diodes 142 are separated with a distance  $d$  apart from one another, and the omni-directional light emitting diodes 142 are coupled to the electrode plate 122. In a preferred embodiment, the omni-directional light emitting diodes 142 are arranged equidistantly on the circumference of the circular lamp body 14. In addition, the omni-directional light emitting diodes 142 form a point light source of a light radiation with an angle coverage of 360 degrees.

**[0023]** The support module 16 is comprised of a plurality of support pillars 162, a support ring 164 and a carrying platform 166. An end of each support pillar 162 is disposed at the base 12, and the other end of each support pillar 162 is disposed at the support ring 164. The support pillars 162 are separated by an angle  $\theta$  through the base 12 and the support ring 164. The carrying platform 166 is disposed at the external periphery of the support ring 164 for carrying the circular lamp body 14 as shown in FIG. 2.

**[0024]** In this preferred embodiment, three support pillars 162 are used, and the angle  $\theta$  that separates the support pillars 162 is equal to 120 degrees. Wherein, the support pillars 162, the support ring 164 and the carrying platform 166 are made of a transparent, translucent or opaque blasted glass material. In addition, the support ring 164 has a radius greater than the radius of the base 12, so that the support pillars 162 can be coupled to the base 12 and the support ring 164 with an arc.

**[0025]** The annular lamp cover 18 forms a containing space 182, and the circular lamp cover 18 is mounted onto the support ring 164 for containing the carrying platform 166 in the containing space 182 as shown in FIG. 3. Wherein, the circular lamp cover 18 is made of a transparent, translucent or opaque blasted glass material.

**[0026]** With reference to FIG. 4 for a schematic structural view of an omni-directional light radiation lamp in accordance with the second preferred embodiment of the present invention, the omni-directional light radiation lamp 10' also comprises the base 12, the circular lamp body 14, the support module 16 and the annular lamp cover 18, and the difference between this preferred embodiment and the previous preferred embodiment resides on that the omni-directional light radiation lamp 10' further comprises a thermoelectric conversion layer 20, a solar conversion layer 22 and an energy storage unit 24.

**[0027]** The thermoelectric conversion layer 20 is disposed between the circular lamp body 14 and the carrying

platform 166 and used for converting heat energy generated by the circular lamp body 14 into electric energy. For example, the thermoelectric conversion layer 20 is a film thermoelectric generator with the Seebeck effect. The solar conversion layer 22 is disposed on the base 12 and/or the support pillars 162 and used for converting light energy radiated from the omni-directional light emitting diodes 142 into electric energy. For example, the solar conversion layer 22 is a film solar cell, a spherical micro solar cell or a paper battery. The energy storage unit 24 is coupled to the thermoelectric conversion layer 20 and the solar conversion layer 22 for storing the electric energy.

**[0028]** With reference to FIG. 5 for a schematic structural view of an omni-directional light radiation lamp in accordance with the third preferred embodiment of the present invention, the omni-directional light radiation lamp 10" also comprises the base 12, the circular lamp body 14, the support module 16, the annular lamp cover 18, the thermoelectric conversion layer 20, the solar conversion layer 22 and the energy storage unit 24, and the difference between this preferred embodiment and the previous preferred embodiment resides on that the omni-directional light radiation lamp 10" further comprises a control unit 26, a wireless communication unit 28, a power supply module 30 and a power controller 32.

**[0029]** The control unit 26 and the wireless communication unit 28 are coupled to the energy storage unit 24 for using the electric energy. Wherein, the wireless communication unit 28 is provided for receiving a control signal CS from the power controller 32 and the control unit 26 adjusts the brightness of the omni-directional light emitting diodes 142 and controls the omni-directional light emitting diodes 142 to enter into an ON or OFF state according to the control signal CS.

**[0030]** The power supply module 30 further comprises an electric connection unit and a voltage conversion unit, and the power supply module 30 is coupled to the base 12, and the electric connection unit is provided for connecting the standard lamp socket, and the voltage conversion unit is coupled to the electrode plates 122.

**[0031]** The power controller 32 is provided for generating the control signal CS to adjust the brightness of the omni-directional light emitting diodes 142 and controls the ON/OFF state.

**[0032]** With reference to FIG. 6 for a schematic system view of an omni-directional radiation illumination system in accordance with a preferred embodiment of the present invention, the omni-directional radiation illumination system 40 comprises a plurality of the aforementioned omni-directional light radiation lamps 10 and a power supply module 30. Wherein, several omni-directional light radiation lamp 10 can be stacked and combined, and the power supply module 30 is electrically coupled to the omni-directional light radiation lamps 10, and the power supply module 30 is combined with a standard lamp socket that supplies standard utility power in order to supply electric energy required by the omni-

directional light radiation lamps 10.

**[0033]** In addition, the omni-directional radiation illumination system 40 further comprises the control unit 26, the wireless communication unit 28 and the energy storage unit 24, and these units 16, 28, 24 are installed in the power supply module 30. Wherein, the wireless communication unit 28 is provided for receiving a control signal CS from the power controller 32 and the control unit 26 adjusts the brightness of the omni-directional light emitting diodes 142 and controls the omni-directional light emitting diodes 142 to enter into an ON or OFF state according to the control signal CS. The control signal CS generated by the power controller 32 is received to control the omni-directional light emitting diodes 142 to enter into an ON or OFF state.

**[0034]** Therefore, the omni-directional light radiation lamp and illumination system in accordance with the present invention assemble the low-power omni-directional packaged light emitting diodes into a 3D light emitting source with low heat source and omni-directionality, and then transparent support module and annular lamp cover are combined to produce a light radiation with an angle coverage of 360 degrees. In addition, the present invention converts the heat energy and light energy produced by the lamp body and/or an external light source into electric energy by the thermoelectric conversion layer and the solar conversion layer, so as to drive another omni-directional light radiation lamp to increase its light intensity. The present invention further provides a power controller to control the lamp body in order to achieve a smart illumination control and a power saving effect of the lamp. The electric power required by the power controller can come from a power source with the electric energy converted by the thermoelectric conversion layer and the solar conversion layer.

**[0035]** While the invention has been described by means of specific embodiments, numerous modifications and variations could be made thereto by those skilled in the art without departing from the scope and spirit of the invention set forth in the claims.

## Claims

1. An omni-directional light radiation lamp, applied to a standard lamp socket that supplies standard utility power, comprising:

a base, having a plurality of electrode plates;  
a circular lamp body, having a plurality of omni-directional light emitting diodes electrically coupled to one another by a series circuit and separated with a distance apart from one another, and the omni-directional light emitting diodes being coupled to the electrode plate;  
a support module, comprised of a plurality of support pillars, a support ring and a carrying platform, and an end of each of the support pillars

- being disposed at the base, and the other end of each of the support pillars being disposed at the support ring, and the support pillars being separated by an angle through the base and the support ring, and the carrying platform being disposed at the external periphery of the support ring for carrying the circular lamp body; and an annular lamp cover, forming a containing space, and being installed at the support ring for disposing the carrying platform in the containing space.
2. The omni-directional light radiation lamp of claim 1, further comprising a thermoelectric conversion layer disposed between the circular lamp body and the carrying platform for converting heat energy generated by the circular lamp body into electric energy.
  3. The omni-directional light radiation lamp of claim 2, wherein the thermoelectric conversion layer is a film thermoelectric generator with the Seebeck effect.
  4. The omni-directional light radiation lamp of claim 1, further comprising a solar conversion layer disposed on at least one of the base and the support pillars, and the solar conversion layer being provided for converting light energy radiated from the omni-directional light emitting diodes into electric energy.
  5. The omni-directional light radiation lamp of claim 4, wherein the solar conversion layer is a film solar cell, a spherical micro solar cell or a paper battery.
  6. The omni-directional light radiation lamp of claim 2, further comprising an energy storage unit for storing the electric energy.
  7. The omni-directional light radiation lamp of claim 4, further comprising an energy storage unit for storing the electric energy.
  8. The omni-directional light radiation lamp of claim 6, further comprising a control unit and a wireless communication unit, both coupled to the energy storage unit, and the wireless communication unit being provided for receiving a control signal, and the control unit being provided for adjusting the brightness of the omni-directional light emitting diodes and controlling the omni-directional light emitting diodes to enter into an ON or OFF state according to the control signal.
  9. The omni-directional light radiation lamp of claim 7, further comprising a control unit and a wireless communication unit, both coupled to the energy storage unit, and the wireless communication unit being provided for receiving a control signal, and the control unit being provided for adjusting the brightness of the omni-directional light emitting diodes and controlling the omni-directional light emitting diodes to enter into an ON or OFF state according to the control signal.
  10. The omni-directional light radiation lamp of claim 8, further comprising a power controller provided for generating the control signal, and connecting to the wireless communication unit through a wireless communication technology to transmit the control signal to the wireless communication unit.
  11. The omni-directional light radiation lamp of claim 9, further comprising a power controller provided for generating the control signal, and connecting to the wireless communication unit through a wireless communication technology to transmit the control signal to the wireless communication unit.
  12. The omni-directional light radiation lamp of claim 1, further comprising a power supply module, having an electric connection unit and a voltage conversion unit, and the power supply module being coupled to the base, and the electric connection unit being coupled to the standard lamp socket, and the voltage conversion unit being coupled to the electrode plates.
  13. The omni-directional light radiation lamp of claim 1, wherein the base is a hollow cone, and after the electrode plates are installed in the hollow cone and stacked and combined with the plurality of bases, the electrode plates are electrically coupled to one another.
  14. An omni-directional radiation illumination system, comprising:
    - a plurality of omni-directional light radiation lamps, each comprising:
      - a base, having a plurality of electrode plates;
      - a circular lamp body, having a plurality of omni-directional light emitting diodes electrically coupled to one another by a series circuit, and the omni-directional light emitting diodes being separated with a distance apart from one another, and the omni-directional light emitting diodes being coupled to the electrode plate;
      - a support module, comprised of a plurality of support pillars, a support ring and a carrying platform, and an end of each of the support pillars being disposed at the base, and the other end of each of the support pillars being disposed at the support ring, and the support pillars being separated from

each other by an angle through the base and the support ring, and the carrying platform being disposed at the external periphery of the support ring for carrying the circular lamp body; and 5  
an annular lamp cover, forming a containing space, and being installed at the support ring for disposing the carrying platform in the containing space;  
a power supply module, electrically coupled 10  
to the omni-directional light radiation lamps, and the power supply module being coupled to a standard lamp socket that supplies standard utility power in order to supply 15  
electric energy required by the omni-directional light radiation lamps.

15. The omni-directional light radiation lamp of claim 14, further comprising a control unit and a wireless communication unit, and the wireless communication 20  
unit being provided for receiving a control signal, and the control unit being provided for adjusting the brightness of the omni-directional light emitting diodes and controlling the omni-directional light emitting 25  
diodes to enter into an ON or OFF state according to the control signal.
16. The omni-directional light radiation lamp of claim 15, further comprising a power controller provided for 30  
generating the control signal, and connecting to the wireless communication unit through a wireless communication technology to transmit the control signal to the wireless communication unit.

35

40

45

50

55

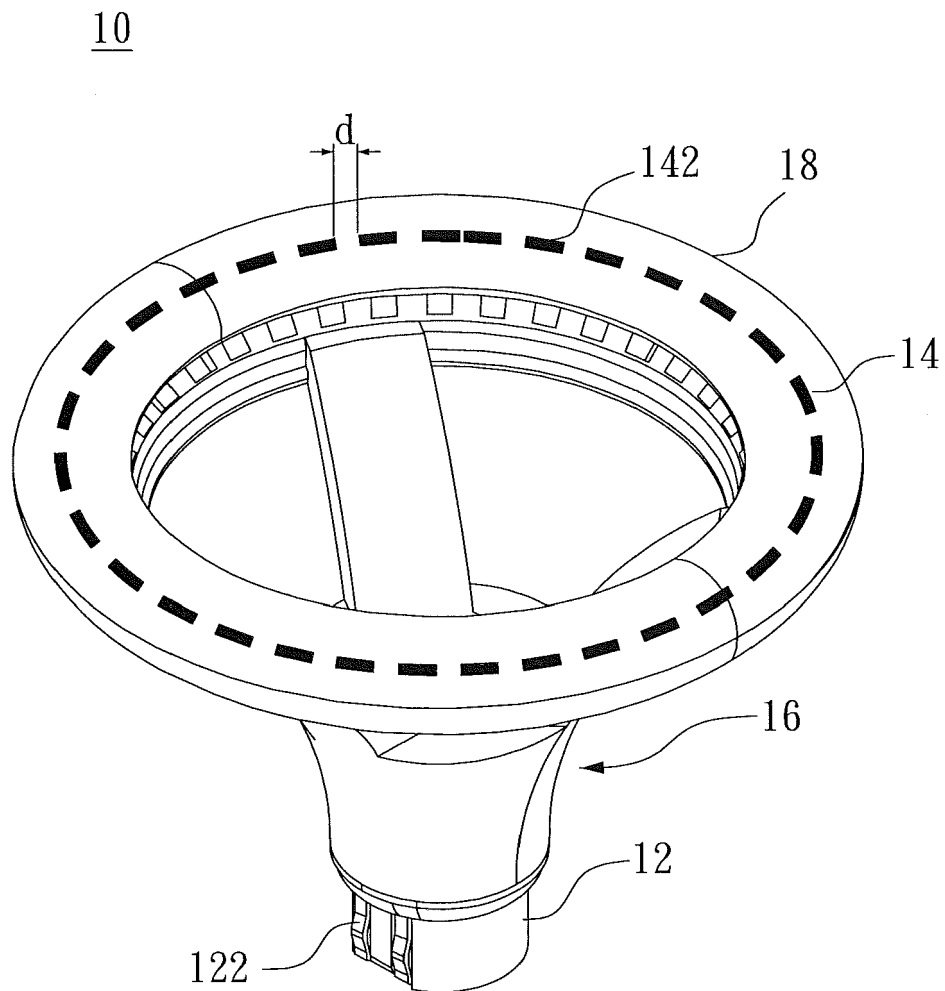


FIG. 1

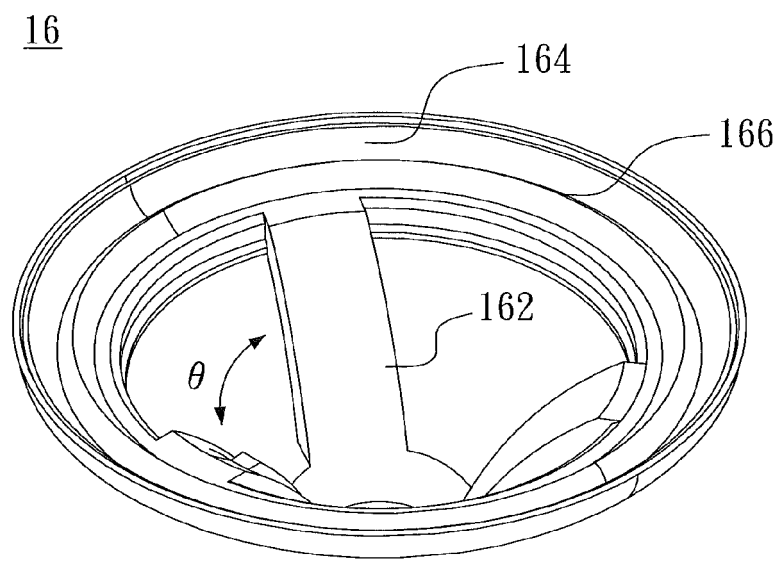


FIG. 2

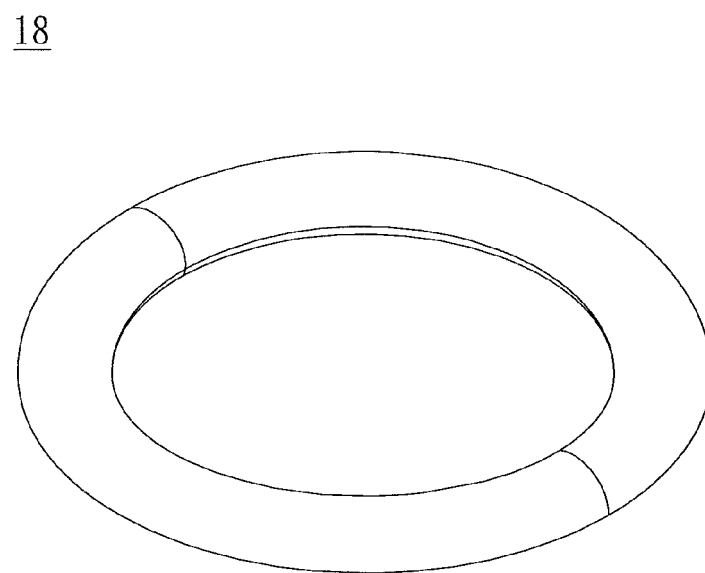


FIG. 3



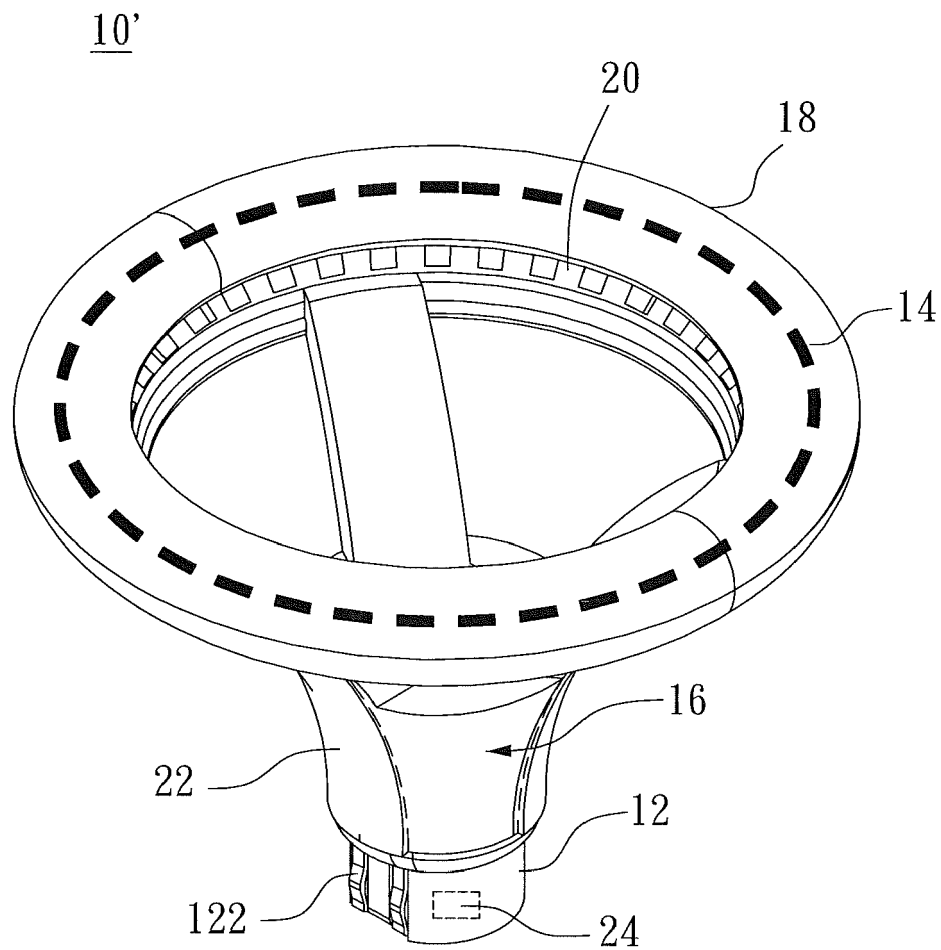


FIG. 4

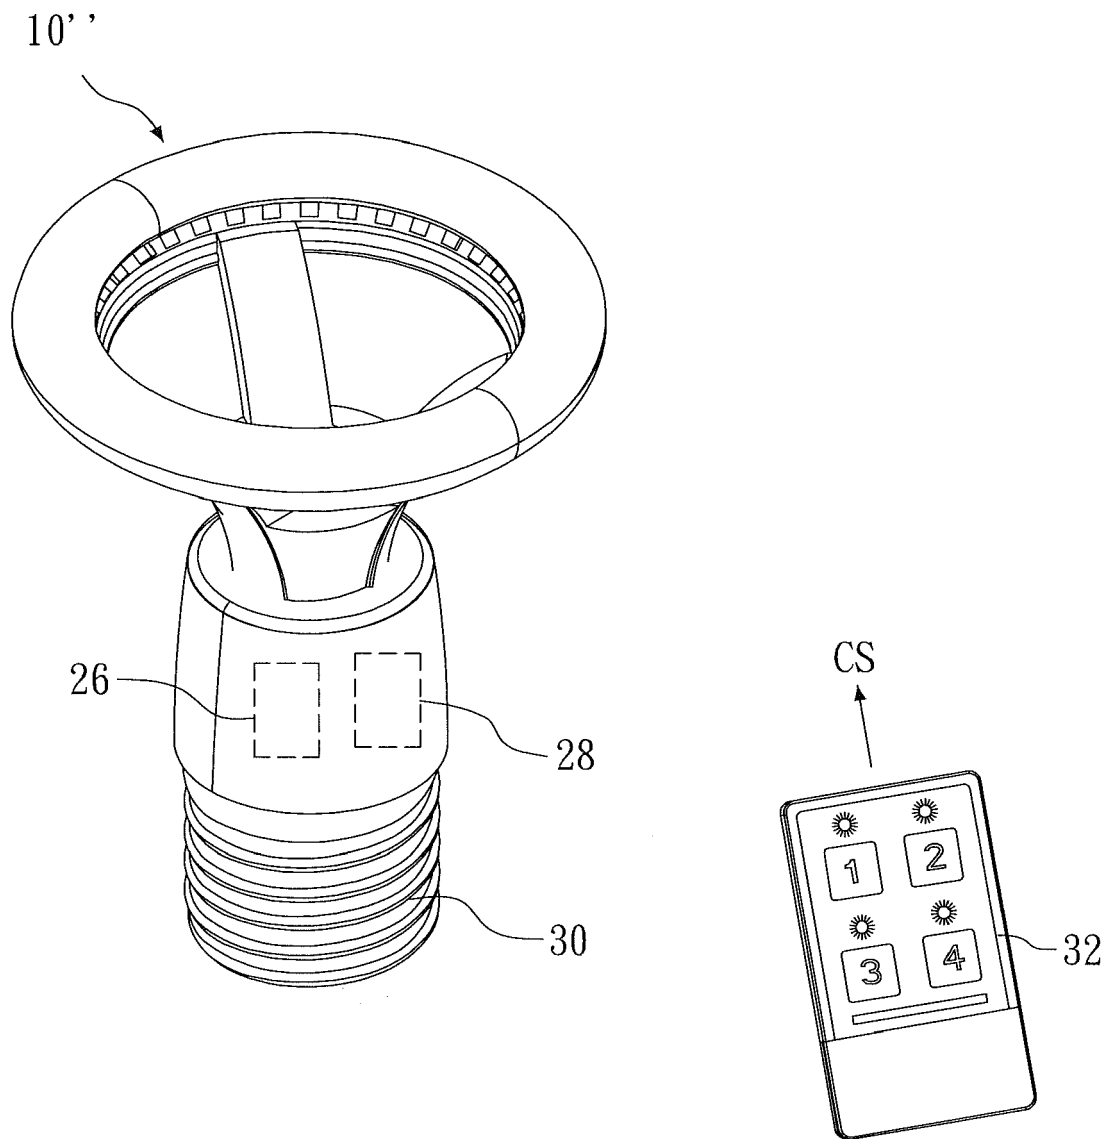


FIG. 5

40

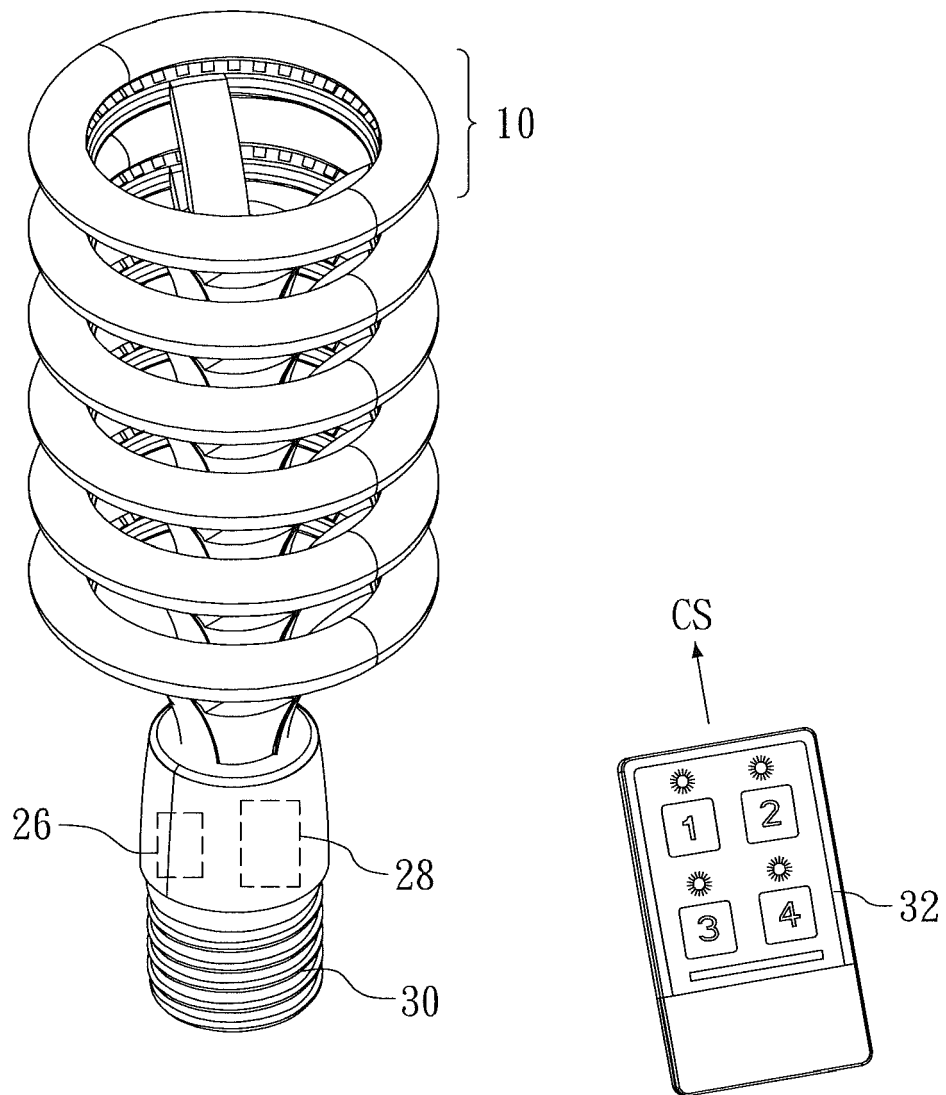


FIG. 6



## EUROPEAN SEARCH REPORT

Application Number  
EP 12 16 1411

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	WO 2010/089397 A1 (OSRAM GMBH [DE]; BREIDENASSEL NICOLE [DE]; HOETZL GUENTER [DE]; REINGR) 12 August 2010 (2010-08-12)	1,12,13	INV. F21S9/03 F21V23/04 F21K99/00
Y	* page 12, paragraph 4 - page 13, paragraph 3 * * figure 7 *	2-11	ADD. F21Y101/02 F21Y103/02
Y	US 2011/234107 A1 (SIMON DAVID L [US] ET AL) 29 September 2011 (2011-09-29)	2,3,6	
A	* paragraph [0023] * * paragraph [0029] - paragraph [0031] * * paragraph [0037] * * figure 3 *	1	
Y	WO 2011/094444 A2 (KATSAROS S [US]) 4 August 2011 (2011-08-04)	4,5,7	
A	* paragraph [0002] * * paragraph [0013] - paragraph [0015] * * figure 1 *	1	
Y	US 2008/304249 A1 (DAVEY GEORGE [US] ET AL) 11 December 2008 (2008-12-11)	8-11,15,16	TECHNICAL FIELDS SEARCHED (IPC)
A	* paragraph [0002] * * paragraph [0030] - paragraph [0037] *	1	F21S F21V F21K
X	WO 2011/135151 A1 (INVEST Y DESARROLLO DE LED S L [ES]; BERNAL BARRIOS LUIS [ES]; VILLA C) 3 November 2011 (2011-11-03)	1,12-14	
Y	* abstract * * figures 8,10 *	15,16	
X	WO 2011/089103 A1 (OSRAM GMBH [DE]; BREIDENASSEL NICOLE [DE]; HOETZL GUENTER [DE]; REINGR) 28 July 2011 (2011-07-28)	1,12,13	
	* page 16, line 34 - page 18, line 17 * * figures 8,10 * * figures 1,8 *		
----- -/--			
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 6 August 2012	Examiner Schulz, Andreas
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

 2  
EPO FORM 1503 03.82 (P04C01)



## EUROPEAN SEARCH REPORT

Application Number  
EP 12 16 1411

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	DE 200 18 435 U1 (SHINING BLICK ENTPR CO [TW]) 22 February 2001 (2001-02-22) * page 1, paragraph 1 * * page 4, paragraph 6 - page 5, paragraph 2 * * figure 4 *	1,12,13	
A	----- WO 2009/044716 A1 (KOHA CO LTD [JP]; AOKI KAZUO [JP]; KASE TADASHI [JP]; AZUMA TOSHIJI [J]) 9 April 2009 (2009-04-09) * the whole document *	1	
A	----- US 2011/140589 A1 (DANIEL MUESSLER [CH]) 16 June 2011 (2011-06-16) * paragraph [0002] * * paragraph [0024] - paragraph [0034] * * figure 3A * -----	1	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (IPC)
Place of search		Date of completion of the search	Examiner
The Hague		6 August 2012	Schulz, Andreas
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ..... &amp; : member of the same patent family, corresponding document</p>			

2  
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 12 16 1411

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

06-08-2012

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2010089397 A1	12-08-2010	CN 102308147 A	04-01-2012
		DE 102009008096 A1	19-08-2010
		EP 2394096 A1	14-12-2011
		US 2012014098 A1	19-01-2012
		WO 2010089397 A1	12-08-2010
US 2011234107 A1	29-09-2011	US 2011234107 A1	29-09-2011
		WO 2011119921 A2	29-09-2011
WO 2011094444 A2	04-08-2011	NONE	
US 2008304249 A1	11-12-2008	US 2008304249 A1	11-12-2008
		US 2009174302 A1	09-07-2009
WO 2011135151 A1	03-11-2011	ES 2378800 A1	18-04-2012
		WO 2011135151 A1	03-11-2011
WO 2011089103 A1	28-07-2011	DE 102010001047 A1	21-07-2011
		WO 2011089103 A1	28-07-2011
DE 20018435 U1	22-02-2001	DE 20018435 U1	22-02-2001
		US 6523978 B1	25-02-2003
WO 2009044716 A1	09-04-2009	NONE	
US 2011140589 A1	16-06-2011	NONE	