(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) EP 2 647 362 B1

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
21.01.2015 Bulletin 2015/04

(51) Int Cl.:
A61H 23/02 *(2006.01)*

(21) Application number: **12250090.3**

(22) Date of filing: **05.04.2012**

(54) **Massaging device with multiple ultrasonic transducers**

Massagevorrichtung mit mehreren Ultraschallwandlern

Dispositif de massage avec de multiples transducteurs ultrasoniques

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(43) Date of publication of application:
09.10.2013 Bulletin 2013/41

(73) Proprietor: **La Pierres, Inc.**
San Jose CA 95138 (US)

(72) Inventors:
- **Wahng, Chao Uei**
  San Jose, CA 95138 (US)
- **Zhou, Yuchen**
  San Jose, CA 95138 (US)
- **Tieu, Hieu**
  San Jose, CA 95138 (US)

(74) Representative: **Beresford, Keith Denis Lewis**
Beresford & Co
16 High Holborn
London WC1V 6BX (GB)

(56) References cited:
EP-A1- 1 279 394
US-A1- 2005 256 431
US-A1- 2007 249 046

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 647 362 B1

Printed by Jouve, 75001 PARIS (FR)

Description

FIELD OF THE INVENTION

[0001] The invention relates to the technology of ultrasonic implementation in massaging devices. More particularly, the invention relates to an ultrasonic device with a single vibration transmission plate which has multiple ultrasonic modes and can provide vibrations in deferent frequencies.

BACKGROUND AND PRIOR ART

[0002] Ultrasound methods used for skin care and beautification have been long demonstrated and realized in commercial products and therapeutic devices. The following listed documents are deemed to be the references which are most relevant to the subject matter of the present invention:

[1] Y. Mitsu, "Skin beautification cosmetic system using iontophoresis device, ultrasonic facial stimulator, and cosmetic additive", Patent No. 7,427,273 B2 (2008);
[2] M. Nunomura, et al, "Ultrasound applying skin care device", Pub. No. US 2006/0149169 (2006);
[3] U. Motoyoshi, "ULTRASONIC FACIAL AND BEAUTY APPLIANCE", Pub. No. JP2007050204 (A) (2007);
[4] H. Hisao, "ULTRASONIC FACE MASSAGER", Pub. No. JP2001314473 (A) (2001);
[5] J. Reed, et al, "Ultrasound based cosmetic therapy method and apparatus", Pub. No. US 2009/0318853 (2009);
[6] FaceMate 330 Ultrasonic Face and Skin Massager from Balkowitsch Enterprises (see www.balkowitsch.com); and
[7] S. H. Dayan, "Ultrasound-assisted Facial Skin Rejuvenation", Skin Inc. Magazine (2001).
[8] "Ultrasonic cosmetic device", Pub. No. EP 1 279 394 A1.

[0003] The existing products share a common feature of a single ultrasound transducer exciting a single vibration plate with a roughly the same or similar size as the transducer. FIG. 1 shows a schematic of such kind of design according to the prior art. The vibration plate 1, which is usually metallic, contacts human skin with its outside smooth surface and is driven by an ultrasonic transducer 2 on the inside surface at an ultrasonic frequency. The vibration from the transducer 2 is transmitted to the human skin or skin care products between the outside surface of the plate 1 and the human skin via the driven vibration of the plate 1. The plate 1 and the transducer 2 are generally contained within an enclosed housing structure 3 for handling.

[0004] The devices according to the prior art mentioned above only provide vibration with a single frequency. Scientific research demonstrates that ultrasonic treatment of skin is beneficial for beautification purposes. It is desired that multiple frequencies are used in the ultrasonic device. For example, a higher frequency ultrasonic mode activates the skin care specimen molecules while a lower frequency mode pushes the active ingredients of the specimen deeper into the skin to enhance the beautification effect.

[0005] For some of the existing products, such as the device described in FaceMate 330 Ultrasonic Face and Skin Massager from Balkowitsch Enterprises, two ultrasound modes are adopted. The devices utilize two separate vibrating plates, with each plate having an ultrasound transducer vibrating at a different frequency. Such design although provides options of two distinctive ultrasound modes, where the higher frequency ultrasound mode acts superficially to activate molecules of beauty products, and the lower frequency mode enables deeper penetration of the product for better beautification result with the lower frequency mode, it has the intrinsic flaw of requiring user to manually shift plates to the target skin area to benefit the functions of different ultrasound modes. Such requirement is not only creating a tedious task for the user but also non-intuitive, which may lead to easy confusion at the user side and limit its advertised functions of the multiple modes.

[0006] Therefore, what is desired is an intuitive and user friendly device with a mechanism enabling a transmission plate to provide vibrations in different modes which can be switched electronically. With this mechanism, a user can focus more on the skin beautification process and its results, rather than on operating the device itself.

SUMMARY OF THE INVENTION

[0007] One object of this invention as claimed is to generate ultrasonic vibrations at multiple frequencies on an ultrasound transmission plate.

[0008] Another object of this invention is to match the different ultrasonic transducers' frequencies with a respective corresponding different plate thickness, such that the plate area where each transducer resides has a thickness that is matching to the ultrasound mode of that transducer and is most efficient for transmission of the ultrasonic vibration at the frequency of the transducer.

[0009] The present invention teaches an ultrasonic device with an ultrasonic vibration transmission plate being excited by multiple ultrasonic transducers. Multiple ultrasonic modes excitation on the same plate are realized by patterning the base plate thickness such that each different thickness of the plate matches to the frequency of the ultrasonic transducer residing on that thickness. This design provides feasibility of single plate excitation by multiple transducers and delivers easy usage and better skin care results.

[0010] A first aspect of the invention provides an ultrasonic massage device including at least one ultrasonic

vibration transmission plate with at least one surface of the plate being adapted to contact a target surface to be massaged, at least two ultrasonic vibration generation transducers each having a different frequency between 20kHz to 25MHz and in physical contact with respective areas of the transmission plate, and wherein different areas on the transmission plate where different ultrasonic transducers reside have different thicknesses for each transducer having a different frequency than the other ones.

[0011] In one embodiment, an ultrasonic massage device includes a plate adapted to contact a target surface to be massaged, a first ultrasonic vibration generation transducer mounted to a rear surface of the plate at a region where the plate has a first thickness, and a second ultrasonic vibration generation transducer mounted to the rear surface of the plate at a region where the plate has a second thickness, and wherein the first and second thicknesses are respectively non-zero integer multiples of half of the wavelength of the respective ultrasonic vibrations generated by the first and second ultrasonic vibration generation transducers.

[0012] In one implementation of the ultrasonic device according to the present invention, each different plate thickness under each ultrasonic transducer correspondence to the frequency of that transducer to transmit ultrasonic vibration more efficiently from the transducer to the skin.

[0013] In another implementation of the ultrasonic device according to the present invention, the different plate thickness can be realized by creating recesses or wells into the plate, and positioning the transducer within the well and in contact with the bottom surface of the well.

[0014] In another implementation of the ultrasonic device according to the present invention, the different plate thickness can be realized by creating an extrusion on top of the plate where the transducer resides on top surface of the extrusion.

[0015] In another implementation of the ultrasonic device according to the present invention, the different transducers are arranged on the plate side by side. Further, the different transducers may include at least one transducer having a first frequency being neighbored by multiple transducers having a second frequency.

[0016] In another implementation of the ultrasonic device according to the present invention, the different transducers can contact the plate with a concentric arrangement, where at least one of the transducer, i.e. the first transducer, is a ring type with a center clearance, where at least one of the other transducers is positioned within the ring type first transducer center clearance.

[0017] In another implementation of the ultrasonic device according to the present invention, the different transducers can contact the plate with at least one of the transducers, i.e. the first transducer, has a center clearance, where at least one of the other transducers resides within the first transducer center clearance, where the outside shape of the first transducer, the shape of the clearance and the shape of the other transducers can be any regular shape, for example ellipse, triangle, rectangle or square, or any other arbitrary irregular shape.

[0018] Yet in another implementation of the ultrasonic device according to the present invention, the different transducers can contact the plate with at least one of the transducers, i.e. the first transducer, has a clearance that makes the first transducer being a partially enclosed shape, where at least one of the other transducers resides within the first transducer clearance, where the outside shape of the first transducer, the shape of the clearance and the shape of the other transducers can be any arbitrary regular shape, for example ellipse, triangle, rectangle or square, or any other arbitrary irregular shape.

BRIEF DESCRIPTION OF THE DRAWINGS

[0019]

FIG. 1 is schematic diagram illustrating an ultrasonic transducer according to the prior art;
FIG. 2A is a schematic diagram illustrating a top view of the transducer according to the first preferred embodiment of the present invention;
FIG. 2B is a schematic diagram illustrating a cross-sectional view of the ultrasonic transducer of FIG.2A;
FIG. 3A is a schematic diagram illustrating a top view of the transducer according to the second preferred embodiment of the present invention;
FIG. 3B is a schematic diagram illustrating a cross-sectional view of the ultrasonic transducer of FIG.3A;
FIG. 4A is a schematic diagram illustrating a top view of the transducer according to the third preferred embodiment of the present invention; and
FIG. 4B is a schematic diagram illustrating a cross-sectional view of the ultrasonic transducer of FIG.4A;
FIG. 5A is a schematic diagram illustrating a top view of the transducer according to the forth preferred embodiment of the present invention;
FIG. 5B is a schematic diagram illustrating a cross-sectional view of the ultrasonic transducer of FIG.5A;
FIG. 6A is a schematic diagram illustrating a top view of the transducer according to the fifth preferred embodiment of the present invention;
FIG. 6B is a schematic diagram illustrating a cross-sectional view of the ultrasonic transducer of FIG.6A;
FIG. 7A is a schematic diagram illustrating a top view of the transducer according to the sixth preferred embodiment of the present invention;
FIG. 7B is a schematic diagram illustrating a cross-sectional view of the ultrasonic transducer of FIG.7A;
FIG. 8A is a schematic diagram illustrating a top view of the transducer according to the seventh preferred embodiment of the present invention;
FIG. 8B is a schematic diagram illustrating a cross-sectional view of the ultrasonic transducer of FIG.8A;
FIG. 9A is a schematic diagram illustrating a top view of the transducer according to the eighth preferred

embodiment of the present invention;
and
FIG. 9B is a schematic diagram illustrating a cross-sectional view of the ultrasonic transducer of FIG.9A.
FIG. 10A is a schematic diagram illustrating a top view of the transducer according to the ninth preferred embodiment of the present invention;
FIG. 10B is a schematic diagram illustrating a cross-sectional view of the ultrasonic transducer of FIG. 10A;
FIG. 11A is a schematic diagram illustrating a top view of the transducer according to the tenth preferred embodiment of the present invention; and
FIG. 11B is a schematic diagram illustrating a cross-sectional view of the ultrasonic transducer of FIG. 11A.

DESCRIPTION OF THE DRAWINGS

[0020] While the present invention may be embodied in many different forms, designs or configurations, for the purpose of promoting an understanding of the principles of the invention, reference will be made to the embodiments illustrated in the drawings and specific language will be used to describe the same. It will nevertheless be understood that no limitation of the scope of the invention is thereby intended. Any alterations and further implementations of the principles of the invention as described herein are contemplated as would normally occur to one skilled in the art to which the invention relates.

[0021] The present invention teaches an ultrasonic device for skin care massage, comprising one or more ultrasonic vibration transmission plates, each of which having a rear surface and a smooth front surface for contacting human skin; and at least two different ultrasonic vibration transducers coupled to a rear surface of each of the ultrasonic vibration plates. Each of the ultrasonic vibration transducers generates an ultrasonic wave with a unique frequency between 20kHz to 25MHz. Each of the ultrasonic vibration transducers has a bottom surface paralleling to the smooth surface. A distance between the bottom surface of any of the ultrasonic vibration transducers to the smooth surface is approximately an integer times of the half wavelength of the ultrasonic wave generated by the ultrasonic vibration transducer.

[0022] In the context of this application, a plate thickness matching with the transducer's frequency means that when an ultrasonic transducer is positioned on a vibration transmission plate surface, the thickness of the vibration transmission plate under the transducer matches with the frequency of the ultrasonic transducer for maximally transmitting the vibrations generated by the transducer. In other words, at the matching thickness, the vibration transmission plate can most efficiently transmit the ultrasonic vibration generated by the transducer across the thickness of the plate to the other side of the plate opposing the side where the transducer resides. Such thickness is usually N times of the half wavelength of the intrinsic sound wave of the plate at the frequency where the ultrasonic transducer operates, where N is a non-zero integer.

[0023] FIG. 2A is a schematic diagram illustrating a top view of the ultrasonic transmission device, called a transducer, according to a first embodiment of the present invention, and FIG. 2B is a schematic diagram illustrating a cross-sectional view of the transducer of FIG.2A. The ultrasonic transducer includes (1) a plate 21; (2) a lower frequency transducer (TLF) 22; (3) a first plate thickness 24 between the bottom surface of the TLF 22 and the treatment surface 26 of the plate 21; (4) a higher frequency transducer (THF) 25 residing in a counterbore 23 in the plate 21; and (5) a second plate thickness 27 between the bottom surface of the THF 25 and the treatment surface 26 of the plate 21.

[0024] TLF 22 and THF 25 are incorporated in the same plate side by side with the plate base thickness matching TLF frequency, while THF 25 resides within a counterbore type well structure 23 recessed into the plate 21. The first plate thickness 24 of the plate area where THF 25 resides matches with the THF frequency. In implementations, there can be multiple THFs neighboring a single TLF or multiple TLFs neighboring a single THF. Both THF25 and TLF 22 are in a shape of circular column.

[0025] FIG. 3A is a schematic diagram illustrating a top view of the ultrasonic transmission device, called a transducer, according to a second embodiment of the present invention, and FIG. 3B is a schematic diagram illustrating a side cross-sectional view of the transducer of FIG. 3A. The ultrasonic transducer includes (1) a plate 31; (2) a lower frequency transducer (TLF) 32; (3) a first plate thickness 34 between the bottom surface of the TLF 32 and the treatment surface 36 of the plate 31; (4) a higher frequency transducer (THF) 35; and (5) a second plate thickness 37 between the bottom surface of the THF 35 and the treatment surface 36 of the plate 31.

[0026] TLF 32 and THF 35 are incorporated in the same plate side by side with the plate base thickness matching with THF frequency, while TLF 32 sits on an extrusion 33 arising from the base plate 31. The extrusion 33 and base plate 31 form an effective thickness 34 that matches with the TLF frequency. In implementations, there can be multiple THFs neighboring a single TLF or multiple TLFs neighboring a single THF. Both THF35 and TLF 32 are in a shape of circular column.

[0027] FIG. 4A is a schematic diagram illustrating a top view of the ultrasonic transmission device, called a transducer, according to a third embodiment of the present invention, and FIG. 4B is a schematic diagram illustrating a side cross-sectional view of the transducer of FIG. 4A. The ultrasonic transducer includes (1) a plate 41; (2) a lower frequency transducer (TLF) 42; (3) a first plate thickness 44 between the bottom surface of the TLF 42 and the treatment surface 46 of the plate 41; (4) a higher frequency transducer (THF) 45; and (5) a second plate thickness 47 between the bottom surface of the THF 45 and the treatment surface 46 of the plate 41.

[0028] TLF 42 and THF 45 incorporated in the same plate 41 with a concentric annular arrangement, where TLF 42 is a ring type transducer and THF 45 is a smaller round transducer that resides within a counterbore well 43 recessed into the base plate 41 located within the center clearance of the TLF 42. The first plate thickness 44, i.e. the plate base thickness, matches with the TLF frequency. The second plate thickness 47, i.e. the effective plate thickness, matches with the THF frequency. Both THF45 and TLF 42 are in a shape of circular column.

[0029] FIG. 5A is a schematic diagram illustrating a top view of the ultrasonic transmission device, called a transducer, according to a fourth embodiment of the present invention, and FIG. 5B is a schematic diagram illustrating a side cross-sectional view of the transducer of FIG. 5A. The ultrasonic transducer includes (1) a plate 51; (2) a lower frequency transducer (TLF) 52; (3) a first plate thickness 54 between the bottom surface of the TLF 52 and the treatment surface 56 of the plate 51; (4) a higher frequency transducer (THF) 55; and (5) a second plate thickness 57 between the bottom surface of the THF 55 and the treatment surface 56 of the plate 51.

[0030] TLF 52 and THF 55 are incorporated in the same plate 51 with a concentric arrangement, where THF 55 is a ring type transducer and TLF 52 is a smaller transducer that sits on top of an extrusion 53 arising from the base plate 51. The extrusion 53 is located within the center clearance of the THF 55. The second plate thickness 57, i.e. the plate base thickness, matches with the THF frequency. The first plate thickness 54, i.e. the effective plate thickness, matches with the TLF frequency. Both THF55 and TLF 52 are in a shape of circular column.

[0031] FIG. 6A is a schematic diagram illustrating a top view of the ultrasonic transmission device, called a transducer, according to a fifth embodiment of the present invention, and FIG. 6B is a schematic diagram illustrating a side cross-sectional view of the transducer of FIG. 6A. The ultrasonic transducer includes (1) a plate 61; (2) a lower frequency transducer (TLF) 62; (3) a first plate thickness 64 between the bottom surface of the TLF 62 and the treatment surface 66 of the plate 61; (4) a higher frequency transducer (THF) 65; and (5) a second plate thickness 67 between the bottom surface of the THF 65 and the treatment surface 66 of the plate 61.

[0032] TLF 62 and THF 65 are incorporated in the same plate 61 with TLF 62 having a center clearance and THF 65 is a smaller transducer that resides within a counterbore well 63 recessed into the base plate 61 located within the center clearance of the TLF 62. The first plate thickness 64, i.e. the plate base thickness, matches with the TLF frequency. The second plate thickness 67, i.e. the effective plate thickness, matches with THF frequency. THF65 is in a shape of column with a top view of ellipse. TLF62 is in a shape of elliptical cylinder surrounding THF65.

[0033] Although in FIG. 6A, TLF62, the center clearance and THF 65 are shown in elliptical shapes, they can be any regular and irregular shape in practice.

[0034] FIG. 7A is a schematic diagram illustrating a top view of the ultrasonic transmission device, called a transducer, according to a sixth embodiment of the present invention, and FIG. 7B is a schematic diagram illustrating a side cross-sectional view of the transducer of FIG. 7A. The ultrasonic transducer includes (1) a plate 71; (2) a lower frequency transducer (TLF) 72; (3) a first plate thickness 74 between the bottom surface of the TLF 72 and the treatment surface 76 of the plate 71; (4) a higher frequency transducer (THF) 75; and (5) a second plate thickness 77 between the bottom surface of the THF 75 and the treatment surface 76 of the plate 71.

[0035] TLF 72 and THF 75 are incorporated in the same plate 71. THF 75 has a center clearance and TLF 72 is a smaller transducer that sits on top of an extrusion 73 arising from the base plate 71. The extrusion 73 is located within the center clearance of the THF 75. The second plate thickness 77, i.e. the plate base thickness, matches with the THF frequency. The first plate thickness 74, i.e. the effective plate thickness ZLF, matches with the TLF frequency. TLF72 is in a shape of column with a top view of ellipse. THF75 is in a shape of elliptical cylinder surrounding TLF72.

[0036] Although in FIG. 7A, TLF 72, the center clearance and THF 75 are shown in shapes of ellipse, they can be any regular and irregular shape in practice.

[0037] FIG. 8A is a schematic diagram illustrating a top view of the ultrasonic transmission device, called a transducer, according to a seventh embodiment of the present invention, and FIG. 8B is a schematic diagram illustrating a side cross-sectional view of the transducer of FIG. 8A. The ultrasonic transducer includes (1) a plate 81; (2) a lower frequency transducer (TLF) 82; (3) a first plate thickness 84 between the bottom surface of the TLF 82 and the treatment surface 86 of the plate 81; (4) a higher frequency transducer (THF) 85; and (5) a second plate thickness 87 between the bottom surface of the THF 85 and the treatment surface 86 of the plate 81.

[0038] TLF 82 and THF 85 are incorporated in the same plate 81. TLF 82 has a clearance that makes TLF 82 a partially enclosed shape. THF 85 is a smaller transducer that resides within a counterbore well 83 recessed into the base plate 81 located within the clearance of the TLF 82. The first plate thickness 84, i.e. the plate base's larger thickness, matches with the TLF frequency. The second plate thickness 87, i.e. the effective plate thickness 87 matches with the THF frequency. THF85 is in a shape of column with a top view of ellipse. TLF82 is in a shape of partial elliptical cylinder substantially surrounding THF85.

[0039] Although in FIG.8A, TLF 82, the center clearance and THF 85 are shown in shapes of ellipse or partial ellipse, they can be any regular and irregular shape in practice.

[0040] FIG. 9A is a schematic diagram illustrating a top view of the ultrasonic transmission device, called a transducer, according to an eighth embodiment of the present invention, and FIG. 9B is a schematic diagram illustrating

a side cross-sectional view of the transducer of FIG. 9A. The ultrasonic transducer includes (1) a plate 91; (2) a lower frequency transducer (TLF) 92; (3) a first plate thickness 94 between the bottom surface of the TLF 92 and the treatment surface 96 of the plate 91; (4) a higher frequency transducer (THF) 95; and (5) a second plate thickness 97, i.e. the plate's smaller thickness, between the bottom surface of the THF 95 and the treatment surface 96 of the plate 91.

[0041] TLF 92 and THF 95 are incorporated in the same plate 91. THF 95 has a clearance that makes THF 95 a partially enclosed shape. TLF 92 is a smaller transducer that sits on top of an extrusion 93 arising from the base plate 91. The extrusion 93 is located within the center clearance of the THF 95. The second plate thickness 97, i.e. the plate's base thickness, matches with the THF frequency. The first plate thickness 94, i.e. the effective plate thickness, matches with the TLF frequency. TLF 92 is in a shape of column with a top view of ellipse. THF 95 is in a shape of partial elliptical cylinder substantially surrounding TLF 92.

[0042] Although in FIG. 9A, the TLF 92, the center clearance and the THF 95 are shown in shapes of ellipse or partial ellipse, they can be any regular and irregular shape in practice.

[0043] FIG. 10A is a schematic diagram illustrating a top view of the ultrasonic transmission device, called a transducer, according to a ninth embodiment of the present invention, and FIG. 10B is a schematic diagram illustrating a cross-sectional view of the transducer of FIG.10A. The ultrasonic transducer includes (1) a plate 101; (2) a transducer with a first frequency (TF1) 102; (3) a first plate thickness 103 between the bottom surface of the TF1 102 and the treatment surface 106 of the plate 101; (4) a transducer with a second frequency (TF2) 104, that is different from the first frequency; and (5) a second plate thickness 105 between the bottom surface of the TF2 104 and the treatment surface 106 of the plate 101.

[0044] TF1 102 and TF2 104 are incorporated on the same plate side. The first plate thickness 103 matches with the ultrasonic frequency of TF1 102. The second plate thickness 105 matches with the ultrasonic frequency of TF2 104. In implementations, there can be multiple TF1s 102 neighboring a single TF2 104 or multiple TF2s 104 neighboring a single TF1 102. Alternatively, a plurality of TF1s 102 and TF2s 104 can be arranged in an intermixed matrix. A plurality of TF1s 102 and TF2s 104 can also be arranged in separate clusters with each cluster having same frequency transducers, and different clusters are positioned on different areas on the same plate. In all possible arrangements, each transducer resides on a plate thickness that matches to the transducers ultrasonic frequency. Both TF1 102 and TF2 104 are shapes of circular column.

[0045] FIG. 11A is a schematic diagram illustrating a top view of the ultrasonic transmission device, called a transducer, according to a tenth embodiment of the present invention, and FIG. 11B is a schematic diagram illustrating a cross-sectional view of the transducer of FIG.11A. The ultrasonic transducer includes (1) a plate 111; (2) a transducer with a first frequency (TF1) 112; (3) a first plate thickness 113 between the bottom surface of the TF1 112 and the treatment surface 116 of the plate 111; (4) a transducer with a second frequency (TF2) 114 that is different from the first frequency; and (5) a second plate thickness 115 between the bottom surface of the TF2 114 and the treatment surface 116 of the plate 111.

[0046] TF1 112 and TF2 114 are incorporated on the same plate side. TF2 114 has a center clearance. TF1 112 is a smaller transducer that resides in the center clearance of the TF2 114. The first plate thickness 113 matches with the ultrasonic frequency of TF1 112. The second plate thickness 115 matches with the ultrasonic frequency of TF2 114. TF1 112 is in a shape of circular column. TF2 114 is in a shape of annular cylinder surrounding TF1 112.

[0047] Although in FIG. 11A, the TF2 and its center clearance are shown as circular shape, the actual shapes of TF1, TF2 and the center clearance of TF2 can be any regular and irregular shape in practice. There can also be multiple TF1 transducers residing in a single TF2 transducer center clearance. In all possible arrangements, each transducer resides on a plate thickness that matches with the transducers ultrasonic frequency.

[0048] In the above described embodiments, each of the ultrasonic vibration transducers generates an ultrasonic wave with a unique frequency between 20kHz to 25MHz. Ideally, the distance between the bottom surface of an ultrasonic vibration transducer to the smooth treatment surface is an integer times of the half wavelength of the ultrasonic wave generated by the ultrasonic vibration transducer. In implementation, each plate thickness under each ultrasonic transducer may be within -20% and +20% variation of an integer times of the half wavelength of the sound wave traveling within the ultrasonic vibration plate at a frequency same as the frequency of the wave generated by the ultrasonic transducer.

[0049] While one or more embodiments of the present invention have been illustrated above, the skilled artisan will appreciate that modifications and adoptions to those embodiments may be made without departing from the scope of the present invention as defined in the appended claims.

Claims

1. An ultrasonic device for skin care massage, comprising:

   one or more ultrasonic vibration transmission plates (21), each of which having a rear surface and a smooth surface (26) for contacting the skin; and

   at least two different ultrasonic vibration transducers (22, 25) coupled to the rear surface of

each of said ultrasonic vibration plates (21);
wherein each of said ultrasonic vibration transducers is designed to generate an ultrasonic wave with a unique frequency between 20kHz to 25MHz;
wherein each of said ultrasonic vibration transducers has a bottom surface parallel to said smooth surface;
wherein a distance between said bottom surface of any of said ultrasonic vibration transducers to said smooth surface is approximately an integer times of half wavelength of said ultrasonic wave generated by said ultrasonic vibration transducer.

2. The device according to claim 1, wherein said ultrasonic vibration transducers comprise at least one first ultrasonic vibration transducer which is embedded in said ultrasonic vibration plate and at least one second ultrasonic vibration transducer which is coupled to said ultrasonic vibration plate's back surface.

3. The device according to claim 2, wherein said first ultrasonic vibration transducer is in a shape of circular column and said second ultrasonic vibration transducer is in a shape of annular cylinder surrounding said first ultrasonic vibration transducer.

4. The device according to claim 2, wherein said first ultrasonic vibration transducer is in a shape of elliptical column and said second ultrasonic vibration transducer is in a shape of elliptical cylinder surrounding said first ultrasonic vibration transducer.

5. The device according to claim 2, wherein said first ultrasonic vibration transducer is in a shape of elliptical column and said second ultrasonic vibration transducer is in a shape of partial elliptical cylinder substantially surrounding said first ultrasonic vibration transducer.

6. The device according to claim 2, wherein said first ultrasonic vibration transducer is in a shape of column with any type of top view and said second ultrasonic vibration transducer is in a shape of a cylinder with any top view, said second ultrasonic vibration transducer surrounding said first ultrasonic vibration transducer.

7. The device according to claim 1, wherein said ultrasonic vibration transducers comprise at least one first ultrasonic vibration transducer which is coupled to an extruding member of said ultrasonic vibration plate and at least one second ultrasonic vibration transducer which is coupled to said ultrasonic vibration plate's back surface.

8. The device according to claim 7, wherein said first ultrasonic vibration transducer is in a shape of circular column and said second ultrasonic vibration transducer is in a shape of annular cylinder surrounding said first ultrasonic vibration transducer.

9. The device according to claim 7, wherein said first ultrasonic vibration transducer is in a shape of elliptical column and said second ultrasonic vibration transducer is in a shape of elliptical cylinder surrounding said first ultrasonic vibration transducer.

10. The device according to claim 7, wherein said first ultrasonic vibration transducer is in a shape of elliptical column and said second ultrasonic vibration transducer is in a shape of partial elliptical cylinder substantially surrounding said first ultrasonic vibration transducer.

11. The device according to claim 7, wherein said first ultrasonic vibration transducer is in a shape of column with any type of top view and said second ultrasonic vibration transducer is in a shape of a cylinder with any top view, said second ultrasonic vibration transducer surrounding said first ultrasonic vibration transducer.

12. The device according to claim 1, wherein said different ultrasonic vibration transducers are arranged side by side on each of said vibration transmission plates.

13. The device according to claim 1, wherein said different ultrasonic vibration transducers are arranged in intermixed matrix on each of said vibration transmission plates.

14. The device according to claim 1, wherein said different ultrasonic vibration transducers are arranged in various clusters on each of said vibration transmission plates.

15. The device according to claim 14, wherein said ultrasonic vibration transducers in each cluster have a same ultrasonic frequency.

Patentansprüche

1. Ultraschallvorrichtung zur Hautpflegemassage, umfassend:

eine oder mehrere Ultraschallvibrationsübertragungsplatten (21), die jeweils eine Rückseite und eine glatte Seite (26) zur Berührung der Haut aufweisen, und
mindestens zwei verschiedene Ultraschallvibrationswandler (22, 25), die an die Rückseite jeder der Ultraschallvibrationsplatten (21) gekoppelt

sind,
wobei die Ultraschallvibrationswandler jeweils dazu vorgesehen sind, eine Ultraschallwelle mit einer einzigen Frequenz zwischen 20 kHz und 25 MHz zu erzeugen,
wobei die Ultraschallvibrationswandler jeweils eine parallel zur glatten Seite verlaufende Unterseite aufweisen,
wobei ein Abstand zwischen der Unterseite eines jeden Ultraschallvibrationswandlers und der glatten Seite circa eine ganze Zahl mal die halbe Wellenlänge der durch den Ultraschallvibrationswandler erzeugten Ultraschallwelle beträgt.

2. Vorrichtung nach Anspruch 1, wobei die Ultraschallvibrationswandler mindestens einen ersten Ultraschallvibrationswandler, der in die Ultraschallvibrationsplatte eingebettet ist, und mindestens einen zweiten Ultraschallvibrationswandler, der an die Rückseite der Ultraschallvibrationsplatte gekoppelt ist, umfassen.

3. Vorrichtung nach Anspruch 2, wobei der erste Ultraschallvibrationswandler die Form einer runden Säule aufweist und der zweite Ultraschallvibrationswandler die Form eines ringförmigen, den ersten Ultraschallvibrationswandler umgebenden Zylinders aufweist.

4. Vorrichtung nach Anspruch 2, wobei der erste Ultraschallvibrationswandler die Form einer elliptischen Säule aufweist und der zweite Ultraschallvibrationswandler die Form eines elliptischen, den ersten Ultraschallvibrationswandler umgebenden Zylinders aufweist.

5. Vorrichtung nach Anspruch 2, wobei der erste Ultraschallvibrationswandler die Form einer elliptischen Säule aufweist und der zweite Ultraschallvibrationswandler die Form eines teilweise elliptischen, im Wesentlichen den ersten Ultraschallvibrationswandler umgebenden Zylinders aufweist.

6. Vorrichtung nach Anspruch 2, wobei der erste Ultraschallvibrationswandler die Form einer Säule mit beliebiger Art der Draufsicht aufweist und der zweite Ultraschallvibrationswandler die Form eines Zylinders mit beliebiger Draufsicht aufweist, wobei der zweite Ultraschallvibrationswandler den ersten Ultraschallvibrationswandler umgibt.

7. Vorrichtung nach Anspruch 1, wobei die Ultraschallvibrationswandler mindestens einen ersten Ultraschallvibrationswandler, der an ein Extrusionsglied der Ultraschallvibrationsplatte gekoppelt ist, und mindestens einen zweiten Ultraschallvibrationswandler, der an die Rückseite der Ultraschallvibrationsplatte gekoppelt ist, umfassen.

8. Vorrichtung nach Anspruch 7, wobei der erste Ultraschallvibrationswandler die Form einer runden Säule aufweist und der zweite Ultraschallvibrationswandler die Form eines ringförmigen, den ersten Ultraschallvibrationswandler umgebenden Zylinders aufweist.

9. Vorrichtung nach Anspruch 7, wobei der erste Ultraschallvibrationswandler die Form einer elliptischen Säule aufweist und der zweite Ultraschallvibrationswandler die Form eines elliptischen, den ersten Ultraschallvibrationswandler umgebenden Zylinders aufweist.

10. Vorrichtung nach Anspruch 7, wobei der erste Ultraschallvibrationswandler die Form einer elliptischen Säule aufweist und der zweite Ultraschallvibrationswandler die Form eines teilweise elliptischen, im Wesentlichen den ersten Ultraschallvibrationswandler umgebenden Zylinders aufweist.

11. Vorrichtung nach Anspruch 7, wobei der erste Ultraschallvibrationswandler die Form einer Säule mit beliebiger Art der Draufsicht aufweist und der zweite Ultraschallvibrationswandler die Form eines Zylinders mit beliebiger Draufsicht aufweist, wobei der zweite Ultraschallvibrationswandler den ersten Ultraschallvibrationswandler umgibt.

12. Vorrichtung nach Anspruch 1, wobei die verschiedenen Ultraschallvibrationswandler nebeneinander auf jeder der Vibrationsübertragungsplatten angeordnet sind.

13. Vorrichtung nach Anspruch 1, wobei die verschiedenen Ultraschallvibrationswandler in einer vermischten Matrix auf jeder der Vibrationsübertragungsplatten angeordnet sind.

14. Vorrichtung nach Anspruch 1, wobei die verschiedenen Ultraschallvibrationswandler in mehreren Clustern auf jeder der Vibrationsübertragungsplatten angeordnet sind.

15. Vorrichtung nach Anspruch 14, wobei die Ultraschallvibrationswandler in jedem Cluster eine gleiche Ultraschallfrequenz aufweisen.

Revendications

1. Dispositif ultrasonore pour un massage de soin pour la peau, comprenant :

une ou plusieurs plaques de transmission de vibrations ultrasonores (21), chacune d'elles com-

portant une surface arrière et une surface lisse (26) pour venir en contact avec la peau ; et
au moins deux transducteurs de vibrations ultrasonores (22, 25) différents accouplés à la surface arrière de chacune desdites plaques de vibrations ultrasonores (21) ;
dans lequel chacun desdits transducteurs de vibrations ultrasonores est conçu pour générer une onde ultrasonore avec une fréquence unique entre 20 kHz et 25 MHz ;
dans lequel chacun desdits transducteurs de vibrations ultrasonores comporte une surface inférieure parallèle à ladite surface lisse ;
dans lequel une distance entre ladite surface inférieure de l'un quelconque desdits transducteurs de vibrations ultrasonores et ladite surface lisse est égale à environ un nombre entier de demi-longueurs d'onde de ladite onde ultrasonore générée par ledit transducteur de vibrations ultrasonores.

2. Dispositif selon la revendication 1, dans lequel lesdits transducteurs de vibrations ultrasonores comprennent au moins un premier transducteur de vibrations ultrasonores qui est noyé dans ladite plaque de vibrations ultrasonores et au moins un deuxième transducteur de vibrations ultrasonores qui est accouplé à la surface arrière de ladite plaque de vibrations ultrasonores.

3. Dispositif selon la revendication 2, dans lequel ledit premier transducteur de vibrations ultrasonores a la forme d'une colonne circulaire et ledit deuxième transducteur de vibrations ultrasonores a la forme d'un cylindre annulaire entourant ledit premier transducteur de vibrations ultrasonores.

4. Dispositif selon la revendication 2, dans lequel ledit premier transducteur de vibrations ultrasonores a la forme d'une colonne elliptique et ledit deuxième transducteur de vibrations ultrasonores a la forme d'un cylindre elliptique entourant ledit premier transducteur de vibrations ultrasonores.

5. Dispositif selon la revendication 2, dans lequel ledit premier transducteur de vibrations ultrasonores a la forme d'une colonne elliptique et ledit deuxième transducteur de vibrations ultrasonores a la forme d'un cylindre elliptique partiel entourant sensiblement ledit premier transducteur de vibrations ultrasonores.

6. Dispositif selon la revendication 2, dans lequel ledit premier transducteur de vibrations ultrasonores a la forme d'une colonne dans n'importe quel type de vue de dessus et ledit deuxième transducteur de vibrations ultrasonores a la forme d'un cylindre dans n'importe quelle vue de dessus, ledit deuxième transducteur de vibrations ultrasonores entourant ledit premier transducteur de vibrations ultrasonores.

7. Dispositif selon la revendication 1, dans lequel lesdits transducteurs de vibrations ultrasonores comprennent au moins un premier transducteur de vibrations ultrasonores qui est accouplé à un élément d'extrusion de ladite plaque de vibrations ultrasonore et au moins un deuxième transducteur de vibrations ultrasonores qui est accouplé à la surface arrière de ladite plaque de vibrations ultrasonore.

8. Dispositif selon la revendication 7, dans lequel ledit premier transducteur de vibrations ultrasonores a la forme d'une colonne circulaire et ledit deuxième transducteur de vibrations ultrasonores a la forme d'un cylindre annulaire entourant ledit premier transducteur de vibrations ultrasonores.

9. Dispositif selon la revendication 7, dans lequel ledit premier transducteur de vibrations ultrasonores a la forme d'une colonne elliptique et ledit deuxième transducteur de vibrations ultrasonores a la forme d'un cylindre elliptique entourant ledit premier transducteur de vibrations ultrasonores.

10. Dispositif selon la revendication 7, dans lequel ledit premier transducteur de vibrations ultrasonores a la forme d'une colonne elliptique et ledit deuxième transducteur de vibrations ultrasonores a la forme d'un cylindre elliptique partiel entourant sensiblement ledit premier transducteur de vibrations ultrasonores.

11. Dispositif selon la revendication 7, dans lequel ledit premier transducteur de vibrations ultrasonores a la forme d'une colonne dans n'importe quel type de vue de dessus et ledit deuxième transducteur de vibrations ultrasonores a la forme d'un cylindre dans n'importe quelle vue de dessus, ledit deuxième transducteur de vibrations ultrasonores entourant ledit premier transducteur de vibrations ultrasonores.

12. Dispositif selon la revendication 1, dans lequel lesdits différents transducteurs de vibrations ultrasonores sont agencés côte à côte sur chacune desdites plaques de transmission de vibrations.

13. Dispositif selon la revendication 1, dans lequel lesdits différents transducteurs de vibrations ultrasonores sont agencés mélangés en une matrice sur chacune desdites plaques de transmission de vibrations.

14. Dispositif selon la revendication 1, dans lequel lesdits différents transducteurs de vibrations ultrasonores sont agencés en divers groupes sur chacune desdites plaques de transmission de vibrations.

15. Dispositif selon la revendication 14, dans lequel lesdits transducteurs de vibrations ultrasonores dans chaque groupe ont une même fréquence ultrasonore.

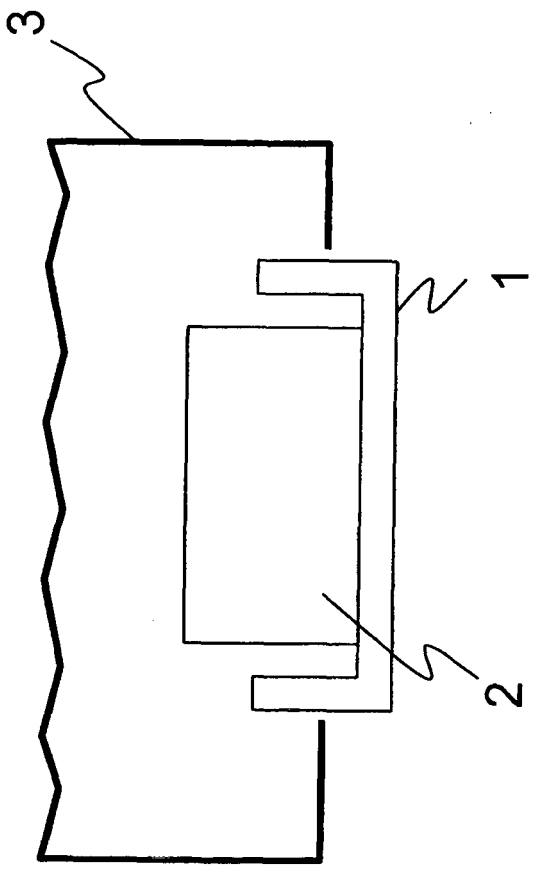


Figure 1

Prior art

Figure 2A

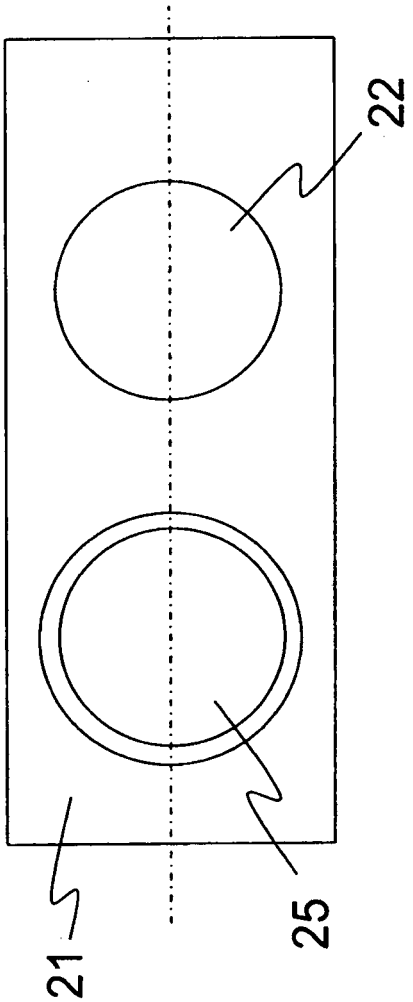


Figure 2B

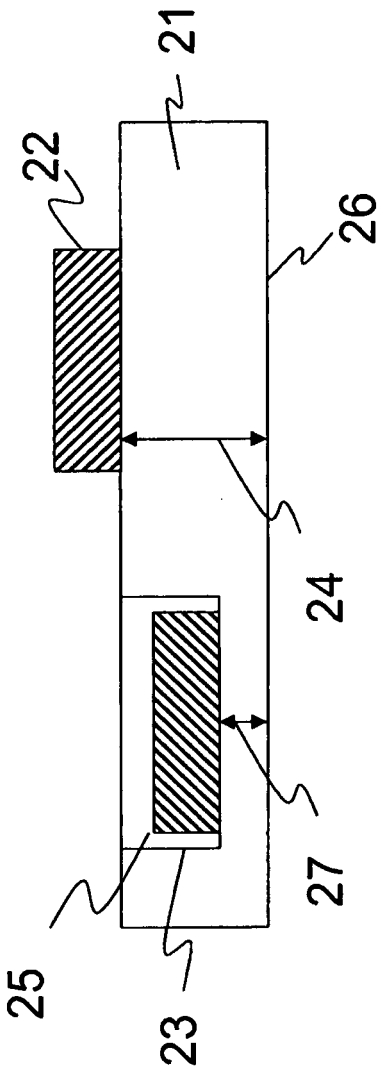


Figure 3A

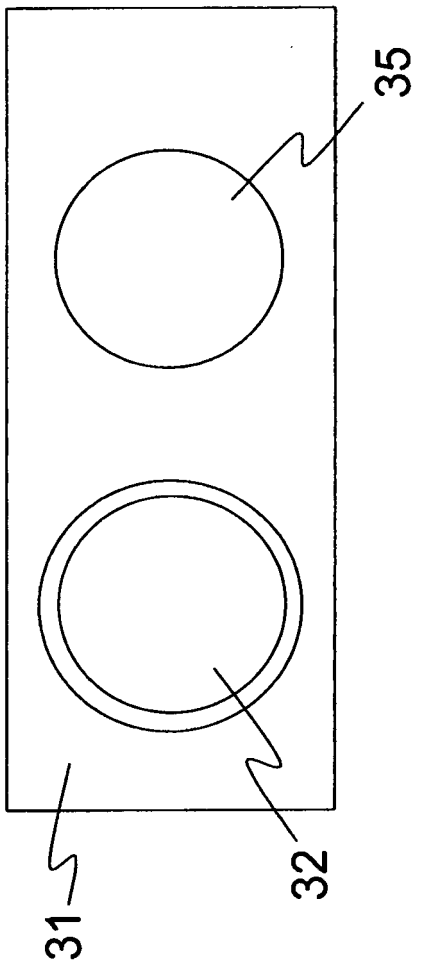


Figure 3B

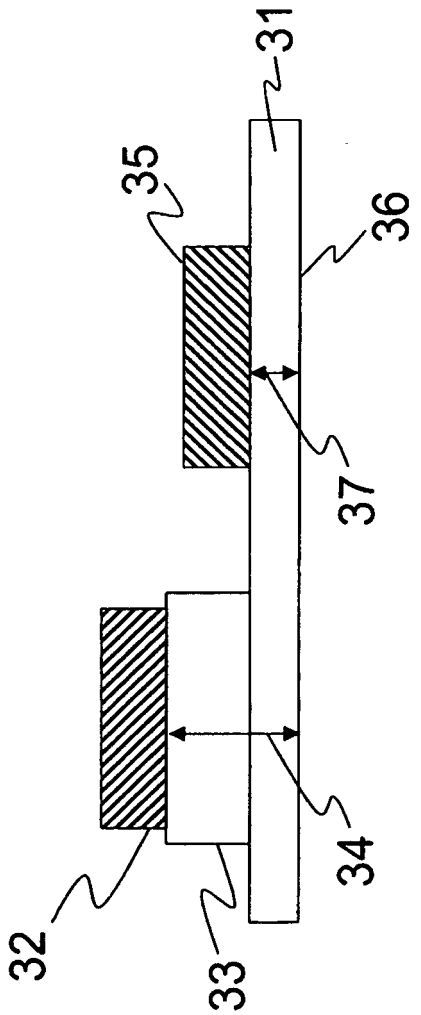


Figure 4A

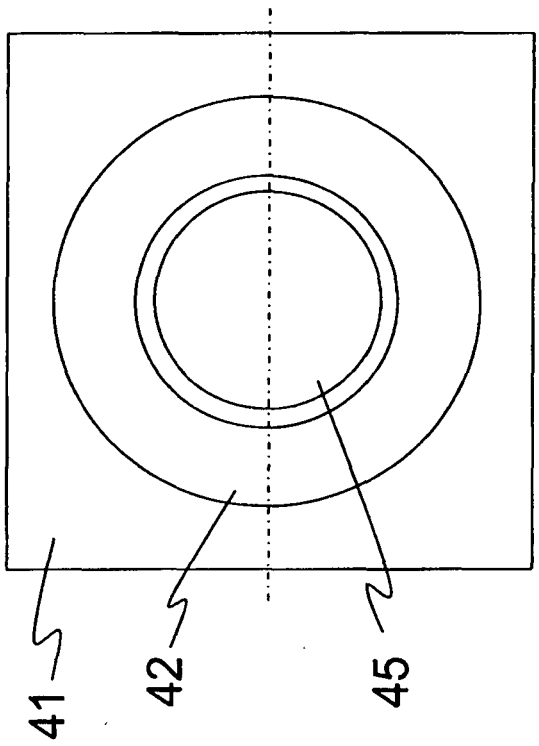


Figure 4B

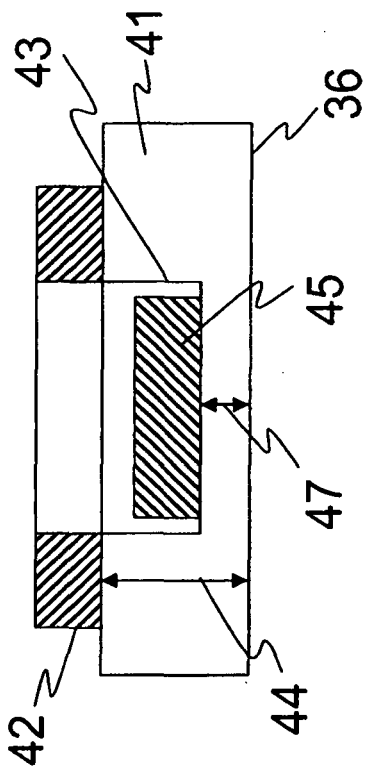


Figure 5A

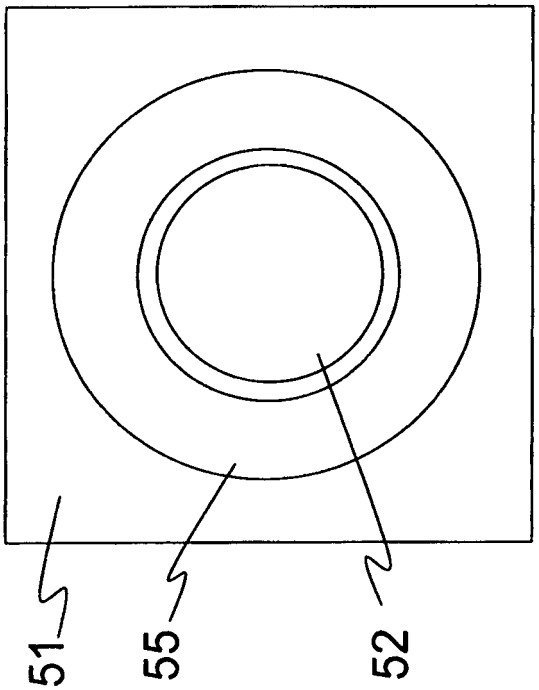


Figure 5B

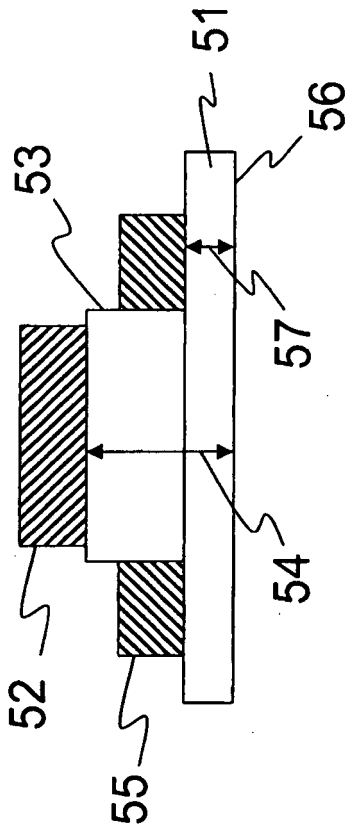


Figure 6A

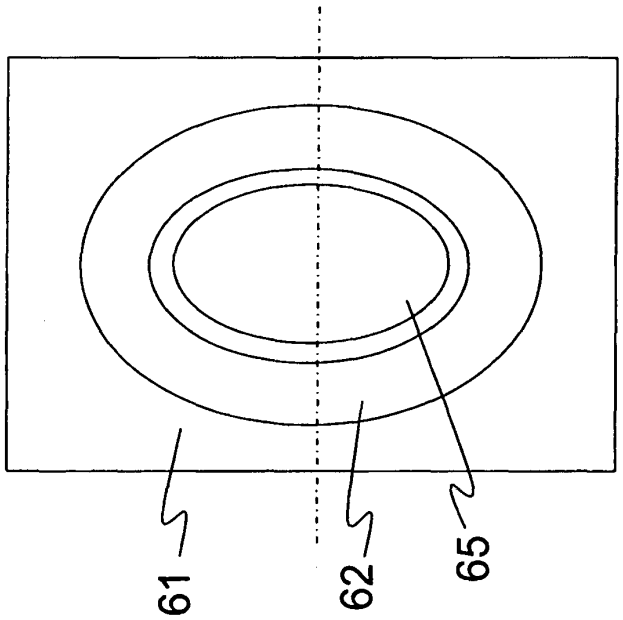


Figure 6B

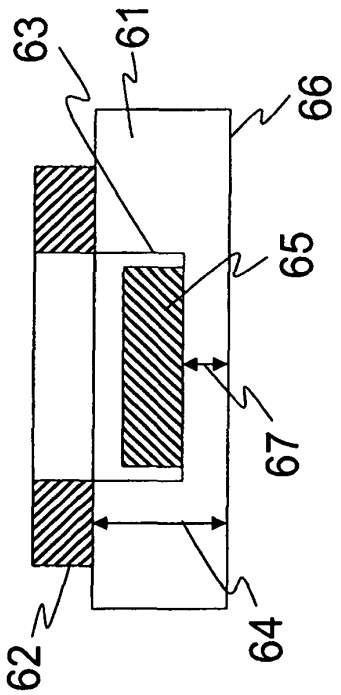


Figure 7A

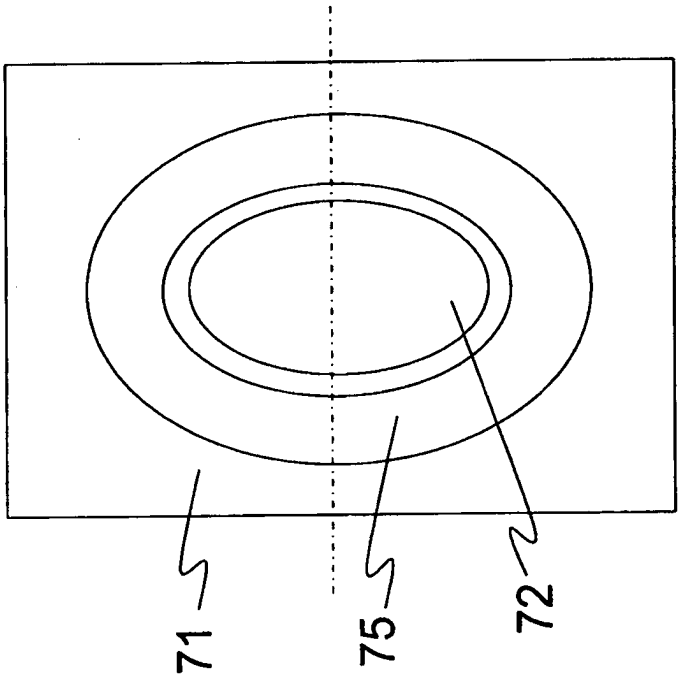


Figure 7B

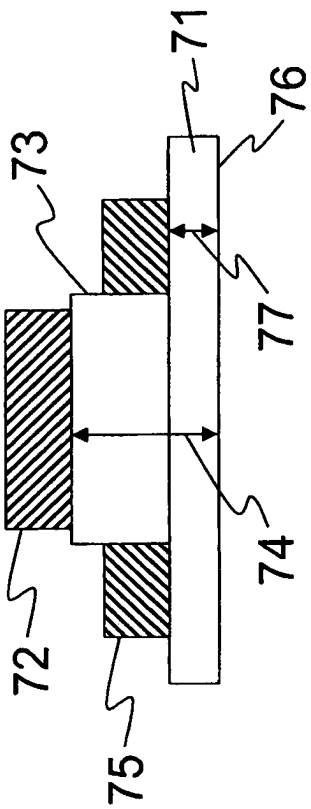


Figure 8A

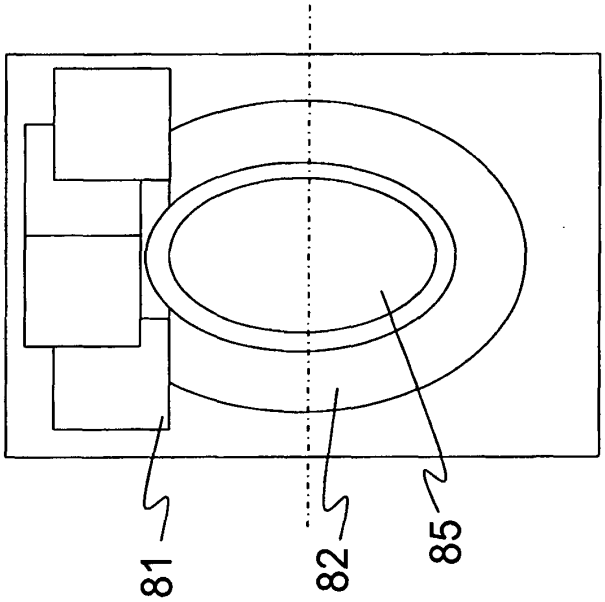


Figure 8B

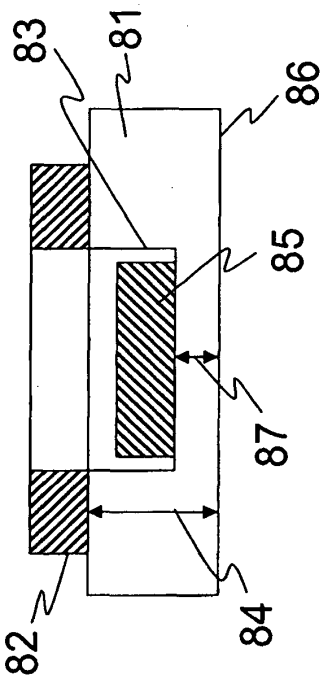


Figure 9A

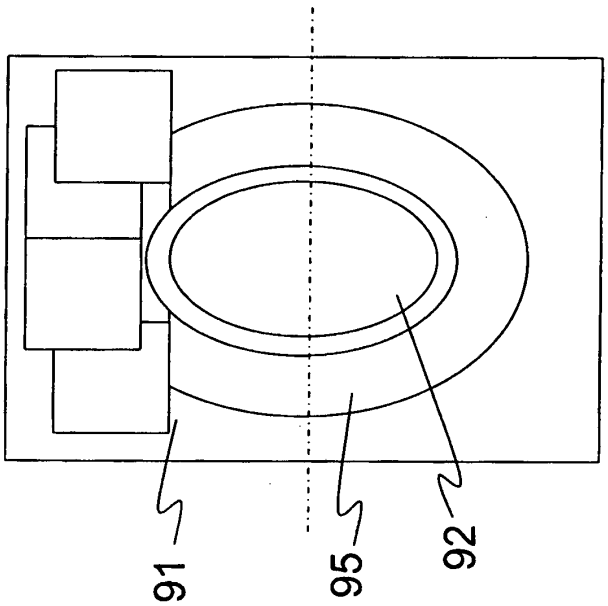


Figure 9B

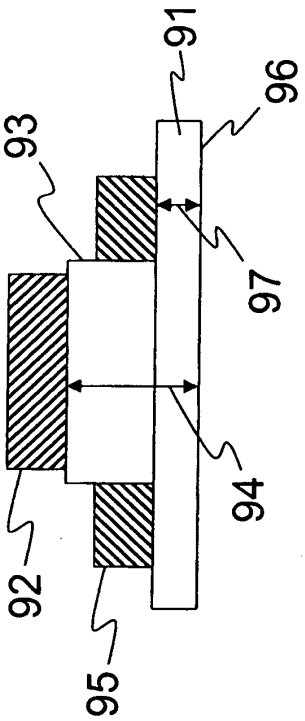


Figure 10A

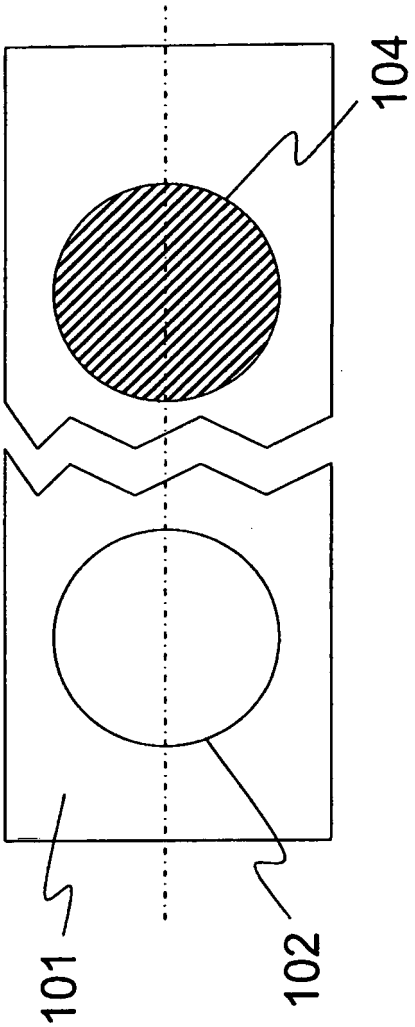


Figure 10B

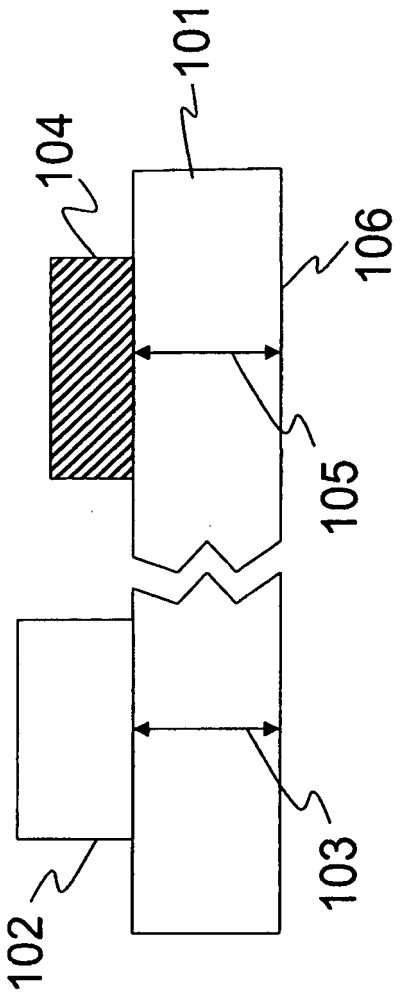


Figure 11A


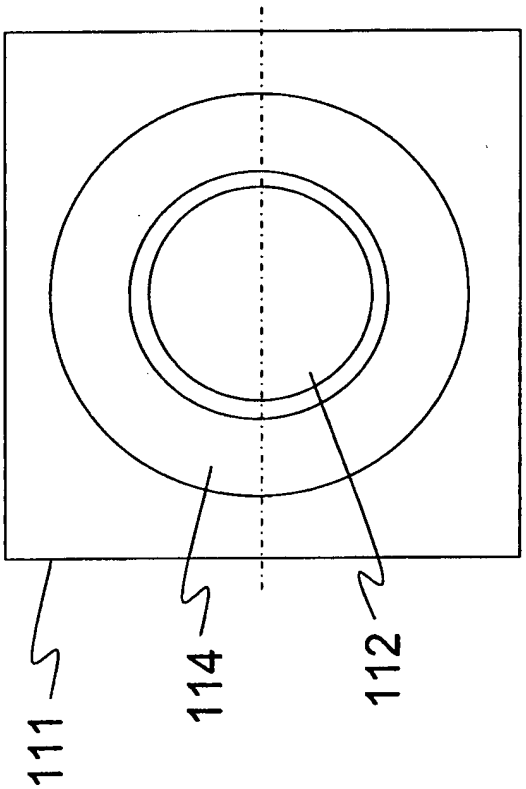


Figure 11B

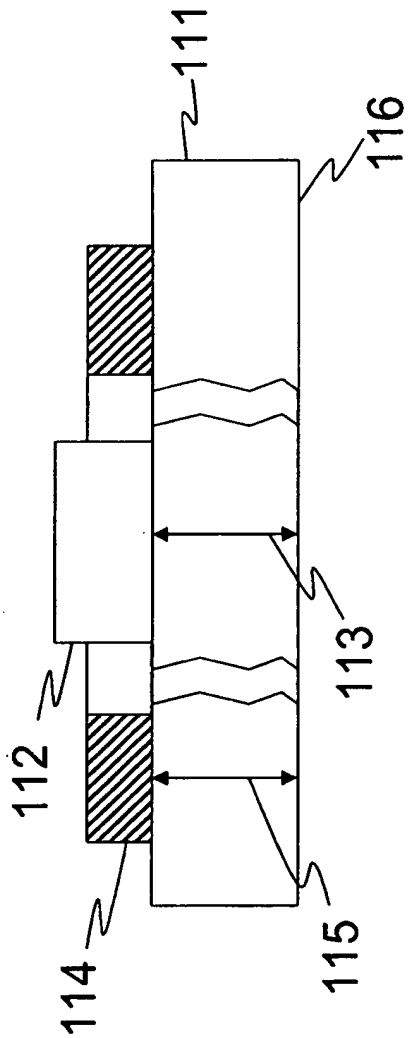

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 7427273 B2 **[0002]**
- US 20060149169 A **[0002]**
- JP 2007050204 A **[0002]**
- JP 2001314473 A **[0002]**
- US 20090318853 A **[0002]**
- EP 1279394 A1 **[0002]**

Non-patent literature cited in the description

- *FaceMate 330 Ultrasonic Face and Skin Massager from Balkowitsch Enterprises, www.balkowitsch.com* **[0002]**
- **S. H. DAYAN.** Ultrasound-assisted Facial Skin Rejuvenation. Skin Inc. Magazine, 2001 **[0002]**