

(19)



(11)

EP 2 653 229 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

23.10.2013 Bulletin 2013/43

(51) Int Cl.:

B02C 4/30 (2006.01)

B30B 11/18 (2006.01)

B30B 15/30 (2006.01)

(21) Application number: **12164950.3**

(22) Date of filing: **20.04.2012**

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

Designated Extension States:

BA ME

(72) Inventor: **Grönvall, Lars**

231 55 Trelleborg (SE)

(74) Representative: **Milanov, Nina Vendela Maria**

Awapatent AB

P.O. Box 5117

200 71 Malmö (SE)

(71) Applicant: **Metso Minerals (Sweden) AB**

231 22 Trelleborg (SE)

(54) **Roller crusher having at least one roller comprising a flange**

(57) The invention relates to a roller crusher (1) having two generally parallel rollers (2) arranged to rotate in opposite directions, towards each other, and separated by a gap, each roller (2) having a first end (3) and a second end (4). The roller crusher (1) comprises a flange (5)

attached to at least one of said ends (3, 4) of one of said rollers (2). The flange (5) extending in a radial direction of said roller (2), and has a height (H) above an outer surface (6) of said roller (2) which is sufficient to extend across said gap substantially along a nip angle (α) of said roller crusher (1).

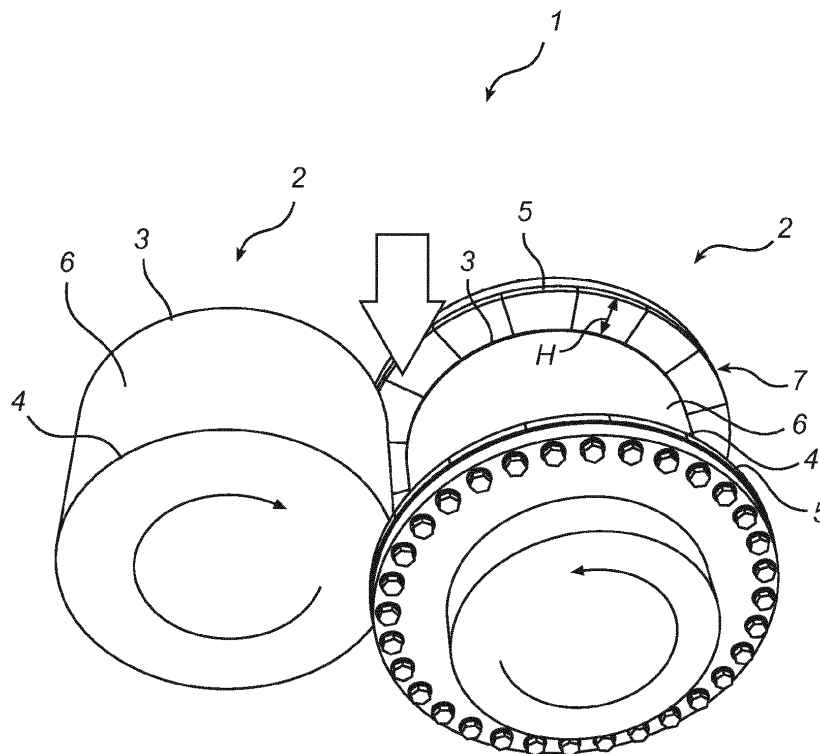


Fig. 1

EP 2 653 229 A1

Description

Technical field

[0001] The invention relates to a roller crusher having two generally parallel rollers arranged to rotate in opposite directions, towards each other, and separated by a gap, each roller having a first end and a second end.

Background art

[0002] When crushing or grinding rock, ore, cement clinker and other hard materials roller crushers may be used having two generally parallel rolls which rotate in opposite directions, towards each other, and which are separated by a gap. The material to be crushed is fed by gravity or choke-fed into the gap. One type of roller crusher is called high pressure grinding rollers or high pressure roller crushers. This type of roller crusher uses a crushing technique called interparticle crushing. Here, the material to be crushed or pulverised is crushed not only by the crushing surface of the rolls, but also by particles in the material to be crushed, hence the name interparticle crushing.

[0003] One example of a high pressure grinding roller is described in EP-516 952. The document discloses an improved roll for a roller press capable of withstanding very high nip forces in a press nip for interparticle crushing. The roller press has a plurality of spaced wear-resistant surface members embedded in the pressing surface of the roll which are of a material harder than the material of the roll surface surrounding the inserts. By varying the size and number and material properties of the embedded pieces, the wear of the press roll is matched to the materials to be comminuted to minimize wear and to match the wear profile along the roll with extended pressing use.

[0004] A general problem associated with existing high pressure grinding rollers is that the ratio between the roller diameter and the roller width is very important due to a significant edge effect, i.e. the crushing result is reduced at the edges of the rollers. This is because of the fact that material can escape over the edges of the rollers thereby reducing the crushing pressure on the material towards the gap at the edges of the rollers. Thus, these roller parameters cannot be varied to the desired extent.

Summary of the invention

[0005] It is an object of the present invention to provide an improvement of the prior art. More particularly, it is an object of the present invention to provide a roller crusher for which the roller diameter and the roller width can be varied more freely without a reduced crushing result.

[0006] These and other objects as well as advantages that will be apparent from the following description of the present invention are achieved by roller crusher according to the independent claims.

[0007] A roller crusher having two generally parallel rollers arranged to rotate in opposite directions, towards each other, and separated by a gap is provided. Each roller has a first end and a second end. The roller crusher comprises a flange attached to at least one of the ends of one of the rollers. The flange extends in a radial direction of the roller, and has a height above an outer surface of the roller which is sufficient to extend across the gap substantially along a nip angle of the roller crusher. This is advantageous in that the flange eliminates the weakness spot at the edge of the rollers. The flange will help maintaining the material on the outer roller surface. That is to say, due to the flange, the material is prevented from falling over the edge of the roller. This will in turn help increasing the pressure on the material towards the gap between the rollers at the edge of the rollers. By eliminating the weakness spot at the edge of the rollers, the roller diameter and the roller width can be varied more freely without a reduced crushing result. Additionally, the flanges will facilitate the providing of an autogenous protection layer on the rollers, consisting of the material to be crushed.

[0008] The height may be sufficient to extend across the gap substantially along a nip angle of the roller crusher, when the gap is set to a maximum operational gap. The advantages mentioned above will thus be achieved at the most critical moment of the crushing operation.

[0009] The flange may comprise a feeding structure on the inside of the flange, said structure extending from the inside of the flange towards the other end of the roller. This is advantageous in that the structure will help increasing the pressure on the material towards the gap between the rollers at the edge of the roller even further. The structure will engage with the material which will be moved inside the crushing area and the pressure will be optimized.

[0010] The structure may be arcuate, continuous, intermittent, or a combination thereof. These are preferred embodiments of the structure.

[0011] The flange may be made of a first material and the structure of a second material, said second material being harder than said first material. This way, the structure will act as a wear-resistant element and protect the flange from wear. The structure will also help creating and holding an autogenous protection layer on the flange.

[0012] The flange may be divided into a plurality of segments, which is advantageous in that both the manufacturing and mounting of the flange will be facilitated. The flange may be attached to the roller by means of adhesive, bolting, screwing, welding, brazing or any other suitable fastening technique.

[0013] The roller crusher may comprise a flange attached to each end of one of said rollers, respectively. The advantages mentioned above will thus be achieved on both ends of the roller.

[0014] Generally, all terms used in the claims are to be interpreted according to their ordinary meaning in the technical field, unless explicitly defined otherwise herein.

All references to "a/an/the [element, device, component, means, etc]" are to be interpreted openly as referring to at least one instance of said element, device, component, means, etc., unless explicitly stated otherwise. Further, by the term "comprising" it is meant "comprising but not limited to" throughout the application. Lastly, the "nip angle" is defined as the angle between the horizontal plane extending through the centre of a first and a parallel second roller, and a straight line which is drawn from the centre of the first roller to and through a point on the parallel second roller, at which point an active engagement between the second roller and the material to be crushed is started. In the literature concerning this subject, two different nip angles are provided. One nip angle concerns single particle crushing, and one nip angle concerns interparticle crushing. The nip angle concerning interparticle crushing is obviously smaller than the nip angle concerning single crushing. Note that, in the present application, the nip angle concerning interparticle crushing is intended.

Brief description of the drawings

[0015] The above, as well as additional objects, features and advantages of the present invention, will be better understood through the following illustrative and non-limiting detailed description of preferred embodiments of the present invention, with reference to the appended drawings, where the same reference numerals will be used for similar elements, wherein:

Fig. 1 is a perspective view of a roller crusher according to one exemplary embodiment of the invention,

Fig. 2a is a perspective view of a roller of the roller crusher having two flanges extending in a radial direction of the roller,

Fig. 2b is a perspective view of a segment of one of the flanges in Fig. 2a,

Fig. 3a is a perspective view of a roller of a roller crusher having two flanges extending in a radial direction of the roller,

Fig. 3b is a perspective view of a segment of one of the flanges in Fig. 3a,

Fig. 4a is a perspective view of a roller of a roller crusher having two flanges extending in a radial direction of the roller,

Fig. 4b is a perspective view of a segment of one of the flange in Fig. 4a, and

Fig. 5 is a side view of the roller crusher in Fig. 1, when having one flange only.

Detailed description of preferred embodiments of the invention

[0016] Fig. 1 illustrates a roller crusher 1 according to one exemplary embodiment of the invention. The roller crusher 1 has two generally parallel rollers 2 arranged to

rotate in opposite directions, towards each other, and are separated by a gap. Each roller 2 has a first end 3 and a second end 4. The roller crusher 1 comprises a flange 5 attached to the first and second end 3, 4 of one of the two rollers 2 of the roller crusher 1. The flanges 5 extend in a radial direction of the roller 2 and have a height H above an outer surface 6 of the roller which is sufficient to extend across the gap substantially along a nip angle α of the roller crusher 1. The height H is sufficient to extend across the gap substantially along a nip angle α of the roller crusher 1 when the gap is set to a maximum operational gap. The flanges 5 are plain and will help maintaining material to be crushed on the outer roller surface 6. That is to say, due to the flanges 5, the material is prevented from falling over the edge of the roller 2. The flanges will also facilitate the providing of an autogenous protection layer on the rollers, consisting of the material to be crushed. The flanges 5 are divided into a plurality of segments 7 in order to facilitate the manufacturing and mounting of the same. The flanges 5 are, for example, attached to the roller 2 by means of adhesive, bolting or screwing.

[0017] In Fig. 2a, the roller 2 of the roller crusher 1 having a flange 5 on each end 3, 4 and extending in a radial direction of the roller 2 is illustrated. The flanges 5 are plain and will eliminate the weakness spot at the edge of the rollers 2. The flanges 5 will help maintaining the material on the outer surface 6 of the rollers 2 and prevent the material from falling over the edge of the roller 2. This will in turn increase the pressure on the material towards the gap between the rollers 2 at the edge of the rollers 2.

[0018] Fig. 2b illustrates a segment 7 of the flange 5 in Fig. 2a. As stated above, the flanges 5 are divided into segments 7 in order to facilitate the manufacturing and mounting of the same. However, the flanges 5 can naturally be designed as one single unit.

[0019] In Fig. 3a, a second embodiment of the roller 2 of the roller crusher 1 is illustrated. Here, the flanges 5 comprise a feeding structure 8 on the inside of the flanges 5. The structure 8 extends from the inside of the flange 5 towards the other end 3, 4 of the roller 2. The structure 8 is continuous and arcuate. The structure 8 will increase the pressure on the material towards the gap between the rollers 2 at the edge of the roller 2. The material will engage with the structure 8 and be pressured towards and through the gap, i.e. the material will be choke-fed into the gap.

[0020] Fig. 3b illustrates a segment 7 of the flange 5 in Fig. 3a. Naturally, also the flanges 5 according to this second embodiment can be designed as one single unit.

[0021] In Fig. 4a, a third embodiment of the roller 2 of the roller crusher 1 is illustrated. Here, the flanges 5 also comprise a feeding structure 8 on the inside. However, the structure 8 according to this embodiment is intermittent.

[0022] Fig. 4b illustrates a segment 7 of the flange 5 in Fig. 4a. Naturally, also the flanges 5 according to this third embodiment can be designed as one single unit.

[0023] In Fig. 5, a side view of the roller crusher 1 is illustrated in order to facilitate the understanding of the nip angle α . A first straight line has been drawn from the centre of the right roller 2 to and through a point on the left roller 2, at which point an active engagement between the left roller 2 and the material to be crushed is started. The nip angle α is measured between the horizontal plane extending through the centre of the left and right roller, and said first straight line. It is the smaller of the two possible angles which can be obtained in accordance with the definition presented above. In the embodiment illustrated in Fig. 5, the height H of the flange 5 above the outer surface 6 of the roller 2 is sufficient to extend across the gap substantially along the nip angle α of the roller crusher 1.

[0024] During the crushing operation of the roller crusher 1, the material to be crushed is transported to the roller crusher 1 by means of a feeding arrangement and is introduced into a funnel of the feeding arrangement. The material to be crushed is then fed to the gap between the two rollers 2 of the roller crusher 1. The flange 5 of the roller crusher 1 will help maintaining the material on the outer roller surface 6 of the rollers 2 and help increasing the pressure on the material towards the gap between the rollers throughout the width of the rollers 2, especially at the edge of the rollers 2. When the material has been crushed by means of the two parallel and rotating crushing rollers 2, it travels by gravity out of gap in order to be transported from the unit.

[0025] The invention has mainly been described above with reference to a few embodiments. However, as is readily appreciated by a person skilled in the art, other embodiments than the ones disclosed above are equally possible within the scope of the invention, as defined by the appended claims.

[0026] For instance, the structure may be of any suitable size and shape, for example straight, inclined, curved, ring shaped, double or single.

[0027] The size and shape of the flanges may also be varied to include a plurality of structures. If the flanges comprise a plurality of structures, these structures may be of different size and shape.

to extend across said gap substantially along a nip angle (α) of said roller crusher (1).

2. A roller crusher (1) according to claim 1, wherein said height is sufficient to extend across said gap substantially along a nip angle (α) of said roller crusher (1), when said gap is set to a maximum operational gap.
3. A roller crusher (1) according to any one of the preceding claims, wherein said flange (5) comprises a feeding structure (8) on the inside of the flange (5), said structure (8) extending from the inside of the flange (5) towards the other end (3, 4) of the roller (2).
4. A roller crusher (1) according to claim 3, wherein said structure (8) is arcuate.
5. A roller crusher (1) according to claims 3 or 4, wherein said structure (8) is continuous.
6. A roller crusher (1) according to claims 3 or 4, wherein said structure (8) is intermittent.
7. A roller crusher (1) according to any one of claims 3-6, wherein said flange is made of a first material and said structure is made of a second material, said second material being harder than said first material.
8. A roller crusher (1) according to any one of the preceding claims, wherein said flange (5) is divided into a plurality of segments (7).
9. A roller crusher (1) according to any one of the preceding claims, wherein said flange (5) is attached to said roller (2) by means of adhesive, bolting, screwing, welding, brazing or any other suitable fastening technique.
10. A roller crusher (1) according to any one of the preceding claims, comprising a flange (5) attached to each end (3, 4) of one of said rollers (2), respectively.

Claims

1. A roller crusher (1) having two generally parallel rollers (2) arranged to rotate in opposite directions, towards each other, and separated by a gap, each roller (2) having a first end (3) and a second end (4), said roller crusher (1) comprising:

a flange (5) attached to at least one of said ends (3, 4) of one of said rollers (2),
 said flange (5) extending in a radial direction of said roller (2),
 said flange (5) having a height (H) above an outer surface (6) of said roller (2) which is sufficient

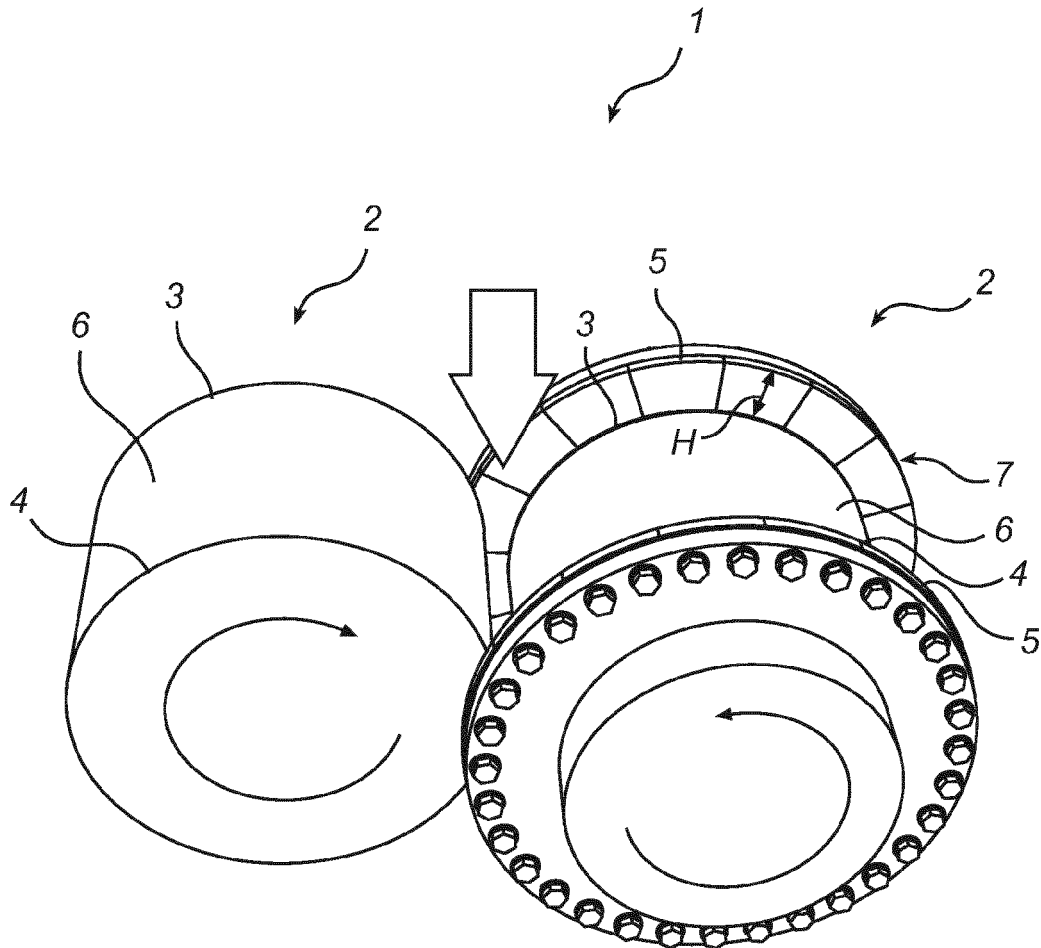
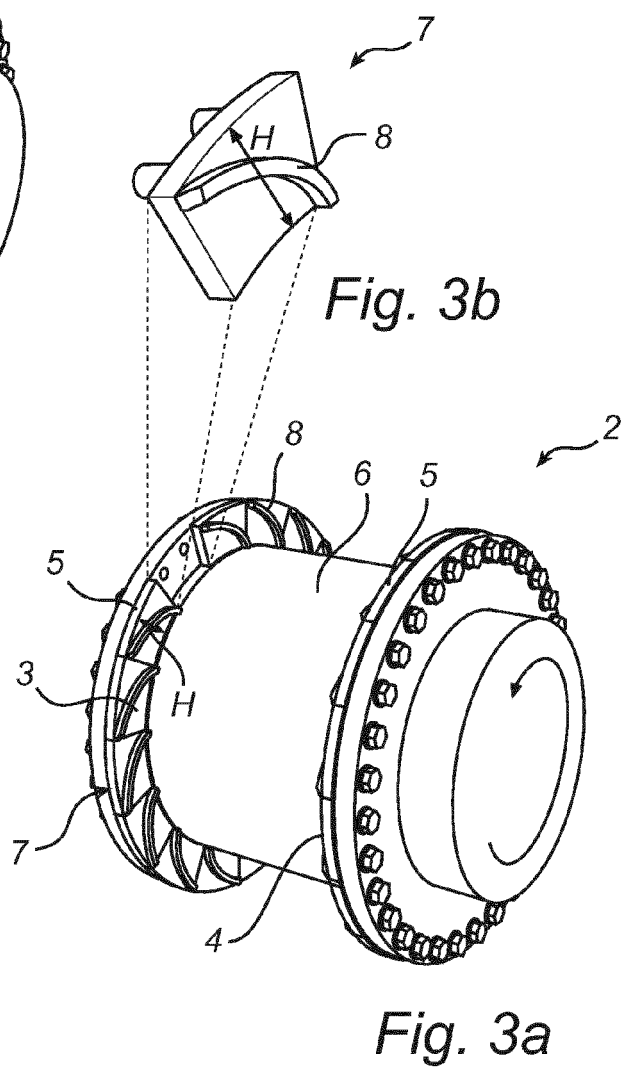
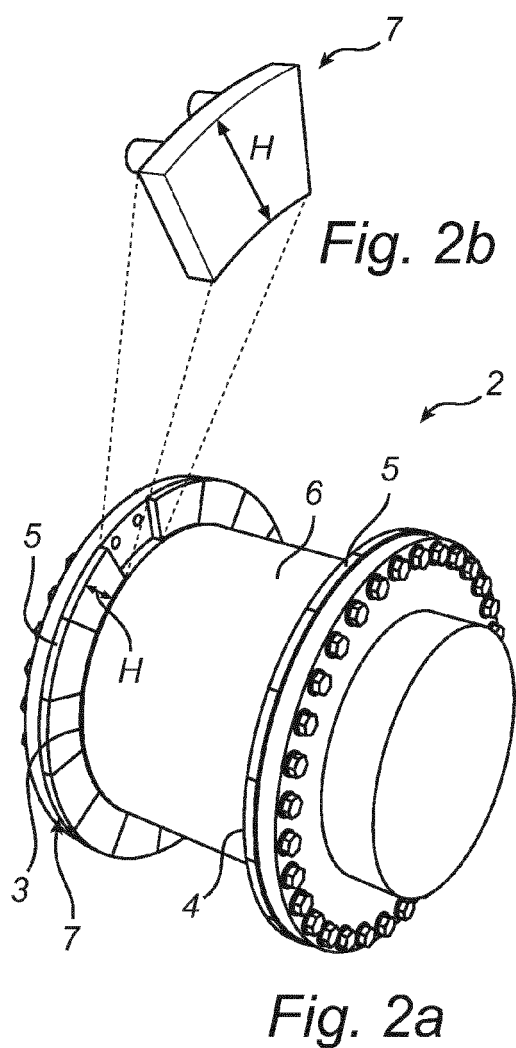
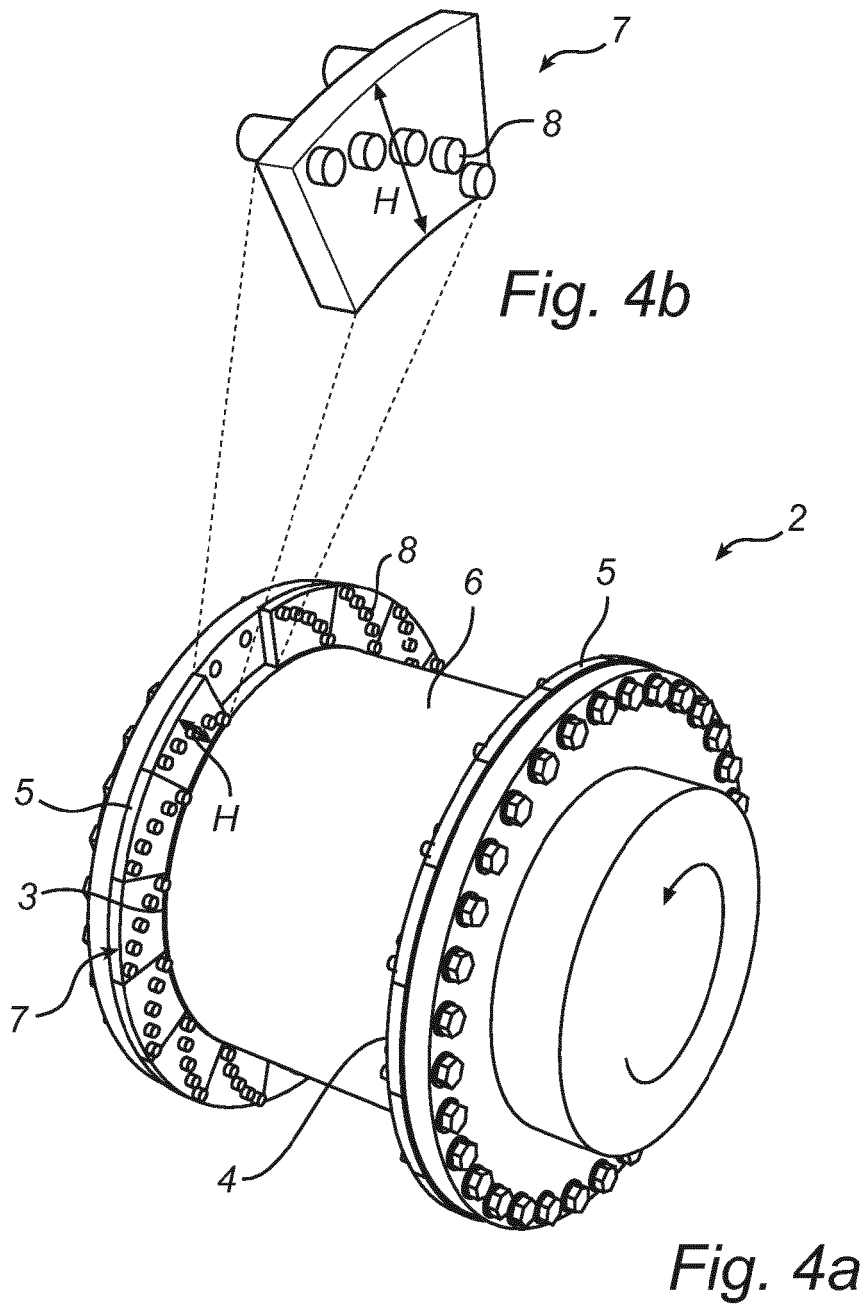


Fig. 1





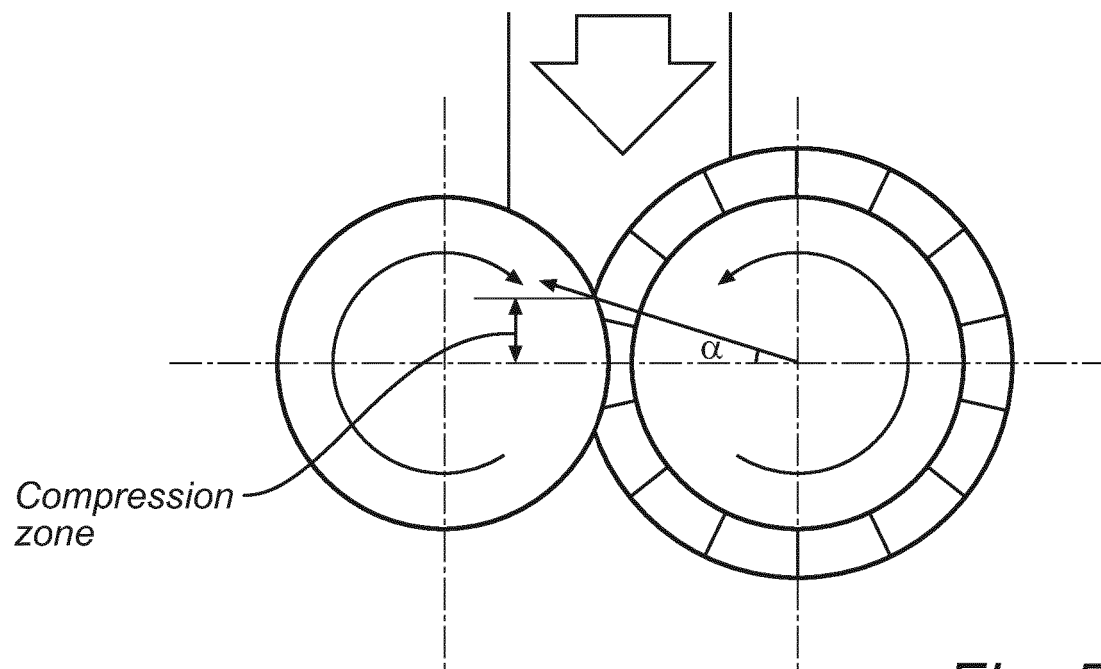


Fig. 5



EUROPEAN SEARCH REPORT

Application Number
EP 12 16 4950

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	EP 0 514 953 A2 (NITTETSU MINING CO LTD [JP]) 25 November 1992 (1992-11-25) * page 3, line 29 - page 4, line 3; figures *	1,2,9,10	INV. B02C4/30 B30B11/18 B30B15/30
X	US 5 054 701 A (DURINCK RENE [FR] ET AL) 8 October 1991 (1991-10-08) * column 2, line 55 - column 3, line 22; figures *	1,9,10	
X	DE 457 037 C (BERGEDORFER MASCHINENFABRIK V0) 6 March 1928 (1928-03-06) * page 1, lines 19-38; figures *	1,2,9,10	
X	US 1 014 383 A (FRAZEE JEREMIAH S [US]) 9 January 1912 (1912-01-09) * page 2, lines 86-96 *	1,9,10	
A	* page 4, lines 14-16; figures *	2	
X	US 1 908 519 A (LEONARD ALBERT P) 9 May 1933 (1933-05-09) * page 3, line 104 - page 4, line 50; figures 5-7 *	1,10	
A		2,3,6,9	TECHNICAL FIELDS SEARCHED (IPC) B02C B30B
A	US 5 253 816 A (KAESTINGSCHAEFER GERHARD [DE] ET AL) 19 October 1993 (1993-10-19) * column 2, lines 10-16; figures 1-3 *	8	
A	US 3 873 259 A (KENNEDY FRANK) 25 March 1975 (1975-03-25) * column 2, lines 13-17; figures *	8	
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 25 February 2013	Examiner Flodström, Benny
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

 2
EPO FORM 1503 03.82 (P04C01)



Application Number

EP 12 16 4950

CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing claims for which payment was due.

- ☐ Only part of the claims have been paid within the prescribed time limit. The present European search report has been drawn up for those claims for which no payment was due and for those claims for which claims fees have been paid, namely claim(s):
- ☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for those claims for which no payment was due.

LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

see sheet B

- ☒ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.
- ☐ As all searchable claims could be searched without effort justifying an additional fee, the Search Division did not invite payment of any additional fee.
- ☐ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:
- ☐ None of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims:
- ☐ The present supplementary European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims (Rule 164 (1) EPC).



**LACK OF UNITY OF INVENTION
SHEET B**

Application Number

EP 12 16 4950

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

1. claims: 1-7, 9, 10

A roller crusher (1) comprising potential special technical features relating to the flange (5) comprising a feeding structure (8) on the inside of the flange (5), said structure (8) extending from the inside of the flange (5) towards the other end (3, 4) of the roller (2).

2. claim: 8

A roller crusher comprising potential special technical features relating to the flange (5) being divided into a plurality of segments (7).

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 12 16 4950

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

25-02-2013

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0514953	A2	25-11-1992	
		AU 604324 B2	13-12-1990
		AU 632621 B2	07-01-1993
		AU 6253990 A	13-12-1990
		DE 3855619 D1	21-11-1996
		DE 3855619 T2	06-03-1997
		DE 3885442 D1	09-12-1993
		DE 3885442 T2	14-04-1994
		EP 0328647 A1	23-08-1989
		EP 0514953 A2	25-11-1992
		US 5088651 A	18-02-1992
		WO 8808330 A1	03-11-1988

US 5054701	A	08-10-1991	
		DE 69007870 D1	11-05-1994
		DE 69007870 T2	01-09-1994
		EP 0404656 A1	27-12-1990
		ES 2051483 T3	16-06-1994
		JP 3032751 A	13-02-1991
		US 5054701 A	08-10-1991

DE 457037	C	06-03-1928	NONE

US 1014383	A	09-01-1912	NONE

US 1908519	A	09-05-1933	NONE

US 5253816	A	19-10-1993	NONE

US 3873259	A	25-03-1975	NONE

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 516952 A [0003]