

(19)



(11)

EP 2 657 557 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
13.11.2019 Bulletin 2019/46

(51) Int Cl.:
F16C 33/72 ^(2006.01) **B60B 27/00** ^(2006.01)

(21) Application number: **13164957.6**

(22) Date of filing: **23.04.2013**

(54) **SENSOR-CARRIER CAP FOR A BEARING OF A WHEEL HUB**

SENSORTRÄGERKAPPE FÜR EIN LAGER EINER RADNABE

CAPUCHON DOTÉ D'UN SUPPORT DE SONDE POUR UN PALIER DE MOYEU DE ROUE

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **24.04.2012 IT TO20120364**

(43) Date of publication of application:
30.10.2013 Bulletin 2013/44

(73) Proprietor: **Aktiebolaget SKF
415 50 Göteborg (SE)**

(72) Inventors:
• **Ciulla, Luca
I-10137 Torino (IT)**

• **Finetti, William
I-10040 La Loggia (TO) (IT)**
• **Weber, Philippe
F-37230 Fondettes (FR)**

(74) Representative: **Tedeschini, Luca
SKF Industrie S.p.A.
Via Pinerolo, 44
10060 Airasca (TO) (IT)**

(56) References cited:
**DE-U1- 29 609 380 JP-A- 2006 226 491
JP-A- 2006 275 200 US-A- 5 172 984
US-A- 5 195 807 US-A1- 2006 159 377**

EP 2 657 557 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND OF THE INVENTION

[0001] The present invention relates to a sensor-carrier cap for a bearing of a wheel hub. The invention also relates to a hub-bearing assembly for a motor vehicle wheel.

[0002] There are known sensor-carrier caps made of plastic material, comprising a bottom wall which has a seat for accommodating the sensor and a lateral cylindrical interface wall for mounting the cap in a wheel hub assembly. The cap is mounted in the wheel hub assembly by interference between the interface wall and an outer ring of the wheel hub assembly. The lateral mounting wall is usually provided with a reinforcement made of metallic material which stiffens the wall. See, for example, US 2006/159377 A1. In some applications, the metal reinforcement is positioned on the radially outer surface of the cylindrical wall; in other cases, the reinforcement is embedded in the plastic material of the lateral wall. This reinforcement of metallic material not only increases the production cost of the sensor-carrier caps described above, but may also cause bimetallic problems when placed in contact with the outer ring of the wheel hub assembly.

[0003] JP 2006 275200 A discloses a sensor-carrier cap according to the preamble of claim 1. A venting plastic bearing end cap is known from US 5 195 807 A.

SUMMARY OF THE INVENTION

[0004] One object of the present invention is to provide a simpler cap which is more economical to manufacture. Another object of the invention is to make the mounting of the cap absolutely reliable.

[0005] These and other objects and advantages are achieved, according to the invention, by a sensor-carrier cap according to Claim 1. According to another aspect of the invention, a hub-bearing assembly having the characteristics defined in Claim 6 is provided. Preferred embodiments of the invention are defined in the dependent claims.

[0006] Briefly, the invention proposes the provision of a sensor-carrier cap which does not have a conventional metal reinforcing insert joined to the cylindrical wall. The cap is snap locked on to the outer ring of the hub-bearing assembly, by snap locking means integral with the cylindrical wall of the sensor-carrier cap. These locking means are snap locked into a recess or undercut formed in a cylindrical cavity provided in a tubular appendix or appendage of the outer bearing ring of the hub-bearing assembly.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] Some preferred embodiments of the invention will now be described, by way of non-limiting example,

with reference to the attached drawings, in which:

Figure 1 is a view in axial section of a bearing assembly of a wheel hub incorporating a sensor-carrier cap;

Figure 2 is an enlarged partial view of a detail of the assembly of Figure 1; and

Figure 3 is an enlarged partial view of the cap of Figure 1.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0008] Figure 1 shows a hub-bearing assembly indicated as a whole by the number 10. In the embodiment shown in Figure 1, the assembly 10 is of the third generation type for a driven wheel (not shown) of a motor vehicle. The assembly 10 comprises a central hub 11 rotatable about a central axis X of rotation, and a rolling bearing 12 which includes a fixed ring 13 positioned radially outside the hub 11, a pair of radially inner, axially adjacent rings 14a, 14b, and a double row of rolling elements, which in this example are conical rollers 15a, 15b. Throughout the present description and the appended claims, any terms and expressions indicating positions and directions, such as "radial" and "axial", are to be understood as referring to the axis of rotation x. On the other hand, expressions such as "axially inner" or "axially outer" relate to a condition in which the hub-bearing assembly is mounted on a motor vehicle.

[0009] The hub 11 forms a central cylindrical portion 17 with an integral flange 18 which extends radially outwards at an axially outer end of the hub. The flange 18 has equally circumferentially spaced axial holes 19 into which bolts 20 are inserted to fasten a wheel (not shown). The inner half-rings 14a, 14b are fastened to the hub, in a known way, by the cold forming of an edge 21 at the axially inner end of the hub, which is deformed in a radially outward direction so as to lock the half-rings axially on the central cylindrical portion 17 of the hub.

[0010] The outer ring 13 forms a radially outer mounting flange 22, adapted to be mounted on a strut (not shown) of the suspension of a vehicle, and a tubular appendix or appendage 23, which projects on the axially inner side of the bearing, in other words on the side which, in use, faces the inside of the vehicle. The tubular appendage 23 has a radially outer surface 24 of cylindrical shape, adapted to be inserted into a housing hole (not shown) formed in the suspension strut. The tubular appendage 23 also has a radially inner surface 25, coaxial with the outer cylindrical surface 24, and a flat end surface 26 which extends radially at the axially inner end of the tubular appendage 23.

[0011] The inner surface 25 comprises an axially inner cylindrical portion 25a and an axially outer undercut cylindrical portion 25b, having an inner diameter "D" greater than an inner diameter "d" of the axially inner cylindrical portion 25a. The cylindrical portions 25a and 25b are

connected by a connecting portion 25c, preferably tapered in an axially inward direction, being conical for example.

[0012] A sensor-carrier cap 30, forming part of a device for detecting the wheel rotation speed, is mounted in an axially inner position on the tubular appendage 23 of the outer ring 13. The cap 30, made of plastic material, comprises a bottom wall 31 placed transversely to a central axis A, and a cylindrical wall 32, which extends axially about the axis A on one side of the bottom wall 31 and forms, jointly with the latter wall, a cavity 33. The central axis A of the cap 30 coincides, in the mounted position, with the central axis X of rotation of the hub-bearing assembly 10.

[0013] The cap 30 forms an annular peripheral projection 34 which projects radially outwards from the cylindrical wall 32 and constitutes a radially extending shoulder surface 38 facing in an axially outward direction, this surface acting as an axial shoulder of the cap to ensure the correct mounting of the cap on the tubular appendage 23.

[0014] The bottom wall 31 forms a seat 35 for accommodating a sensor (not shown). Said sensor and other components of a device for detecting the rotation speed of the hub are known, and therefore need not be described in detail here. It will be sufficient to mention that the detection device further comprises an encoder, indicated schematically by 36, of annular shape, for example a rubber encoder incorporating particles of magnetized powder such as ferrite. The encoder, which can be fastened in various ways and in various positions to the rotatable hub or to another element fixed with respect to rotation to the hub, generally has magnetic north and south poles placed alternately around its circumference.

[0015] The encoder is located in a position opposite the sensor, and is separated from the latter by a gap. In the present exemplary embodiment, the sensor faces the encoder in an axial direction. In other embodiments, the sensor may be mounted so as to face the encoder in a radial direction. The invention is not to be interpreted as being limited to a specific type of detection sensor and corresponding encoder.

[0016] The cylindrical wall 32 of the cap 30 is made entirely of plastic material and is therefore devoid of any conventional metal reinforcement. The cap 30 is mounted on the tubular appendage 23 both by radial interference and by snap locking. For this purpose, the cylindrical wall 32 has a radially outer surface 37 forming a step 39 axially spaced from the shoulder surface 38. The step 39 is adapted to interact by snap locking with the undercut formed by the surfaces 25b and 25c in the inner surface 25 of the tubular appendage 23.

[0017] In the preferred embodiment, the step 39 (Figure 3) is formed by the following portions of the radially outer surface 37:

- a cylindrical portion 37a, which extends axially from the shoulder surface 38;

- an edge portion, which is axially outward in use and is spaced from the shoulder surface 38, and provides a relief 37b projecting in a radially outer direction with respect to the cylindrical surface portion 37a; and
- a connecting portion 37c, tapered in an axially inward direction, being conical for example, which extends between the relief 37b and the portion of cylindrical surface 37a.

[0018] In the example illustrated herein, the relief 37b (and therefore the step 39) is a circumferentially continuous relief in the form of an annular ridge. Alternatively, the relief 37b could be made in a circumferentially discontinuous form, for example as a plurality of bosses spaced apart angularly along the outer surface 37. The reference 39a indicates the circumferential line where the cylindrical portion 37a meets the step 39; 25d indicates the circumferential line where the cylindrical portion 25a joins the tapered connecting portion 25c. The axial distance L between the line 39a and the shoulder surface 38 may be, depending on the machining tolerances, at most equal to, if not shorter than, the distance between the line 25d and the end surface 26 of the tubular appendage 23. In other words, the cylindrical surface portion 37a of the cylindrical wall 32 of the cap has an axial length L which may be at most equal to, if not shorter than, the axial length of the axially inner cylindrical portion 25a of the tubular appendage 23.

[0019] The step 39 runs along the surface 25a until it meets the cylindrical undercut portion 25b. Thus the surface 37 radially interferes with the surface 25 along the portion L. The surface 37c also forms an interference fit with the surface 25c.

[0020] Because of the configuration described above, any axial play between the cap 30 and the outer ring 13 is eliminated, and the cap is mounted stably on the outer ring of the bearing, having an additional forced fit with radial interference which makes it possible to omit the conventional reinforcing insert mentioned in the introductory part.

[0021] Preferably, at least one of the surface portions 25c and 37c is a surface tapered in an axially inward direction. When the cap 30 is mounted onto the outer ring 13, the surface portion 37c is engaged against the surface portion 25c. Because of the mutual engagement of these two tapered surfaces, and owing to the aforesaid distance L, the shoulder surface 38 of the cap is kept in abutment against the end flat surface 26 of the tubular appendage 23, thus helping to keep the cap in the correct axial position on the bearing. The choice of making both surface portions 25c and 37c in the form of surfaces tapered in an axially inward direction is even more helpful in eliminating any axial play between the cap and the outer ring.

[0022] In other embodiments (not shown), only one of the two surfaces 37c and 25c is tapered in an axially inward direction, while the other of the two (25c or 37c) may have a shape other than a tapered shape; for ex-

ample, it may lie in a plane substantially perpendicular (or radial or transverse) to the axis X and the axis A.

[0023] Although certain exemplary embodiments have been illustrated in the detailed description above, it should be understood that a wide variety of hub-bearing assemblies and sensor-carrier caps can be configured in different shapes from those illustrated and described. For example, the surface portions 25a and 25b, shown here as cylindrical, could alternatively be conical. It should also be understood that the illustrated embodiments are purely exemplary and are not to be interpreted as limiting in terms of the scope, application or configuration. The drawings and the preceding detailed description will provide persons skilled in the art with a convenient guide to the application of the invention, but it is to be understood that various changes may be made to the values described.

Claims

1. A sensor-carrier cap (30) for a bearing of a wheel hub, the cap being made of plastic material and comprising:

- a bottom wall (31) arranged transversely to a central axis (A) and providing a seat (35) for accommodating a rotational speed detecting sensor,

- a cylindrical mounting wall (32) extending axially from one side of the bottom wall (31) around said axis (A) ;

the cap being **characterized in that** it comprises snap locking means (37b, 39) projecting in a radially outer direction from the cylindrical wall (32), for locking the sensor-carrier cap on a tubular appendage (23) of a wheel hub bearing.

2. A cap according to claim 1, further comprising an annular peripheral projection (34), which projects radially outwardly from the cylindrical wall (32) and provides a radially extending shoulder surface (38) on the side of the cylindrical wall (32); the cap being **characterized in that** the snap locking means comprise a step (39) formed on a radially outer surface (37) of the cylindrical wall (32) at a position axially spaced from the shoulder surface (38).

3. A cap according to claim 2, **characterized in that** said step (39) is formed by three portions of the radially outer surface (37):

- a first cylindrical portion (37a), which extends axially from the shoulder surface (38);
- a second portion, which is axially spaced from the shoulder surface (38) and provides a relief (37b) projecting in a radially outer direction with respect to the cylindrical surface portion (37a);

and

- a third connection portion (37c) which extends between the relief (37b) and the first cylindrical portion (37a) .

4. A cap according to claim 3, **characterized in that** the third connection portion (37c) includes a surface portion tapering from the relief (37b) towards the first cylindrical surface portion (37a).
5. A cap according to any one of the preceding claims, **characterized in that** the cylindrical wall (32) is made entirely of plastic material and is devoid of metal reinforcing inserts.
6. A hub-bearing assembly (10) for a wheel of a motor vehicle, the assembly (10) comprising:

a central hub (11) rotatable about a central axis (X) of rotation;

a rolling bearing (12) including a stationary ring (13) arranged radially outwardly of the hub (11), and rolling elements (15a, 15b) arranged between the stationary ring (13) and the hub (11), the stationary ring (13) forming a tubular appendage (23) which protrudes from an axially inner side of the ring (13) and has a radially inner surface (25) extending in an axial direction;

the assembly being **characterized in that** the radially inner surface (25) provides an axially inner surface portion (25a), an axially outer, undercut surface portion (25b) having an inner diameter (D) greater than an inner diameter (d) of the axially inner cylindrical surface portion (25a), and a connecting surface portion (25c) which connects the surfaces (25a) and (25b);

the assembly further comprising a sensor-carrier cap (30) according to any one of claims 1 to 5, mounted on the tubular appendage (23) on the stationary ring (13), whereby the snap locking means (39, 37c) of the cap engage the axially outer, undercut surface portion (25b) of the tubular appendage (23).

7. An assembly according to claim 6 comprising a sensor-carrier cap (30) according to claim 2, **characterized in that** the stationary ring (13) has a flat end surface (26), which extends radially at an axially inner end of the tubular appendage (23), and is in axial abutment against the shoulder surface (38) of the sensor-carrier cap (30).
8. An assembly according to claim 6 comprising a sensor-carrier cap (30) according to claim 3, **characterized in that** the first cylindrical portion (37a) of the radially outer surface (37) of the sensor-carrier cap (30) has an axial length (L), and that the axially inner

surface portion (25a) of the tubular appendage (23) has an axial length which is at most equal, if not shorter, than the axial length (L).

9. An assembly according to claim 7 comprising a sensor-carrier cap (30) according to claim 3, **characterized in that** at least one of:

- the connecting surface portion (25c) which connects the axially inner surface portion (25a) and the axially outer, undercut surface portion (25b) of the tubular appendix (23), and
- the third connecting surface portion (37c) that extends between the relief (37b) and the first cylindrical portion (37a) of the outer surface (37) of the sensor-carrier cap (30) is a surface tapered in an axially inner direction, and that

when the sensor-carrier cap (30) is mounted onto the stationary ring (13), the third connecting surface portion (37c) is engaged against the connecting surface portion (25c), and the shoulder surface (38) of the sensor-carrier cap (30) is in abutment against the flat end surface (26) of the tubular appendix (23).

10. An assembly according to claim 9, **characterized in that** both of said surface portions (25c) and (37c) are surfaces tapering in an axially inner direction.

Patentansprüche

1. Sensorträgerkappe (30) für ein Lager einer Radnabe, wobei die Kappe aus einem Kunststoffmaterial hergestellt ist und Folgendes umfasst:

- eine Bodenwand (31), die quer zu einer mittleren Achse (A) angeordnet ist und einen Sitz (35) zum Aufnehmen eines Drehzahlerfassungssensors bereitstellt,
- eine zylindrische Befestigungswand (32), die sich axial von einer Seite der Bodenwand (31) um die Achse (A) erstreckt,

wobei die Kappe **dadurch gekennzeichnet ist, dass** sie Schnappverriegelungsmittel (37b, 39) umfasst, die in einer radial äußeren Richtung von der zylindrischen Wand (32) vorstehen, um die Sensorträgerkappe auf einem röhrenförmigen Fortsatz (23) eines Radnabenlagers zu verriegeln.

2. Kappe nach Anspruch 1, ferner umfassend einen ringförmigen peripheren Vorsprung (34), der radial nach außen von der zylindrischen Wand (32) vorsteht und eine sich radial erstreckende Schulterfläche (38) auf der Seite der zylindrischen Wand (32) bereitstellt, wobei die Kappe **dadurch gekenn-**

zeichnet ist, dass die Schnappverriegelungsmittel eine Stufe (39) umfassen, die auf einer radial äußeren Fläche (37) der zylindrischen Wand (32) an einer Stelle ausgebildet ist, die axial von der Schulterfläche (38) beabstandet ist.

3. Kappe nach Anspruch 2, **dadurch gekennzeichnet, dass** die Stufe (39) durch drei Abschnitte der radial äußeren Fläche (37) ausgebildet ist:

- einen ersten zylindrischen Abschnitt (37a), der sich axial von der Schulterfläche (38) erstreckt,
- einen zweiten Abschnitt, der axial von der Schulterfläche (38) beabstandet ist und ein Relief (37b) bereitstellt, das in einer radial äußeren Richtung in Bezug auf den zylindrischen Flächenabschnitt (37a) vorsteht, und
- einen dritten Verbindungsabschnitt (37c), der sich zwischen dem Relief (37b) und dem ersten zylindrischen Abschnitt (37a) erstreckt.

4. Kappe nach Anspruch 3, **dadurch gekennzeichnet, dass** der dritte Verbindungsabschnitt (37c) einen Flächenabschnitt umfasst, der sich von dem Relief (37b) in Richtung zu dem ersten zylindrischen Flächenabschnitt (37a) verjüngt.

5. Kappe nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, dass** die zylindrische Wand (32) vollständig aus einem Kunststoffmaterial hergestellt und frei von verstärkenden Metalleinsätzen ist.

6. Nabenlageranordnung (10) für ein Rad eines Kraftfahrzeugs, wobei die Anordnung (10) Folgendes umfasst:

eine mittlere Nabe (11), die um eine mittlere Drehachse (X) drehbar ist,

ein Wälzlager (12), das einen feststehenden Ring (13), der radial außen von der Nabe (11) angeordnet ist, und Wälzkörper (15a, 15b), die zwischen dem feststehenden Ring (13) und der Nabe (11) angeordnet sind, umfasst, wobei der feststehende Ring (13) einen röhrenförmigen Fortsatz (23) bildet, der von einer axial inneren Seite des Rings (13) vorsteht und eine radial innere Fläche (25) aufweist, die sich in einer axialen Richtung erstreckt,

wobei die Anordnung **dadurch gekennzeichnet ist, dass** die radial innere Fläche (25) einen axial inneren Flächenabschnitt (25a), einen axial äußeren, hinterschnittenen Flächenabschnitt (25b), der einen Innendurchmesser (D) aufweist, der größer als ein Innendurchmesser (d) des axial inneren zylindrischen Flächenabschnitts (25a) ist, und einen Verbindungsflächenabschnitt (25c), der die Flächen (25a) und

- (25b) verbindet, bereitstellt, wobei die Anordnung ferner eine Sensorträgerkappe (30) nach einem der Ansprüche 1 bis 5 umfasst, die auf dem röhrenförmigen Fortsatz (23) an dem feststehenden Ring (13) befestigt ist, wodurch die Schnappverriegelungsmittel (39, 37c) der Kappe mit dem axial äußeren, hinterschnittenen Flächenabschnitt (25b) des röhrenförmigen Fortsatzes (23) eingreifen.
7. Anordnung nach Anspruch 6, umfassend eine Sensorträgerkappe (30) nach Anspruch 2, **dadurch gekennzeichnet, dass** der feststehende Ring (13) eine ebene Endfläche (26) aufweist, die sich radial an einem axial inneren Ende des röhrenförmigen Fortsatzes (23) erstreckt und sich in axialer Anlage an der Schulterfläche (38) der Sensorträgerkappe (30) befindet.
8. Anordnung nach Anspruch 6, umfassend eine Sensorträgerkappe (30) nach Anspruch 3, **dadurch gekennzeichnet, dass** der erste zylindrische Abschnitt (37a) der radial äußeren Fläche (37) der Sensorträgerkappe (30) eine axiale Länge (L) aufweist und dass der axial innere Flächenabschnitt (25a) des röhrenförmigen Fortsatzes (23) eine axiale Länge aufweist, die höchstens so groß wie die axiale Länge (L), wenn nicht kürzer, ist.
9. Anordnung nach Anspruch 7, umfassend eine Sensorträgerkappe (30) nach Anspruch 3, **dadurch gekennzeichnet, dass**
- der Verbindungsflächenabschnitt (25c), der den axial inneren Flächenabschnitt (25a) und den axial äußeren, hinterschnittenen Flächenabschnitt (25b) des röhrenförmigen Fortsatzes (23) verbindet, und/oder
 - der dritte Verbindungsflächenabschnitt (37c), der sich zwischen dem Relief (37b) und dem ersten zylindrischen Abschnitt (37a) der äußeren Fläche (37) der Sensorträgerkappe (30) erstreckt, eine Fläche ist, die sich in einer axial inneren Richtung verjüngt, und dass sich der dritte Verbindungsflächenabschnitt (37c), wenn die Sensorträgerkappe (30) auf dem feststehenden Ring (13) befestigt ist, in Eingriff mit dem Verbindungsflächenabschnitt (25c) befindet und sich die Schulterfläche (38) der Sensorträgerkappe (30) in Anlage an der ebenen Endfläche (26) des röhrenförmigen Fortsatzes (23) befindet.
10. Anordnung nach Anspruch 9, **dadurch gekennzeichnet, dass** sowohl der Flächenabschnitt (25c) als auch (37c) Flächen sind, die sich in einer axial inneren Richtung verjüngen.

Revendications

1. Capuchon doté d'un support de sonde (30) pour un palier de moyeu de roue, le capuchon étant réalisé en matière plastique et comprenant :
 - une paroi inférieure (31) disposée transversalement à un axe central (A) et comportant un siège (35) pour recevoir une sonde de détection de vitesse de rotation,
 - une paroi de montage cylindrique (32) s'étendant axialement depuis un côté de la paroi inférieure (31) autour dudit axe (A) ; le capuchon étant **caractérisé en ce qu'il** comporte des moyens de verrouillage à encliquetage (37b, 39) faisant saillie dans une direction radialement extérieure à partir de la paroi cylindrique (32), pour verrouiller le capuchon doté d'un support de sonde sur un appendice tubulaire (23) d'un palier de moyeu de roue.
2. Capuchon selon la revendication 1, comprenant en outre une saillie périphérique annulaire (34), qui fait saillie radialement vers l'extérieur à partir de la paroi cylindrique (32) et fournit une surface d'épaulement s'étendant radialement (38) sur le côté de la paroi cylindrique (32) ; le capuchon étant **caractérisé en ce que** les moyens de verrouillage à encliquetage comprennent une marche (39) formée sur une surface radialement extérieure (37) de la paroi cylindrique (32) en une position espacée axialement de la surface d'épaulement (38) .
3. Capuchon selon la revendication 2, **caractérisé en ce que** ladite marche (39) est formée par trois parties de la surface radialement extérieure (37) :
 - une première partie cylindrique (37a) qui s'étend axialement à partir de la surface d'épaulement (38) ;
 - une deuxième partie, qui est espacée axialement de la surface d'épaulement (38) et fournit un relief (37b) faisant saillie dans une direction radialement extérieure par rapport à la partie cylindrique de surface (37a) ; et
 - une troisième partie de connexion (37c) qui s'étend entre le relief (37b) et la première partie cylindrique (37a) .
4. Capuchon selon la revendication 3, **caractérisé en ce que** la troisième partie de connexion (37c) comprend une partie de surface se rétrécissant du relief (37b) vers la première partie cylindrique de surface (37a).
5. Capuchon selon l'une quelconque des revendications précédentes, **caractérisé en ce que** la paroi cylindrique (32) est entièrement réalisée en matière

plastique et est dépourvue d'inserts métalliques de renforcement.

6. Ensemble de palier de moyeu (10) pour une roue d'un véhicule automobile, l'ensemble (10) comprenant :



un moyeu central (11) pouvant tourner autour d'un axe central (X) de rotation ;
un palier à roulement (12) comprenant une bague fixe (13) disposée radialement vers l'extérieur du moyeu (11), et des éléments roulants (15a, 15b) disposés entre la bague fixe (13) et le moyeu (11), la bague fixe (13) formant un appendice tubulaire (23) qui fait saillie depuis un côté axialement intérieur de la bague (13) et a une surface radialement intérieure (25) s'étendant dans une direction axiale ;
l'ensemble étant **caractérisé en ce que** la surface radialement intérieure (25) fournit une partie de surface axialement intérieure (25a), une partie de surface contre-dépouillée axialement extérieure (25b) ayant un diamètre intérieur (D) supérieur à un diamètre intérieur (d) de la partie de surface axialement intérieure cylindrique (25a), et une partie de surface de connexion (25c) qui relie les surfaces (25a) et (25b) ;
l'ensemble comprenant en outre un capuchon doté d'un support de sonde (30) selon l'une quelconque des revendications 1 à 5, monté sur l'appendice tubulaire (23) sur la bague fixe (13), les moyens de verrouillage à encliquetage (39, 37c) du capuchon venant en prise avec la partie de surface contre-dépouillée axialement extérieure (25b) de l'appendice tubulaire (23).

7. Ensemble selon la revendication 6 comprenant un capuchon doté d'un support de sonde (30) selon la revendication 2, **caractérisé en ce que** la bague fixe (13) présente une surface d'extrémité plate (26), qui s'étend radialement au niveau d'une extrémité axialement intérieure de l'appendice tubulaire (23), et est en butée axiale contre la surface d'épaulement (38) du capuchon doté d'un support de sonde (30).
8. Ensemble selon la revendication 6 comprenant un capuchon doté d'un support de sonde (30) selon la revendication 3, **caractérisé en ce que** la première partie cylindrique (37a) de la surface radialement extérieure (37) du capuchon doté d'un support de sonde (30) a une longueur axiale (L) et **en ce que** la partie de surface axialement intérieure (25a) de l'appendice tubulaire (23) a une longueur axiale au plus égale, sinon inférieure, à la longueur axiale (L).
9. Ensemble selon la revendication 7 comprenant un capuchon doté d'un support de sonde (30) selon la revendication 3, **caractérisé en ce qu'**au moins

l'une parmi :

- la partie de surface de connexion (25c) qui relie la partie de surface axialement intérieure (25a) et la partie de surface contre-dépouillée axialement extérieure (25b) de l'appendice tubulaire (23), et
- la troisième partie de surface de connexion (37c) qui s'étend entre le relief (37b) et la première partie cylindrique (37a) de la surface extérieure (37) du capuchon doté d'un support de sonde (30)
est une surface effilée dans une direction axialement intérieure, et **en ce que**
lorsque le capuchon doté d'un support de sonde (30) est monté sur la bague fixe (13), la troisième partie de surface de connexion (37c) est engagée contre la partie de surface de connexion (25c), et la surface d'épaulement (38) du capuchon doté d'un support de sonde (30) est en butée contre la surface d'extrémité plate (26) de l'appendice tubulaire (23).

10. Ensemble selon la revendication 9, **caractérisé en ce que** lesdites deux parties de surface (25c) et (37c) sont des surfaces s'effilant dans une direction axialement intérieure.

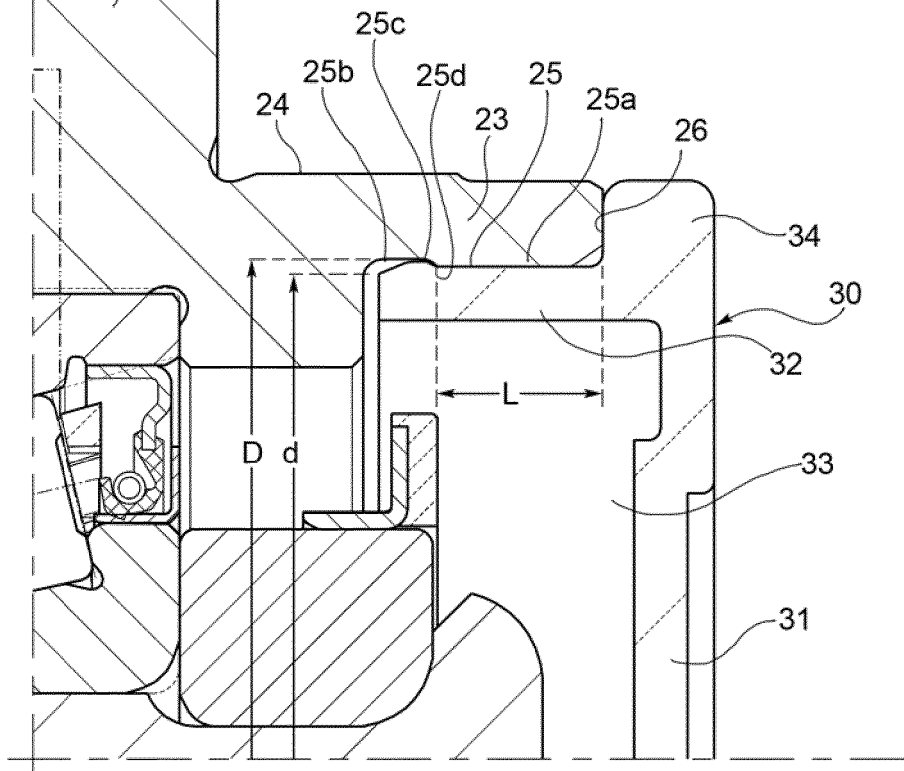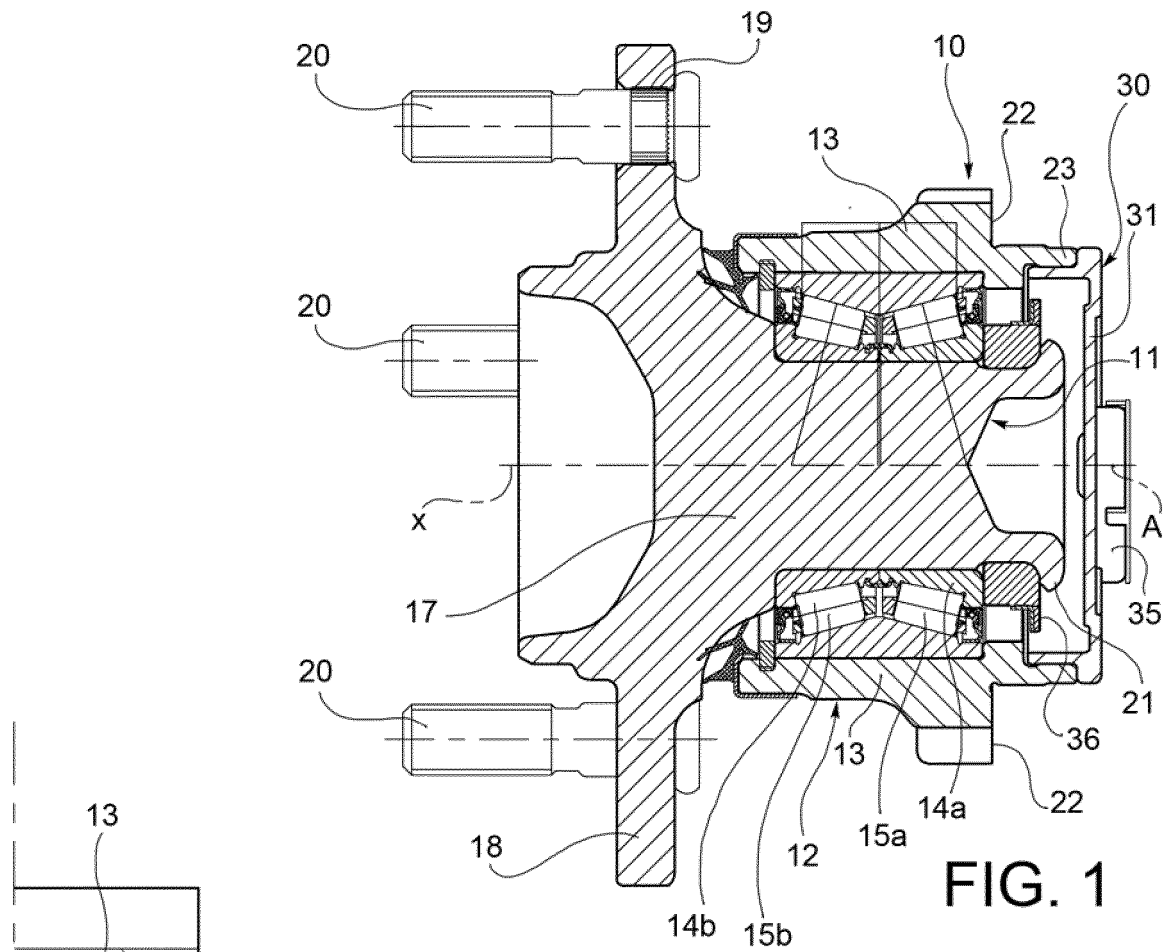

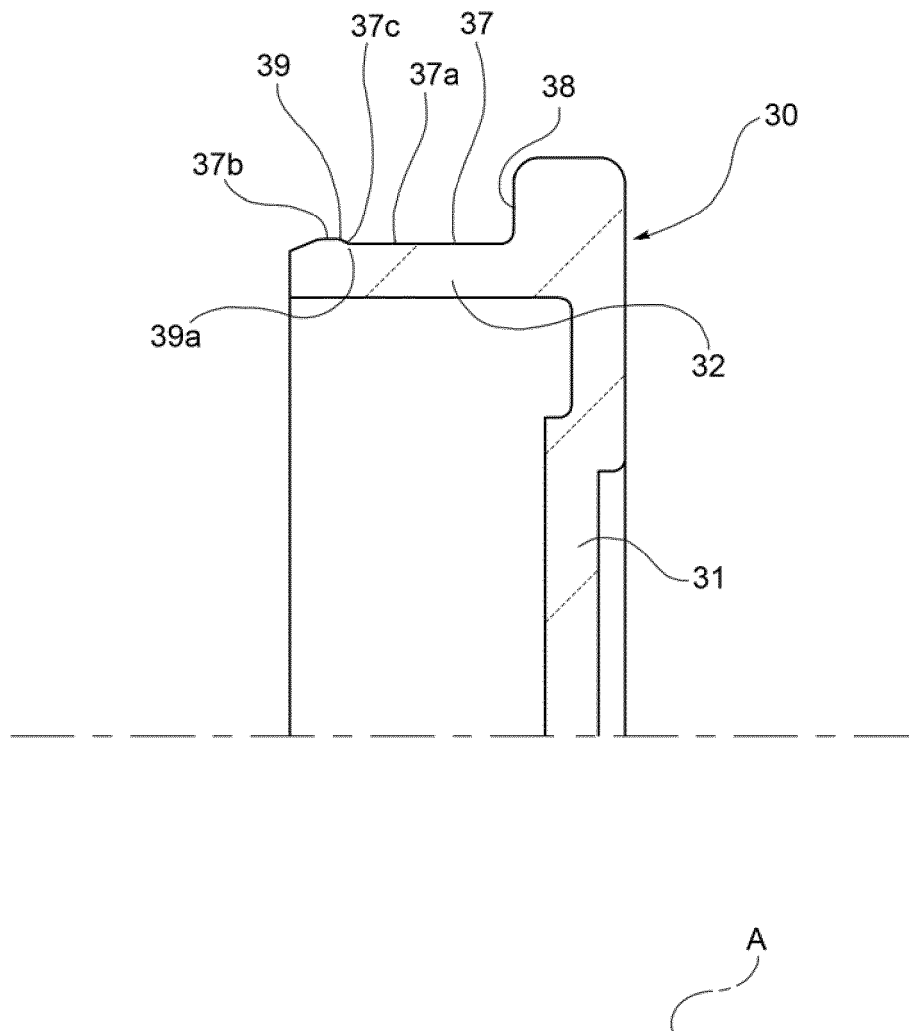


FIG. 3

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 2006159377 A1 [0002]
- JP 2006275200 A [0003]
- US 5195807 A [0003]