

(19)



(11)

EP 2 667 530 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
13.11.2019 Bulletin 2019/46

(51) Int Cl.:
H04H 60/65 (2008.01) H04H 60/51 (2008.01)

(21) Application number: **12168744.6**

(22) Date of filing: **21.05.2012**

(54) Radio station list management

Funkstationslistenverwaltung

Gestion de liste de stations de radio

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(43) Date of publication of application:
27.11.2013 Bulletin 2013/48

(73) Proprietor: **BlackBerry Limited**
Waterloo, ON N2K 0A7 (CA)

(72) Inventor: **Weng, Jianfeng**
Kanata, Ontario K2K 3K1 (CA)

(74) Representative: **Noble, Nicholas et al**
Kilburn & Strode LLP
Lacon London
84 Theobalds Road
London WC1X 8NL (GB)

(56) References cited:
JP-A- 2009 111 602 US-A1- 2010 178 938
US-A1- 2011 281 538

EP 2 667 530 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND

[0001] The availability of FM radio stations, or other radio broadcast stations, varies with geographical location. Prior techniques for selecting preferred stations are additive, meaning that selected radio stations may be assigned to preset buttons and thus added to a list of favorite stations. This may be done by performing a scan of available channels and playing each available channel or a short period of time, during which a user may press and hold a preset button to assign the station being played to the selected preset button. In this way, a selected station is added to the list of stations accessible via the preset buttons. Still further, a computer application or program may perform an automatic scan of radio stations to produce a list of available stations. A user may then select stations from the list of available stations to be added to a list of favorite stations. In both of these examples, the station scan is initiated by the user, and radio stations must be selected one at a time by the user to be added to a list of stations.

[0002] It would be useful to provide an improved method for managing a station list.

[0003] US 2010/0178938 discloses systems and methods for customizing radio presents.

[0004] US 2011/0281538 discloses techniques for recommending over-the-air radio stations and other streaming media to a user.

[0005] JP2009111602A relates to a digital broadcasting receiver that displays a channel list according to the present position of the receiver.

BRIEF DESCRIPTION OF THE DRAWINGS

[0006] Exemplary embodiments of the present disclosure will be described below with reference to the included drawings such that like reference numerals refer to like elements and in which:

FIG. 1 is a block diagram of a communications system, in accordance with illustrative embodiments of the present disclosure;

FIG. 2 is a flow chart of a method of storing a list of preferred radio stations in accordance with some exemplary embodiments of the present disclosure;

FIG. 3 is a diagrammatic representation of several exemplary lists of preferred radio stations in accordance with illustrative embodiments of the present disclosure; and

FIG. 4 is a flow chart of a method for triggering a scan of available radio stations in accordance with certain aspects of the present disclosure.

DETAILED DESCRIPTION

[0007] For simplicity and clarity of illustration, refer-

ence numerals may be repeated among the figures to indicate corresponding or analogous elements. Numerous details are set forth to provide an understanding of the illustrative embodiments described herein. The embodiments may be practiced without these details. In other instances, well-known methods, procedures, and components have not been described in detail to avoid obscuring the disclosed embodiments described. The description is not to be considered as limited to the scope of the exemplary embodiments shown and described herein.

[0008] The present disclosure relates to the management of one or more radio station lists in a wireless receiver. The wireless receiver may be, for example, a dedicated receiver, a cellular telephone, a personal digital assistant (PDA), a tablet, laptop or other computer, or some other portable electronic device. In one illustrative embodiment, a list of preferred radio stations is maintained in the wireless receiver. Upon detection of a scan event, a tuner scans a band of frequencies to detect available radio stations and forms a list of available radio stations. Radio stations that fail to meet a preference criterion are removed from the list of available radio stations to form the list of preferred radio stations. The list of preferred radio stations is stored in a memory and may be accessed by a user to select a radio station for playback.

[0009] **FIG. 1** is a block diagram of a wireless receiver in accordance with various aspects of the present disclosure. The wireless receiver 100 includes a scanner 102, a processor 104, a memory 106 and a radio antenna 108. The scanner 102 includes a tuner 110, a scan controller 112 and a station finder 114. The processor 104 includes an event detector 116, a station list editor 118 and an analysis module 120. The elements of the processor 104 may be implemented as software modules executed by the processor. The tuner 110 receives a broadcast radio signal from the radio antenna 108.

[0010] The broadcast radio signal content may be imbedded using frequency modulation (FM), amplitude modulation (AM) or other modulation scheme apparent to those of skill in the art. In the sequel, the broadcast channels of the various radio stations are described as being multiplexed using frequency division multiplexing. However, other channel or station multiplexing, such as time division multiplexing or code division multiplexing may be used. In such cases, scanning over a band of radio frequencies is considered to be equivalent to scanning over a plurality of multiplexed radio channels.

[0011] When the event detector 116 detects a scan event, the scan controller 112 is activated causing the tuner 110 to scan a range of radio frequencies. The station finder 114 monitors the output from the tuner 110. If a radio station is found at a particular frequency being scanned, characteristics of the radio station, including its broadcast frequency, are stored in memory region 122 of the memory 106 to form a list of available radio stations. Other information, such as the geographical location of the receiver, the time the station was found, and/or infor-

mation from a Radio Data System (RDS) subcarrier signal may also be stored in the memory 122. The station list editor 118 accesses the memory 122, identifies radio stations of the list of available radio stations that fail to meet one or more preference criteria and removes those radio stations from the list of available radio stations. The remaining stations, which meet the preference criteria, are stored in memory region 124 as a list of preferred radio stations.

[0012] A user interface 126 enables a user of the wireless receiver to access the list of preferred radio stations in memory region 124 of the memory 106, retrieve the frequency of the station and control the tuner 110 to select a desired radio station for playback using playback circuit 128. The user interface may comprise, for example, dedicated buttons or other physical controls, a voice interface, or a graphical user interface displayed on a display screen.

[0013] The analysis module 120 monitors the output from the tuner 110. This output is the demodulated signal from the selected radio station. A variety of analyses may be performed by the analysis module 120. For example, the signal may be analyzed for signal strength and/or signal quality. The signal may be analyzed to determine a content classification.

[0014] The playback circuit 128 is responsive to the output from the tuner 110 and may include, for example, a signal driver circuit for a loudspeaker or for an ear-phone output socket 130.

[0015] In one exemplary embodiment, the event detector 116 monitors the ear-phone socket 130 and initiates a new scan when an ear-phone is plugged into the socket 130.

[0016] In a further example, the event detector 116 receives information, relating to the geographic location of the wireless receiver, from a locator 132. The locator 132 may be a Global Positioning System (GPS) receiver. The locator may access a Cell Identifier of a cellular telephone system. In a cellular network, each base transceiver station (BTS) broadcasts both a Local Area Identifier (LAI) and a Cell Identifier to its cells. A wireless receiver within a cell can approximate its actual location using the geographical coordinates of the corresponding BTS. Similarly, the locator 132 may determine an approximate location from a Media Access Control (MAC) Identifier or other identifier received from a nearby wireless network node positioned at a known location.

[0017] In a still further illustrative embodiment, the event detector 116 receives time information from a clock or timer 134. For example, the event detector 116 may initiate a new scan at regular intervals or when the time since the last scan exceeds a limit.

[0018] The user interface 126 may be configured to enable a user to store a set of user preferences in memory region 136 of memory 106. The user preferences may include station content classifications, for example. In one exemplary embodiment, the user preferences include one or more content classifications that the user

does not wish to be included in the list of preferred stations. The station list editor 118 accesses user preference memory 136 and removes stations with the specified content classifications from the list of preferred radio station. For example, a user may wish to avoid talk radio stations or country music stations, so stations with these content classifications are removed from the list. In another example, the user preferences include all one or more content classifications that the user prefers, in which case with stations with other content classifications are removed from the list of preferred stations by the station list editor 118.

[0019] The analysis module 120, the locator 132, the clock or timer 134, and the ear-phone detector associated with ear-phone socket 130 are all examples of automatic scan event generators that are capable of automatically triggering the scanner 102 to perform a new scan for radio stations. User Interface 126 provides a manual scan event generator that may be employed to initiate a scan. Other scan event generators will be apparent to those of ordinary skill in the art.

[0020] The processor 104 may be controlled by computer-executable instructions stored in a non-transitory computer-readable medium such as memory 106. In some exemplary embodiments, the instructions, when executed by the processor, cause the processor to detect a scan event and, upon detection of the scan event, scan a plurality of potential broadcast radio channels to detect available radio stations. For example, the scanner may scan a frequency band to detect stations multiplexed by frequency. Further instructions cause the processor to identify radio stations of the available radio stations that fail to meet a preference criterion, remove the identified radio stations to form the list of preferred radio stations, and store the list of preferred radio stations in a memory accessible to the processor.

[0021] FIG. 2 is a flow chart of a method 200 of storing a list of preferred radio stations in a wireless receiver. The method begins at start block 202. If a scan event is detected, as depicted by the positive branch from decision block 204, a band of radio frequencies is scanned at block 206 to detect available radio stations. Each scanned frequency is monitored to determine if a radio station is available at that frequency, resulting in the formation of a list of available radio stations at block 208. At block 210, radio stations that fail to meet a preference criterion are identified and, at block 212, the identified radio stations are removed from the list of available radio stations to form the list of preferred radio stations. The list of preferred radio stations is stored in a memory at block 214, and flow returns to decision block.

[0022] A scan event may comprise the connection of an ear-phone to the ear-phone socket. That is, a new scan may be performed when an ear-phone is plugged into the wireless receiver. A new scan may also be performed if a time since a prior scan has elapsed, or if a signal quality of the radio station being listened to falls below a set threshold. A scan event may comprise a

change in location. For example, a current location of the wireless receiver may be compared to a location where a previous scan was performed. If the locations are sufficiently far apart, a new scan may be triggered and the list of preferred radio stations is updated. A new scan may also be performed when requested by a user via a user interface of the wireless receiver.

[0023] One or more preference criteria may be used to determine which radio stations should be removed from, or retained in, the list of available radio stations. Example criteria include: a minimum threshold of signal quality, the preferred content classifications, and content classifications to be removed. Content classification include, for example, 'talk radio', 'news', 'jazz', 'rock', 'country', 'religious', 'sports', 'music', etc. In one embodiment, a content classification is determined from a database of classifications indexed by broadcast frequency or channel. In a further embodiment, the content classification is determined from an analysis of signals broadcast from the radio stations. In a still further embodiment, the content classification is determined from Radio Data System (RDS) subcarrier signals broadcast from the radio stations.

[0024] Invalid radio stations, that is, stations having no content, may also be removed from the list of available radio stations.

[0025] In some exemplary embodiments, a locator is used to determine the geographic location of the wireless receiver when a scan is made. The list of preferred radio stations may include a broadcast frequency of each radio station and the location of the wireless receiver when the scan was made.

[0026] FIG. 3 is a diagrammatic representation of several exemplary lists of preferred radio stations. The figure shows a first list 300, a second list 302 and a third list 304. Each entry of the first list 300 includes a scan location 306 and a scan time 308, that record where and when the first list was formed. Each entry 310 in the list 300 includes a broadcast frequency (or equivalently the broadcast channel) of the radio station. Optionally, each entry may also include a station identifier, a content classification and/or other information associated with the station (such as the number of times a station has been accessed). The stations may be sorted in an ascending or descending order according to the broadcast frequency associated with each station or according to the number of times that each station has been accessed. In a further illustrative embodiment, the scan location and scan time may be listed in each entry 310. The second list 302, which was formed at a different scan location 312 and at a different scan time 314, has a similar structure to that of the first list. The second list includes a number of entries 316, each relating to a preferred radio station.

[0027] In one exemplary embodiment, the first list of preferred radio stations 300 and the second list of preferred radio stations 302 are compared. If the lists are found to be substantially similar, the first and second lists

are combined or merged to form a third list of preferred radio stations 304. Lists of preferred radio stations may be determined to be substantially similar if they have a number of entries in common. The third list of preferred radio stations 304 comprises a combination of the first and second lists of preferred radio stations. In the example shown in FIG. 3, stations with identifiers ID-1, ID-2, ID-4 and ID-5 are common to both the first list and the second list. The scan location 318 of the third list may be a mid point between the locations 306 and 312. The scan time 320 of the third list 304 may be the later, or earlier, of the scan times 308 or 314, or some other time, such as the time the third list was formed, for example. The entries 322 in third list 304 include all of the entries from the first list 300 and the second list 302, but redundant entries have been removed to avoid duplication. Combining the lists reduces the number of lists and reduces the amount of memory required to store the lists.

[0028] The process of combination may be repeated. For example, the third list 304 may itself be combined with another substantially similar list.

[0029] Once one or more lists of preferred radio stations are formed, the user may select a radio station from the list for playback. If multiple lists are formed, the list made at the location closest to the current location may be presented to the user as a default list.

[0030] An entry within a list may be designated as a default selection. When the wireless receiver is switched on, the preferred list may be selected dependent upon the location of the wireless receiver, and the default selection in that list may be selected as the initial radio station to be played back.

[0031] FIG. 4 is a flow chart of a method for triggering a scan for available radio stations in accordance with exemplary embodiments of the present disclosure. The method 400 allows one or more lists of preferred radio stations to be updated when various scan events are detected and a scan is conducted. A particular exemplary embodiment may detect one or more types of scan events. Following start block 402 in FIG. 4, a check is made at decision block 404 to determine if the geographical location of the wireless receiver has changed exceeding a set amount from a previous scan position. If the location has changed by more than the set amount, as depicted by the positive branch from decision block 404, a scan is conducted and then one or more lists of preferred radio stations are updated at block 406. If the position has not changed sufficiently, flow continues to decision block 408 where the quality of one or more radio signals is checked. If the user is listening to a radio station, the quality of the radio signal of that radio station is monitored. If the quality of the signal is below a set threshold, as indicated by a quality measure, the user may be asked if he or she wishes a new scan of radio stations to be conducted. Upon a positive answer from the user, a scan is conducted and then one or more lists of preferred radio stations are updated at block 406, as indicated by the positive branch from decision block 408.

Otherwise, a scan is not conducted and the user continues listening to the radio station. If the user is not listening to a radio station, the default radio station may be monitored or, alternatively, each of the radio stations in the list associated with the current location may be monitored in turn. In one exemplary embodiment, if quality falls below the set threshold, the monitored station is removed from the list associated with the current location. Alternatively, a new scan may be performed. If the quality of the signal is above the set threshold, as indicated by the negative branch from decision block 408, flow continues to decision block 410 where a check is performed to see if a timed event has occurred. For example, the timed event may be a scheduled time, such as every hour at 10 minutes past the hour, or a relative time, such as 30 minutes after a previous scan. If a timed event has occurred, as depicted by the positive branch from decision block 410, a scan is conducted and then the list of preferred radio station is updated at block 406, otherwise, flow continues to decision block 412. At decision block 412 the action of connecting an ear-phone to the wireless receiver is detected. If an ear-phone connection is detected, as depicted by the positive branch from decision block 412, a scan is conducted and then the list of preferred radio station is updated at block 406. Otherwise, flow continues to decision block 414 where user requests are detected. A scan event may be requested by a user. For example, a user may interact with a graphical user interface of the wireless receiver or press a designated button on the wireless receiver to generate a scan request. If a user request is received, as depicted by the positive branch from decision block 414, a scan is conducted and then the list of preferred radio station is updated at block 406. Otherwise, flow returns to block 404 to detect other scan events. A particular embodiment may be configured to detect one or more of the scan events shown in **FIG. 4**. Scan events other than the examples depicted in the figure may also be detected.

[0032] Scan events may be detected in combination. For example, a new scan may be performed if an ear-phone and the wireless device is in a new location, or a new scan may be performed if 25 minutes have elapsed since the **last** scan, and the ear-phone is plugged in.

[0033] The wireless receiver disclosed above may be a dedicated radio receiver or a cellular telephone, a personal digital assistant (PDA), a tablet, laptop or other computer, or some other portable electronic device able to receive radio broadcasts.

[0034] The implementations of the present disclosure described above are intended to be merely exemplary. It will be appreciated by those of skill in the art that alterations, modifications and variations to the illustrative embodiments disclosed herein may be made without departing from the scope of the present disclosure. Moreover, selected features from one or more of the above-described exemplary embodiments may be combined to create alternative embodiments not explicitly shown and described herein.

[0035] It will be appreciated that any module or component disclosed herein that executes instructions may include or otherwise have access to non-transient and tangible computer readable media such as storage media, computer storage media, or data storage devices (removable or non-removable) such as, for example, magnetic disks, optical disks, or tape data storage. Computer storage media may include volatile and non-volatile, removable and non-removable media implemented in any method or technology for storage of information, such as computer readable instructions, data structures, program modules, or other data. Examples of computer storage media include RAM, ROM, EEPROM, flash memory or other memory technology, CD-ROM, digital versatile disks (DVD) or other optical storage, magnetic cassettes, magnetic tape, magnetic disk storage or other magnetic storage devices, or any other medium which can be used to store the desired information and which can be accessed by an application, module, or both. Any such computer storage media may be part of the server, any component of or related to the network, backend, etc., or accessible or connectable thereto. Any application or module herein described may be implemented using computer readable/executable instructions that may be stored or otherwise held by such computer readable media.

[0036] The present disclosure may be embodied in other specific forms without departing from its essential characteristics. The described exemplary embodiments are to be considered in all respects only as illustrative and not restrictive. The scope of the disclosure is, therefore, indicated by the appended claims rather than by the foregoing description. All changes that come within the meaning and range of equivalency of the claims are to be embraced within their scope.

Claims

1. A method of managing preferred radio stations in a wireless receiver (100), the method comprising:

in response to detecting a scan event (204), scanning a plurality of radio broadcast channels (206) to detect available radio stations of the plurality of radio broadcast channels; identifying radio stations (210) of the available radio stations that fail to meet a preference criterion; removing the identified radio stations from the available radio stations (212) to form a list of preferred radio stations that meet the preference criterion; and storing the list of preferred radio stations (214), wherein detecting the scan event (204) comprises detecting at least one of the following events: connection (412) of an ear-phone to the wireless receiver;

and
a signal quality below a set threshold (408),
and wherein storing the list of preferred radio
stations comprises:

storing a broadcast channel of each radio
station in the list of preferred radio stations;
storing the location (306) of the wireless re-
ceiver (100); the method further comprising:

comparing a first list (300) of preferred
radio stations stored at a first location
(306) with a second list (302) of pre-
ferred radio stations stored at a second
location (312); and
replacing the first and second lists of
preferred radio stations with a third list
(304) of preferred radio stations if the
first and second lists of preferred radio
stations have a predetermined number
of entries in common; where the third
list of preferred radio stations (304) in-
cludes a combination of the first (300)
and second (302) lists of preferred ra-
dio stations.

2. The method of claim 1, where detecting the scan
event further comprises:

determining a location of the wireless receiver
(100); and
comparing (404) the location of the wireless re-
ceiver to a previous location of the wireless re-
ceiver (100) associated with a previous scan
event.

3. The method of claim 1, where the preference crite-
rion is a criterion comprising at least one of:

a signal quality characteristic; and
a content classification.

4. A wireless receiver (100) comprising:

a scanner (102) operable to scan a plurality of
radio broadcast channels to find available radio
stations in response to a scan event;
a station list editor (118) operable to remove ra-
dio stations of the available radio stations that
fail to meet a preference criterion, to form a list
of preferred radio stations;
a memory (106) operable to store the list of pre-
ferred radio stations;
a scan event generator;
a locator (132) operable to determine a geo-
graphical location of the wireless receiver; and
a scan event detector (116) arranged to detect
the scan event,

wherein detecting the scan event comprises:

a signal quality analyzer (120) detecting a
signal quality below a set threshold; and
an ear-phone detector detecting connection
of an ear-phone into an ear-phone socket
(130) of the wireless receiver,
wherein storing the list of preferred radio
stations comprises:

storing a broadcast channel of each ra-
dio station in the list of preferred radio
stations;
storing the location (306) of the wireless
receiver (100), and wherein the station
list editor (318) is further arranged to
compare a first list (300) of preferred
radio stations stored at a first location
(306) with a second list (302) of pre-
ferred radio stations stored at a second
location (312); and
to replace the first and second lists of
preferred radio stations with a third list
(304) of preferred radio stations if the
first and second lists of preferred radio
stations have a predetermined number
of entries in common; where the third
list of preferred radio stations (304) in-
cludes a combination of the first (300)
and second (302) lists of preferred ra-
dio stations.

5. The wireless receiver (100) of claim 4 wherein de-
tecting the scan event further comprises: the locator
(132) detecting a geographical location of the wire-
less receiver; and comparing (404) the location of
the wireless receiver to a previous location of the
wireless receiver associated with a previous scan
event.

6. The wireless receiver (100) of claim 4, where the
memory (106) is operable to store a list of user pref-
erences relating to radio stations, and where the sta-
tion list editor (118) is responsive to the list of user
preferences.

7. The wireless receiver (100) of claim 4, further com-
prising an analysis module (120) operable to deter-
mine a content classification of a radio station,
wherein the station list editor (118) is responsive to
the analysis module (120).

8. The wireless receiver (100) of claim 7, wherein the
analysis module (120) comprises a Radio Data Sys-
tem (RDS) receiver.

9. The wireless receiver (100) of claim 8, further com-
prising an analysis module (120) operable to monitor

a quality of a radio station signal, wherein the station list editor (118) is responsive to the analysis module (120).

10. The wireless receiver (100) of claim 4, further comprising a user interface (120) to enable input of user preferences relating to radio stations. 5
11. The wireless receiver (100) of claim 4, further comprising: 10
a user interface (126) operable to select a radio station from the list of preferred radio stations dependent upon the geographical position of the wireless receiver (100). 15

Patentansprüche

1. Verfahren zum Verwalten bevorzugter Funkstationen in einem drahtlosen Empfänger (100), wobei das Verfahren umfasst: 20
- als Reaktion auf das Erfassen eines Abtastereignisses (204) das Abtasten einer Vielzahl von Funkübertragungskanälen (206), um verfügbare Funkstationen der Vielzahl von Funkübertragungskanälen zu erfassen; 25
Identifizieren von Funkstationen (210) der verfügbaren Funkstationen, die ein Präferenzkriterium nicht erfüllen; 30
Entfernen der identifizierten Funkstationen aus den verfügbaren Funkstationen (212), um eine Liste von bevorzugten Funkstationen zu erstellen, die das Präferenzkriterium erfüllen; und 35
Speichern der Liste von bevorzugten Funkstationen (214),
wobei das Erfassen des Abtastereignisses (204) das Erfassen mindestens eines der folgenden Ereignisse umfasst;
Verbindung (412) eines Kopfhörers mit dem drahtlosen Empfänger; 40
und
eine Signalqualität unterhalb eines festgelegten Schwellenwerts (408),
und wobei das Speichern der Liste von bevorzugten Funkstationen umfasst: 45
- Speichern eines Übertragungskanals jeder Funkstation in der Liste von bevorzugten Funkstationen; 50
Speichern des Standorts (306) des drahtlosen Empfängers (100); wobei das Verfahren weiter umfasst:
- Vergleichen einer ersten Liste (300) 55
von bevorzugten Funkstationen, die an einem ersten Standort (306) gespeichert wurde, mit einer zweiten Liste

(302) von bevorzugten Funkstationen, die an einem zweiten Standort (312) gespeichert wurde; und
Ersetzen der ersten und zweiten Liste von bevorzugten Funkstationen durch eine dritte Liste (304) von bevorzugten Funkstationen, wenn die erste und zweite Liste von bevorzugten Funkstationen eine vorbestimmte Anzahl von Einträgen gemeinsam haben; wobei die dritte Liste von bevorzugten Funkstationen (304) eine Kombination der ersten (300) und zweiten (302) Liste von bevorzugten Funkstationen aufweist.

2. Verfahren nach Anspruch 1, wobei das Erfassen des Abtastereignisses weiter umfasst: Bestimmen eines Standorts des drahtlosen Empfängers (100); und Vergleichen (404) des Standorts des drahtlosen Empfängers mit einem früheren Standort des drahtlosen Empfängers (100), der einem vorherigen Abtastereignis zugeordnet ist.
3. Verfahren nach Anspruch 1, wobei das Präferenzkriterium ein Kriterium ist, das mindestens eines der folgenden umfasst: 30
- eine Signalqualitätscharakteristik; und
eine Klassifizierung der Inhalte.
4. Drahtloser Empfänger (100), umfassend: 35
- eine Abtasteinrichtung (102), die betrieben werden kann, um eine Vielzahl von Funkübertragungskanälen abzutasten, um als Reaktion auf ein Abtastereignis verfügbare Funkstationen zu finden;
einen Stationslisteneditor (118), der betreibbar ist, um Funkstationen der verfügbaren Funkstationen zu entfernen, die ein Präferenzkriterium nicht erfüllen, um eine Liste der bevorzugten Funkstationen zu erstellen;
einen Speicher (106), der betreibbar ist, um die Liste von bevorzugten Funkstationen zu speichern;
einen Abtastereignisgenerator;
ein Ortungsgerät (132), das betreibbar ist, um einen geografischen Standort des drahtlosen Empfängers zu bestimmen; und
einen Abtastereignisdetektor (116), der angeordnet ist, um das Abtastereignis zu erfassen, wobei das Erfassen des Abtastereignisses umfasst: 45
- dass ein Signalqualitätsanalysator (120) eine Signalqualität unterhalb eines festgelegten Schwellenwerts erfasst; und

dass ein Kopfhörerdetektor die Verbindung eines Kopfhörers mit einer Kopfhörerbuchse (130) des drahtlosen Empfängers, erfasst,
wobei das Speichern der Liste von bevorzugten Funkstationen umfasst:

Speichern eines Übertragungskanals jeder Funkstation in der Liste von bevorzugten Funkstationen;
Speichern des Standorts (306) des drahtlosen Empfängers (100), und wobei der Stationslisteneditor (318) weiter angeordnet ist, um eine erste Liste (300) von bevorzugten Funkstationen, die an einem ersten Standort (306) gespeichert wurde, mit einer zweiten Liste (302) von bevorzugten Funkstationen zu vergleichen, die an einem zweiten Standort (312) gespeichert wurde; und um die erste und zweite Liste von bevorzugten Funkstationen durch eine dritte Liste (304) von bevorzugten Funkstationen zu ersetzen, wenn die erste und zweite Liste von bevorzugten Funkstationen eine vorbestimmte Anzahl von Einträgen gemeinsam hat, wobei die dritte Liste von bevorzugten Funkstationen (304) eine Kombination der ersten (300) und zweiten (302) Liste von bevorzugten Funkstationen aufweist.

5. Drahtloser Empfänger (100) nach Anspruch 4, wobei das Erfassen des Abtastereignisses weiter umfasst: dass das Ortungsgerät (132) einen geografischen Standort des drahtlosen Empfängers erfasst; und dass der Standort des drahtlosen Empfängers mit einem früheren Standort des drahtlosen Empfängers, der einem vorherigen Abtastereignis zugeordnet ist, verglichen wird
6. Drahtloser Empfänger (100) nach Anspruch 4, wobei der Speicher (106) betreibbar ist, um eine Liste von Benutzerpräferenzen in Bezug auf Funkstationen zu speichern, und wobei der Stationslisteneditor (118) auf die Liste der Benutzerpräferenzen reagiert.
7. Drahtloser Empfänger (100) nach Anspruch 4, weiter umfassend ein Analysemodul (120), das betreibbar ist, um eine Inhaltsklassifizierung einer Funkstation zu bestimmen, wobei der Stationslisteneditor (118) auf das Analysemodul (120) reagiert.
8. Drahtloser Empfänger (100) nach Anspruch 7, wobei das Analysemodul (120) einen Empfänger für ein Radiodaten-System (RDS) umfasst.

9. Drahtloser Empfänger (100) nach Anspruch 8, weiter umfassend ein Analysemodul (120), das betreibbar ist, um eine Qualität eines Funkstationssignals zu überwachen, wobei der Stationslisteneditor (118) auf das Analysemodul (120) reagiert.

10. Drahtloser Empfänger (100) nach Anspruch 4, weiter umfassend eine Benutzerschnittstelle (120), um die Eingabe von Benutzerpräferenzen in Bezug auf Funkstationen zu ermöglichen.

11. Drahtloser Empfänger (100) nach Anspruch 4, weiter umfassend:
eine Benutzerschnittstelle (126), die betreibbar ist, um eine Funkstation aus der Liste der bevorzugten Funkstation auszuwählen, und zwar abhängig von der geografischen Position des drahtlosen Empfängers (100).

Revendications

1. Procédé de gestion de stations radio préférées dans un récepteur sans fil (100), le procédé comprenant les étapes consistant à :

en réponse à la détection d'un événement de balayage (204), balayer une pluralité de canaux de diffusion radio (206) pour détecter des stations radio disponibles de la pluralité de canaux de diffusion radio ;
identifier les stations radio (210) des stations radio disponibles qui ne satisfont pas à un critère de préférence ;
retirer les stations radio identifiées des stations radio disponibles (212) pour former une liste de stations radio préférées qui satisfont au critère de préférence ; et
stocker la liste de stations radio préférées (214), dans lequel la détection de l'événement de balayage (204) comprend la détection d'au moins l'un des événements suivants :

la connexion (412) d'un écouteur au récepteur sans fil ; et
une qualité de signal en-dessous d'un seuil défini (408),
et dans lequel le stockage de la liste de stations radio préférées comprend les étapes consistant à :

stocker un canal de diffusion de chaque station radio dans la liste de stations radio préférées ;
stocker l'emplacement (306) du récepteur sans fil (100) ; le procédé comprenant en outre les étapes consistant à :

- comparer une première liste (300) de stations radio préférées stockées dans un premier emplacement (306) à une deuxième liste (302) de stations radio préférées stockées dans un deuxième emplacement (312) ; et
remplacer les première et deuxième listes de stations radio préférées par une troisième liste (304) de stations radio préférées si les première et deuxième listes de stations radio préférées ont un nombre prédéterminé d'entrées en commun ; où la troisième liste de stations radio préférées (304) comporte une combinaison des première (300) et deuxième (302) listes de stations radio préférées.
2. Procédé selon la revendication 1, où la détection de l'événement de balayage comprend en outre les étapes consistant à :
- déterminer un emplacement du récepteur sans fil (100) ; et
comparer (404) l'emplacement du récepteur sans fil à un emplacement précédent du récepteur sans fil (100) associé à un événement de balayage précédent.
3. Procédé selon la revendication 1, où le critère de préférence est un critère comprenant au moins l'une parmi :
- une caractéristique de qualité de signal ; et
une classification de contenu.
4. Récepteur sans fil (100) comprenant :
- un dispositif de balayage (102) ayant pour fonction de balayer une pluralité de canaux de diffusion radio pour trouver des stations radio disponibles en réponse à un événement de balayage ;
un éditeur de liste de stations (118) ayant pour fonction de retirer des stations radio des stations radio disponibles qui ne satisfont pas à un critère de préférence pour former une liste de stations radio préférées ;
une mémoire (106) ayant pour fonction de stocker la liste de stations radio préférées ;
un générateur d'événement de balayage ;
un localisateur (132) ayant pour fonction de déterminer un emplacement géographique du récepteur sans fil ; et
un détecteur d'événement de balayage (116) conçu pour détecter l'événement de balayage, dans lequel la détection l'événement de balayage comprend :
- la détection, par un analyseur de qualité de signal (120), d'une qualité de signal en-dessous d'un seuil défini ; et
la détection, par un détecteur d'écouteur, d'une connexion d'un écouteur dans un support d'écouteur (130) du récepteur sans fil, dans lequel le stockage de la liste de stations radio préférées comprend les étapes consistant à :
- stocker un canal de diffusion de chaque station radio dans la liste de stations radio préférées ;
stocker l'emplacement (306) du récepteur sans fil (100), et dans lequel l'éditeur de liste de stations (318) est en outre conçu pour comparer une première liste (300) de stations radio préférées stockées dans un premier emplacement (306) à une deuxième liste (302) de stations radio préférées stockées dans un deuxième emplacement (312) ; et
pour remplacer les première et deuxième listes de stations radio préférées par une troisième liste (304) de stations radio préférées si les première et deuxième listes de stations radio préférées ont un nombre prédéterminé d'entrées en commun ; où la troisième liste de stations radio préférées (304) comporte une combinaison des première (300) et deuxième (302) listes de stations radio préférées.
5. Récepteur sans fil (100) selon la revendication 4 dans lequel la détection l'événement de balayage comprend en outre : par le localisateur (132), la détection d'un emplacement géographique du récepteur sans fil ; et la comparaison (404) de l'emplacement du récepteur sans fil à un emplacement précédent du récepteur sans fil associé à un événement de balayage précédent.
6. Récepteur sans fil (100) selon la revendication 4, où la mémoire (106) a pour fonction de stocker une liste de préférences d'utilisateur relatives à des stations radio, et où l'éditeur de liste de stations (118) est sensible à la liste de préférences d'utilisateur.
7. Récepteur sans fil (100) selon la revendication 4, comprenant en outre un module d'analyse (120) ayant pour fonction de déterminer une classification de contenu d'une station radio, dans lequel l'éditeur de liste de stations (118) est sensible au module

d'analyse (120).

8. Récepteur sans fil (100) selon la revendication 7, dans lequel le module d'analyse (120) comprend un récepteur de système de données radio (RDS). 5
9. Récepteur sans fil (100) selon la revendication 8, comprenant en outre un module d'analyse (120) ayant pour fonction de surveiller une qualité d'un signal de station radio, dans lequel l'éditeur de liste de stations (118) est sensible au module d'analyse (120). 10
10. Récepteur sans fil (100) selon la revendication 4, comprenant en outre une interface utilisateur (120) pour permettre l'entrée de préférences d'utilisateur relatives à des stations radio. 15
11. Récepteur sans fil (100) selon la revendication 4, comprenant en outre : 20
une interface utilisateur (126) ayant pour fonction de sélectionner une station radio dans la liste de stations radio préférées en fonction de la position géographique du récepteur sans fil (100). 25

30

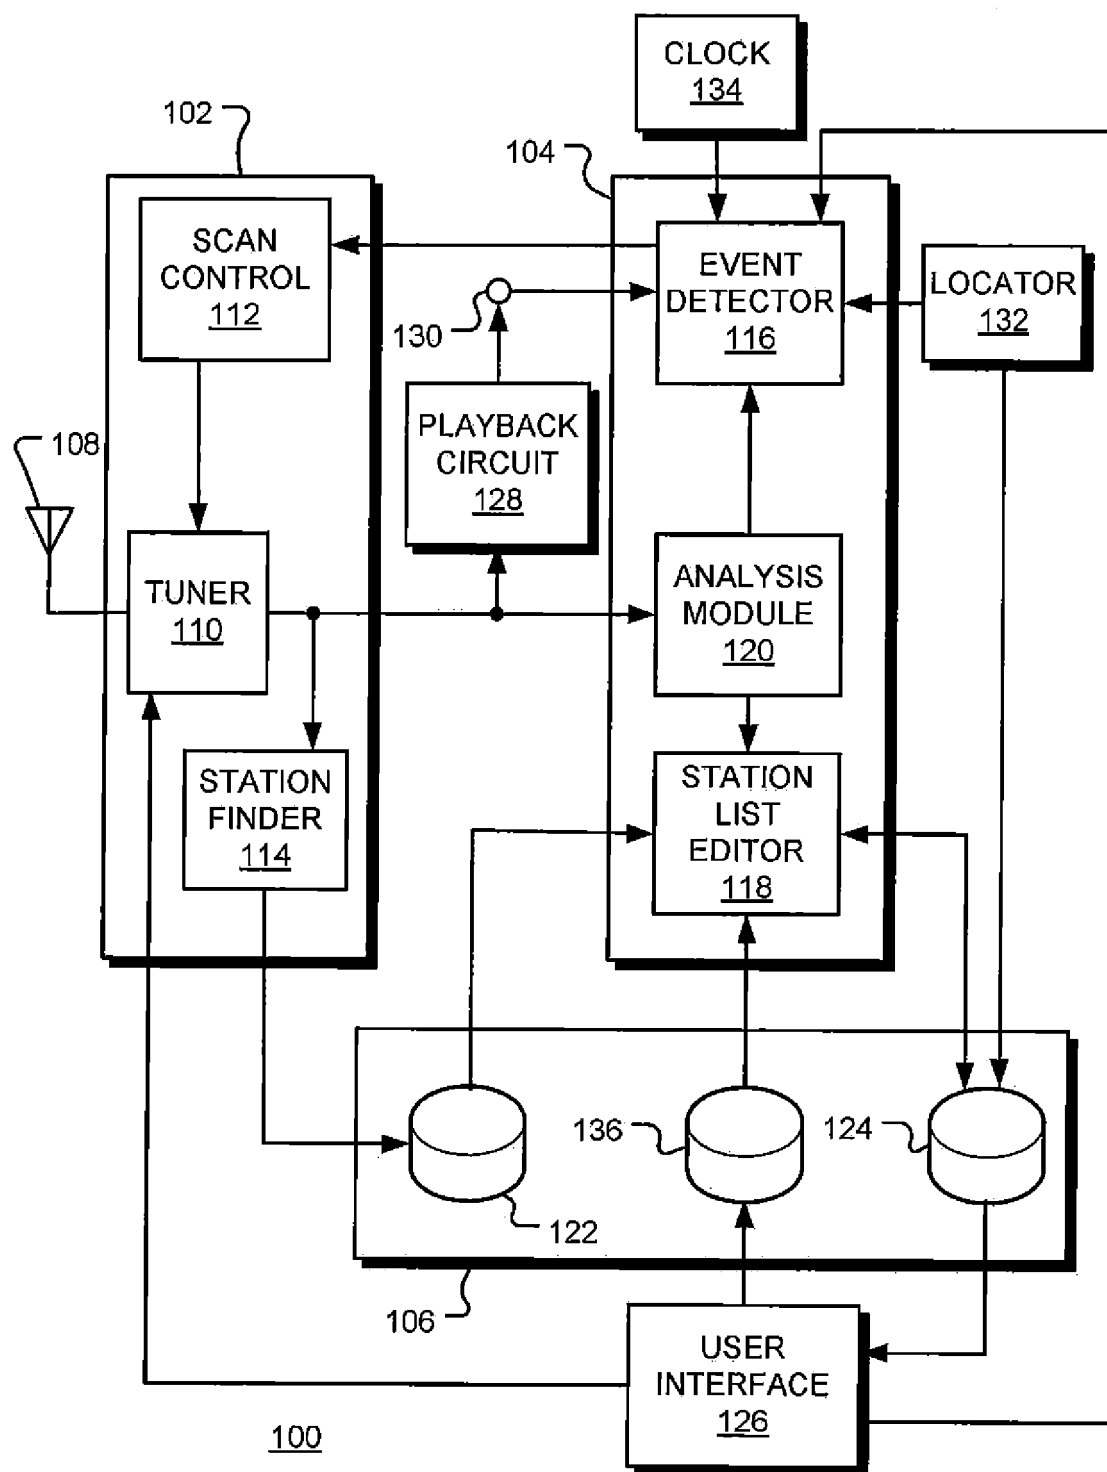
35

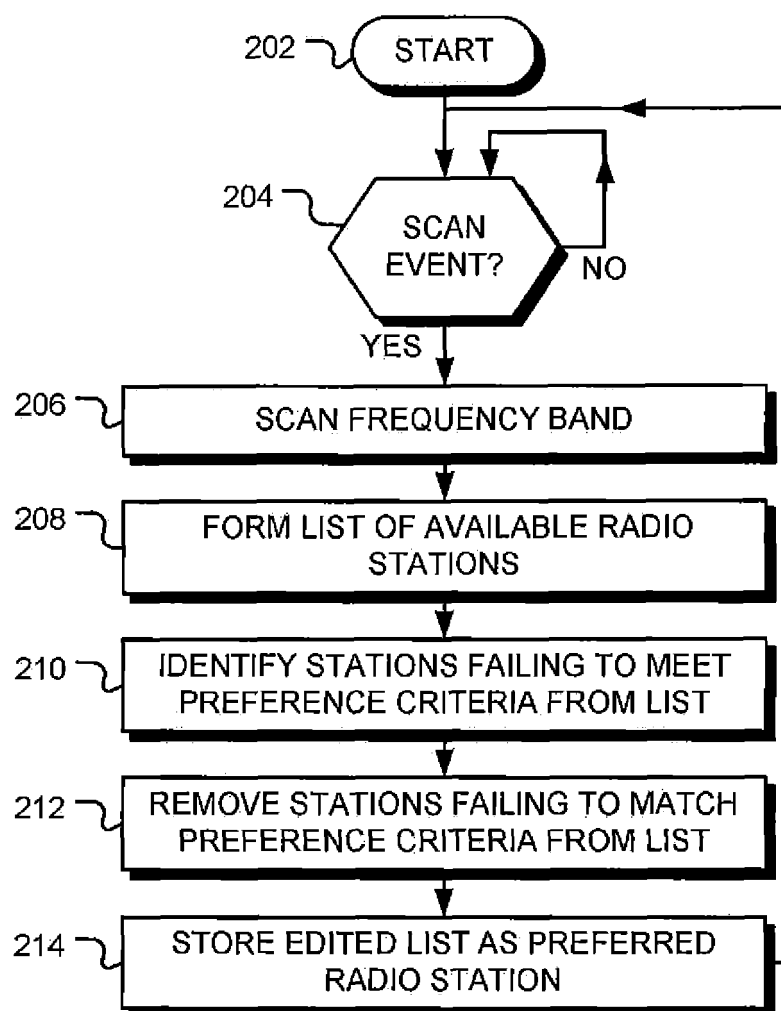
40

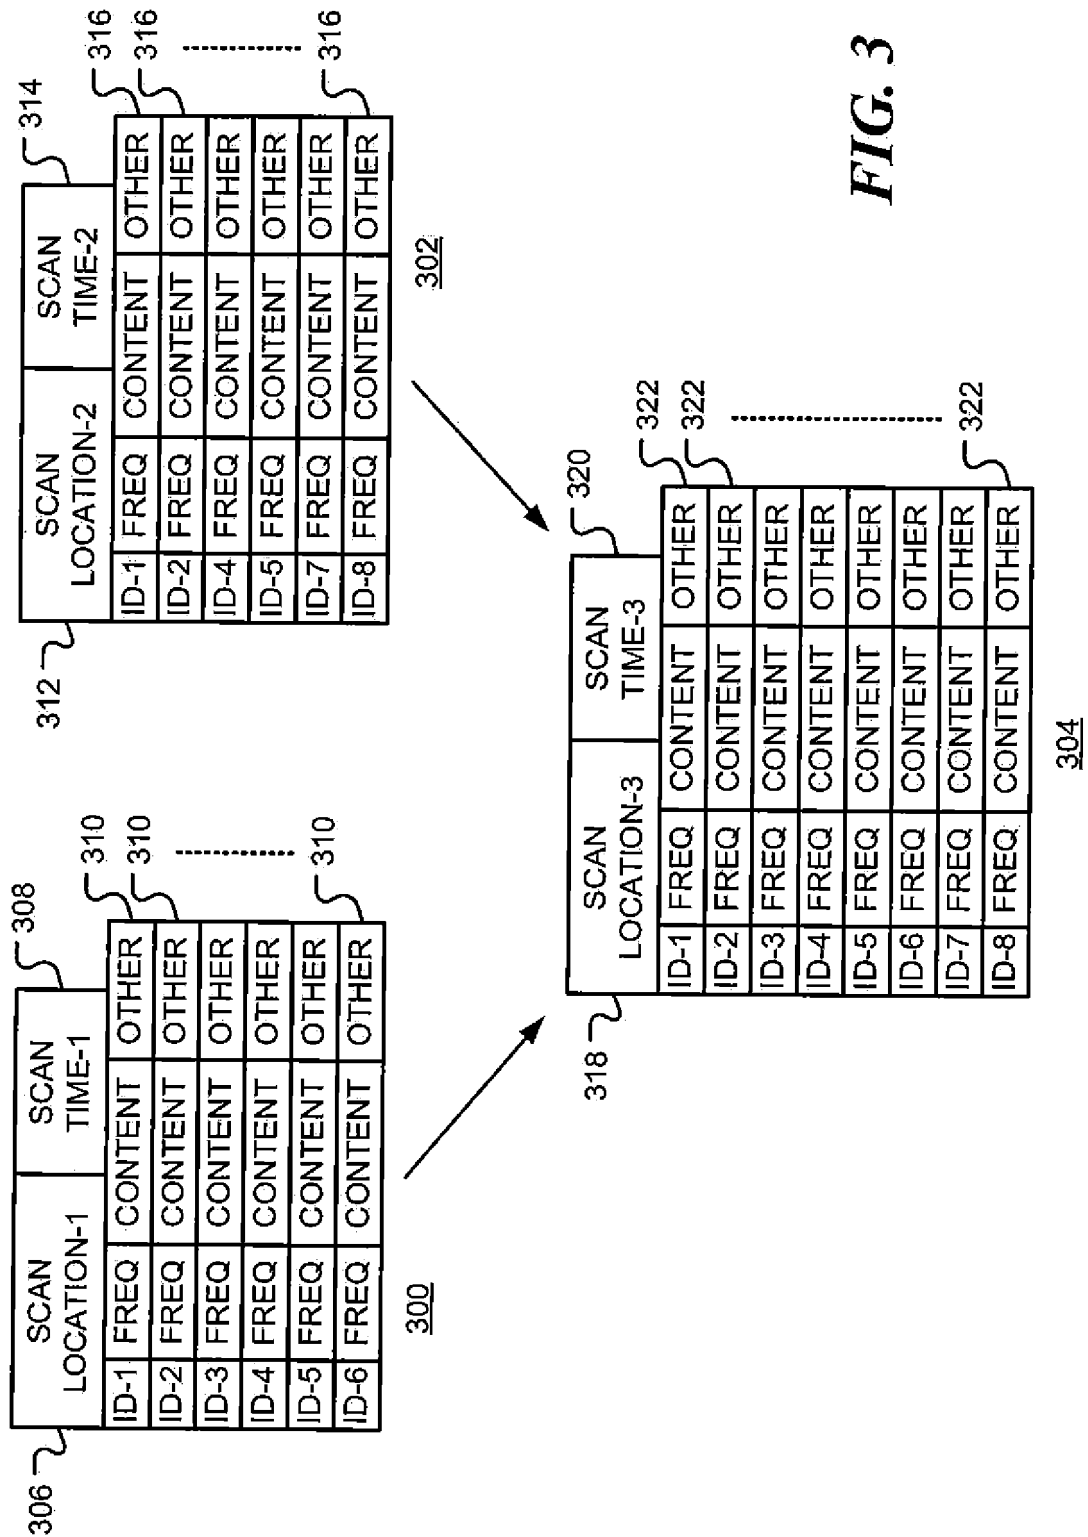
45

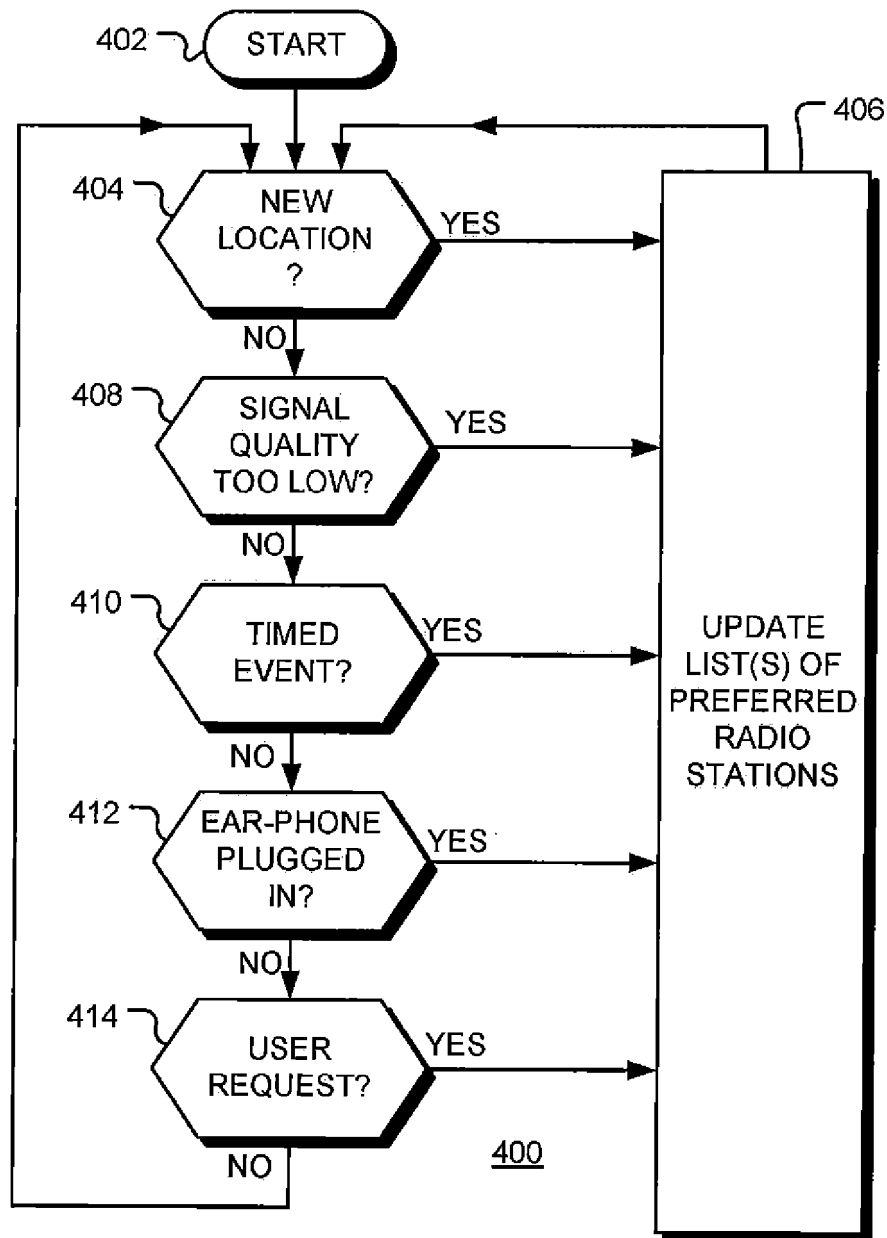
50

55

**FIG. 1**

200**FIG. 2**



**FIG. 4**

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20100178938 A [0003]
- US 20110281538 A [0004]
- JP 2009111602 A [0005]