



(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
22.01.2014 Bulletin 2014/04

(51) Int Cl.:
A47C 17/16 (2006.01) A61G 7/16 (2006.01)

(21) Application number: **12865077.7**

(86) International application number:
PCT/CN2012/073624

(22) Date of filing: **09.04.2012**

(87) International publication number:
WO 2013/104150 (18.07.2013 Gazette 2013/29)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(72) Inventor: **MACKERT, Michael**
Changshu
Jiangsu 215558 (CN)

(30) Priority: **15.01.2012 CN 201210010649**

(74) Representative: **Kramer - Barske - Schmidtchen**
Landsberger Strasse 300
80687 München (DE)

(71) Applicant: **Innotec Motion (Changshu) Co., Ltd.**
Changshu, Jiangsu 215558 (CN)

(54) **FURNITURE UNDERFRAME OF SITTING-LYING TYPE FURNITURE**

(57) This invention discloses a type of underframe of sitting/sleeping furniture, comprising a supporting frame and a seat frame with backrest. This seat frame is arranged on this supporting frame in a movable manner via a quasi-parallel deflecting system. This quasi-parallel deflecting system consists of the supporting frame, the seat frame, and two rockers, so that the seat frame can move between two terminal positions: sitting position and sleeping position. With this underframe, when the seat frame moves between sitting position and sleeping position, rear pivot and front pivot of the quasi-parallel deflecting system are formed and arranged on the supporting frame, so that resultant gravity of the person at sleeping position is applied at a point behind the two pivots on the seat frame along the direction of the backrest. On the other hand, resultant gravity of the person at sitting position is applied at a point in front of the rear pivot on the seat frame. The structure of this invention can ensure motion characteristics of this underframe (preventing unintended movement).

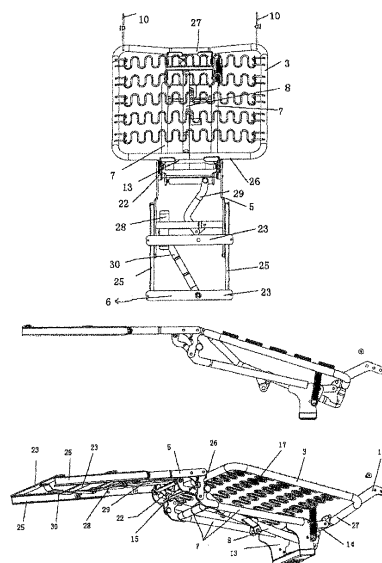


Fig. 2

Description

Technical field

[0001] This invention belongs to the field of furniture technology and in particular, relates to a type of underframe of sitting/sleeping furniture.

Background of the invention

[0002] Underframe of sitting/sleeping furniture is used for sitting/sleeping type furniture, e.g. movable reclining chair and sofa in front of TV etc. Chair can be adjusted from sitting position to sleeping and back. On such furniture underframe, different design modes can be used to install corresponding sitting/sleeping furniture, since such underframe features a supporting frame, on which furniture parts such as rakers, footrest frame, seat frame, backrest, and arm rest can be installed. For sitting furniture, first use an adjusting/driving device to adjust such furniture parts, e.g. adjustment of footrest for outward swaying. This is related to adjustment of sitting type furniture using electric drive installed inside, or use of transfer of weight of the person sitting on such furniture. Such footrest frame can be completely deflected to so-called retracted position or a position of certain angle under the furniture. At a position already swayed outward, the footrest frame is in front of the sitting/sleeping furniture and basically on a straight line or curved line extending from the bearing surface. Besides, footrest frame can be equipped with a so-called footrest frame extension piece, which is pulled into the footrest frame at retracted position or extended from footrest frame at extracted position.

[0003] Underframe of sitting/sleeping furniture is known from German utility model 29600282UI. For sitting furniture described in this utility model, the seat frame is part of the parallel deflecting system and allows adjustment of the frame from sitting position to sleeping position. In this connection, upper longitudinal deflecting rod of the parallel deflecting system constitutes or bears the seat frame, with lower longitudinal deflecting rod fixed on the lower structure. The footrest frame includes two guide rails, relying on which the footrest frame can be connected to the seat frame in a turnover mode. On such sitting/sleeping furniture, footrest frame guide rails constitute transverse deflecting rods in front of the seat frame and these guide rails are also hinged with lower longitudinal deflecting rod fixed at the frame side. Movement of the seat frame from sitting position to sleeping position will cause the standstill footrest frame (at inner position) under the seat frame to sway outward. The footrest frame supports a footrest frame element at one side moving along the direction of guide rail longitudinal axis, to close the footrest frame. Due to movable and telescoping arrangement of guide rails, footrest frame related to footrest frame element stretching distance can have different lengths. At position of footrest frame swaying inward, footrest frame element is pulled inside, so that it can sway

inward under the seat frame. If the footrest frame is already in the sleeping position (swayed outward), the footrest frame element can be pulled out to increase the length of the footrest frame.

[0004] Another type of underframe of sitting/sleeping furniture is known from patent EP2356922A1. In this underframe, rotating motion of footrest frame is linked to motion of seat frame via a buffer unit, and status of the footrest frame at retracted position is maintained using a supporting/retaining spring. Since the design of longitudinal deflecting rod and vertical lever and the matching between longitudinal deflecting rod/ vertical lever and seat frame have no sufficiently stable terminal position, from the point of view of kinematic configuration of sitting position or sleeping position, such additional buffer unit and supporting/retaining spring are very necessary for construction of the parallel deflecting system of the underframe of sitting/sleeping furniture. Change of dead weight on seat frame and footrest frame by the person sitting or sleeping on the furniture may cause the following consequence: loading or unloading in the scope of footrest frame will cause unintended movement of the seat frame.

Summary of the invention

[0005] Based on aforesaid prior arts, this invention proceeds to design a type of underframe of sitting/sleeping furniture, aimed to ensure motion characteristics (prevent unintended movement) of the underframe due to change of dead weight on seat frame and footrest frame by the person sitting/sleeping on the furniture.

[0006] To realize this purpose, the technical scheme of this invention is described as follows:

A type of underframe of sitting/sleeping furniture, comprising a supporting frame and a seat frame with backrest, wherein said seat frame is installed on said supporting frame in a movable manner via a quasi-parallel deflecting system; said quasi-parallel deflecting system consists of a supporting frame, a seat frame, a first rocker, and a second rocker, so that seat frame can move between two terminal positions: sitting position and sleeping position. Among them, first rocker is hinged with supporting frame to form rear pivot, and second rocker is hinged with supporting frame to form front pivot. Positions of said rear pivot and front pivot are such that with seat frame at sleeping position, resultant gravity of the person is applied on seat frame at a point behind rear pivot and front pivot along the direction of the backrest, and with seat frame at sitting position, resultant gravity of the person is applied on seat frame at a point in front of the rear pivot.

[0007] With the underframe moving between sitting position and sleeping position, rear pivot near backrest and front pivot near chair end are designed and arranged on

the supporting frame for the quasi-parallel deflecting system of the seat frame, so that at sleeping position, resultant gravity of the person is applied on backrest of seat frame behind the pivots, and with seat frame at sitting position, resultant gravity of the person is applied on seat frame at a point in front of the rear pivot. At sleeping position, rockers of the quasi-parallel deflecting system constantly turn rearward along backrest side, so that hinges on these rockers with the seat frame are behind rear pivot of the seat frame, thereby occupying a stable terminal position. This position limiting can be achieved by a corresponding limit stop fixed on the supporting frame. When adjusted to the setting position, it is necessary to adjust the seat frame to a position past the top dead center of the quasi-parallel deflecting system, and at this position, the resultant gravity of the person sitting on the furniture will be applied at a point in front of the rear pivot on the seat frame, thereby between the rear pivot and the front pivot on the seat frame. Accordingly, a similar limit stop is required here to realize the final position defined for the sitting position and with mechanic stability. It is thereby ensured that these two final positions do not require additional fixing or force, such as spring tightening device or similar, to reliably maintain fixed posture of the seat frame at these positions. In this way, slight (or more precisely involuntary) transfer of weight of the person sitting or sleeping on the furniture will not cause moving of the seat frame to an unwanted position. In particular, even if additional support is provided for feet, since the footrest frame can be folded, and this footrest frame is linked to motion of the seat frame using a familiar mode, only slight loading will be applied on the seat frame via the footrest frame. This may cause unwanted movement of the seat frame. The design of this invention can ensure prevention of this situation, without affecting intended adjustment of the seat frame.

[0008] Special advantages of this invention: During adjustment between the sitting position and the sleeping position, the seat frame of this underframe is maintained at an unstable equilibrium state. At this time, the resultant gravity of a person sitting or sleeping on the furniture just passes rear pivot of seat frame, and this point is the top dead center of the quasi-parallel deflecting system about seat frame rear pivot, so that the seat frame will normally not stay at such unstable equilibrium state, either adjusted toward terminal point of the sleeping position or toward that of the sitting position, finally achieving mechanic stability. Another advantage: If the sitting position and the sleeping position constitute stable terminal position of adjustment and movement of seat frame respectively, the positions relative to the seat frame quasi-parallel deflecting system are limited by limit stops fixed on supporting frame respectively, for example, these limit stops are provided on longitudinal deflecting rod of similar fixed on the supporting frame, so that in virtue of interaction with rockers, only some specified largest hunting angles of rockers can be realized.

[0009] Further improvement by this invention: Front

transverse stay tube and rear transverse stay tube of the seat frame are hinged and fixed via rocker to the support of the longitudinal deflecting rods constituting quasi-parallel deflecting system. As part of the quasi-parallel deflecting system, the seat frame is supported over its whole length and at its terminal positions, and especially favorable introduction of force/supporting function for the seat frame can be obtained. Members installed on the supporting frame and rear pivot formed are located in the area under transverse stay tube at the side of seat frame backrest. Accordingly, due to relatively long longitudinal deflecting rod and corresponding distribution of weight (dead weight of the sitting/sleeping furniture and weight of the user) on the seat frame and backrest, the most favorable level transmission ratio is achieved. In this way, level transmission ratio between front pivot and rear pivot of the seat frame is improved, so that it is not necessary to use other aux. device (e.g. spring) to maintain mechanic safety and stability of seat frame at two terminal positions corresponding to sitting position and sleeping position.

[0010] The underframe of sitting/sleeping furniture of this invention can be switched between its sitting position and sleeping position solely by transfer of the weight of the person on such furniture, or by additional driving mechanism (preferably electric or hydraulic driving mechanism). Besides, manual adjustment using electric device or elastic support that adopts inflated spring.

[0011] For comfort of the sitting/sleeping person, the front pivot of seat frame is arranged higher than the rear pivot of the seat frame. At sitting position, some seat frame surface for sitting can be adjusted slightly rearward (inclining) along the direction of backrest. Also, according to length of rockers and geometric shape of the quasi-parallel deflecting system, reverse inclination of sleeping position can be increased so that the sleeping position is more comfortable.

[0012] Further improvement by this invention: A footrest with footrest frame is configured on the seat frame using known mode. This footrest frame can rotate about a turning shaft basically parallel to the front transverse stay tube of the seat frame, and the relatively distance between this footrest frame and the seat frame can be adjusted using jiggers. When these jiggers and the quasi-parallel deflecting system take this footrest to the closed position, the seat frame will be in the sitting status, and when they take this footrest to the open position, the seat frame will be in the sleeping status. The footrest frame is connected to the quasi-parallel deflecting system via the jiggers, which are used to deflect the footrest from retracted position (with seat frame at sitting position) to the swayed-out (with seat frame at sleeping position). Inside the footrest frame, a telescoping extension piece is provided and can extend parallel to and along the footrest frame with the footrest at open status. The jiggers will only drive this extension piece for extending operation during the process of swaying of footrest frame from inside to outside and with distance between end of this

frame and the ground exceeding a minimum value. If the lower end of the footrest frame has not reached the lowest point, extending of the extension piece will impede outward swaying of the footrest frame, and reduce structural height of the supporting frame.

[0013] For this reason, in the further scheme, the extending driving device for the footrest frame extension piece is a bent lever driving device. When the footrest is swayed outward by a very small angle, the bent lever driving device will drive the extension piece for very small linear extending operation. When the footrest frame performs relatively large outward sway, the bent lever driving device will drive the whole footrest for relatively large extending operation of the extension piece. When the lowest point of the footrest frame exceeds the lowest point of the rotating motion step by step, by corresponding design of the bent lever driving device, the footrest frame extension piece will start to move accordingly. Later, through such bent lever driving device, sufficient adjusting length of footrest frame extension piece can be ensured for the designed lever length and rotating point, so that the footrest frame can extend far in front of the seat frame, providing comfortable support for feet/legs of user almost over its full length. Besides, through linear guide rails, in particular roller guide rails, outward extending of footrest frame extension piece can be guided. Through coordinated transfer of force on underframe of sitting/sleeping furniture, commonly used expensive ball guide rails can be replaced by low cost roller guide rails. On the underframe of this invention, footrest frame can be moved without providing buffer unit or supporting/retaining spring.

Description of drawing figures

[0014] Fig.1 is an amplified illustration of members of the underframe of sitting/sleeping furniture of this invention, with the underframe at sleeping position and showing seat frame of drastically inclined backrest and totally turned over/extended footrest.

[0015] Fig.2 to Fig.6 illustrate the underframe of this invention during adjustment from the sleeping position shown in Fig.1 to the sitting position, in the form of staged plans, as well as views of the underframe in different directions.

[0016] Fig.7 is an amplified illustration of the footrest frame shown in Fig.5 at its swaying position at some time; at this time, the footrest frame passes the lowest point.

[0017] In these figures: 1-underframe of sitting/sleeping furniture; 2-supporting frame; 3-seat frame; 4-footrest; 5-footrest frame; 6-footrest frame extension piece; 7-longitudinal deflecting rods fixed on the supporting frame; 8-inclined strut; 9-rear pivot of seat frame at backrest side; 10-flange; 11-mounting plate; 12-vertical pipe; 13-supporting frame bearing fork; 14-rocker; 15-rocker; 16-limit stop; 17-mattress support spring; 18-flange used for motor adjustment; 19-seat frame hinge connecting flange; 20-turning shaft of hinged connection of footrest

frame; 21-footrest adjusting lever; 22-footrest frame extension piece adjusting lever; 23-footrest frame extension piece support; 24-roller; 25-guiding section steel; 26-seat frame front transverse stay tube; 27-seat frame rear transverse stay tube; 28-lever of bent lever driving device; 29-lever of bent lever driving device; 30-lever of bent lever driving device; 31-limit stop; 32-intermediate connecting rod; 33-front pivot of seat frame at footrest side; 34-spring; 35-turning shaft; 36-pure rotating track of footrest; 37-superposed track of footrest

Preferred embodiment

[0018] The following provides further detailed description in combination with the drawing figures and a preferred embodiment.

[0019] The underframe of sitting/sleeping furniture of this invention shown in the figures is a structure without mattress and outer cover, so as to allow better understanding of its members and functions. Basic design and functions are already known from prior art so that only necessary description of special performance, structure necessary for such performance, and its functions is provided here for the members used and the matching between its geometry and functions. For other aspects, refer to known underframe 1 of prior art. The underframe 1 of this invention is such that this underframe along with supporting frame 2 can be adapted to different rakers, e.g. those comprising mounting plate 11 and vertical pipe 12. Also, a seat frame 3 is provided and can hold and/or control backrest and footrest 4 (not shown) that can be installed on flange 10. The same reference symbols have been provided for same or similar parts with same or similar functions. The concept "front" refers to front of underframe 1 of sitting/sleeping furniture in the scope of footrest 4, and the concept of "rear" refers to rear of underframe 1 of sitting/sleeping furniture in the area of backrest (not shown), which can be movable or fixed on corresponding flange 10 with respect to seat frame 3.

[0020] Underframe 1 of sitting/sleeping furniture is supported on the rakers via mounting plates 11 and vertical pipes 12 on the base. At upper part of vertical pipe, a supporting frame bearing fork 13 is provided. The two tubular longitudinal deflecting rods 7 on two forks 13 extend forward along the direction of footrest 4. Above longitudinal deflecting rods 7 arranged at the two sides and fixed on supporting frame 2, it can be seen from a complete tube frame structure that seat frame 3 is basically a rectangle. The two longitudinal stay tubes of seat frame 3 are roughly parallel with longitudinal deflecting rods 7, and seat frame 3 is connected to transverse stay tubes 26 and 27 at its two terminals. Seat frame 3 adopts mattress support springs 17 to constitute a pedestal, which constitutes the mattress (not shown) of the sitting/sleeping furniture along with underframe 1. Below the layer of seat frame 3, a tubular zigzag inclined strut 8 can be identified from center area of rear transverse stay tube 27 to center area of front transverse stay tube 26. This

inclined strut 8 consolidates seat frame 3 and allows arrangement of two flanges 18, which can be used for electric adjustment (not shown) of the seat frame 3.

[0021] Seat frame 3, two longitudinal deflecting rods 7, rockers 14 and 15, and intermediate connecting rod 32 constitute a quasi-parallel deflecting system. Through this system, seat frame 3 can be adjusted from the sleeping position shown in Fig.1 (amplified) to the sitting position shown in Fig.6. For this purpose, longitudinal deflecting rods 7 can be inclined forward and extended upward, and seat frame 3 along with backrest (not shown) can be easily inclined rearward according to ergonomics and lengths of rockers 14 and 15, while increasing inclination of seat frame 3 at sleeping position (Fig.1) relative to that at sitting position.

[0022] The concept of quasi-parallel deflecting system indicates a modified deflecting system as compared with purely parallel deflecting system. In this system, not only lengths of rockers 14 and 15 can be changed, but also their geometric shape and bending. However, in principle, basic geometric shape of quasi-parallel deflecting system remains unchanged.

[0023] In this design, relative to the two longitudinal deflecting rods 7, arrangement of seat frame 3 can be adjusted using backrest side hinged rear pivot 9 and footrest side hinged front pivot 33. Inside hinged pivots 9 and 33, rockers 14 and 15 can be installed in a rotating manner, with the other end of these rockers directly hinged to seat frame 3 or via intermediate connecting rod 32. Seat frame can rotate around (and extend from) hinged pivots 9 and 33, and during this movement, due to lever lengths of rockers 14 and 15, and level transmission ratio, inclination of seat frame 3 changes from sitting position to sleeping position (i.e. increases). Adjusting movement of seat frame 3 toward the sleeping position is limited by a front limit stop 16, which blocks movement of rocker 15 to the right side as shown in Fig.1. Conversely, adjusting movement of seat frame 3 toward the sitting position is limited by a backrest side limit stop 31, which blocks movement of rocker 14 to the left side. Therefore, these limit stops 16 and 31 define permitted scope of rotation of seat frame 3 between the sitting position and the sleeping position.

[0024] Regarding the very favorable design of underframe 1 of sitting/sleeping furniture of this invention, only these descriptions are provided. Due to geometrical structure of members of this quasi-parallel deflecting system, seat frame 3 can maintain its sleeping position or sitting position stable and unchanged without using auxiliary means to control positions of pivots 9 and 33. Therefore, at sleeping position, resultant gravity of the person sleeping on the furniture is applied along the direction of backrest at a point on seat frame 3 behind pivots 9 and 33. Conversely, at sitting position, resultant gravity of the person sitting on the furniture is applied on seat frame 3 at a point in front of backrest side pivot 9. As shown in the figure, at the sleeping position, rockers 14 and 15 of the quasi-parallel deflecting system always turn rearward at

backrest side, so that the hinges of seat frame 3 with rockers 14 and 15 are behind backrest side pivot 9 on seat frame 3, thereby occupying a stable terminal position; in this regard, a corresponding limit stop 16 limits its position. When adjusted to the sitting position, it is necessary to adjust seat frame 3 to a position past top dead center of the quasi-parallel deflecting system, and at this position, resultant gravity of the person sitting on the furniture is applied on seat frame 3 at a point in front of backrest side pivot 9, hence acting between pivots 9 and 33 on seat frame 3. In this regard, a corresponding limit stop 31 is adopted to define the sitting position and the terminal position of mechanic stability. Therefore, it shall be ensured that no additional fixing or force (e.g. spring) is required at these two terminal positions to maintain seat frame 3 at these positions. In this way, slight (or more precisely involuntary) transfer of weight of the person sitting or sleeping on the furniture will not cause moving of the seat frame 3 to an unwanted position. In particular, even if additional support is provided for feet, on a footrest 4 that can be folded, since this footrest is linked to motion of the seat frame 3 using a familiar mode, only slight loading will be applied on the seat frame 3 via the footrest 4. This may cause unwanted movement of the seat frame 3. The design of this invention can ensure prevention of this situation, without affecting intended adjustment of the seat frame 3.

[0025] Seat frame 3 is moved from sleeping position shown in Fig.1 and meeting Fig.2 to the sitting position shown in Fig.6. This process is clearly identified and understood by looking at Fig.2 to Fig.6. Therefore, these figures are not studied in details here.

[0026] On underframe 1 of sitting/sleeping furniture, levers 21 and 22 are configured to force transfer of movement of seat frame 3 to the footrest 4. Lever 21 and lever 22 each has a horizontal or nearly horizontal turning shaft (20 and 35), and one end of these levers is connected to the quasi-parallel deflecting system in motion, either directly or via one or more actuators. Lever 21 is responsible to deflect footrest frame 5 around turning shaft 20, which is fixed on seat frame 3 via flange 19. Looking at Fig.2 to Fig.5, footrest frame 5 moves from sitting position (Fig.6) to sleeping position (Fig.2), extending out from under seat frame 3, with its extended position roughly horizontal with pedestal. In the reverse process, footrest 5 turns totally inside under seat frame 3.

[0027] Superposed on rotating motion of footrest frame 5, an extension piece 6 arranged inside footrest frame 5 can be pulled out linearly relative to footrest frame 5, thus extending footrest 4 compared with the length of inward turnover. To this end, a number of rollers 24 are arranged at outer side of footrest frame 5, and on these rollers, type C guiding section steel 25 can be guided and adjusted. Linear adjustment and moving of footrest frame extension piece 6 is driven by a bent lever type driving device, which comprises individual levers 28, 29, and 30. When lever 22 is used to move seat frame 3, the driving operation adopts a basically familiar mode. For this pur-

pose, lever 22 and lever 29 driven by bent lever are connected together via hinged turning shaft 35 using a matching mode not shown. In this way, to adjust seat frame 3 from sitting position (Fig.6) to sleeping position (Fig.2), you only need to just the seat frame 3; this can both sway footrest frame 5 outward and linearly extend extension piece 6 from the footrest frame.

[0028] Fig.7 illustrates another characteristic (amplified): Due to adoption of driving by bent lever and its geometric dimensions and the position of gyration point of such drive, only when footrest frame 5 reaches or passes the deepest point of track involving the underframe during the change from sitting position to sleeping position, can linear movement of footrest frame extension piece 6 from inside footrest frame 5 start. If linear movement of footrest frame extension piece 6 has started earlier, it will be necessary to increase clearance off ground of the underframe 1 of sitting/sleeping furniture, so that the end of footrest frame extension piece 6 will not hit pedestal during outward swaying and extending. This may cause uncomfortable seated position or necessary limiting of footrest frame extension piece 6. Accordingly, compared with the length that can be reached, the whole footrest 4 needs to be shortened, so does supporting surface for legs. With driving by bent lever, under such situation, simple adjustment of kinetic performance of footrest frame extension piece 6 is permitted, as kinetic characteristics of driving using bent lever can be designed accordingly. When exceeding the range of small amount of linear movement as driven by bent lever, linear movement of the footrest frame extension piece 6 for a sufficient travel will be permitted.

Claims

1. A type of underframe (1) of sitting/sleeping furniture, comprising a supporting frame (2) and a seat frame (3) with backrest, wherein said seat frame (3) is installed on said supporting frame (2) in a movable manner via a quasi-parallel deflecting system; said quasi-parallel deflecting system consists of supporting frame (2), seat frame (3), first rocker (14), and second rocker (15), so that seat frame (3) can move between two terminal positions: sitting position and sleeping position. Among them, first rocker (14) is hinged with supporting frame (2) to form rear pivot (9), and second rocker (15) is hinged with supporting frame (2) to form front pivot (33). Positions of said rear pivot (9) and front pivot (33) are such that with seat frame (3) at sleeping position, resultant gravity of the person is applied on seat frame (3) at a point behind rear pivot (9) and front pivot (33) along the direction of the backrest, and with seat frame (3) at sitting position, resultant gravity of the person is applied on seat frame (3) at a point in front of the rear pivot (9).
2. The underframe of sitting/sleeping furniture according to claim 1, wherein two limit stops said (16, 31) are fixed on said supporting frame (2), to limit amplitude of movement of said quasi-parallel deflecting system between the two terminal positions.
3. The underframe of sitting/sleeping furniture according to claim 2, wherein said supporting frame (2) includes two longitudinal deflecting rods (7) fixed on supporting frame (2), said limit stops (16, 31) are fixed on said longitudinal deflecting rods (7), one end of said longitudinal deflecting rods (7) is hinged with second rocker (15) to form front pivot (33) and second rocker (15) is then hinged with front transverse stay tube (26) of seat frame (3), and the other end of said longitudinal deflecting rods (7) is hinged with first rocker (14) to form rear pivot (9), with first rocker (14) directly hinged with rear transverse stay tube (27) of seat frame (3) or via intermediate connecting rod (32).
4. The underframe of sitting/sleeping furniture according to claim 1, wherein conversion of said seat frame (3) between sitting position and sleeping position is realized by transfer of weight of the person or electric/hydraulic driving mechanism or manual adjustment.
5. The underframe of sitting/sleeping furniture according to claim 1, wherein said front pivot (33) of said seat frame (3) is higher than said rear pivot (9) above ground.
6. The underframe of sitting/sleeping furniture according to any of claim 1 to claim 5, wherein said seat frame (3) is configured with a footrest (4) complete with a footrest frame (5); said footrest frame (5) can sway around seat frame (3) via turning shaft (20); said turning shaft (20) is fixed on front transverse stay tube (26) of seat frame (3) in parallel via flange (19); said footrest frame (5) is connected to the quasi-parallel deflecting system via jogger (21), to deflect footrest (4) from the inward swaying position with seat frame (3) at sitting status to the outward swaying position with seat frame (3) at sleeping status; said footrest frame (5) includes a telescoping extension piece (6) and said jogger (21) will only drive said extension piece (6) for extending operation during swaying of footrest frame (5) from inside to outside and with distance of end of this frame above ground exceeding a minimum.
7. The underframe of sitting/sleeping furniture according to claim 6, wherein there are a total of two said joggers, directly hinged with the quasi-parallel deflecting system or via an actuator.
8. The underframe of sitting/sleeping furniture according to claim 6, wherein telescoping of said extension

piece (6) is driven by a bent lever comprising three interlocking bars (28, 29, 30) and outward extending of said extension piece (6) is guided by a roller guide rail.

5

10

15

20

25

30

35

40

45

50

55

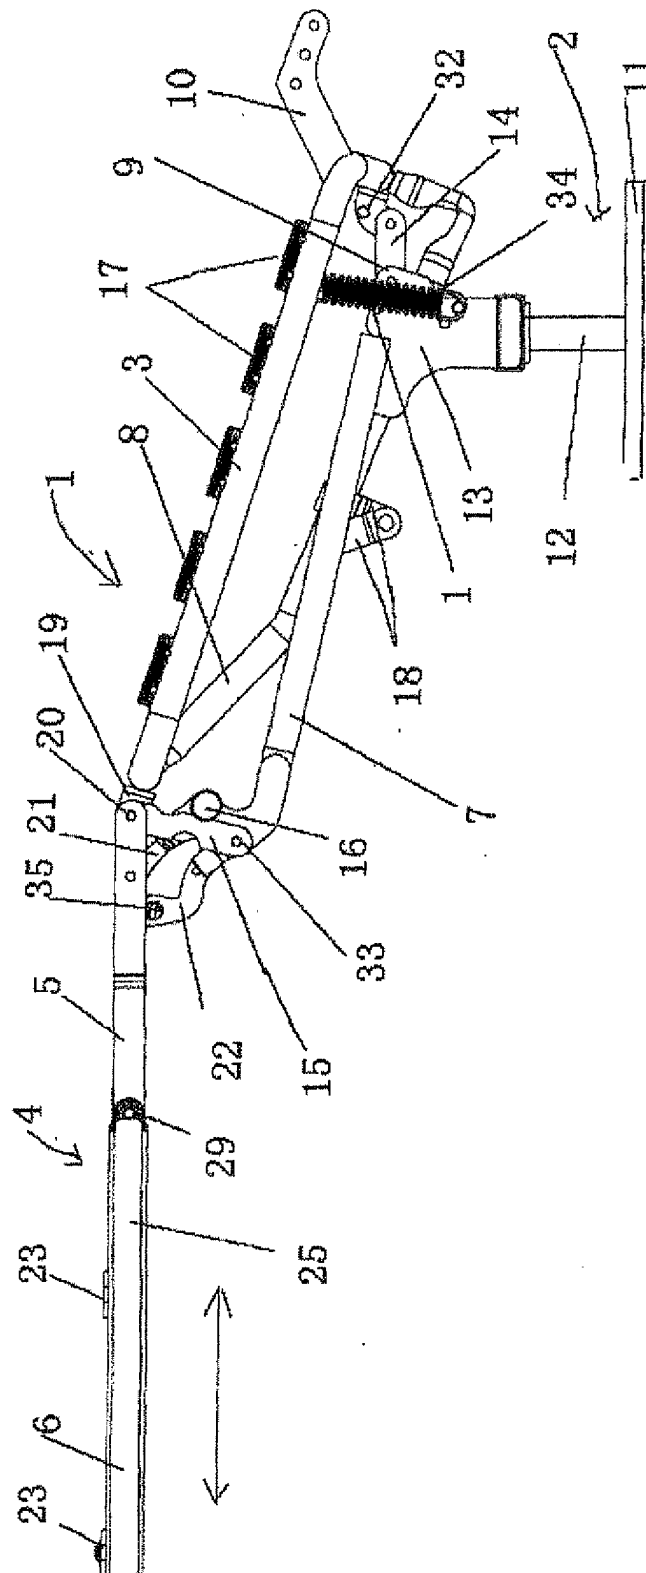


Fig. 1

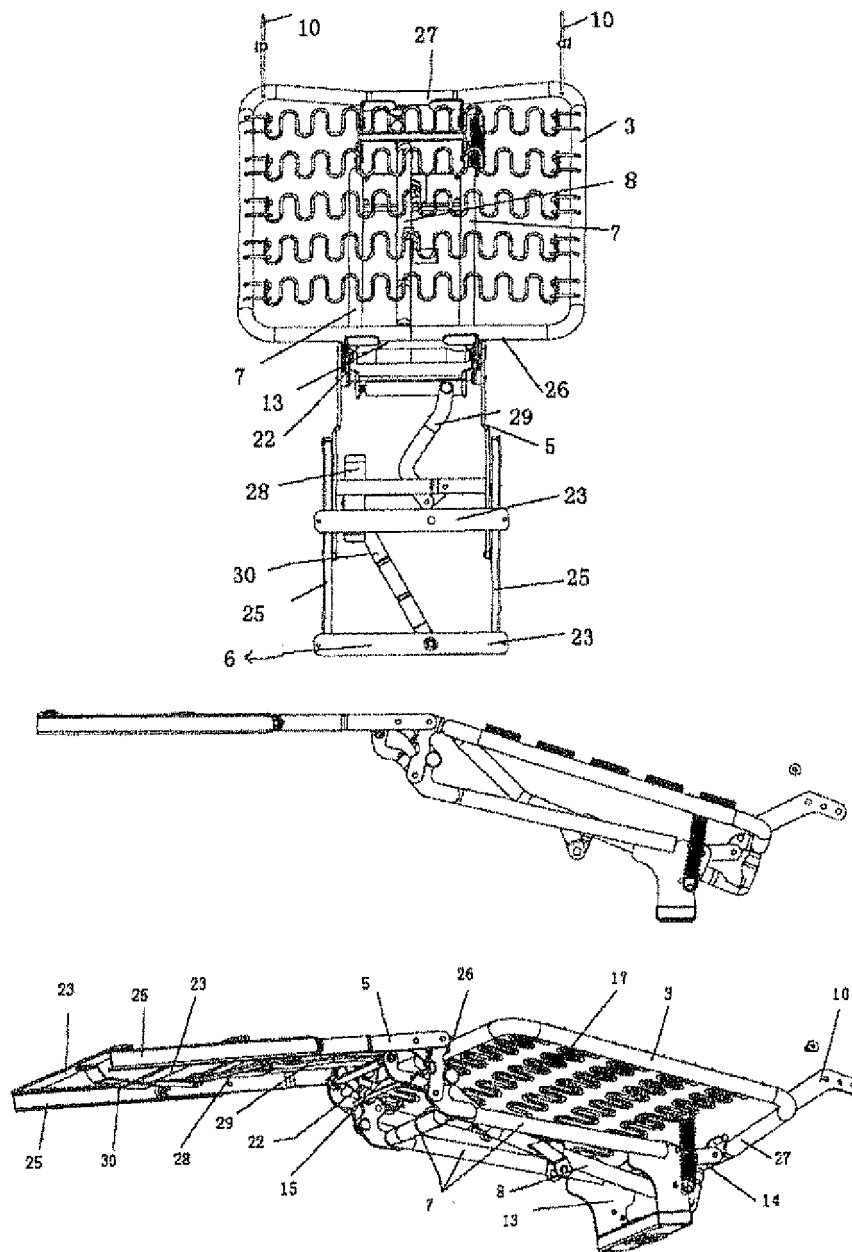


Fig. 2

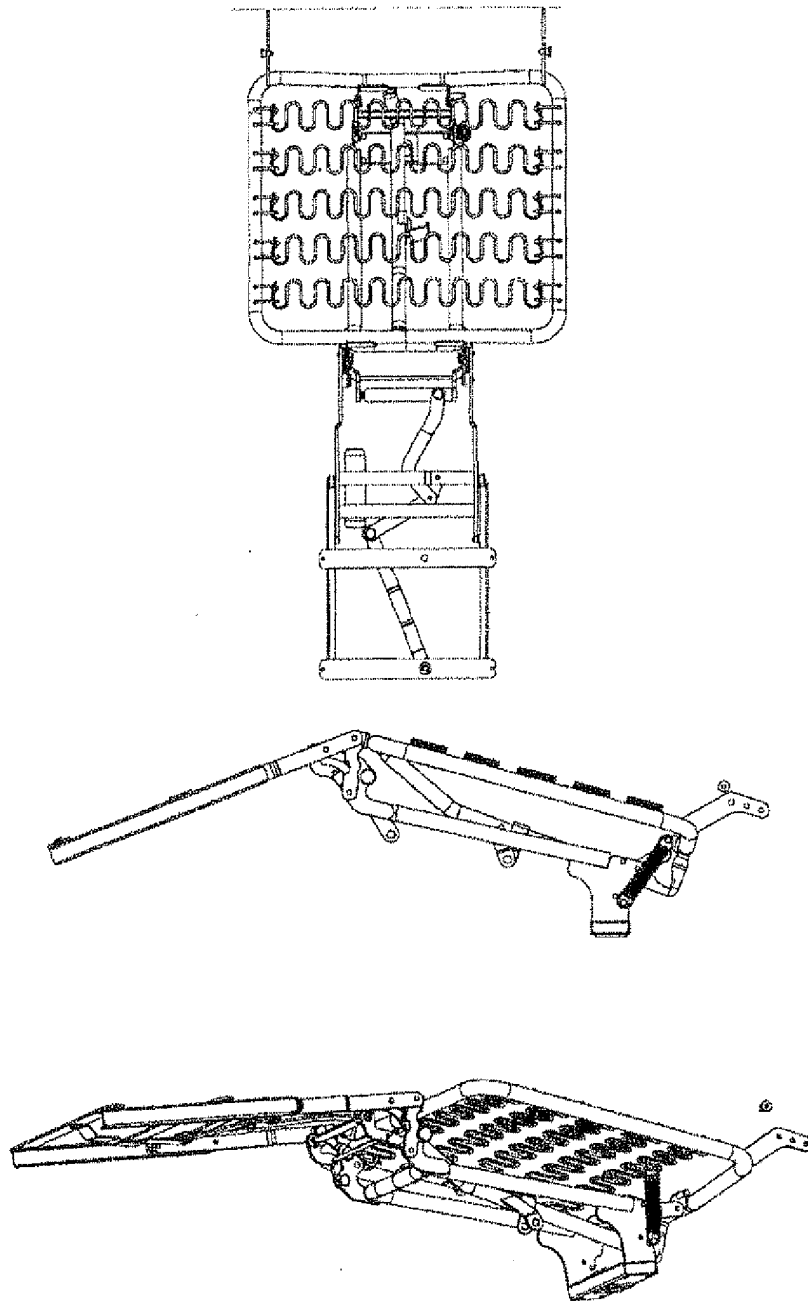


Fig.3

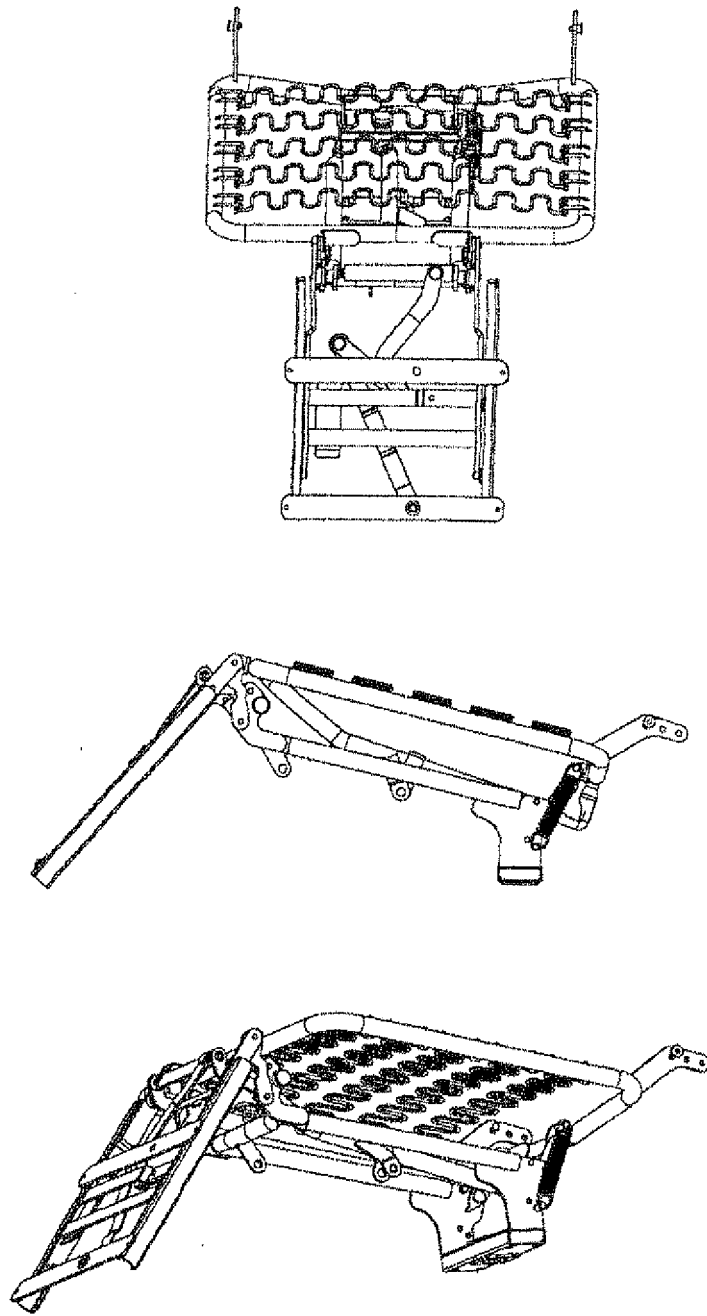


Fig. 4

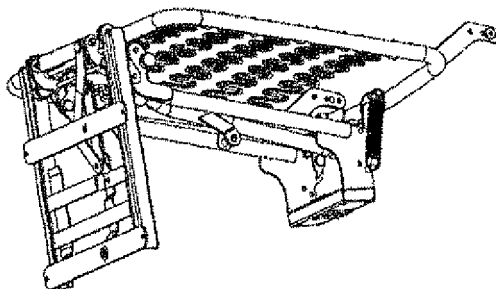
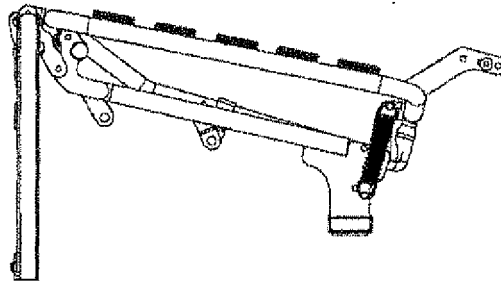
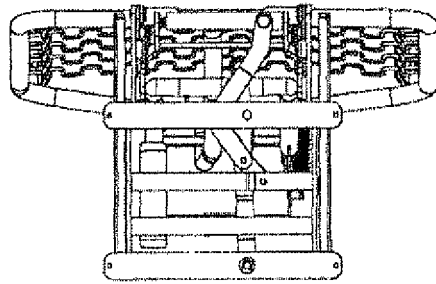


Fig. 5

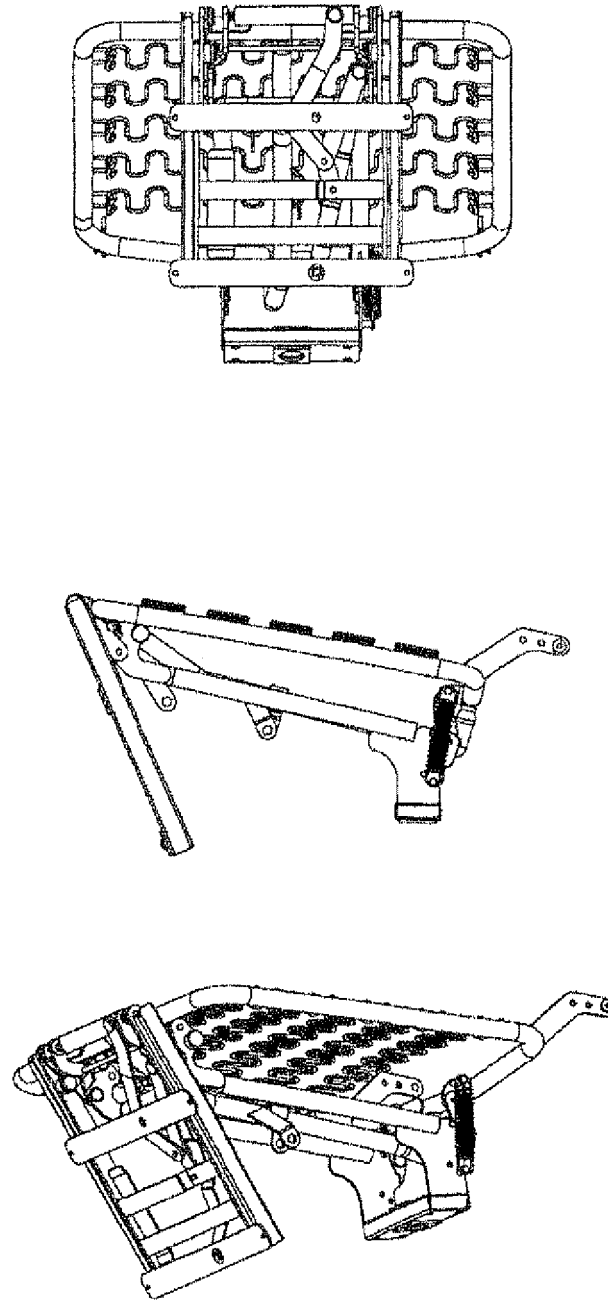


Fig. 6

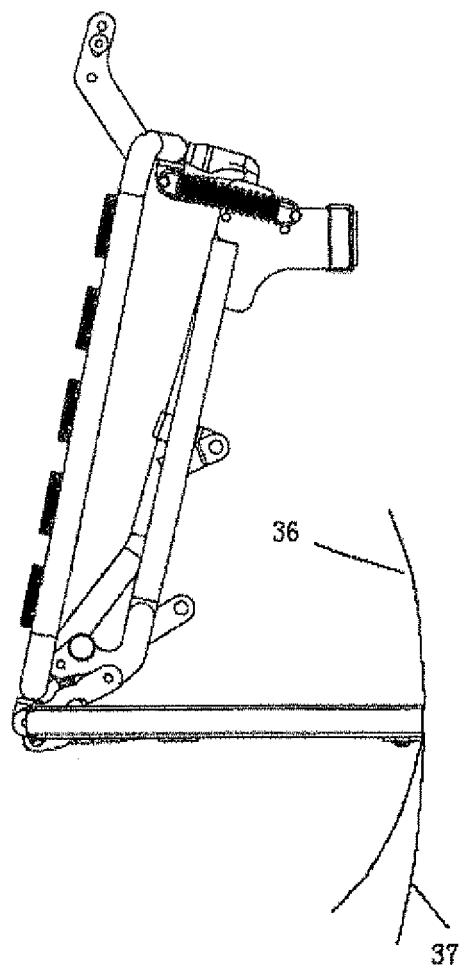


Fig. 7

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2012/073624

A. CLASSIFICATION OF SUBJECT MATTER

See the extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: A47C 17/; A61G 7/

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

CNABS, CNTXT: sitting and lying sitting lying gravity barycentre dead weight branch point rocker frame heel rest

VEN, USTXT: seat+ pivot+ rock+ weight foot feet

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	CN 1321453 A (LI, Ping), 14 November 2001 (14.11.2001), description, page 2, line 9 to page 3, 8 th line from the bottom, and figures 1-3	1-8
A	CN 101919633 A (YAN, Nengjin), 22 December 2010 (22.12.2010), the whole document	1-8
A	US 6792633 B1 (TAKANO CO., LTD.), 21 September 2004 (21.09.2004), the whole document	1-8
A	DE 3107771 A1 (PEITZ & CO STANZWERK), 16 September 1982 (16.09.1982), the whole document	1-8

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 10 October 2012 (10.10.2012)	Date of mailing of the international search report 08 November 2012 (08.11.2012)
Name and mailing address of the ISA/CN: State Intellectual Property Office of the P. R. China No. 6, Xitucheng Road, Jimenqiao Haidian District, Beijing 100088, China Facsimile No.: (86-10) 62019451	Authorized officer ZHANG, Xiaoxia Telephone No.: (86-10) 62085817

Form PCT/ISA/210 (second sheet) (July 2009)

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2012/073624

Patent Documents referred in the Report	Publication Date	Patent Family	Publication Date
CN 1321453 A	14.11.2001	None	
CN 101919633 A	22.12.2010	None	
US 6792633 B1	21.09.2004	KR 20010050998 A	25.06.2001
		JP 4484304 B2	16.06.2010
		JP 2001178778 A	03.07.2001
		US 2004205895 A1	21.10.2004
		US 7003830 B2	28.02.2006
DE 3107771 A1	16.09.1982	DE 8105791 U1	13.08.1981

Form PCT/ISA/210 (patent family annex) (July 2009)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2012/073624

A. CLASSIFICATION OF SUBJECT MATTER

A47C 17/16 (2006.01) i

A61G 7/16 (2006.01) i

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- DE 29600282 U1 [0003]
- EP 2356922 A1 [0004]