



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication: **19.02.2014 Bulletin 2014/08** (51) Int Cl.: **A47B 21/03 (2006.01)**

(21) Application number: **13180379.3**

(22) Date of filing: **14.08.2013**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME

(30) Priority: **14.08.2012 FI 20124159 U**
29.04.2013 FI 20134110 U

(71) Applicant: **Ergo Unit Oy**
00560 Helsinki (FI)

(72) Inventors:
• **Inkeroinen, Maija**
00560 Helsinki (FI)
• **Inkeroinen, Aimo**
00560 Helsinki (FI)

(74) Representative: **Kolster Oy Ab**
Iso Roobertinkatu 23
PO Box 148
00121 Helsinki (FI)

(54) **Element for a work surface, and an arrangement**

(57) There is provided an element (202) for a work surface (204) and an arrangement including one or more elements. The element comprises opposite faces and the element (202) is being arranged to be installed in a first position with respect to the work surface (204) and in a second position with respect to the work surface, in

which first position and second position different opposite faces are out on the work surface. The element comprises screen work accessories (210) on one of the opposite faces, whereby in the first position of the element the screen work accessories are out on the work surface and in the second position of the element the screen work accessories reside underneath the work surface.

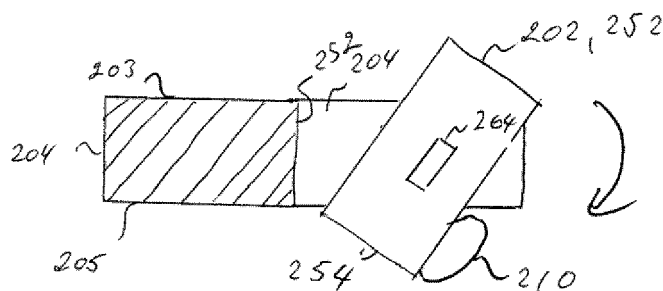


Fig. 2c

Description

Background

[0001] The invention relates to a work surface, and particularly to an element for a work surface.

[0002] In screen work, the health of a worker is greatly affected by the ergonomics of a workstation. Good ergonomics enables the worker's musculoskeletal ill-health to be reduced or even prevented. Common disorders or diseases in those performing screen work include back diseases, arthrosis, polyarthritis or sequela thereof, rheumatoid arthritis, knee arthritis, hip arthritis, chronic back syndrome, and chronic neck-shoulder area pain.

[0003] In screen work, the worker's wrists and elbow joints are subject to strain and stress when the worker uses a keyboard or a mouse controller. Consequently, the worker's wrists and elbow joints may become painful.

[0004] Screen work is the typical kind of work carried out in office spaces. The efficiency of space utilization of office spaces influences companies' operating costs, which are to be kept low. Absence from workstations on account of workers being on sick leaves or business trips reduces the efficiency of office spaces. Conference rooms and other spaces which, when unused, reduce the efficiency of the particular space also contribute to the efficiency of the space utilization of office spaces.

Brief description of embodiments

[0005] An object of the invention is thus to provide an apparatus so as to enable at least some of the aforementioned problems to be solved. The object of the invention is achieved by an arrangement and an element for a work surface which are characterized by what is stated in the independent claims. Preferred embodiments of the invention are disclosed in the dependent claims.

[0006] The idea underlying the invention is that an arm rest may be hidden or brought out onto a work surface. Thus, the work surface may have more than one and at least two modes of use. In a first mode of use, the work surface makes screen work accessories available to a user while in a second mode of use the screen work accessories are hidden from the user. The screen work accessories enable a screen work station to be provided on the work surface, wherein the work station is capable of taking into account screen work requirements, such as ergonomics, and thus of helping in preventing the worker from developing musculoskeletal disorders or diseases.

[0007] According to an aspect of the invention, there is provided an element for a work surface, the element comprising opposite faces and the element being arranged to be installed in a first position with respect to the work surface and in a second position with respect to the work surface, in which first position and second position different opposite faces are out on the work surface, wherein the element comprises screen work acces-

sories on one of the opposite faces, whereby in the first position of the element the screen work accessories are out on the work surface and in the second position of the element the screen work accessories reside underneath the work surface.

[0008] According to another aspect of the invention, there is provided an arrangement comprising an element according to an aspect.

[0009] An advantage of the arrangement and element according to the invention is that the use of arrangements, such as work surfaces, including the element becomes more versatile. Since the modifiability of the work surface makes it possible to use the work surface in different modes of use, the use of the office space provided with the work surface may be modified from screen work to other forms of work which do not necessitate accessories, such as an arm rest, a data processing device controller and/or a reading stand, contained in the element. Further, since the arrangement and the element provide an arm rest, the use of office spaces may be enhanced taking the ergonomics of the work stations into account. Arrangements that include many elements according to the invention enable the arrangement to be utilized simultaneously for screen work as well as for other work wherein the accessories, such as an arm rest, a data processing device controller and/or a reading stand, contained in the element are hidden from the user.

Brief description of the figures

[0010] The invention is now described in closer detail in connection with preferred embodiments and with reference to the accompanying drawings, in which

Figure 1a shows an element installed in a position with respect to a work surface, in which position an arm rest is hidden from a user, according to an embodiment;

Figures 1b and 1c show an element installed in a position with respect to the work surface, in which position the arm rest is out on the work surface, according to some embodiments;

Figure 1d shows an element and a work surface, according to an embodiment;

Figures 2a to 2e show movement of an element with respect to a work surface when the position of the element is changed with respect to the work surface without detaching the element from the work surface, according to an embodiment;

Figure 3 shows movement of an element with respect to a work surface when the position of the element is changed with respect to the work surface by detaching it from the work surface, according to an embodiment;

Figures 4a and 4b show an element in different positions with respect to a work surface when an arm rest extends farther than a face of the element in a depth direction of the work surface, according to an

embodiment;

Figures 5a, 5b, and 5c show an element in different positions with respect to a work surface when an arm rest extends farther than a face of the element in a width direction of the work surface, according to some embodiments;

Figure 6 shows an arrangement comprising a plurality of elements for a work surface, according to an embodiment;

Figure 7 shows an arm rest and a controller for a data processing device, installed in an element for a work surface, according to an embodiment;

Figures 8a and 8b show an arm rest, a controller for a data processing device, and a reading stand, installed in an element for a work surface, according to an embodiment;

Figure 9 shows an element and a work surface, according to an embodiment;

Figure 10 shows an element and a work surface, according to an embodiment;

Figure 11 shows an element and a work surface, according to an embodiment;

Figure 12 shows an element according to an embodiment, arranged to receive screen work accessories.

Detailed description of embodiments

[0011] In the embodiments set forth, ergonomics of screen work is improved by means of an arm rest. Typical arm rests used in screen work are padded e.g. with foam plastic upholstered with fabric or leather.

[0012] Referring to Figures 1a to 1d, an element 102 for a work surface 104 is shown in different positions with respect to a work surface. The element comprises opposite faces 106, 108, an arm rest 110 being installed on one 108 of the faces. The element is installable in two different positions with respect to the work surface, in each different position a different opposite face being out on the work surface. In Figures 1a and 1d, the element 102 is shown installed in a position with respect to the work surface 104, in which position the arm rest 110 is hidden from a user. In Figures 1b and 1c, the arm rest is out on the work surface. The arm rest is fastened to the element e.g. by screws or other fastening means available to those skilled in the art such that the arm rest stays fastened to the element when the arm rest is used in screen work and the element is turned into different positions.

[0013] In Figures 1a to 1d, the element comprises edges 151, 152, 153, and 154 at which it confines itself to the work surface in a depth direction S_p and in a width direction L_p of the work surface. On both its sides 151, 153, the element is flanked by the work surface in the width direction of the work surface. An edge of the element 150 closest in the depth direction of the work surface is not confined by the work surface, in which case the edge is free.

[0014] In Figures 1a to 1d, the depth direction S_p of

the work surface is determined from the user 150 in front of the element perpendicularly towards the work surface including the element. The width direction L_p of the work surface is perpendicular to the depth direction. The width direction and the depth direction are both in a plane determined by a face of the work surface. The width direction and the depth direction of the work surface may be determined in the same way in all embodiments set forth.

[0015] When the element is in a position where the arm rest is hidden from the user, the face 108 of the element to which the arm rest 110 is fastened is downwards. In such a case, the arm rest resides under the work surface and discernible underneath the work surface. The arm rest is hidden from the user when it is not out on the work surface.

[0016] When the element is in a position where the arm rest 110 is out on the work surface, the face 108 of the element to which the arm rest 110 is fastened is upwards. In such a case, the arm rest resides on the work surface and out on the upper face of the work surface.

[0017] A face of the element is upwards when it is on the same side of the work surface as is the face of the work surface on which the weight of objects, e.g. a coffee cup, to be laid on the face of the work surface is supported. A face of the element is downwards when it is on a side of the work surface opposite to the face of the work surface on which the weight of objects to be laid on the face of the work surface is supported.

[0018] The element 102 comprises a part to be installed in the work surface, a face 106, 108 of the part settling in the same plane as the face of the work surface does when the arm rest is hidden. In such a case, the work surface may be used as a work surface with a uniform surface but no element.

[0019] When the arm rest 110 is out on the work surface, the element is in a position with respect to the work surface enabling ergonomic screen work. In the screen work position, the face 108 of the element may be placed in the same plane as the face of the work surface, but it is also possible to place it in another plane. The arm rest may comprise one or more rests installed at a front edge of the work surface, which is closest to the user 150 when the arm rest is out on the work surface. The arm rest may comprise: an elbow rest, a wrist rest or a combined elbow and wrist rest. An ordinary arm rest has a thickness of 5 cm or less, in which case it lifts the user's hand to a height of a data processing device controller to be placed on the element.

[0020] In Figure 1b, the element 102 is shown installed in a position with respect to the work surface wherein the arm rest 110 is out on the work surface, according to an embodiment. In Figure 1b, the arm rest is installed on the face of the element and close to the edge 152 of the element close to the user 150 when the user is at a desk. In such a case, the edge 154 of the element opposite in the depth direction S_p of the desk to the edge 150 close to the user is farthest from the user.

[0021] In an embodiment, the position of the element

may be changed with respect to the work surface from the position of Figure 1a to the position of Figure 1b. In such a case, the element is reversed in the depth direction Sp of the work surface. The work surface may be reversed by turning it by 180 degrees, for instance. When the element 104 is turned from the position of Figure 1b to the position of Figure 1a with respect to the work surface, the edge 152 of the element, at which the arm rest is provided in Figure 1b, turns according to Figure 1a farther from the user than the edge 154 closest to the user in the depth direction Sp of the work surface in Figure 1a. In such a case, the arm rest 110 turns to be hidden and far away from the user, as is shown by the location of the edge 152 in Figure 1a.

[0022] Since in Figure 1a the arm rest 110 of the element is installed at the edge 152, which in the depth direction Sp of the work surface is far away from the user 150 when the element has been turned into the position of Figure 1a, wherein the arm rest is hidden, the user's leg room underneath the work surface is kept as large as possible. Although the arm rest is downwards, the leg room experienced by the user may thus be kept substantially as before as compared with the position of the element in Figure 1b, wherein the arm rest is out on the work surface. Thus, no need exists for the user to change the ergonomically set height of his or her chair as a result of the turning of the element, enabling unergonomic chair height to be avoided.

[0023] In an embodiment, the position of the element 102 may be changed with respect to the work surface from the position of Figure 1c to the position of Figure 1a. When the element 104 is turned from the position of Figure 1c into the position of Figure 1a with respect to the work surface, the edge 154 of the element at which the arm rest is in Figure 1b turns and becomes hidden according to Figure 1a, and remains close to the user 150.

[0024] It is to be noted that the above-disclosed examples of changing the position of the element with respect to the work surface, wherein the arm rest is either hidden underneath the work surface or brought out on the work surface, may be carried out in both directions, i.e. to bring the arm rest out or to hide the arm rest.

[0025] The work surface may be e.g. a desk or another work surface enabling screen work. Screen work comprises work carried out by using data processing devices, such as computers, mobile telephones, tablet computers and/or various controllers for data processing devices, including for instance mouse controllers and keyboards. Ordinarily, work surfaces are made out of wood, for instance. The material of the element may be selected to be the same as the material of the work surface.

[0026] In an embodiment, the material of the element may be selected to be a transparent material, such as glass. This enables the user to see, through the element, the arm rest turned to be hidden underneath the work surface. Thus, preferably, the glass used is sufficiently clear to enable visibility through the element. Owing to

the transparency, it is possible for the user to see the hidden arm rest, in which case it is possible to discern the arm rest even if it is turned underneath the work surface. Since the user is thus capable of discerning the arm rest even if it is turned to be hidden, the element becomes easier to use, enabling directions necessary for using the element to be reduced.

[0027] Figure 1d shows an element and a work surface according to an embodiment. The element and work surface of Figure 1d illustrate the element and work surface of Figures 1a to 1c in closer detail. In Figure 1d, the work surface comprises a recess formed by edges 151a and 153a in the depth direction as well as an edge 152a in the width direction. The edge 152a of the work surface in the width direction forms a rear edge of the recess, defining a depth at which the element is to be installed in the work surface. The recess formed by the edges 151a, 152a, and 153a is rectangular, but it is to be noted that recesses of other shapes are also feasible.

[0028] Preferably, the size of the recess formed by the edges 151a, 152a, and 153a is as similar as possible to the size of the element 102, in which case when the element resides in the recess, supported by fastening means 162 and 164, the work surface and the element form a surface which is as uniform as possible. In such a case, the edges 151a and 153a of the work surface in the depth direction meet the corresponding edges 151b and 153b of the element, and the edge 152a of the work surface in the width direction meets the corresponding edge 152b of the element. Thus, the use of the work surface when the element is in the position where the arm rest is turned to be hidden corresponds as well as possible with the use of the work surface with no element.

[0029] The fastening means 162, 164 enable the position of the element 102 to be changed with respect to the work surface 104. The element comprises fastening means 164 at the edges 151b and 153b parallel with the depth Sp of the work surface. The work surface comprises fastening means 162 at the edges 151a and 153a parallel with the depth of the work surface. The fastening means 164 support the element on the fastening means 164 of the work surface.

[0030] In an embodiment, the fastening means support the element on the work surface to be moved with respect to the work surface in the direction of the depth Sp of the work surface. Movement of such an element with respect to the work surface is illustrated in Figure 3.

[0031] In Figure 3, the position of an element 302 is changed with respect to the work surface 304 by detaching the element from the work surface, according to an embodiment. The edges of the element and the work surface 311a, 311b, 313a, 313b are provided with fastening means enabling movement in the depth direction of the work surface by means of rails, for instance. In such a case, the position of the element 320 may be changed with respect to the work surface 304 from the situation of Figure 1a, wherein the arm rest is hidden, to the situation of Figure 1c, wherein the arm rest is out on

the work surface, by pulling the element 302 off the work surface. Referring to Figures 1a and 1c, upon pulling the element the direction of movement is towards the user 150.

[0032] The element becomes detached from the work surface when the fastenings between the element and the work surface no longer support the element on the work surface. When rail fastening is used between the element and the work surface, the element becomes detached when the rails end. When the element is off the work surface, as in Figure 3, it may be reversed in the width direction of the work surface, in which case the arm rest is brought out on the work surface or hidden away from top of the work surface, depending on the initial position. Next, the element is pushed back in place in the work surface, in which case the fastening means provided at the edges support the element with respect to the work surface. The element may be turned in the manner described above from the position of Figure 1a to the position of Figure 1c, or vice versa.

[0033] Referring again to Figure 1d, in an embodiment the fastening means 162 and 164 may fasten the element to be rotatable around an axis of the desk in the width direction. Such a fastening may be achieved e.g. when the fastening means 162, 164 comprise an axis via which the element at the edges 151b, 153b becomes fastened to the edges 151a, 153b of the work surface. The fastening allows the element to rotate such that the arm rest can be turned underneath the work surface from top of the work surface, or vice versa. In addition, when the arm rest is hidden, the upper face of the element resides in the same plane as the upper face of the work surface. Preferably, the fastening means enable the element to rotate by 180 degrees, in which case the turning of the arm rest to be hidden and out is carried out by reverse rotational movements. It is to be noted that the fastening means may also enable rotation by more than 180 degrees, e.g. 360 degrees.

[0034] In an embodiment, the fastening means 162 and 164 fasten the element to the work surface to be moved in the depth direction of the work surface and rotatable with respect to the work surface. The movement in the depth direction of the work surface and the rotation may take place as described above. The rotation may thus be arranged around an axis of the work surface in the width direction formed by the fastening means.

[0035] When the arm rest is hidden, it is not visible on the work top of the work surface, in which case the work surface may be used unhindered by accessories necessary for screen work, such as the arm rest. The hiding of the arm rest thus enables the work surface to be used in a versatile manner. Consequently, the office space, such as a room, in which the work surface is located may serve both as a screen work space and as space for other purposes, such as work necessitating unhindered desk surface, e.g. graphic design or hobby activities.

[0036] Figures 2a to 2e show movement of an element 202 with respect to a work surface 204 when the position

of the element is changed with respect to the work surface without detaching the element from the work surface, according to an embodiment. Fastening means 264 fasten the element to the work surface to be moved in the depth direction of the work surface and rotatable with respect to the work surface. The rotation may take place around an axis of the work surface in the width direction formed by the fastening means.

[0037] In Figures 2a to 2e, the movement of the element is shown in cross section 'a' designated in broken line in Figures 1a and 1b. The movement of the element from the situation of Figure 1b to the situation of Figure 1a may take place as shown in Figures 2a to 2e. Figure 2a shows an initial situation corresponding to Figure 1b, wherein the arm rest 210 is out on the work surface 203 and the element is installed in the front edge 252 of the element, which is close to the user of the work surface. The rear edge 254 of the element contacts or is as close as possible to the work surface 204. Thus, no gap exists between the work surface and the element to enable objects to fall off the work surface therethrough. From the situation of Figure 2a, the position of the element changes with respect to the work surface via the phases of Figures 2b to 2d to a final situation of Figure 2e, wherein the arm rest is downwards, on the side of the lower face 205 of the work surface. The situation of Figure 2e thus corresponds to the situation of Figure 1a. It is to be noted that the movement shown in Figures 2a to 2e may also take place when the situation of Figure 2e is the initial situation, in which case the movement of the element with respect to the work surface proceeds via Figures 2d, 2c, 2b to the situation of Figure 2a by following directions of movement reverse with respect to the directions of movement shown by arrows in Figures 2a to 2e.

[0038] Figure 2b shows the position of the element with respect to the work surface when the element has been moved from the situation of Figure 2a by pulling the element outwards from the work surface in a direction shown by the arrow in Figure 2a. The element has thus been moved in the direction of depth S_p of the work surface. Preferably, the element has been moved at least to a distance d_1 from the work surface. The distance d_1 may be set to be such that the element is allowed to move by rotating around an axis formed by the means 264 fastening the element to the work surface. In an embodiment, the distance d_1 is selected according to the dimensions of the arm rest. For instance, d_1 may be determined to be the length of the arm rest in the depth direction of the work surface. Examples of arm rest lengths in the depth direction of the work surface are shown in Figures 4a, 4b, 5a, and 5b.

[0039] In an embodiment, the element 202 comprises an arm rest 210 which is superimposed with the work surface 204 when the element is in the position of Figure 2a with respect to the work surface, providing an ergonomic work station for screen work, or in the position of Figure 2b with respect to the work surface, forming a uniform surface with the work surface. In such a case,

the distance d_1 may correspond to a distance the element has to move in the depth direction of the work surface in order for the arm rest no longer to be superimposed with the work surface. The work surface may be underneath the arm rest e.g. in the situation of Figure 5a, wherein the arm rest extends, superimposed with the work surface, in the width direction of the work surface. Further, Figure 2e describes a situation wherein the arm rest is superimposed with the work surface.

[0040] In an embodiment, the fastening means are arranged on the basis of the distance d_1 to allow the element to rotate while it is fastened to the work surface. The fastening means may comprise rails, whose length is selected on the basis of the distance d_1 .

[0041] In Figure 2c, the element is rotated clockwise, supported by the fastening means 264, in which case the arm rest 210 moves from top of the work surface underneath the work surface, to be hidden.

[0042] In Figure 2d, the element has rotated into a position wherein the opposite faces of the element are in parallel to a plane determined by the work surface, in which case the element is moved into place by pushing it inwards into the work surface. The element is thus moved in the depth direction S_p of the work surface.

[0043] In Figure 2e, the element contacts or is as close as possible to the work surface in the depth direction of the work surface. In such a case, the arm rest resides underneath the work surface, hidden therein, in which case the work surface has been modified from the work station of Figure 2a providing ergonomics for screen work to a work station suitable for other tasks. When the arm rest extends along the element either in the width direction L_p and/or in the depth direction S_p of the work surface, in the position of Figure 2e with respect to the work surface the arm rest is superimposed with the work surface, supporting the element on the work surface. When the work surface is again to be used for screen work, the work surface may again be modified to suit screen work, in which case the element is moved with respect to the work surface from the situation of Figure 2e via Figures 2d, 2c, 2b to the situation of Figure 2a by following directions of movement reverse with respect to the directions of movement shown by arrows in Figures 2a to 2e.

[0044] Figures 4a and 4b show an element 402 in different positions with respect to a work surface 404 when the arm rest extends farther than the face 403, 405 of the element in the depth direction of the work surface, according to an embodiment. Figure 4a shows cross section 'a' in Figure 1b while Figure 4b shows cross section 'a' in Figure 1a. In Figures 4a and 4b, the arm rest 410 extends onto the element to a distance d_{te} in the depth direction S_p of the work surface, and farther than the element in the depth direction of the work surface by a distance d_{ty} . Fastening means 411 support the element to be moved into different positions with respect to the work surface, in which case the arm rest 410 may be turned out, into the position of Figure 4a, with respect to the work surface, and to be hidden, into the position of

Figure 4b, with respect to the work surface, as explained above in connection with Figures 2a to 2e. Since the arm rest extends farther than the element by the distance d_{ty} , the arm rest is superimposed with the work surface when it has been turned to be hidden underneath the work surface in the position according to Figure 4b of the element with respect to the work surface.

[0045] In an embodiment, the element rotates by more than 180 degrees, e.g. 360 degrees, in the depth direction of the work surface. In such a case, the work surface may rotate as shown in Figures 2b and 2d, and the distance d_1 may be selected on the basis of the distance d_{ty} shown in Figures 4a and 4b, so as to correspond to the distance d_{ty} , for instance.

[0046] Figures 5a to 5c show an element 502 in different positions with respect to a work surface 504 when an arm rest 510a, 510c extends farther than the face of the element in the width direction L_p of the work surface, according to some embodiments. Thus, the arm rest 510a, 510c fastened to the element 502 extends, superimposed with the work surface, in the width direction L_p of the work surface. The situation of Figure 5a corresponds to the situation of Figure 1b as shown from the front of the work surface from the direction of the user 150 but with the arm rest 510a extending onto the work surface in the width direction of the work surface. The situation of Figure 5b corresponds to the situation of Figure 1a, as shown from the front of the work surface from the direction of the user 150 but with the arm rest 510a extending under the lower face 505 of the work surface in the width direction of the work surface. In the situation of Figure 5a, the arm rest is superimposed with the work surface and on top of the upper face 503 of the work surface. In the situation of Figure 5b, the arm rest is superimposed with the work surface and underneath the lower face 505 of the work surface.

[0047] Figure 5c illustrates the dimensions of the arm rest 510c with respect to the element 502 and the work surface 504 when the arm rest extends farther than the face of the element in the width direction L_p of the work surface, as in Figures 5a and 5b and, in addition, in the depth direction S_p of the work surface. Thus, the arm rest 510c fastened to the element 502 extends, superimposed with the work surface, in the width direction, as the arm rest 510a in Figures 5a and 5b, as well as in the depth direction. In the figure, parts remaining underneath the element and the arm rest of the work surface are shown in broken line within an area inside the arm rest. The arm rest 510c extends farther than the element in the depth direction S_p of the work surface and exceeds the front edge of the element over the distance d_{ty} and extends onto the element over the distance d_{te} , as in Figures 4a and 4b.

[0048] The arm rest 510a, 510c of Figures 5a to 5c extends onto the work surface in the width direction L_p of the work surface. Over this section, the arm rest extends onto the element in the depth direction of the work surface by a distance d_{tt} . The arm rest may be shaped

so that $d_{tt} = d_{te}$.

[0049] The element 504 of Figures 5a to 5c may be turned into another position as shown in Figures 2a to 2e when in the embodiments shown in Figures 2a to 2e, d_1 is selected on the basis of d_{tt} and at least equals d_{tt} . When $d_{tt} < d_{te}$, d_1 may be selected on the same grounds. Thus, in the series of movements of Figures 2a to 2e, the element does not have to be moved over the depth of the entire element out of its place in the work surface.

[0050] Figure 7 shows an arm rest 710_{la}, 710_{lb}, 710_{ra}, 710_{rb} and a controller 730, 720 for a data processing device, installed in an element 702 for a work surface, according to an embodiment. The element may be the element shown in Figures 1a to 1d, for instance. The arm rest comprises separate wrist rests for the left 710_{la} and the right 710_{ra} hand as well as forearm rests for the left 710_{lb} and the right hand 710_{rb}. The data processing device controller may comprise a keyboard 720 and/or a mouse controller 730. The keyboard 720 comprises a part comprising the alphabet, an alphabet part, 722 and a number keyboard 724 for entering numbers and computing simple arithmetic basic equations with one hand.

[0051] The arm rest may be symmetrical or asymmetrical. The dimensions of a symmetrical arm rest in the depth direction S_p of the work surface are symmetrical, in which case the dimensions of the arm rest are the same for the left hand and the right hand of a user 750. In an embodiment, the arm rest is shaped asymmetrically with respect to the keyboard 720 such that the shortest length d_m of the elbow rest in the depth direction of the work surface resides in the middle of the alphabet part of the keyboard, in which case the arm rest, which provides support for both the alphabet part and the number keyboard, is wider d_r on the right side as viewed from the user than on the left side d_l as viewed from the user. This makes it possible for the user to come close to the alphabet part of the keyboard, enabling the user's arms to be supported during use of both the alphabet part and the number keyboard.

[0052] The element 702 may be installed in the work surface as shown in the previous embodiments. When the data processing device controllers are installed in the element, the users of portable data processing devices, such as tablet computers, mobile telephones or other small computers, may be provided with ergonomic accessories by turning the side of the element containing the arm rest and the controller out. Thus, irrespective of the smallness of the data processing device, its user may now use an ordinarily-sized keyboard which can be installed in the element, and an arm rest which provides occupational ergonomics.

[0053] Figures 8a and 8b show an arm rest 810, a controller for a data processing device 820, and a reading stand 830 installed in an element 802 for a work surface, according to an embodiment. The element may be the element shown in Figures 1a to 1d, for instance. The element comprises the arm rest 810 and the reading stand 830, which is hinged to the element 802 by a hinge

840. The reading stand is in Figure 8a in a closed position while in Figure 8b the reading stand is in an opened position. Owing to the hinged fastening, the reading stand may be turned between the positions of Figures 8a and 8b. In the closed position, the reading stand encloses the data processing device controller 820, e.g. a keyboard, a mouse controller or a combined keyboard and mouse controller, as in Figure 7. In the closed position, the leg room taken by the reading stand underneath the work surface is as small as possible when the element has been turned into a position wherein the arm rest is hidden.

[0054] In Figure 8b, the reading stand is in the opened position, wherein the reading stand is in use, enabling an item to be read, for instance a book or a data processing device, such as a tablet computer, mobile telephone, to be placed thereon. In the opened position, the reading stand is supported at an angle α with respect to the work surface, in which case the reading stand provides support for the item to be read. In the opened position of the reading stand, the screen work accessories, such as the keyboard and the mouse, covered by the reading stand in Figure 8a are out. In such a case, in addition to the arm rest and the keyboard, the element provides ergonomics for screen work also by the reading stand, which enables the text or display to be read to be set in an easily readable position. In addition, when the reading stand is in the closed position, it protects the keyboard e.g. from the user at the work surface inadvertently pushing the keyboard, which could otherwise harm the keyboard.

[0055] Figure 6 shows an arrangement comprising a plurality of elements 608, 618, 628, 638, 648, 658 for a work surface 604, according to an embodiment. The elements may be arranged in the work surface as shown in the embodiments described above. The arrangement may comprise a building, a room or a work surface, such as a desk. The elements of the arrangement form a number of work stations corresponding to the number of the elements, wherein the purpose of use of the work stations may be changed by changing the position of an element from screen work, when the arm rest is out on the work surface, to be suitable for other work, when the arm rest is hidden.

[0056] The arrangement may be a room, e.g. a conference room, wherein the purpose of use of the conference room may be broadened from conferences to be suitable for screen work, when the arm rest is out on the work surface. The broadening of the purpose of use enables the conference room to be used for screen work outside conference hours in a manner taking screen work ergonomics into account. This enables the efficiency of office spaces to be improved by taking the screen work ergonomics into account, whereby possible detrimental effects of making the use of office spaces more efficient on the workers' occupational ergonomics may be minimized.

[0057] The arrangement 604 may be a work surface, such as a desk, wherein the desk may provide a number of work stations corresponding to the number of ele-

ments, each work station enabling the arm rest to be brought out or hidden as shown in the embodiments described above.

[0058] Figure 9 shows an element 902 and a work surface 904, according to an embodiment. The element may be an element shown in the previous embodiments. The element is shown from above and turned into a position with respect to a work surface, wherein an arm rest installed in the element resides underneath the work surface. The element is embedded in the work surface, in which case the work surface surrounds the element. In such a case, the work surface surrounds the element both in the depth direction S_p of the work surface and in the width direction L_p of the work surface. Preferably, the element is above and below free from the work surface, as in the above-described embodiments. A section of the work surface 906 remains between the element and the user 950 of the work surface, the dimension of the section in the depth direction being illustrated by a measurement S_e in Figure 9. The element 902 may be turned into another position with respect to the work surface by fastening the element to the work surface rotatably e.g. through an axis, as described in the previous embodiments. Since the work surface surrounds the element at the edges of the work surface in the width and depth directions, the user may lean on the work surface on every side of the element. It is to be noted that since in the embodiment of Figure 9 the work surface surrounds the element, the element may be fastened to be rotatable with respect to the work surface, e.g. through an axis, either in the width direction or the depth direction of the work surface.

[0059] Figure 10 shows an element 1002 and a work surface 1004, according to an embodiment. The element may be an element shown in the previous embodiments. The element is shown from above and turned into a position with respect to a work surface, wherein an arm rest installed in the element resides underneath the work surface. Edges 1052, 1054 of the element in the width direction L_p of the work surface are mirror images of one another, in which case the edges of the element in both its positions relate to the work surface in the same manner. The edges of the element may be straight, as described in the previous embodiments. Referring to Figure 10, the edges 1052 and 1054 may be curved. The edge 1054 closest to the user of the work surface may curve away from the user in the depth direction of the work surface. Thus, the element forms a recess, enabling the user to come close to the work surface. When the user is as close to the work surface as possible, the work surface may at least partly surround the user and provide support in the width direction of the work surface. The edge 1054 is a mirror image of the edge 1052 residing closest to the user, and the edge 1054 curves towards the opposite edge 1052.

[0060] Figure 11 shows an element 1102 and a work surface 1104, according to an embodiment. The element may be an element shown in the previous embodiments. The element is shown from above and turned into a po-

sition with respect to a work surface, wherein screen work accessories installed in the element reside underneath the work surface. The screen work accessories may comprise one or more of the group consisting of: an arm rest, a data processing device controller, a reading stand, and a combination thereof.

[0061] In Figure 11, the element is embedded in the work surface, in which case the work surface surrounds the element. In such a case, the work surface surrounds the element both in the depth direction S_p of the work surface and in the width direction L_p of the work surface. Preferably, the element is above and below free from the work surface, as in the above-described embodiments. A section of the work surface 1106 remains between the element and the user 1150 of the work surface, the dimension of the section in the depth direction being illustrated by a measurement S_e in Figure 11.

[0062] In an embodiment, the section of the work surface remaining between the user and the element comprises an arm rest 1106. Preferably, the arm rest may be embedded in the work surface so that it forms a substantially uniform work top with the work surface. Thus, when the element and the screen work accessories therein have been turned underneath the work surface, the arm rest interferes as little as possible with other work to be carried out on the work surface not necessitating screen work accessories. The arm rest may be asymmetrical or symmetrical, as described above. The arm rest may also be embedded so as to protrude upwards from the work surface, in which case the height of the arm rest from the work surface may be set according to the screen work accessories used in order to achieve the best ergonomics when the screen work accessories have been turned out, onto the work surface.

[0063] The element 1102 may be turned into another position with respect to the work surface by fastening the element to the work surface rotatably e.g. through an axis, as described in the previous embodiments. Since the work surface surrounds the element at the edges of the work surface in the width and depth directions, the user may lean on the work surface on every side of the element. It is to be noted that since in the embodiment of Figure 11 the work surface surrounds the element, the element may be fastened to be rotatable with respect to the work surface, e.g. through an axis, either in the width direction or the depth direction of the work surface.

[0064] Figure 12 shows an element 1204 according to an embodiment, which is arranged to receive screen work accessories 1224. The element may be used in work surfaces as shown in the embodiments described above. The element comprises a groove 1222 arranged to receive at least part of the screen work accessories 1224a, 1224b, such as the keyboard. The groove runs across the element over its entire extent or part thereof, as shown in Figure 12. The screen work accessories may cover the groove when the screen work accessories reside on the element. The bottom of the screen work accessories may be provided with a protrusion 1226, which

is shown in a side profile 1224b of the screen work accessories. When the screen work accessories have been placed on the element, the protrusion settles in the groove. Such a protrusion is typical e.g. in wireless keyboards, where batteries or accumulators reside in the bottom of the keyboard, thus forming a protrusion. The protrusion may also be brought out or hidden, as are e.g. legs that are commonly used in the bottoms of keyboards for computers and that may be brought out, in which case they protrude from the bottom, and hidden, in which case they do not protrude from the bottom. Preferably, the groove is directed to run in the width direction L_p of the work surface when the element is fastened to the work surface. In such a case, the protrusions typical in keyboards in particular become placed in the element such that the keyboard settles symmetrically with respect to the user of the work surface.

[0065] It is to be noted that the groove may be arranged according to the type of the protrusion. A plurality of grooves may also be provided. For instance, the element may be provided with recesses corresponding to the size and number of the legs of a keyboard.

[0066] When the screen work accessories 1226a have been placed on the element 1204, the protrusion settles itself in the groove of the element, in which case the screen work accessories can be supported more firmly on the face of the element than if the element were not provided with a groove for a protrusion. Further, the groove of the element enables keyboards in particular to be placed on the element such that the angle between the keyboard and the element is very small and even non-existent. Preferably, the depth of the groove is arranged to enable the protrusion to fit entirely in the groove when the keyboard has been placed on the element. Thus, a keyboard with a protrusion can be placed on an element directly, irrespective of the protrusion, in which case the effect of the protrusion on the position of the keyboard on the element may be eliminated and occupational ergonomics may be adapted user-specifically, irrespective of the protrusion.

[0067] It is possible to fasten the screen work accessories and the element to one another, in which case the screen work accessories may be turned together with the element when the element is turned into different positions with respect to the work surface. The fastening may be implemented using stick-on tape, for instance. The stick-on tape may be applied to a surface of the screen work accessories residing against the element, to a surface of the element residing towards the screen work accessories, or both.

[0068] In an embodiment, the groove of the element and the protrusion of the screen work accessories to be arranged therein are provided with stick-on tape. The stick-on tape may be applied in to the groove, to the protrusion, or both.

[0069] Stick-on tapes suitable for fastening the element and the screen work accessories comprise e.g. so-called textile "hook-and-loop" stick-on tapes manufac-

tured by Velcro, for instance. Typically, such "hook-and-loop" stick-on tapes include two strip-like parts to be detachably attached to one another. When the strip-like parts are pressed against one another, they become detachably attached together. Typically, the surfaces of the strip-like parts to be attached to one another comprise loops and hooks such that the hooks attach to the loops. Typically, separating the parts from one another makes a scratchy noise. The parts of the stick-on tape may be fastened fixedly e.g. with glue to pieces that are to be detachably fastened to one another by means of the stick-on tape. In an embodiment, the element comprises an arm rest with a padding made out of a vegetable-oil-based foam plastic. Thus, the recyclability of the arm rest is improved.

[0070] An embodiment comprises a method of manufacturing an element for a work surface. The method comprises removing from the work surface a part from which the element is to be made. The removed part is worked up to be installed in different positions with respect to the work surface, in which positions opposite surfaces of the part are parallel to a plane determined by the work surface. To the removed part, an arm rest is also fastened. The installability of the removed part into different positions may be implemented by an axis and/or rails, for example. The axis enables the removed part to turn into different positions with respect to the work surface, in which case the arm rest enabling screen work ergonomics may be brought out when a data processing device is used on the work surface, and the arm rest can be hidden underneath the work surface when no data processing device is needed. It will be apparent to a person skilled in the art that as technology advances, the basic idea of the invention may be implemented in many different ways. The invention and its embodiments are thus not restricted to the above-described examples but they may vary within the scope of the claims.

Claims

1. An element (102, 702, 802, 1204) for a work surface (104), the element (102) comprising opposite faces (106, 108) and the element (102) being arranged to be installed in a first position with respect to the work surface (104) and in a second position with respect to the work surface (104), in which first position and second position different opposite faces are out on the work surface, **characterized in that** the element comprises screen work accessories (110) on one of the opposite faces, whereby in the first position of the element the screen work accessories (110) are out on the work surface (104) and in the second position of the element the screen work accessories (110) reside underneath the work surface (104).
2. An element (102) as claimed in claim 1, **characterized in that** the element (102) comprises fastening

means (164) for fastening the element to the work surface (104) to be moved in a depth direction of the work surface (104) and rotatable with respect to the work surface (104).

3. An element (102) as claimed in any one of the preceding claims, **characterized in that** the element (102) comprises screen work accessories (110) which in the first and the second position are superimposed with the work surface (104). 10
4. An element (102) as claimed in any one of the preceding claims, **characterized in that** the element (102) is arranged to be moved between the first and the second position in the depth direction of the work surface (104) by a distance corresponding to a distance over which the screen work accessories (110) are superimposed with the work surface (104). 15
5. An element (102) as claimed in any one of the preceding claims, **characterized in that** edges of the element in a width direction of the work surface are mirror images and curve towards one another in the depth direction of the work surface. 20
6. An element (102) as claimed in any one of the preceding claims, **characterized in that** the element (102) comprises screen work accessories (110) installed to extend farther than the element (102) in the depth direction and/or in the width direction of the work surface (104). 25
7. An element (102, 702) as claimed in any one of the preceding claims, **characterized in that** the element (102, 702) comprises screen work accessories (110) comprising an arm rest, such as an elbow rest, a wrist rest or a combined elbow and wrist rest, and/or a controller (720, 730) for a data processing device, such as one or more of the group consisting of: a mouse controller (730) and a keyboard (720). 30
8. An element (102, 802, 1204) as claimed in any one of the preceding claims, **characterized in that** the element (102, 802, 1204) comprises a reading stand (830) and one or more controllers (820) for a data processing device, the reading stand (830) being placeable in a closed position, wherein the reading stand encloses the one or more controllers (820) for a data processing device, and in an opened position, wherein the reading stand enables an item to be read to be placed thereon. 40
9. An element (102, 702, 802, 1204) as claimed in any one of the preceding claims, **characterized in that** the element is made out of a transparent material, for example glass. 45
10. An element (102, 702, 802, 1204) as claimed in any 50

one of the preceding claims, **characterized in that** the screen work accessories comprise an arm rest with a padding made out of a vegetable-oil-based foam plastic.

11. An element (1204) as claimed in any one of the preceding claims, **characterized in that** the element (1204) comprises a groove (1222) arranged to receive one or more protrusions (1226) provided in a bottom of the screen work accessories (1224a, 1224b), the depth of the groove (1222) being adapted such that the protrusion (1226) fits entirely in the groove (1222) when the screen work accessories (1224a, 1224b) have been placed on the element (1204) and the screen work accessories (1224a, 1224b) have been fastened to the element by means of stick-on tape, for instance, applicable in to the groove (1222), for instance. 5
12. An arrangement, **characterized in that** the arrangement comprises one or more elements (102, 702, 802, 1102, 1204) according to any one of claims 1 to 11. 10
13. An arrangement as claimed in claim 12, **characterized in that** the arrangement comprises a work surface (104, 1104) or a room. 15
14. An arrangement as claimed in any one of claims 12 or 13, **characterized in that** the work surface (1104) surrounds the element (1102) in a depth direction of the work surface (1104) and in a width direction of the work surface (104). 20
15. An arrangement as claimed in claim 14, **characterized in that** a section of the work surface (1104) remaining between a user (1150) and the element comprises an arm rest (1106). 25

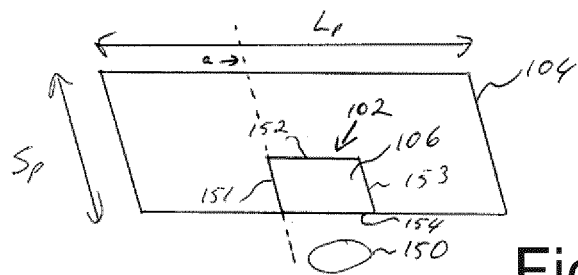


Fig. 1a

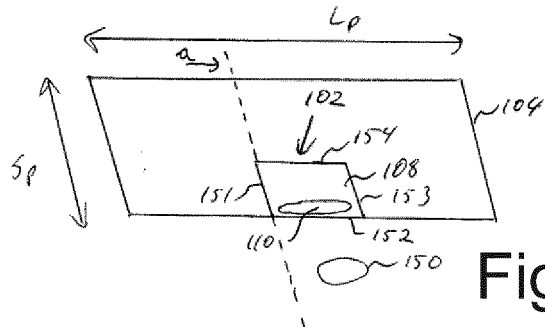


Fig. 1b

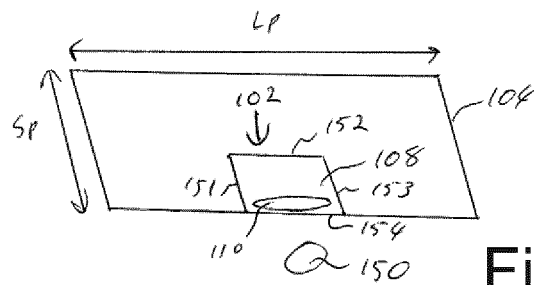


Fig. 1c

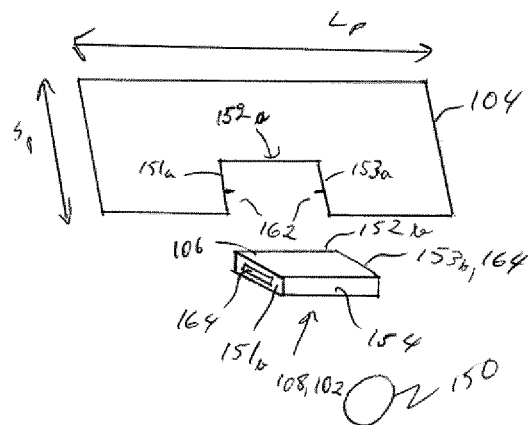


Fig. 1d

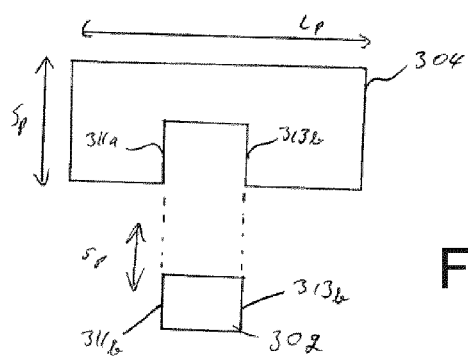


Fig. 3

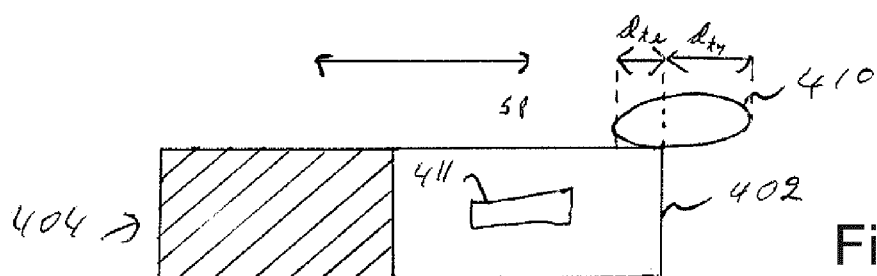


Fig. 4a

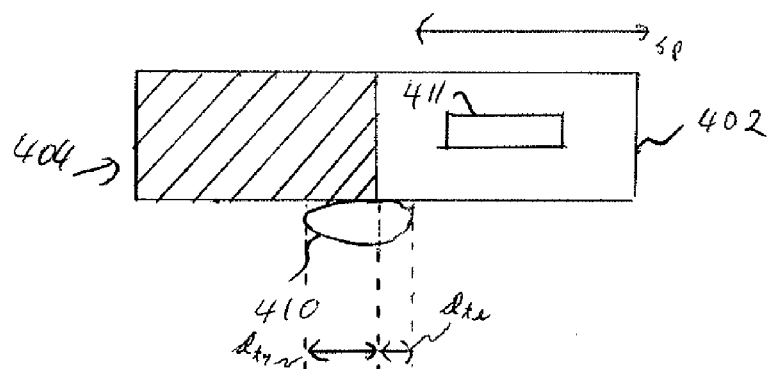


Fig. 4b

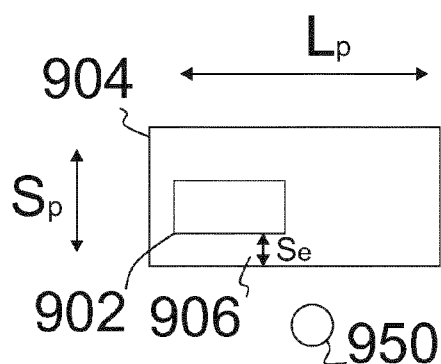


Fig. 9

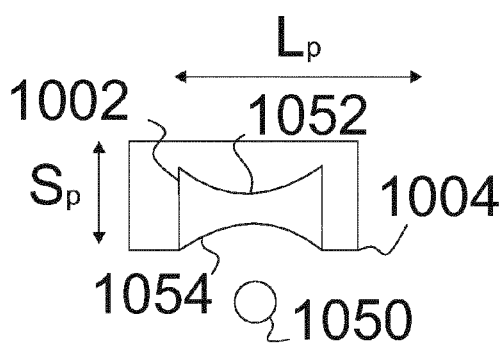
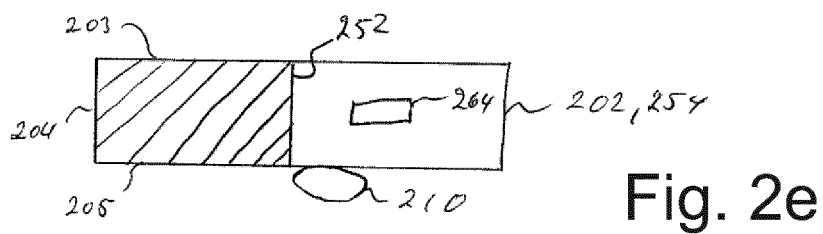
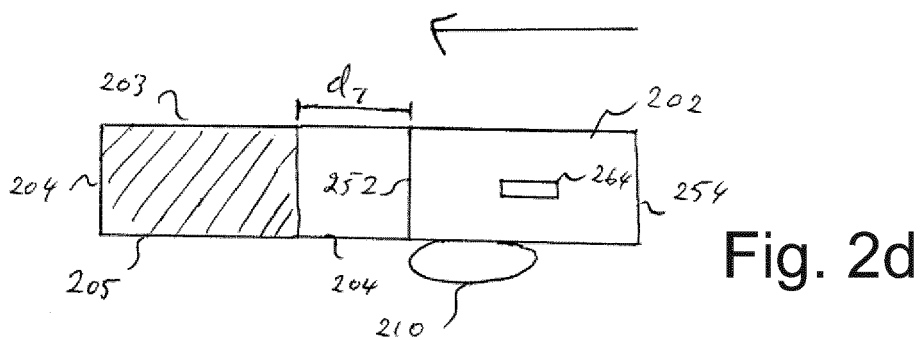
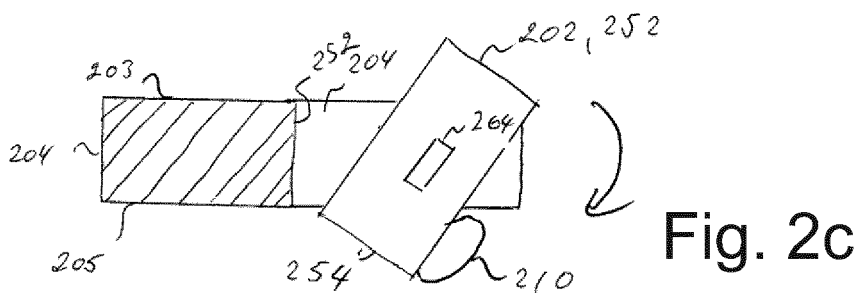
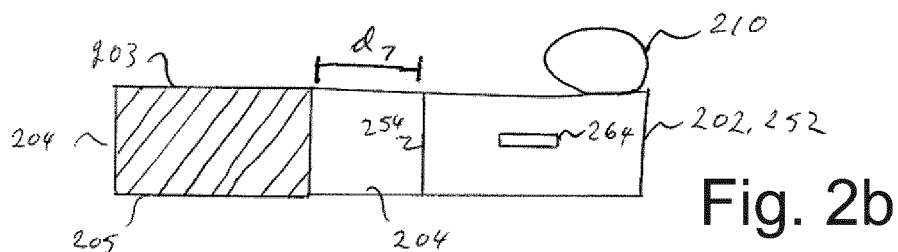
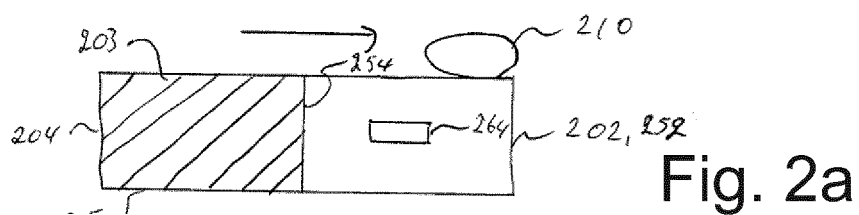


Fig. 10



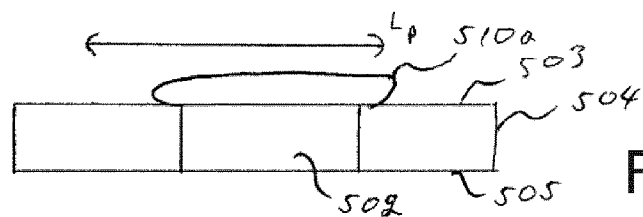


Fig. 5a

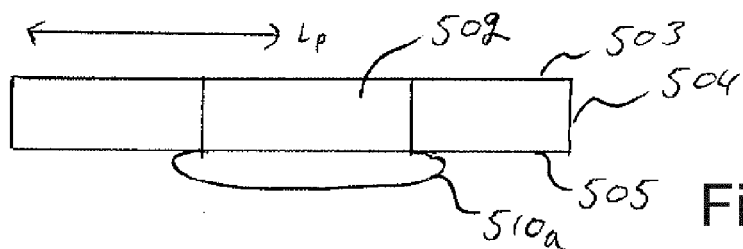


Fig. 5b

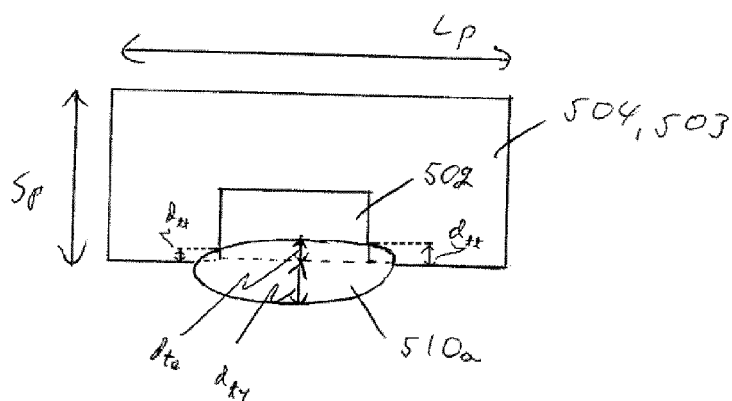


Fig. 5c

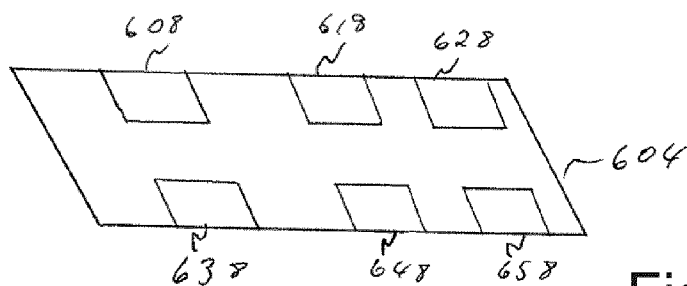


Fig. 6

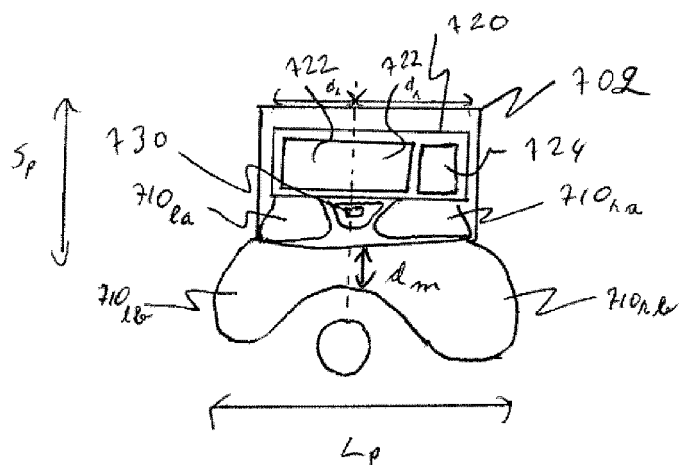


Fig. 7

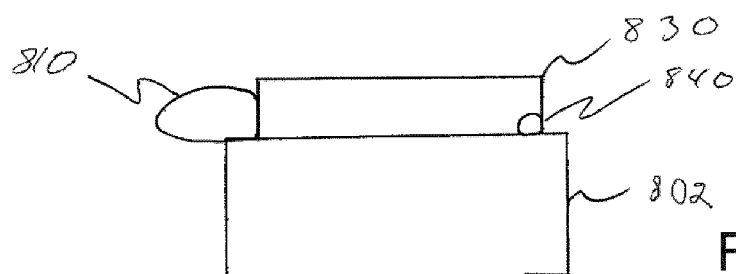


Fig. 8a

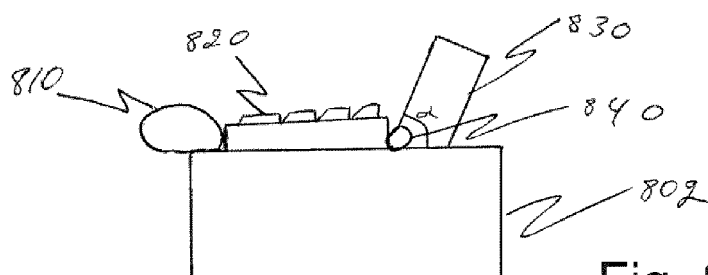


Fig. 8b

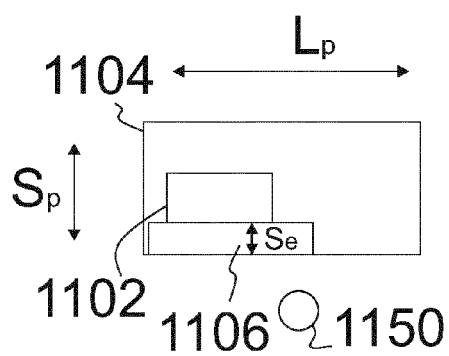


Fig. 11

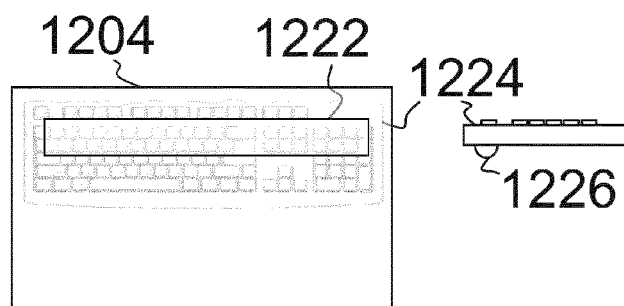


Fig. 12



EUROPEAN SEARCH REPORT

Application Number
EP 13 18 0379

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	WO 99/08566 A1 (COTTERILL MICHAEL J [AU]) 25 February 1999 (1999-02-25)	1-7,9,11	INV. A47B21/03
Y	* figures 20-21 *	10	
X	US 2003/230222 A1 (LIU YU-AN [US]) 18 December 2003 (2003-12-18) * figures 1,3 * * sentence 1, paragraph 0019 * * sentence 1, paragraph 0022 *	1,8, 12-14	
X	US 2001/028548 A1 (OURA NOBUHIRO [JP] ET AL) 11 October 2001 (2001-10-11) * figures 1-2 *	1,10, 12-15	
X	US 5 197 699 A (SMITH MARK R [US] ET AL) 30 March 1993 (1993-03-30) * figure 10 *	1	
Y		10	
			TECHNICAL FIELDS SEARCHED (IPC)
			A47B
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 18 November 2013	Examiner Alff, Robert
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

2
EPO FORM 1503 03.02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 13 18 0379

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

18-11-2013

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9908566	A1	25-02-1999	NONE
US 2003230222	A1	18-12-2003	TW 567779 U 21-12-2003 US 2003230222 A1 18-12-2003
US 2001028548	A1	11-10-2001	JP 2001290576 A 19-10-2001 US 2001028548 A1 11-10-2001
US 5197699	A	30-03-1993	US 5197699 A 30-03-1993 US 5358203 A 25-10-1994 US 5451020 A 19-09-1995

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82