



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication: **02.04.2014 Bulletin 2014/14** (51) Int Cl.: **E05D 15/56 (2006.01)**

(21) Application number: **13186069.4**

(22) Date of filing: **26.09.2013**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME

(72) Inventor: **Lambertini, Marco**
40068 SAN LAZZARO DI SAVENA (BOLOGNA) (IT)

(74) Representative: **Lanzoni, Luciano**
Bugnion S.p.A.
Via di Corticella, 87
40128 Bologna (IT)


(30) Priority: **26.09.2012 IT BO20120522**

(71) Applicant: **GSG INTERNATIONAL S.p.A.**
40054 Budrio (Bologna) (IT)

(54) **Carriage unit for sliding door or window of the lift and slide type**

(57) Described is a carriage unit for sliding doors or windows of the lift and slide type (1), comprising at least one main carriage (4, 5), associated, in use, on a bottom crosspiece (6) of a sash (3) and resting on a horizontal base track (7) to allow the sliding of the sash (3) in both the opening and closing directions; the main carriage (4, 5) having a drive linkage (13) of the movement comprising an operating arm (25) interposed and connected, in use, between / to a rod (23) slidable in the sash (3) and means (12) for lifting and lowering the sash (3) positioned and acting on the main carriage (4, 5); the sash (3) being connected, in turn, to a handle (14); the handle (14) being positioned on the sash (3) for controlling the open posi-

tion, with a lifting of the sash (3) relative to the track (7), and the closed position, with a lowering of the sash (3) relative to the track (7) by rotating the handle (14) from a first configuration to a second configuration, and vice versa, in such a way as to also activate the means (12) for the lifting and lowering; the operating arm (25) of the drive linkage (13) of the movement has adjustable means (24) for its secure connection with the rod (23); the adjustable means (24) being designed for adapting the position of the arm (25) relative to the operating rod (23) keeping unchanged the position of the rod (23) and the relative configuration adopted by the handle (14) and by the lifting means of the main carriage (4, 5). [Figure 2]

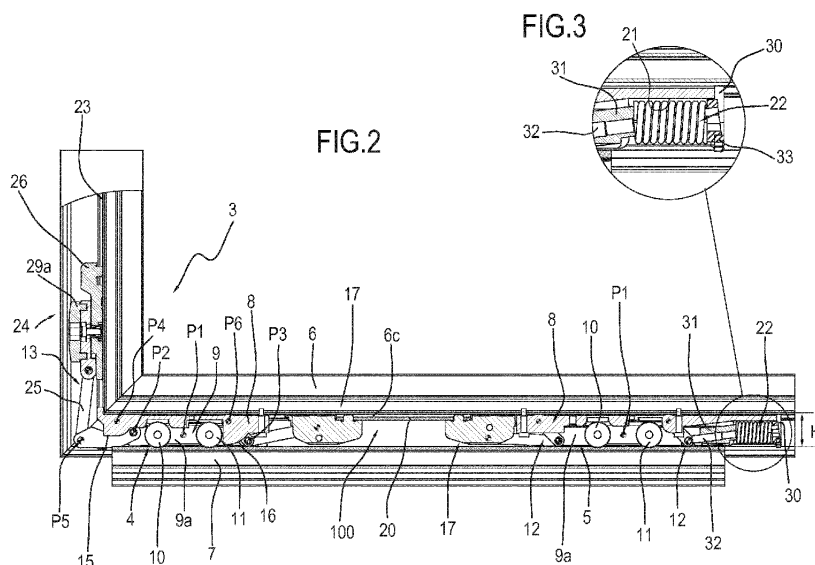

Description

[0001] This invention relates to a carriage unit for sliding doors or windows, in particular forming part of a carriage unit for doors or windows known in the jargon of the trade as "lift and slide".

[0002] These doors and windows normally comprise:

- a fixed frame;
- at least one movable sash, horizontally slidable relative to the fixed frame between an open position and a closed position;
- at least one sliding unit, or carriage unit, which is associated with the bottom crosspiece of the sash and is guided by a horizontal base track to allow the sliding of the sash to and from the above-mentioned open and closed positions;
- a control handle, positioned on the sash, which, firstly, allows the sash to be lifted so as to move the lower seals of the sash away from the sides of the track and thereby allow the sliding of the latter to and from the above-mentioned open and closed positions, and, secondly, allows the sash to be lowered in the closed position so as to seal the door or window;
- locking / unlocking means, which act between the vertical member of the sash and the fixed frame for locking/unlocking the sash in its closed position controlled by the above-mentioned handle.

[0003] In this specification, attention is focused on the carriage unit which, in the majority of the embodiments on the market, comprises a pair of carriages (main and secondary) so as to support the sliding sash in a distributed manner.

[0004] One of the prior art solutions of structures of each carriage of the unit comprises:

- a box-shaped frame, on which are hinged, at its ends, a pair of wheels designed to rest on the track, and
- a connecting body, interposed between the box-shaped frame and the lower part of the sliding sash, to allow the lifting and lowering of the sash relative to the box-shaped frame.

[0005] More specifically, according to some examples of prior art structures (of which some embodiments may be seen in patents DE 7816563U, EP 1298271, EP 1298272, EP 1437471), the connecting body is, on one side, connected to the lower part of the sash, and, on the other side, connected to the box-shaped frame by means of a coupling between a pin and an inclined slot (applied and made on the box-shaped frame and on the connecting body or vice versa depending on the solutions adopted).

[0006] The movement of the connecting body (and of the sash) relative to the box-shaped frame of the carriage is imparted by the above-mentioned control handle, through a drive linkage which changes the relative posi-

tion between the pin and the inclined slot.

[0007] In light of this, so as to increase the efficiency of the lift and slide mechanisms (where the term "efficiency" means a smaller force to be applied to the handle to lift even heavy sashes), pre-loaded springs are used, designed to reduce the weight of the sash to be lifted and facilitate the opening movement. A prior art solution, by this Applicant, is illustrated in patent EP 2220316.

[0008] However, the prior art solutions of these carriages together also with the presence of the pin - slot - spring combination have several drawbacks.

[0009] A first problem is due to the "inclined slot" guide unit present on the carriages.

[0010] It should be noted that the control mechanism starting from the operation of the handle and ending with the secondary carriage determines a sum of clearances due to the mechanical couplings in series which are present. More specifically, the drive unit connected to the carriage must couple with the slidable control rod connected to the handle.

[0011] A prior art solution of a carriage with coupling between drive linkage and rod is described in patent document GB 1.093.352.

[0012] This coupling, during assembly, must be extremely precise to allow the exact timing between the handle in closed sash position with carriages completely lowered and in open position with carriages completely lifted.

[0013] If this coupling is not performed precisely, the effective stroke of the carriage unit is reduced or even insufficient for the correct operation. Therefore, a sum of clearances may translate into a loss of stroke of the main carriage and to a sometimes even greater degree of the secondary carriage with consequent non-use of the stroke space (such as, for example, that of the pin in the inclined slot).

[0014] In light of this, the loss of stroke therefore becomes a reduction in the height of lifting of the sash.

[0015] In other words, with this slot system, the effective value of lifting the sash is more or less high depending on the sum of clearances which are created. This is without being able to make adjustments, since the system structured in this way on the carriages is, so to speak, of the rigid type.

[0016] A second problem is the reduced capacity of the assistance by the spring, due to the fact that as the lifting of the sash increases, the spring tends to "unload" and progressively reduce the relative contribution in the lifting of the sash.

[0017] This reduced effect of the spring is therefore reflected on the manoeuvre performed by the user on the handle which, in effect, requires a greater effort during the last degrees of rotation of the handle coinciding with the last step of lifting the sash.

[0018] Another problem encountered is due to the weight of the sash when it is lifted.

[0019] In the system with slot, pin and spring, the weight of the sash always bears on the inclined slot and,

in cascade, on the entire train of the mechanism until reaching the handle.

[0020] This cascade effect of the weight on heavy sashes may result in a poor stability of the handle which, in some cases, tends, merely by touching it, to release itself from the open position precisely because of the effect of the weight of the sash.

[0021] The aim of this invention is to provide a carriage unit for sliding doors or windows of the lift and slide type which overcomes the above mentioned drawbacks of the prior art.

[0022] More specifically, the aim of this invention is to provide a carriage unit for sliding doors or windows of the lift and slide type which is able to use fully the effective stroke width of the carriages by its precise and adaptable connection to the system for movement of the door or window.

[0023] A further aim of this invention is to provide a carriage unit for sliding doors or windows of the lift and slide type which allows the opening and closing of the door or window without excessive effort for the user and with a high degree of stability of the movable sash in the open position.

[0024] A further aim of the invention is to provide a carriage unit for sliding doors or windows of the lift and slide type which may be adapted to any type of profile making the movable sash, that is, also in the case of small sized profiles, whilst maintaining high lifting strokes.

[0025] These aims are fully achieved by the carriage unit for sliding doors or windows of the lift and slide type according to this invention, as characterized in the appended claims.

[0026] More specifically, the carriage unit for sliding doors or windows of the lift and slide type comprises at least a main carriage, associated, in use, with a bottom crosspiece of a sash and resting on a horizontal base track to allow the sliding of the sash in both the open and closed directions.

[0027] The main carriage has a movement drive linkage comprising an operating arm interposed and connected, in use, between / to a rod slidable in the sash and means for lifting and lowering the sash positioned and acting on the main carriage.

[0028] The rod is connected, in turn, to a handle.

[0029] The handle is positioned on the sash for controlling the open position, with a lifting of the sash relative to the track, and the closed position, with a lowering of the sash relative to the track by rotating the handle from a first configuration to a second configuration, and vice versa, in such a way as to also activate the means for lifting and lowering.

[0030] According to the invention, the operating arm of the drive linkage has adjustable means for its secure connection with the rod.

[0031] Also according to the invention, the adjustable means are designed for adapting the position of the arm relative to the operating rod keeping unchanged the po-

sition of the rod and the relative configuration adopted by the handle and by the lifting means of the main carriage.

[0032] Thanks to this system, which allows the adjustment of the rod - drive linkage connection point, the movement given by the mechanisms which control the carriages is maintained in perfect timing between the handle at zero degrees when the sash is in the lowered position and the handle at 180° when the sash is in the raised position.

[0033] In this way, any errors in cutting the rod are eliminated, allowing the door or window installer to work without particular high precision requirements and without this having an impact on the final quality of the door or window.

[0034] This and other features of the invention will become more apparent from the following description of a preferred embodiment of it, illustrated by way of non-limiting example in the accompanying drawings, in which:

- Figure 1 is a schematic front view of a sliding door or window of the lift and slide type equipped with the carriage unit according to the invention;
- Figure 2 is a front view the carriage unit of the sliding door or window, according to the invention, with some parts in cross section in a configuration where the movable sash of the door or window is closed;
- Figure 3 is an enlarged view of a secondary carriage of Figure 2;
- Figure 4 is a schematic rear view of the carriage unit and the sash of Figure 2;
- Figure 5 is a front view the carriage unit of the sliding door or window, according to the invention, with some parts in cross section in a configuration where the movable sash of the door or window is open;
- Figure 6 is a schematic rear view of the carriage unit and the sash of Figure 5;
- Figure 7 is an exploded perspective view of a main carriage forming part of the carriage unit of the preceding figures;
- Figure 8 is an exploded perspective view of a secondary carriage forming part of the carriage unit of the preceding figures;
- Figures 9 and 10 illustrate means of adjusting the secondary carriage in a first operating configuration, in an assembled perspective view and in a partially exploded view, respectively;
- Figures 11 and 12 illustrate means of adjusting the secondary carriage in a second operating configuration, in an assembled perspective view and in a partially exploded view, respectively;

[0035] With reference to the accompanying drawings, in particular Figures 1 to 6, the carriage unit according to the invention, denoted by the numeral 100, can be used for sliding doors or windows of the lift and slide type and denoted by the numeral 1.

[0036] These doors and windows 1 essentially com-

prise: a fixed frame 2, at least one movable sash 3, a pair of carriage 4 and 5 forming the above-mentioned carriage unit and a control element 14 comprising a handle.

[0037] In light of this, the sash 3 is slidable relative to the fixed frame 2 between a closed position (see Figure 1) and an open position (not illustrated).

[0038] It should be noted that the sash 3 is slidable horizontally along a fixed track 7 positioned at the base of the fixed frame 2 and, in its fully open position (not illustrated), can (purely by way of example) be superposed over a fixed sash 101 or a sash that is also mobile.

[0039] The pair of carriages 4, 5 are associated with the bottom crosspiece 6 of the sash 3 and are guided by the track 7 to allow the sliding of the sash 3 to and from the above-mentioned open and closed positions.

[0040] The carriage 4 will hereafter be called "main", which, in the direction F2 of closing the sash 3, is positioned in front of the other carriage 5, which on the other hand will be called "secondary", and is connected, in series with the main carriage 4.

[0041] The door or window 1 comprises, as indicated, a control handle 14 positioned on the sash 3.

[0042] The control handle 14 is connected to the carriage unit 100 using a connecting rod 23 slidable inside the vertical member of the movable sash 3.

[0043] In turn, the rod 23 is connected to a drive linkage 13 of the movement imparted by the handle 14 connected to the main carriage 4.

[0044] In this way, the rotation of the handle 14 in one direction or the other allows:

- the sash 3 to be lifted so as to move the lower seals of the sash 3 away from the sides of the track 7 and thereby allow the sliding of the latter to and from the above-mentioned open and closed positions (see arrow F1 and Figures 5 and 6), or
- the sash 3 to be lowered to the closed position so that the seals close the door or window 1 (see arrow F2 and Figures 2 and 4).

[0045] For example, and without restricting the scope of the invention, the main carriage 4 comprises a first box-type frame 8 having an upper portion 8a designed to be slidably coupled, in use, to the lower crosspiece 6 of the sash.

[0046] Again by way of an example, the main carriage 4 comprises a second frame 9 supporting a pair of wheels 10 and 11 positioned, in use, resting on the track 7.

[0047] In light of this, the second frame 9 is designed to allow a pivoting movement of the two wheels 10 and 11 about a single pivot point P1. Preferably, the main carriage 4 comprises a link mechanism 12 for lifting and lowering the sash 3 relative to the track 7, corresponding to the open and closed positions, respectively, of the sash.

[0048] The link mechanism 12 is positioned and acting between the first frame 8 and, in use, the drive linkage 13 controlled by the handle 14 positioned on the sash 3.

[0049] Preferably (see Figure 7), the link mechanism 12 is also connected to the second frame 9 for allowing a movement, in both directions, of the pair of wheels 10 and 11 on the track 7 during the lifting and lowering movement of the sash 3 and keeping the same pair of wheels 10 and 11 centred relative to the first frame 8 during lifting or lowering.

[0050] Preferably, the first frame 8 comprises its respective upper portion 8a shaped to form two coupling grooves S1 and S2 in a channel 6c made on the bottom crosspiece 6 of the sash 3.

[0051] Preferably, the first frame 8 comprises a surface 15 and 16 shaped at each of its ends and configured for forming a contact guide cam for the hinge point P2, P3 of the link mechanism 12 connected to the drive linkage 13.

[0052] In light of this, each shaped surface 15 and 16 forms a point for resting and supporting at a height (from the bottom) the first frame 8 to the hinge point P2, P3 at the raised opening position of the sash 3.

[0053] Thanks to this mechanical combination and the large supporting surface of the first frame 8 on the sash 3, the lifted position of the sash 3 is extremely stable even in the presence of heavy sashes.

[0054] More in detail, the link mechanism 12 comprises a first proximal movement rod 12a hinged, at three different points P4, P5, P2, to the first frame 8, to the drive linkage 13 and to the second frame 9, respectively.

[0055] In light of this, the link mechanism 12 comprises a second rod 12b, distal relative to the drive linkage 13, hinged to the first frame 8 at a point P6, at one end, and at the other end, hinged at a single point P3 to the second frame 9 and to a rigid connecting unit 17 associated with the lower crosspiece 6 of the sash 3 for forming a rigid contact between second rod 12b and crosspiece 6 during the lifting and lowering movement. Preferably, the rigid connecting unit 17 is also associated, in series, with the second secondary carriage 5.

[0056] It should be noted that the first and second rods 12a and 12b form two bilateral pairs of rods forming the movement mechanism.

[0057] In light of this, it should be noted that the above-mentioned pivot points or hinge points (P1, P2, P3, P4, P5, P6) are formed by relative rotatable fixing pins between the various components.

[0058] Preferably, the second frame 9 comprises two flat plates 9a, 9b partially housed in the first frame 8 and movable relative to the first frame 8.

[0059] In light of this, each plate 9a, 9b is hinged, at its relative ends, to the link mechanism 12.

[0060] It should be noted that the two flat plates 9a, 9b forming the second frame 9 have a single pivot point P1 for the pair of wheels 10 and 11 in an intermediate area relative to the two hinge points P2, P3 with the link mechanism 12.

[0061] In light of this, the pair of wheels 10 and 11 are rotatably fixed to a pair of horizontal rockers 18 and 19 having the central pivot point P1 hinged to the second

frame 9.

[0062] The pair of rockers 18 and 19 forms a further frame inside the second frame 9 and makes the pair of wheels 10 and 11 independent from the second frame 9 and from the first frame 8.

[0063] The pair of wheels 10 and 11 are indirectly connected to the second frame 9 by the pivot point P1.

[0064] The link mechanism 12 connecting between the first frame 8, second frame 9 and drive linkage 13 therefore determines a movement for lifting or lowering the first frame 8, with the action of the handle 14, with consequent lifting and lowering of the sash 3 (see Figures 2 to 6).

[0065] These movements are determined by the rotation of the connecting rods 12a and 12b which lift or lower the first frame 8 with relative backwards or forwards sliding of the second frame 9 thanks to the pair of wheels 10 and 11 connected to it.

[0066] The presence of the cam surfaces 15, 16 on the first frame 8 facilitates the lifting and lowering movements of the first frame 8 and also keeps the lifted position stable.

[0067] Thanks to this kinematic mechanism, the rotation of the handle, especially during the lifting of the sash 3, is extremely fast and "smooth" without excessive effort by the user.

[0068] As described above, the main carriage 4 has a movement drive linkage 13 comprising an operating arm 25 interposed and connected, in use, between / to the rod 23 slidable in the sash 3 and the means 12 for lifting and lowering the sash 3 positioned and acting on the main carriage 4 (link mechanism 12).

[0069] The rod 23 is connected, in turn, to the handle 14.

[0070] In light of this, the handle 14 is positioned on the sash 3 for controlling the open position, with the lifting of the sash 3 relative to the track 7, and the closed position, with the lowering of the sash 3 relative to the track 7 by rotating the handle 14 from a first configuration to a second configuration, and vice versa, in such a way as to also activate the means 12 for lifting and lowering (configuration at 0° for lowering and closing the sash 3 and rotated by 180° for lifting and opening the sash 3).

[0071] According to the invention, the operating arm 25 of the drive linkage 13 has adjustable means 24 for its secure connection with the rod 23.

[0072] Also according to the invention, the adjustable means 24 are designed for adapting the position of the arm 25 relative to the operating rod 23 keeping unchanged the position of the rod 23 and the relative configuration adopted by the handle 14 and by the lifting means of the main carriage 4 (as well as the secondary carriage 5, all upon assembly), see in particular Figures 2, 5 and 7.

[0073] It should be noted that this solution with adjustable means can be adapted to any type of carriage unit with a structure different from that described above and which is described below merely by way of a non-limiting

example of the solution proposed in this description.

[0074] Preferably, on the rod 23 can be coupled an end 26 defining the fixed end point of secure connection with the connecting means 24 between the rod 23 and the operating arm 25.

[0075] It should be noted that the end 26 being slidably insertable, in use, in the sash 3.

[0076] Preferably (as described above), the adjustable joining means 24 are connected to the free end of the movement arm 25.

[0077] Preferably, the adjustable connecting means 24 comprise a slide 27 articulated with the movement arm 25 and configured for the contact and the front joining with the end 26 connected to the rod 3.

[0078] Moreover, the connecting means 24 comprise means 28 for adjusting the relative position between the end 26 and the slide 27.

[0079] Preferably, these adjusting means 28 are positioned between two contact surfaces 26a, 27a of the end 26 and of the slide 27, so as to allow a modification of the position of the slide 27 relative to the end 26 varying the angle of inclination of the arm 25 relative to the rod 23 and the lifting and lowering means 12.

[0080] In other words, the slide 27 adapts itself to the point of contact with the end 26 modifying its position and the angular position of the arm 25 relative to the rod 3 and the lifting means 12 thanks to the dual articulation of the arm 25 hinged, on one side, to the slide 27 and, on the other side, to the lifting means 12.

[0081] In light of this, the adjustable connecting means 24 also comprise means 29 for clamping the slide 27 to the end 26 and configured for locking the slide 27 to the end 26 in the defined position.

[0082] Preferably, the adjusting means 28 comprise a toothed surface 27a and a counter-toothed surface 26a made on the corresponding front contact surfaces of the slide 27 and of the end 26 which can be coupled to or co-penetrated in each other to allow a plurality of separate positions between the slide 27 and the end 26.

[0083] It should be noted that the clamping means 29 comprise a cap 29a which can be coupled on the outer surface of the slide 27.

[0084] In light of this, the cap 29a comprises screw elements 29b passing through a slot-shaped cavity 29c made on the slide 27 and screwably engageable, in use, in a cavity 26b of the end 26 for locking the latter with the slide 27 in the adopted position of the latter.

[0085] In practice, the position of the end 26 on the rod 23 is relatively important during assembly of the movement accessories as, even if there have been errors in cutting and drilling holes in the rod 23, the assembly technician can modify the position between the slide 27 and the end 26 by loosening the screws 31 and, therefore, the coupling between the slide 27 and the end 26.

[0086] At this point, the technician can translate, in steps, the slide 27 until reaching the correct coupling between the slide 27 and the end 26 coupled in the cavity of the rod 23: this is without pulling or pushing the handle

14 or the means 12 in such a way as to not modify the configurations adopted by the handle 14 and by the lifting and lowering means 12.

[0087] Once the (end 26) rod 23 - slide 27 has been coupled, the technician can again clamp end 26 and slide 27 in the adopted position.

[0088] Thanks to this system, which comprises a toothed and adjustable connecting joint, the movement given by the mechanisms which control the carriages is maintained in perfect timing between the handle at zero degrees when the sash is in the lowered position and the handle at 180° when the sash is in the raised position.

[0089] In this way, any errors in cutting the rod are eliminated, allowing the door or window installer to work without particular precision requirements and without this having an impact on the final quality of the door or window. Preferably (see Figure 8), the structure and the functions of the elements of the secondary carriage 5 are very similar to those of the main carriage 4.

[0090] Preferably, the secondary carriage comprises a first box-type frame 8 having an upper portion 8a designed to be slidably coupled, in use, to the lower crosspiece 6 of the sash 3.

[0091] Again preferably, the secondary carriage 5 comprises a second frame 9 supporting a pair of wheels 10 and 11 positioned, in use, resting on the track 7.

[0092] In light of this, the second frame 9 is designed to allow a pivoting movement of the two wheels 10 and 11 about a single pivot point P1. Again preferably, the secondary carriage 5 comprises a link mechanism 12 for lifting and lowering the sash 3 relative to the track 7, corresponding to the open and closed positions, respectively, of the sash 3.

[0093] In light of this, the link mechanism 12 is positioned and acting between the first frame 8 and, in use, a connecting unit 17 in series with the first carriage 4.

[0094] It should be noted that, thanks to the connecting unit 17, the movement for lifting and lowering the sash 3 is synchronized with the movement of the main carriage 4 which, in turn, is connected to the drive linkage 13. Preferably, the connecting unit 17 in series, for example, comprises two slides 17a and 17b slidably connected to the channel 6c of the crosspiece 6.

[0095] Each slide 17a, 17b is, on one side, hinged to the corresponding link mechanisms 12 of the two carriages 4 and 5 and, on the other side, it is joined to the corresponding slide 17 or 17b using a rigid rod 20 with a suitable length depending on the size of the sash 3.

[0096] Preferably, the first frame 8 of the secondary carriage 5 comprises a rear end cavity 21 for housing an auxiliary elastic element 22, interposed between the first frame 8 and the link mechanism 12, and pushing on the link mechanism 12 during lifting of the sash 3.

[0097] Thanks to this structure, the secondary carriage 5, or, more precisely, its link mechanism 12, is facilitated in the lifting of the sash 3 by a suitable modulation of the movement of the connecting rods 12b positioned in the rear point of the sash 3.

[0098] It should be noted that the secondary carriage 5 differs in certain details with respect to the main carriage 4, in addition to the presence of the auxiliary elastic element 22.

[0099] The two connecting rods 12a and 12b are of the simple type with only two pivot points each (P4 and P2 in front and P3, P6 in the rear).

[0100] The first frame 8 of the secondary carriage 5 can be free of the cam surfaces, since the assistance and the stabilization in the movements and in the stabilization of the position is performed by the elastic element 22. Preferably, the first frame 8 comprises the cavity 21 for housing the elastic element 22 open below and formed by a rear end vertical wall 30.

[0101] A front contact or retaining block 31 of the elastic element 22 is constrained to the second frame 9.

[0102] In light of this, the block 31 is interposed between the end of the elastic element 22 and the link mechanism 12 (see Figures 2, 8 and 9 to 12). More precisely, the block 31 is interposed between the front end of the elastic element 22 and a rear pivot point P3 of the link mechanism 12 connected to the second frame 9.

[0103] It should be noted that the retaining block 31 comprises adjustable means 32 for the contact with the link mechanism 12.

[0104] In light of this, the retaining block 31 comprises threaded screw means 32 for the contact with the link mechanism 12.

[0105] More specifically, the adjustable means 32 are in direct contact with the rear pivot point P3 of the link mechanism 12.

[0106] Preferably, the vertical wall 30 of the first frame 8 and the block 31 comprise corresponding through holes 30a, 31a configured for allowing the direct access from the outside of operating elements for actuating the screw means 32 (which is described in more detail below).

[0107] To complete the structure, the first frame 8 of the secondary carriage 5 comprises an end spacer 33 for the snap-on attachment and the quick release of the elastic element 22 from the cavity 21 of the first frame 8 and positioned, in use, between the end of the elastic element 22 and the rear vertical wall 30 of the first frame 8.

[0108] The spacer 33 allows the elastic element to be replaced quickly and easily, for example, if it is decided, during assembly, to increase or decrease the elastic response on the connecting rods.

[0109] Preferably, the secondary carriage 5 also comprises the pair of wheels 10 and 11 rotatably fixed to a pair of horizontal rockers 18, 19 having the central pivot point P1 hinged to the second frame 9.

[0110] Preferably, the secondary carriage 5 has the first frame 8 comprising its respective upper portion 8a shaped to form two coupling grooves S1 and S2 in the channel 6c made on the bottom crosspiece 6 of the sash 3. Preferably, the secondary carriage 5 comprises means 34 for adjusting the distance of the sash 3 relative to the track 7 at least in its lowered position, positioned between the first frame 8 and the second frame 9 and acting di-

rectly on the first frame 8 (see Figures 9 to 12).

[0111] In other words, these means allow the height H of the rear part of the sash 3 to be varied relative to the track 7 for adjusting any misalignments during assembly between the vertical member of the sash and the vertical member of the fixed frame 1: all with the carriage unit 100 already assembled.

[0112] Preferably, the adjustment means 34 comprise the second frame 9 equipped with a pair of slots 35 with a vertical extension engaged in the single pivot point P1 of the wheels 10 and 11.

[0113] Preferably, the adjustment means 34 comprise a movable third frame 36 interposed between the pair of wheels 10 and 11 and the second frame 9 and connected to the second frame 9 at the single pivot point P1 using a pair of inclined slots 37.

[0114] Preferably, the adjustment means 34 also comprise movement means 38 positioned on the second carriage 5 and configured for translating the third frame 36 in both directions with corresponding lifting and lowering of the second frame 9 along the single pivot point P1 with relative lifting and lowering of the first frame 8 and of the sash 3 relative to the track 7.

[0115] It should be noted that the second and third frames 9 and 36 comprise corresponding pairs of flat plates 9a, 9b and 36a, 36b equipped with the above-mentioned slots 35 and 37.

[0116] In light of this, the means 38 for moving the second 9 and third 36 frame comprise a drive 31 slidably housed inside the first frame 8 and configured for connecting to the rear end of the second 9 and third 36 frame and moving the rear ends of the second 9 and third 36 frame.

[0117] It should be noted that the drive comprises the above-mentioned block 31 for retaining the elastic element 22.

[0118] The block 31 is equipped, on both sides, with enlargements 40 for guiding (pushing and pulling) the two frames 9 and 36.

[0119] The enlargements are engaged in corresponding slot-shaped cavities 41, 42 made on the rear ends of the second 9 and third 36 frame.

[0120] The means 32 housed in the block 31 also form part of the adjustment means 38.

[0121] The means 32 are adjustable and allow adjustment of the height of the sash 3.

[0122] In light of this, the means 32 are in contact with the link mechanism 12 forming a fixed contrast point when adjusting the height.

[0123] More specifically, the above-mentioned screw means 32 are threaded and housed in the block 31.

[0124] In light of this, the screw means 38 are used for adjusting the height of the sash 3 and in contact with the link mechanism 12 forming the fixed contrast point when adjusting the height H.

[0125] As already mentioned, the first frame 8 comprises the vertical end wall 30 equipped with a through hole 30a.

[0126] In turn, the block 31 comprises a corresponding through hole 31a configured, together with the through hole 30a of the first frame 8, for allowing direct access from the outside of operating elements for adjusting the screw means 32 in such a way as to translate, in both directions, the block 31 and the second 9 and third 36 frame (the operating elements are not illustrated since of known type).

[0127] The adjustment system structured in this way allows the position of the sash 3 to be adapted/aligned if, after assembly, an imperfect alignment is found between the vertical member of the fixed frame and the vertical member of the movable sash.

[0128] The adjustment is extremely easy and fast thanks to the possibility of inserting a suitable tool inside the rear end of the secondary carriage and operating on the screw means 32.

[0129] The screw means 32 are a contrast with one of the pivot points of the connecting rod 12b lever which, in effect, is a fixed contact element: this therefore allows the translation of the block 31 which, in turn, acts on the second 9 and third 36 frame using the relative slotted end cavities 41 and 42.

[0130] The movement / translation of the third frame 36 determines a vertical movement (high-low) of the second frame 9 in contact with the first frame 8 due to the coupling between the slots 35 and 37 with the pivot point P1 of the wheels 10 and 11.

[0131] The vertical movement of the second frame 9 determines a lifting or lowering of the first frame 8 and, therefore, of the sash 3 in that area, thereby determining a correction of alignment of the sash relative to the fixed frame.

[0132] Therefore, thanks to the above-mentioned structure, the carriage unit according to this invention fully achieves the pre-set aims.

[0133] The unit with the movement system using connecting rods and pairs of wheels with a reduced centre-to-centre distance and pivoting allows the "lift & slide" function to be achieved within smaller spaces with the advantage of being able to reduce the dimensions of the profile receiving the carriage unit and therefore with a competitive advantage in terms of cost of the profile.

[0134] The pairs of pivoting wheels allow a correct movement of the sash along the track even in the absence of linearity on the track caused by irregularities of the track or of the floor on which the door or window rests. The connecting rod unit mounted on the carriages uses its reduced stroke and the maximum preloading of the rear spring in the position in which the connecting rods are kinematically in the most critical position, that is, at approximately 45°.

[0135] As the connecting rods move towards the vertical position, the spring loses its load but the kinematic mechanism increases in efficiency so much so that with the connecting rods at about 90° the effort exerted on the handle is only needed to overcome friction and not also lift the sash.

[0136] The entire general structure of the carriages described above ensures a constant and repetitive lifting height of the sash regardless of the weight of the sash and any clearances present in the kinematic mechanism.

[0137] In effect, when the connecting rods which generate the lifting are at about 90° they generate the same lifting value.

[0138] The combination between lifting rods and first frame also allows, in the lifted position, to discharge the load of the sash on the connecting rods, on the wheels etc., but it is not transmitted to the handle which, in effect, will no longer be sensitive to the weight of the sash and the risk of undesired rotation.

Claims


1. A carriage unit for sliding doors or windows of the lift and slide type (1), the door or window comprising at least one fixed frame (2) and a sash (3) horizontally slidable relative to the frame (2), between an open position and a closed position; at least one main carriage (4, 5), associated, in use, with the bottom cross-piece (6) of the sash (3) and resting on a horizontal base track (7) to allow the sliding of the sash (3) in both the opening and closing directions; the main carriage (4, 5) having a drive linkage (13) of the movement comprising at least one operating arm (25) interposed and connected, in use, between / to a rod (23) slidable in the sash (3) and means (12) for lifting and lowering the sash (3) positioned and acting on the main carriage (4, 5); the sash (3) being connected, in turn, to a handle (14); the handle (14) being positioned on the sash (3) for controlling the open position, with a lifting of the sash (3) relative to the track (7), and the closed position, with a lowering of the sash (3) relative to the track (7) by rotating the handle (14) from a first configuration to a second configuration, and vice versa, in such a way as to also activate the means (12) for the lifting and lowering;
characterised in that the operating arm (25) of the motion drive linkage (13) has adjustable means (24) for its secure connection with the rod (23); the adjustable means (24) being designed for adapting the position of the arm (25) relative to the operating rod (23) keeping unchanged the position of the rod (23) and the relative configuration adopted by the handle (14) and by the lifting means of the main carriage (4, 5).
2. The carriage unit according to claim 1, wherein on the rod (23) can be coupled an end (26) defining the fixed end point of secure connection with the connecting means (24) between the rod (23) and the operating arm (25); the end (26) being slidably insertable, in use, in the sash (3).

3. The carriage unit according to claim 1 or 2, wherein the adjustable connecting means (24) comprise:

- a slide (27) articulated with the movement arm (25) and designed for the contact and the front joining with an end (26) connected to the rod (3).
- means (28) for adjusting the relative position between the end (26) and the slide (27) positioned between the two contact surfaces (26a, 27a) of the end (26) and of the slide (27), so as to allow a modification of the position of the slide (27) relative to the end (26) varying the angle of inclination of the arm (25) relative to the rod (23) and the lifting and lowering means (12).

4. The carriage unit according to claim 3, wherein the adjustable connecting means (24) also comprise means (29) for clamping the slide (27) to the end (26) and designed for locking the slide (27) to the end (26) in the defined position.
5. The carriage unit according to claim 3 or 4, wherein the adjusting means (28) comprise a toothed surface (27a) and a counter-toothed surface (26a) made on the corresponding front contact surfaces of the slide (27) and of the end (26) which can be coupled to or co-penetrated in each other to allow a plurality of relative separate positions between the slide (27) and the end (26).
6. The carriage unit according to any one of claims 3 to 5, wherein the clamping means (29) comprise a cap (29a) which can be coupled to the outer surface of the slide (27); the cap (29a) comprising screw elements (29b) passing through a slot-shaped cavity (29c) made on the slide (27) and screwably engageable, in use, in a cavity (26b) of the end (26) for locking the latter with the slide (27) in the adopted position of the latter.

FIG.1

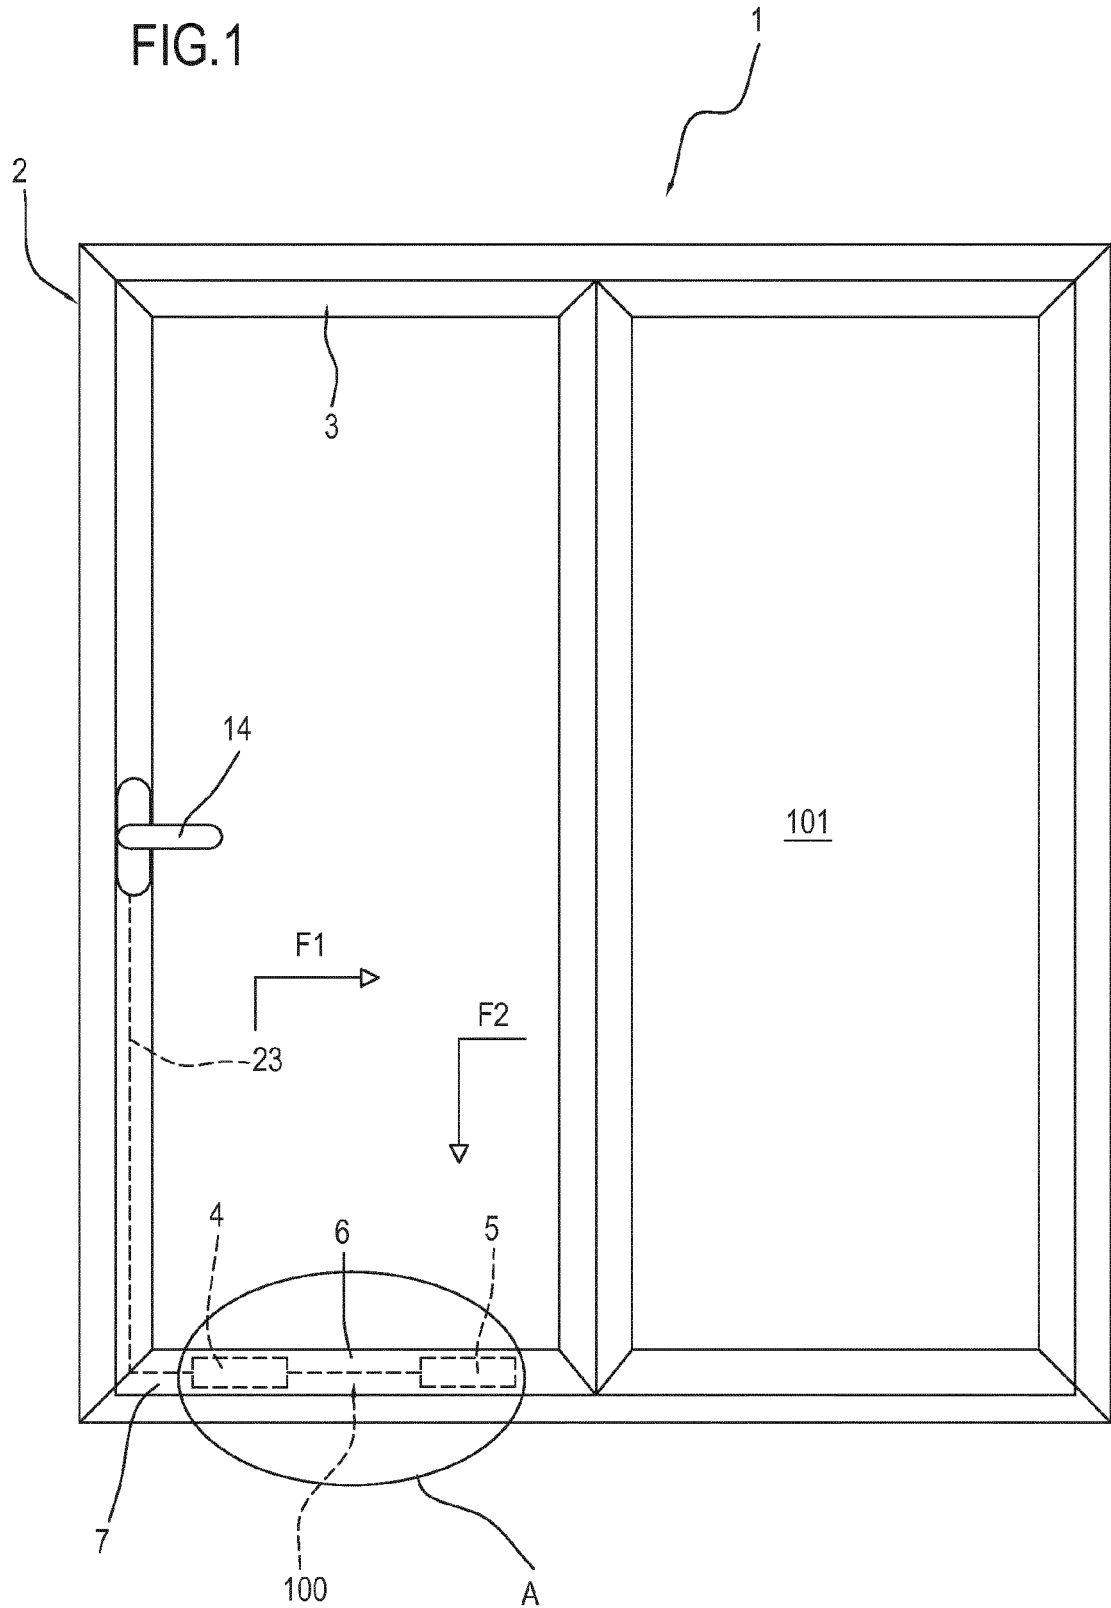

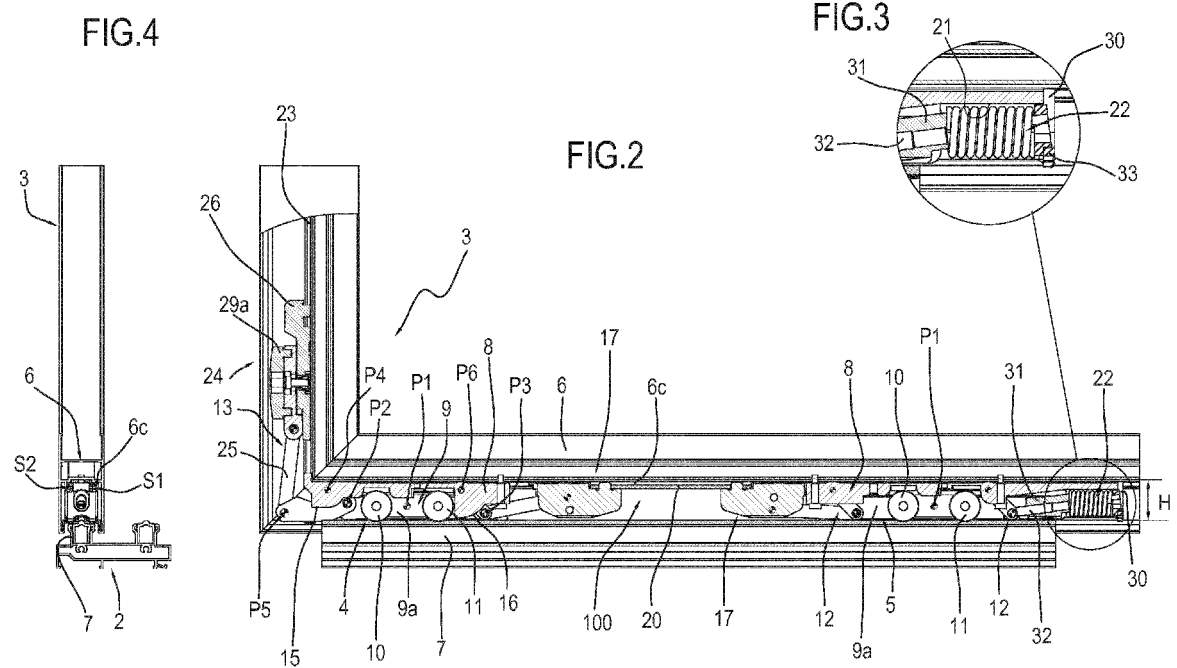


FIG.6

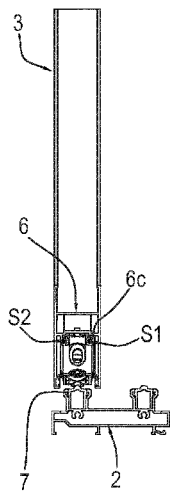


FIG.5

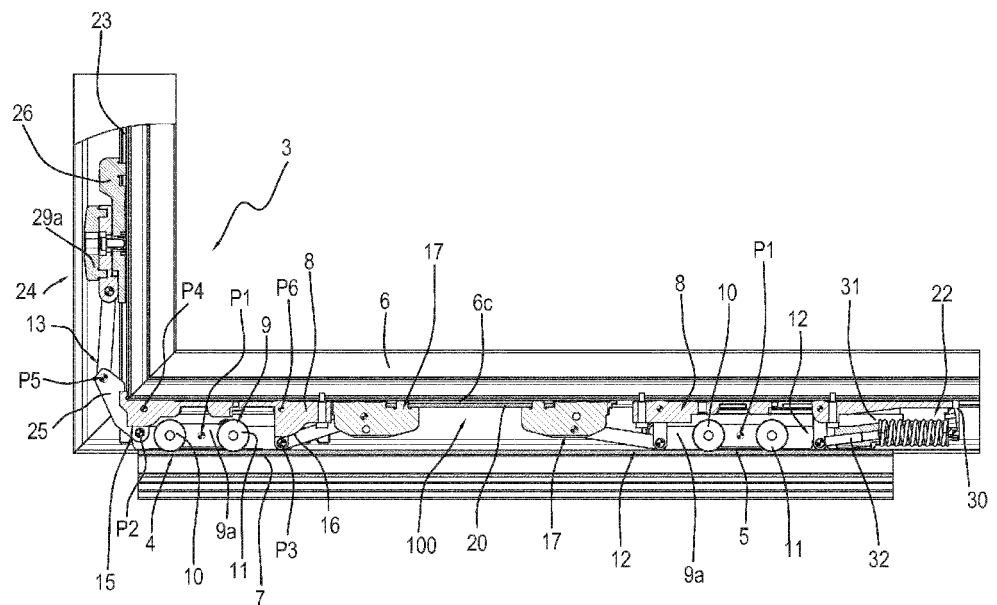


FIG.7

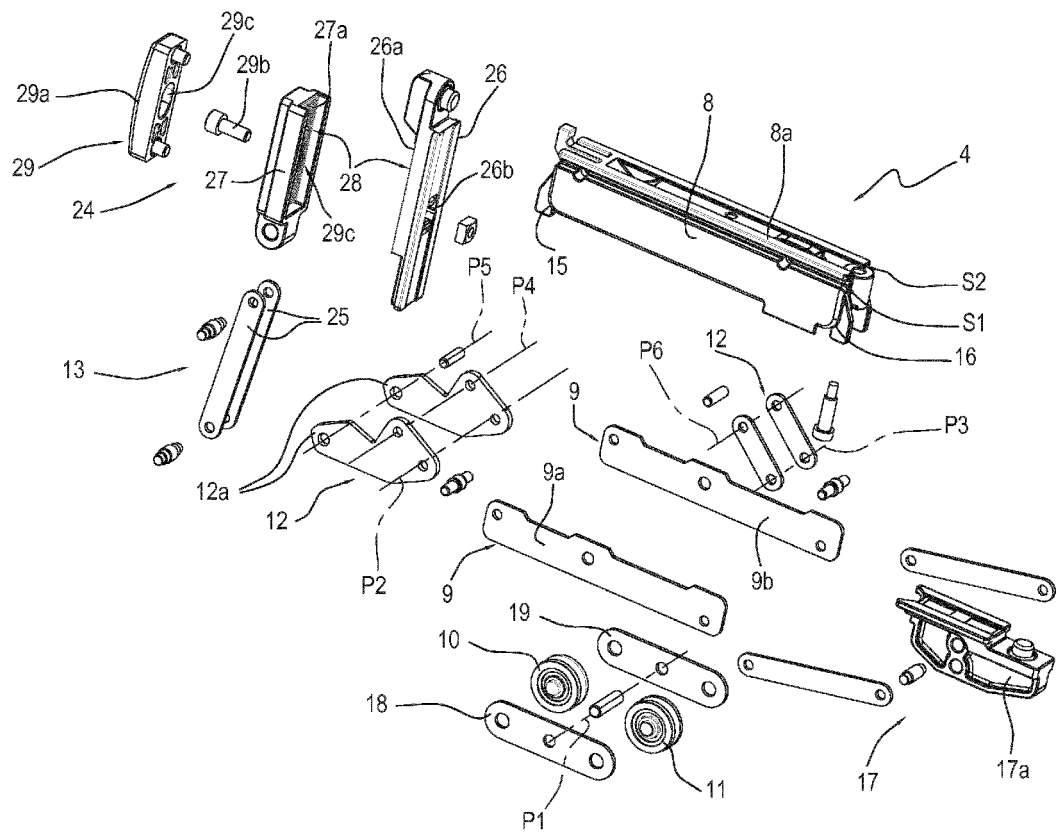


FIG.8

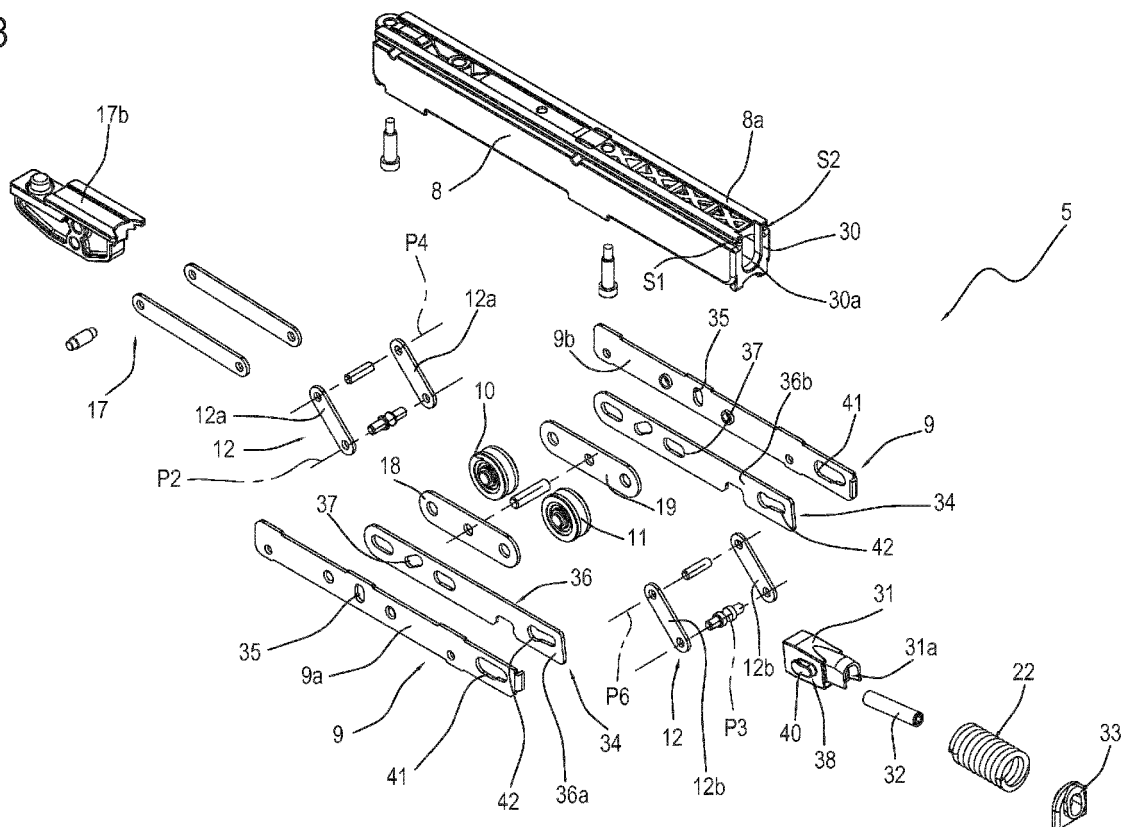


FIG.9

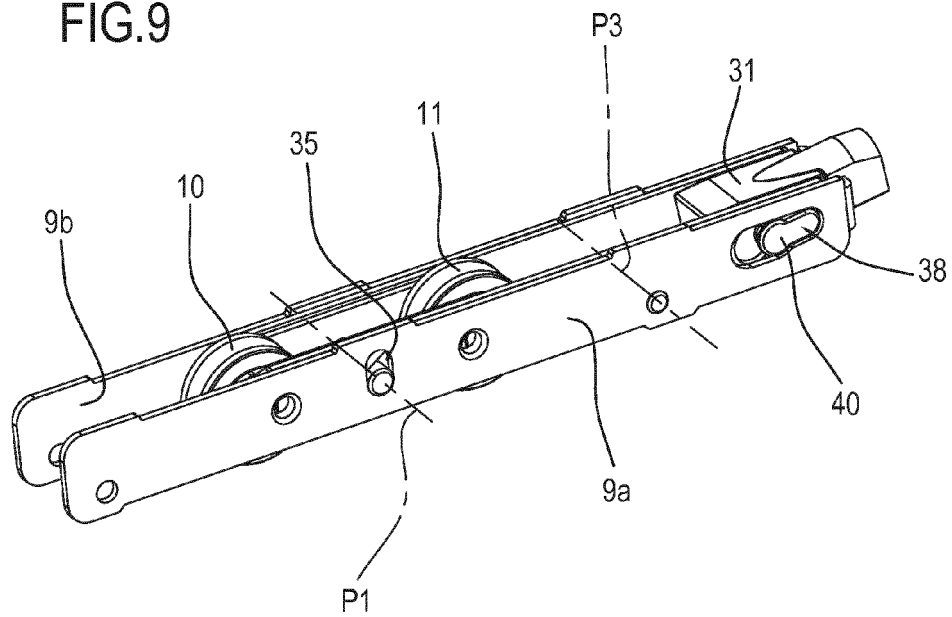


FIG.10

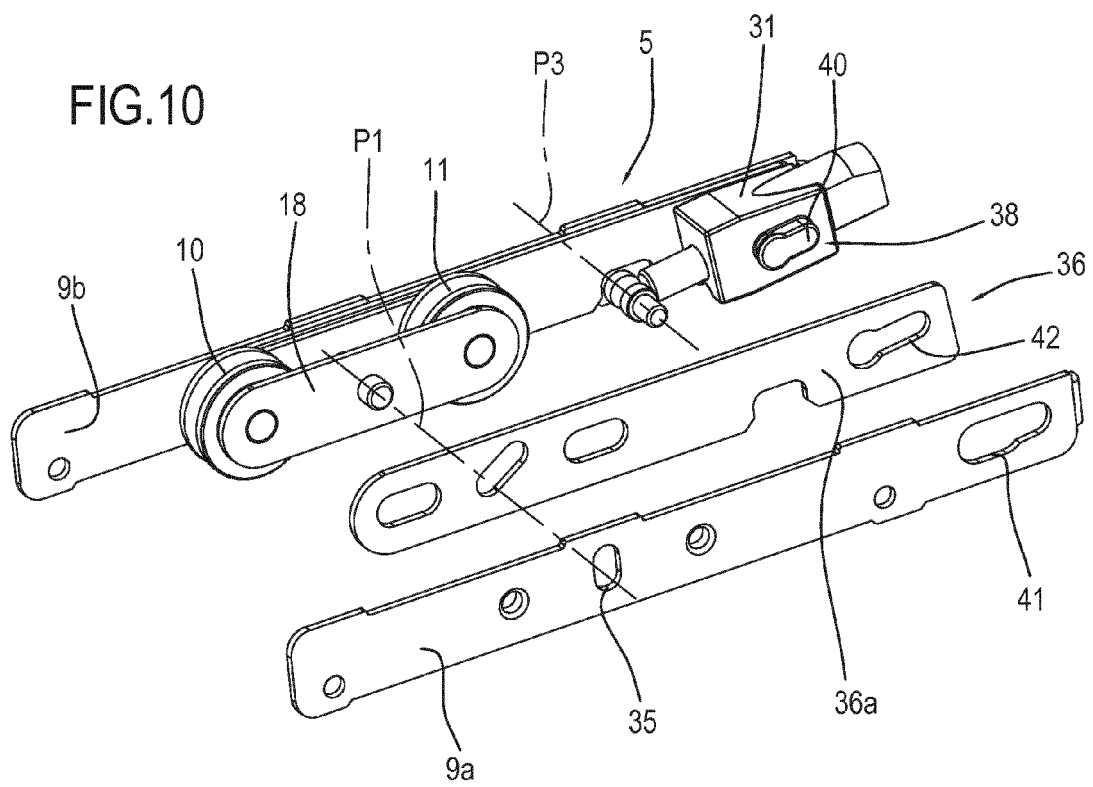


FIG.11


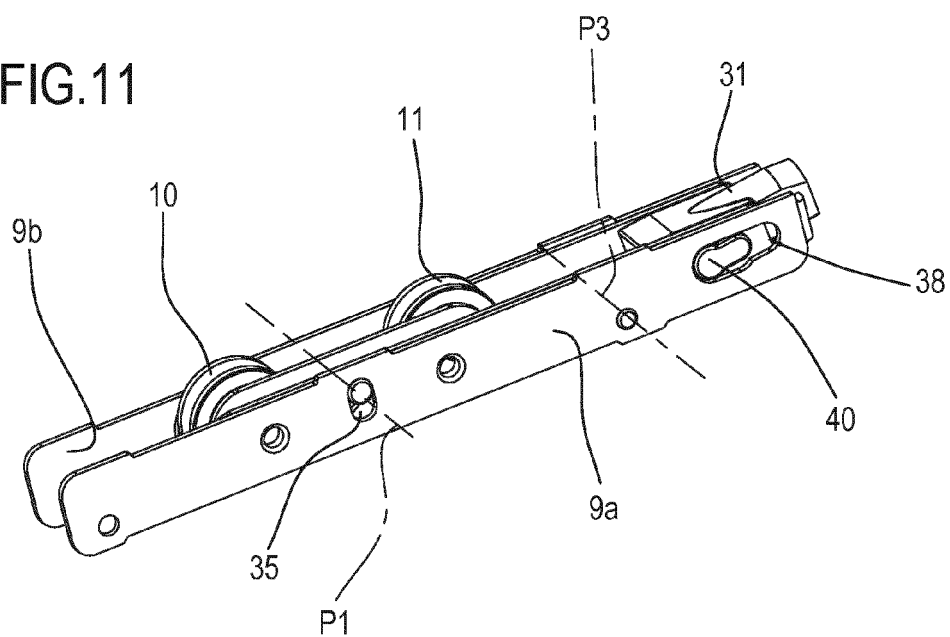


FIG.12



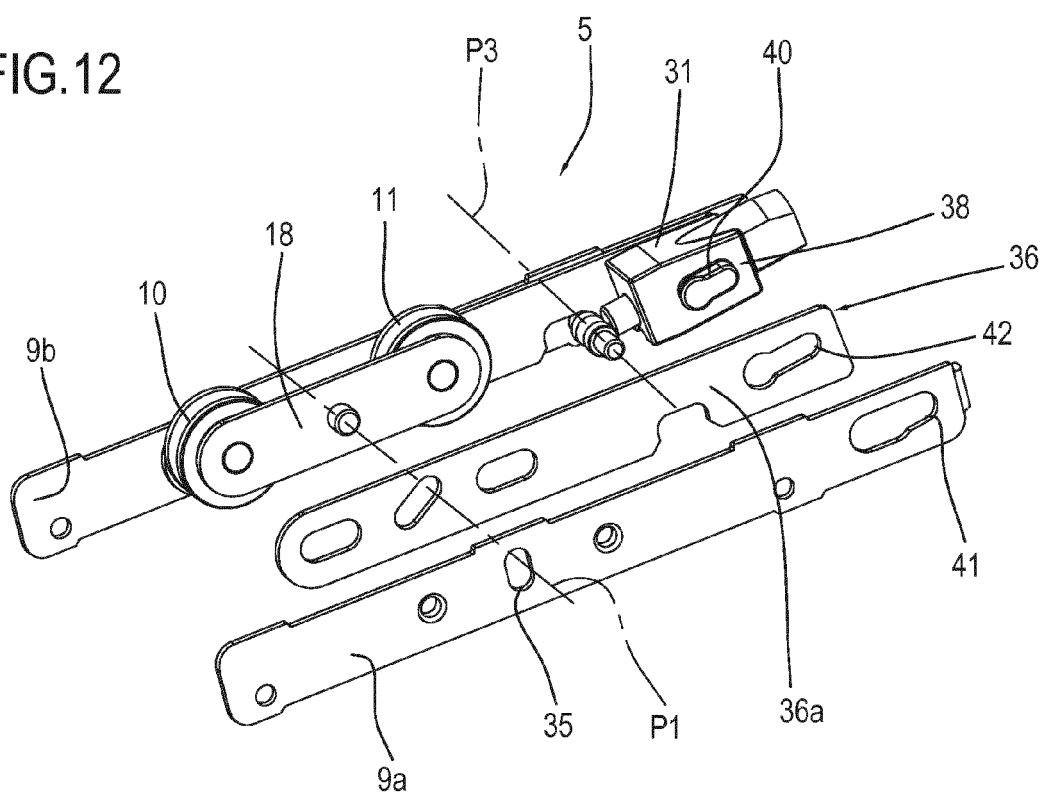

EUROPEAN SEARCH REPORT

Application Number
EP 13 18 6069

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	GB 1 093 352 A (GRETSCH UNITAS GMBH) 29 November 1967 (1967-11-29) * page 2, line 83 - line 107; figures 1,2 *	1	INV. E05D15/56
Y	FR 2 316 421 A1 (ALUSUISSE [CH]) 28 January 1977 (1977-01-28) * page 2, line 34 - page 4, line 2; figure 1 *	1-6	
Y	GB 2 384 816 A (LAIRD SECURITY HARDWARE LTD [GB]) 6 August 2003 (2003-08-06) * page 2, line 4 - line 11 * * page 5, line 14 - page 11, line 18; figures 2-8 *	1-6	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (IPC)
			E05D E05C
Place of search		Date of completion of the search	Examiner
The Hague		6 December 2013	Rémondot, Xavier
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

1
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 13 18 6069

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

06-12-2013

Patent document cited in search report		Publication date	Patent family member(s)	Publication date	
GB 1093352	A	29-11-1967	AT	248277 B	25-07-1966
			BE	657658 A	16-04-1965
			CH	432283 A	15-03-1967
			DE	1187152 B	11-02-1965
			DK	113829 B	28-04-1969
			FR	1420881 A	10-12-1965
			GB	1093352 A	29-11-1967
			NL	6414725 A	23-08-1965
			NO	135328 B	13-12-1976

FR 2316421	A1	28-01-1977	BE	843059 A1	18-10-1976
			CH	587405 A5	29-04-1977
			DE	2626531 A1	13-01-1977
			DK	265276 A	18-12-1976
			ES	448947 A1	01-07-1977
			FR	2316421 A1	28-01-1977
			IT	1061158 B	20-10-1982
			NL	7606517 A	21-12-1976
			NO	762072 A	20-12-1976
			SE	416834 B	09-02-1981
			YU	145176 A	28-02-1982

GB 2384816	A	06-08-2003	NONE		

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- DE 7816563 U [0005]
- EP 1298271 A [0005]
- EP 1298272 A [0005]
- EP 1437471 A [0005]
- EP 2220316 A [0007]
- GB 1093352 A [0011]