



(12) **CORRECTED EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(15) Correction information:
Corrected version no 1 (W1 A1)
Corrections, see
Bibliography INID code(s) 71

(51) Int Cl.:
E04B 5/48 (2006.01) **E04C 2/52** (2006.01)
F24D 3/14 (2006.01) **F24F 5/00** (2006.01)

(48) Corrigendum issued on:
09.07.2014 Bulletin 2014/28

(86) International application number:
PCT/ES2011/070479

(43) Date of publication:
07.05.2014 Bulletin 2014/19

(87) International publication number:
WO 2013/001106 (03.01.2013 Gazette 2013/01)

(21) Application number: **11770117.7**

(22) Date of filing: **30.06.2011**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(72) Inventors:
• **TARRAGA SANCHEZ, Enrique**
E-30740 San Pedro del Pinatar (Murcia) (ES)
• **JORDAN FERNANDEZ, Luis**
E-08172 Sant Cugat del Valles (Barcelona) (ES)

(71) Applicants:
• **Tarraga Sanchez, Enrique**
30740 San Pedro del Pinatar (Murcia) (ES)
• **Jordan Fernandez, Luis**
08172 Sant Cugat del Valles (Barcelona) (ES)
• **Cortinas Muñoz, Jaume**
08912 Badalona, Barcelona (ES)

(74) Representative: **Carvajal y Urquijo, Isabel et al**
Clarke, Modet & Co.
C/ Goya, 11
28001 Madrid (ES)

(54) **MODULAR PANEL FOR THERMAL ENERGY TRANSFER**

(57) The present invention relates to a modular panel for thermal energy transfer particularly configured for being used in ceilings and walls, comprising a heat-insulating layer (2) forming a supporting structure demarcated by a lower face (2A), an upper face (2B), two side faces (2C, 2D) and two end faces (2E, 2F). Said panel (1) comprises at least one conducting plate (3) attached to the lower face (2A). Said conducting plate (3) is formed by a groove (31) embedded in the heat-insulating layer (2), defining a longitudinal cavity (32) which is configured to house a hydraulic pipe (6), and defining a longitudinal opening (34) which allows inserting the hydraulic pipe (6); a transfer plate (35) extending on the lower face (2A) and closure means (4) configured to seal the longitudinal opening (34) and press the hydraulic pipe (6) against the groove (31).

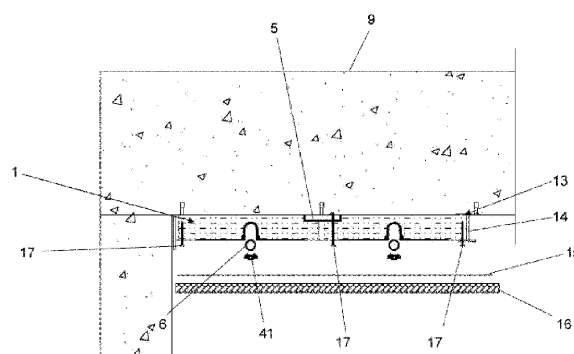


Fig. 13