



(12) **CORRECTED EUROPEAN PATENT APPLICATION**

(15) Correction information:
Corrected version no 1 (W1 A1)
Corrections, see
Bibliography INID code(s) 71

(51) Int Cl.:
F16B 47/00 ^(2006.01) **A01K 63/00** ^(2006.01)

(48) Corrigendum issued on:
03.09.2014 Bulletin 2014/36

(43) Date of publication:
04.06.2014 Bulletin 2014/23

(21) Application number: **13170199.7**

(22) Date of filing: **03.06.2013**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME

(71) Applicant: **Eden SRL**
36050 Cartigliano VI (IT)

(72) Inventor: **Lolato, Samuele**
36020 Pove del Grappa VI (IT)

(74) Representative: **Modiano, Micaela Nadia et al**
Modiano & Partners (IT)
Via Meravigli, 16
20123 Milano (IT)

(30) Priority: **30.11.2012 IT PD20120359**

(54) **Device for fixing apparatuses for aquariums, aqua-terrariums and the like to a surface of said aquarium, aqua-terrarium or the like**

(57) A device (10) for fixing apparatuses (11) for aquariums, aqua-terrariums and the like to a surface of the aquarium (12), aqua-terrarium or the like, of the type comprising at least two suction cups (13, 14) fixed to a supporting portion (15) of an apparatus for aquariums (11), aqua-terrariums or the like, each suction cup (13, 14) comprising a central part (16, 17) for fixing to the supporting portion (15) of the apparatus (11), and a partial vacuum dome (18, 19) adapted to be pressed against an

adhesion surface (20, 21) of the aquarium (12), aqua-terrarium or the like.

Each suction cup (13, 14) has, at its central part (16, 17), an orifice (22, 23) for the passage of fluids, which is blocked by a corresponding flow control element (24, 25), the latter being supported by means (26, 27) for its reversible movement in a direction for the at least partial opening of the orifice (22, 23).

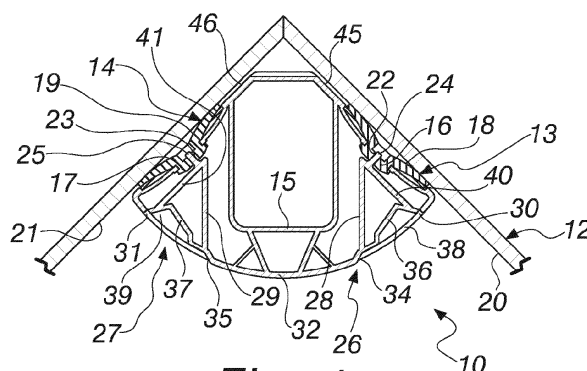


Fig. 4