



(12) **CORRECTED EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(15) Correction information:
Corrected version no 1 (W1 A1)
Corrections, see
Bibliography INID code(s) 72

(51) Int Cl.:
B60C 23/04 (2006.01) B25B 27/14 (2006.01)

(86) International application number:
PCT/CN2012/077529

(48) Corrigendum issued on:
13.08.2014 Bulletin 2014/33

(87) International publication number:
WO 2013/155791 (24.10.2013 Gazette 2013/43)

(43) Date of publication:
25.06.2014 Bulletin 2014/26

(21) Application number: **12874901.7**

(22) Date of filing: **26.06.2012**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR

• **Steelmate Co., Ltd.**
Zhongshan, Guangdong 528425 (CN)

(30) Priority: **18.04.2012 CN 201210115373**

(72) Inventor: **Li, Zhitao**
Zhongshan, Guangdong 528425 (CN)

(71) Applicants:
• **Li, Zhitao**
Zhongshan, Guangdong 528425 (CN)

(74) Representative: **Gulde & Partner**
Patent- und Rechtsanwaltskanzlei mbB
Wallstraße 58/59
10179 Berlin (DE)

(54) **EXTERNAL TIRE PRESSURE GAUGE AND MOUNTING STRUCTURE THEREOF, AND CORRESPONDING MOUNTING AND DISMOUNTING TOOL**

(57) An external tire pressure gauge mounting structure includes a base and a cap; the base and cap are locked together to provide an internal mounting space; the mounting structure also includes a gear, a cushion ring and a locking member; the gear is fixed on the base and has teeth; a through hole is defined in the cushion ring and teeth is provided on a sidewall of the through hole; the gear is inserted into the cushion ring, and the teeth of the cushion ring and gear mesh each other; the locking member is pressed against the cushion ring and gear; the locking member, gear and base all have their threaded holes. Also disclosed is a handling tool used for above mounting structure. The invention makes improvements upon the mounting structure of the tire pressure gauge and provides a handling tool which is easy to use. As such, mounting and dismounting of the tire pressure gauge becomes convenient.

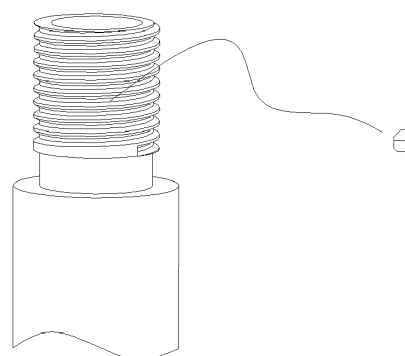


Figure 2