



(11)

EP 2 749 722 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
02.07.2014 Bulletin 2014/27

(51) Int Cl.:
E05F 5/00 (2006.01) *E05F 5/02* (2006.01)

(21) Application number: 12199473.5

(22) Date of filing: 27.12.2012

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**
 Designated Extension States:
BA ME

- **Huang, Ting-Tsai**
Kaohsiung City (TW)
- **Jhao, Yi-Syuan**
Kaohsiung City (TW)
- **Wang, Chun-Chiang**
Kaohsiung City (TW)

(71) Applicants:
 • **King Slide Works Co., Ltd.**
Kaohsiung City (TW)
 • **King Slide Technology Co., Ltd.**
Kaohsiung City (TW)

(74) Representative: **Viering, Jentschura & Partner**
Patent- und Rechtsanwälte
Kennedydamm 55 / Roßstrasse
40476 Düsseldorf (DE)

(72) Inventors:
 • **Chen, Ken-Ching**
Kaohsiung City (TW)

Remarks:
Amended claims in accordance with Rule 137(2)
EPC.

(54) Hinge assembly with damping device

(57) A hinge assembly includes a hinge cup (10), an arm (14), an installation member (12), a damping device (16), a first resilient member (18), a second resilient member (20), a first pin (22) and a second pin (24). The hinge cup (10) has a receiving space (34) and a positioning hole (40) communicating with the receiving space (34). The bottom wall (28) of the receiving space (34) has two lugs (42a, 42b) and at least one first engaging part (44). The arm (14) is pivotably connected to the hinge cup (10). The damping device (16) is located in the receiving space (34) of the hinge cup (10) and includes a damping member (48), a slide (50) and a housing (52). One end of the damping member (48) is mounted in the positioning hole (40). The damping member (48) has a piston rod (56) which is connected to the slide (50). The housing (52) has at least one second engaging part (68) which is engaged with the first engaging part (44) on the bottom wall (28) of the hinge cup (10). The first resilient pin (22) connects the arm (14) and the first resilient member (18) to the hinge cup (10). The second pin (24) connects the second resilient member (20) to the hinge cup (10). When the arm (14) is moved toward a closed position relative to the hinge cup (10), the arm (14) pushes the slide (50) to provide the damping force.

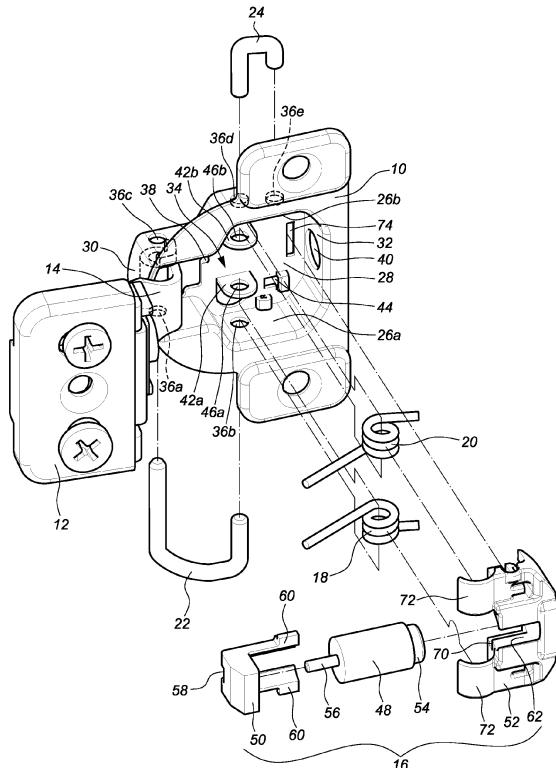


FIG. 1

Description**FIELD OF THE INVENTION**

[0001] The present invention relates to a hinge assembly, and more particularly, to a hinge assembly with a damping device.

BACKGROUND OF THE INVENTION

[0002] U.S. 2011/0291538 A1 of Brunnmayr discloses a "Furniture Hinge". Figs. 9a and 9b of Brunnmayr disclose a damping device 10 and a housing 10a. The housing 10a of the damping device has an outward resilient arresting element 24a. A hinge cup 6a has an opening 23a into which the resilient arresting element 24a is inserted. However, the connection simply by the resilient arresting element 24a and the opening 23a is not secure enough.

[0003] Fig. 10a of Brunnmayr discloses another installation way which has a clip-like member 24 which is engaged with an elongate recess 23a in the hinge cup 6a so that the damping device 10 is installed in the hinge cup 6. However, when the damping device 10 is hit by the hinge lever 7, the impact is directed transferred to the positioning position where the damping device 10 is installed in the hinge cup 6, the damping device 10 is easily loosened.

[0004] The present invention intends to provide a hinge assembly with a damping device which is more securely installed so as to improve the shortcomings of the conventional hinge assemblies.

SUMMARY OF THE INVENTION

[0005] The present invention relates to a hinge assembly and comprises a hinge cup having a first side wall, a second side wall, a bottom wall connected between the first and second side walls, a front wall connected between two respective front ends of the first and second side walls, and a rear wall connected between two respective rear ends of the first and second side walls. A receiving space is defined by the first and second side walls, the bottom wall, the front wall and the rear wall. The bottom wall of the receiving space has a first lug, a second lug and at least one first engaging part. An arm is pivotably connected between the first and second side walls of the hinge cup. The arm is located adjacent to the front wall of the hinge cup. An installation member is connected to the arm and installed on a piece of furniture. A damping device is located in the receiving space of the hinge cup and has a damping member, a slide and a housing. The damping member has a piston rod which is connected to the slide. The slide has at least one wing which is located corresponding to one of the first and second lugs. The housing is located in the receiving space and the damping member is accommodated in the housing. The housing has a room, an opening commu-

nicating with the room, and at least one second engaging part. The damping member extends through the room and the opening. The second engaging part is engaged with the first engaging part on the bottom wall of the hinge cup. A first resilient member is connected between the first lug and the first side wall so as to provide a force to the arm. A second resilient member is connected between the second lug and the second side wall so as to provide a force to the arm. A first pin has two ends which respectively connect the arm and the first resilient member to the hinge cup. A second pin connects the second resilient member to the hinge cup.

[0006] When the arm is located at an open position relative to the hinge cup, the at least one wing of the slide contacts one of the first and second lugs so that the slide is located at a position wherein the slide can be pushed relative to the arm.

[0007] When the arm is moved toward a close position relative to the hinge cup, the arm pushes the slide which moves the piston rod, and the at least one wing of the slide is separated from one of the first and second lugs.

[0008] Preferably, the housing has at least one slide slot and the at least one wing of the slide is linearly moved in the slide slot.

[0009] Preferably, the housing has a positioning member extending therefrom. The bottom wall of the hinge cup has an installation hole in which the positioning member is inserted.

[0010] Preferably, the housing has two covers which respectively cover the first and second resilient members.

[0011] Preferably, the slide has a recess, and the hinge cup has a stop which is engaged with the recess.

[0012] Preferably, the first side wall has a first hole and a second hole. The second side wall has a third hole, a fourth hole and a fifth hole. The first lug has a first through hole and the second lug has a second through hole. The first pin is a U-shaped pin. Two ends of the first pin extend through the first and second holes and are located in the third hole and the first through hole respectively so as to be connected to the arm and the first resilient member. The second pin is a U-shaped pin. Two ends of the second pin extend through the fourth and fifth holes. One of the two ends of the second pin extends through the second through hole and is connected with the second resilient member.

[0013] Preferably, the rear wall has a positioning hole and the damping member has an engaging portion which is engaged with the positioning hole.

[0014] Preferably, the first resilient member and the second resilient member are torsion springs.

[0015] Preferably, the housing has a reception slot which communicates with the room. The damping member has a threaded portion, a guide portion and an adjustment member. The damping member is linearly movable in the room. The adjustment member is located in the reception slot of the housing and is movably and threadedly connected to the threaded portion. The ad-

justment member is partially exposed from the reception slot of the housing.

[0016] Preferably, the hinge cup has a guide groove and a positioning hole, wherein the guide groove is located in the bottom wall of the hinge cup and substantially perpendicular to the rear wall of the hinge cup. The positioning hole is located in the rear wall of the hinge cup. The guide portion of the damping member extends through the guide groove so that the damping member is linearly movable relative to the hinge cup. The threaded portion of the damping member partially extends through the positioning hole.

[0017] One aspect of the present invention is to provide a hinge assembly with a damping device, wherein the damping device is securely mounted on the hinge cup of the hinge assembly.

[0018] Another aspect of the present invention is to provide a hinge assembly with a damping device, wherein the travel of the damping device is adjustable.

[0019] The present invention will become more obvious from the following description when taken in connection with the accompanying drawings which show, for purposes of illustration only, a preferred embodiment in accordance with the present invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0020]

Fig. 1 is an exploded view to show the first embodiment of the damping device and the hinge assembly of the present invention;

Fig. 2 shows the first embodiment of the assembled damping device and the hinge assembly of the present invention;

Fig. 3 is a partial cross sectional view of the first embodiment of the hinge assembly of the present invention;

Fig. 4 shows that the first embodiment of the hinge assembly of the present invention is connected between the cabinet and the door;

Fig. 5 shows that the door is pivoted toward the cabinet, and the arm is in contact with the slide under the first embodiment of the present invention;

Fig. 6 shows the status of the first embodiment of the hinge assembly of the present invention when the door is at the closed position relative to the cabinet;

Fig. 7 shows the status of the first embodiment of the hinge assembly of the present invention when the door is at the open position relative to the cabinet; Fig. 8 is an exploded view to show the second embodiment of the damping device of the present invention;

Fig. 9 is a perspective view to show the second embodiment of the hinge assembly with the damping device of the present invention;

Fig. 10 shows that the second embodiment of the

damping member is adjusted to the first position; Fig. 11 shows that the second embodiment of the damping member is adjusted to the second position, and

Fig. 12 shows that the second embodiment of the damping member is adjusted to the third position to shut off the damping function.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0021] Referring to Figs. 1 to 3, the hinge assembly of the present invention comprises a hinge cup 10, an installation member 12, an arm 14 connected between the

hinge cup 10 and the installation member 12, a damping device 16 connected to the hinge cup 10, a first resilient member 18 and a second resilient member 20 connected to the hinge cup 10, a first pin 22 connected to the arm 14 and the first resilient member 18, and a second pin 24 connected to the second resilient member 20. The first and second resilient members 18, 20 respectively provide a first force and a second force to the arm 14. The damping device 16 provides a damping force to the arm 14.

[0022] The hinge cup 10 comprises a first side wall 26a, a second side wall 26b, a bottom wall 28 which is connected between the first and second side walls 26a, 26b, a front wall 30 connected between two respective front ends of the first and second side walls 26a, 26b, and a rear wall 32 connected between two respective rear ends of the first and second side walls 26a, 26b. A receiving space 34 is defined by the first and second side walls 26a, 26b, the bottom wall 28, the front wall 30 and the rear wall 32. The first side wall 26a has a first hole 36a and a second hole 36b, and the second side wall 26b has a third hole 36c, a fourth hole 36d and a fifth hole 36e. The bottom wall 28 has a stop 38 located adjacent to the front wall 30, and the rear wall 32 has a positioning hole 40. The bottom wall 28 further has a first lug 42a, a second lug 42b and at least one or two first engaging parts 44. The first lug 42a has a first through hole 46a, and the second lug 42b has a second through hole 46b.

[0023] The installation member 12 is connected to the arm 14 and installed on a piece of furniture such as a cabinet.

[0024] The arm 14 is pivotably connected between the first and second side walls 26a, 26b of the hinge cup 10. The arm 14 is located adjacent to the front wall 30 of the hinge cup 10.

[0025] The damping device 16 is located in the receiving space 34 of the hinge cup 10 and comprises a damping member 48, a slide 50 and a housing 52. The damping member 48 has an engaging portion 54 on the rear end thereof, and the engaging portion 54 is engaged with the positioning hole 40 of the rear wall 32 as shown in Fig. 3. The damping member 48 has a piston rod 56 on the front end thereof, and the piston rod 56 is connected to

the slide 50. Preferably, the slide 50 has a recess 58, and the stop 38 of the hinge cup 10 is engaged with the recess 58 to temporarily position the slide 50. The slide 50 has two wings 60 which are located corresponding to the first and second lugs 42a, 42b. Preferably, the two wings 60 are in contact with the first and second lugs 42a, 42b to temporarily position the slide 50. The housing 52 is located in the receiving space 34 and the damping member 48 is accommodated in the housing 52. The housing 52 covers the first and second resilient members 18, 20. The housing 52 has a room 62, an opening 64 communicating with the room 62, a positioning member 66, at least one or two second engaging parts 68, two slide slots 70 and two covers 72. The damping member 48 extends through the room 62 and the opening 64, and the engaging portion 54 extends through the opening 64. The bottom wall 28 of the hinge cup 10 has an installation hole 74 in which the positioning member 66 is inserted. The at least one second engaging part 68 is engaged with the at least one first engaging part 44 on the bottom wall 28 of the hinge cup 10. The slide slots 70 allow the wings 60 of the slide 50 to move linearly.

[0026] The first resilient member 18 is connected between the first lug 42a and the first side wall 26a. Preferably, the first resilient member 18 is a torsion spring pivotably connected to the first lug 42a and is covered by the cover 72 of the housing 52 as shown in Fig. 4.

[0027] The second resilient member 20 is connected between the second lug 42b and the second side wall 26b. Preferably, the second resilient member 20 is a torsion spring pivotably connected to the second lug 42b and is covered by the cover 72 of the housing 52 as shown in Fig. 4.

[0028] The first pin 22 is a U-shaped pin. Two ends of the first pin 22 extend through the first and second holes 36a, 36b and are located in the third hole 36c and the first through hole 46a respectively so as to be connected to the arm 14 and the first resilient member 18. The first resilient member 18 provides a first force to the arm 14.

[0029] The second pin 24 is a U-shaped pin. Two ends of the second pin 24 extend through the fourth and fifth holes 36d, 36e, one of the two ends of the second pin 24 extends through the second through hole 46b and is connected with the second resilient member 20. The second resilient member 20 provides a second force to the arm 14.

[0030] As shown in Fig. 4, the installation member 12 is installed to the cabinet 76, and the hinge cup 10 is connected to the door 78. When the door 78/arm 14 is moved toward a closed position relative to the cabinet 76/hinge cup 10 (shown in Figs. 5 and 6), the arm 14 pushes the slide 50 which moves the piston rod 56 to slowly retract into the damping member 48 to have a damping function. Therefore, the door 78 is slowly and quietly closed to the cabinet 76. In the meanwhile, the wings 60 of the slide 50 are separated from the first and second lugs 42a, 42b (Fig. 6 shows that one of the wings 60 is separated from the first lug 42a), and the stop 38

of the hinge cup 10 is moved away from the recess 58 of the slide 50.

[0031] As shown in Fig. 7, when the arm 14 is spread out relative to the hinge cup 10 at an open position, the piston rod 56 of the damping member 48 extends and moves the slide 50 until the wings 60 of the slide 50 contact the first and second lugs 42a, 42b (the drawing shows that one of the wings 60 contacts the first lug 42a). Simultaneously, the stop 38 of the hinge cup 10 is engaged with the recess 58 of the slide 50, so that the slide 50 is located at a position wherein the slide 50 can be pushed relative to the arm 14 to generate the damping function.

[0032] The damping device 16 is installed to the hinge cup 10 by the configuration that the engaging portion 54 of the damping member 48 extends through the opening 64 of the housing 52 and is engaged with the positioning hole 40 of the rear wall 32. Further, the at least one second engaging part 68 of the housing 52 is engaged with the first engaging part 44 on the bottom wall 28 of the hinge cup 10 so as to position the damping device 16 to the hinge cup 10. During the damping process, the wings 60 of the slide 50 are linearly movable in the slide slots 70 of the housing 52 so as to provide smooth and stable damping force. Accordingly, when the arm 14 contacts the slide 50 or when the arm 14 is closing toward the hinge cup 10, the damping device 16 provides stable damping travel.

[0033] It is noted that the travel distance of the damping device 16 can be adjustable. As shown in Figs. 8 and 9, in another embodiment, the hinge cup 10 has a guide groove 80. The guide groove 80 is located in the bottom wall 28 of the hinge cup 10 and substantially perpendicular to the rear wall 32 of the hinge cup 10. The housing 52 has a reception slot 82 which communicates with the room 62. The damping member 48 has a threaded portion 84, a guide portion 86 and an adjustment member 88. The threaded portion 84 is located corresponding to the positioning hole 40 of the rear wall 32 of the hinge cup 10. The threaded portion 84 of the damping member 48 partially extends through the positioning hole 40. The guide portion 86 extends through the guide groove 80, so that the damping member 48 is linearly movable relative to the hinge cup 10. The adjustment member 88 is located in the reception slot 82 of the housing 52 and is movably and threadedly connected to the threaded portion 84. The adjustment member 88 is partially exposed from the reception slot 82 of the housing 52. By this way, the damping member 48 is linearly movable linearly in the room 62.

[0034] As shown in Figs. 10 and 11, when the adjustment member 88 is rotated in a certain rotating direction, the damping member 48 moves to a first position relative to the hinge cup 10 in response to the rotation of the adjustment member 88, so that relative position of the slide 50 to the arm 14 can also be changed. Consequently, the impact angle, the arm 14 hits the slide 50 to generate the damping function when the arm 14 is pivoted to close the hinge cup 10, can be adjusted. The damping

function is executed when the door 78 is located at the angle α relative to the cabinet 76 (as Fig. 10 shown), so that the door 78 is slowly and quietly closed within the range of the angle α . When the adjustment member 88 is further rotated in the certain rotating direction, the damping member 48 moves to a second position relative to the hinge cup 10 (as Fig. 11 shown), the arm 14 is pivoted toward the cabinet 76, the impact angle is changed from the angle α to angle β . Therefore, when the door 78 is being closed toward the cabinet 76 and the angle therebetween is within the range of the angle β , the damping function is executed so that the door 78 is slowly and quietly closed within the range of the angle β .

[0035] As shown in Fig. 12, the damping function 16 is shut off when the adjustment member 88 is rotated to move the damping member 48 to a third position relative to the hinge cup 10. Wherein, the slide 50 is moved away from the arm 14, so that when the arm 14 is located at the complete closed position relative to the hinge cup 10, the arm 14 does not touch the slide 50.

[0036] While we have shown and described the embodiment in accordance with the present invention, it should be clear to those skilled in the art that further embodiments may be made without departing from the scope of the present invention.

Claims

1. A hinge assembly comprising:

a hinge cup (10) having a first side wall (26a), a second side wall (26b), a bottom wall (28) which is connected between the first and second side walls (26a, 26b), a front wall (30) connected between two respective front ends of the first and second side walls (26a, 26b), and a rear wall (32) connected between two respective rear ends of the first and second side walls (26a, 26b), a receiving space (34) being defined by the first and second side walls (26a, 26b), the bottom wall (28), the front wall (30) and the rear wall (32), the bottom wall (28) of the receiving space (34) having a first lug (42a), a second lug (42b) and at least one first engaging part (44); an arm (14) pivotably connected between the first and second side walls (26a, 26b) of the hinge cup (10), the arm (14) located adjacent to the front wall (30) of the hinge cup (10); an installation member (12) connected to the arm (14) and installed on a piece of furniture; a damping device (16) located in the receiving space (34) of the hinge cup (10) and having a damping member (48), a slide (50) and a housing (52), the damping member (48) having a piston rod (56) which is connected to the slide (50), the slide (50) having at least one wing (60) which is located corresponding to one of the first and

second lugs (42a, 42b), the housing (52) located in the receiving space (34) and the damping member (48) being accommodated in the housing (52), the housing (52) having a room (62), an opening (64) communicating with the room (62), and at least one second engaging part (68), the damping member (48) extending through the room (62) and the opening (64), the second engaging part (68) engaged with the first engaging part (44) on the bottom wall (28) of the hinge cup (10);

a first resilient member (18) connected between the first lug (42a) and the first side wall (26a) so as to provide a force to the arm (14); a second resilient member (20) connected between the second lug (42b) and the second side wall (26b) so as to provide a force to the arm (14); a first pin (22) having two ends which respectively connect the arm (14) and the first resilient member (18) to the hinge cup (10); a second pin (24) connecting the second resilient member (20) to the hinge cup (10); when the arm (14) is located at an open position relative to the hinge cup (10), the at least one wing (60) of the slide (50) contacts one of the first and second lugs (42a, 42b), and when the arm (14) is moved toward a closed position relative to the hinge cup (10), the arm (14) pushes the slide (50) which moves the piston rod (56), the at least one wing (60) of the slide (50) is separated from one of the first and second lugs (42a, 42b).

2. The hinge assembly as claimed in claim 1, wherein the housing (52) has at least one slide slot (70), and the at least one wing (60) of the slide (50) is linearly moved in the slide slot (70).
3. The hinge assembly as claimed in claim 1, wherein the housing (52) has a positioning member (66) extending therefrom, the bottom wall (28) of the hinge cup (10) has an installation hole (74) in which the positioning member (66) is inserted.
4. The hinge assembly as claimed in claim 1, wherein the housing (52) has two covers (72) which respectively cover the first and second resilient members (18, 20).
5. The hinge assembly as claimed in claim 1, wherein the slide (50) has a recess (58), and the hinge cup (10) has a stop (38) which is engaged with the recess (58).
6. The hinge assembly as claimed in claim 1, wherein the first side wall (26a) has a first hole (36a) and a second hole (36b), the second side wall (26b) has a third hole (36c), a fourth hole (36d) and a fifth hole

(36e), the first lug (42a) has a first through hole (46a) and the second lug (42b) has a second through hole (46b), the first pin (22) is a U-shaped pin, two ends of the first pin (22) extend through the first and second holes (36a, 36b) and located in the third hole (36c) and the first through hole (46a) respectively so as to be connected to the arm (14) and the first resilient member (18), the second pin (24) is a U-shaped pin, two ends of the second pin (24) extend through the fourth and fifth holes (36d, 36e), one of the two ends of the second pin (24) extending through the second through hole (46b) and connected with the second resilient member (20).

7. The hinge assembly as claimed in claim 1, wherein the rear wall (32) has a positioning hole (40), and the damping member (48) has an engaging portion (54) which is engaged with the positioning hole (40). 15

8. The hinge assembly as claimed in claim 1, wherein the first resilient member (18) and the second resilient member (20) are torsion springs. 20

9. The hinge assembly as claimed in claim 1, wherein the housing (52) has a reception slot (82) which communicates with the room (62), the damping member (48) has a threaded portion (84), a guide portion (86) and an adjustment member (88), the damping member (48) is linearly movable in the room (62), the adjustment member (88) is located in the reception slot (82) of the housing (52) and is movably and threadedly connected to the threaded portion (84), and the adjustment member (88) is partially exposed from the reception slot (82) of the housing (52). 25

10. The hinge assembly as claimed in claim 9, wherein the hinge cup (10) has a guide groove (80) and a positioning hole (40), the guide groove (80) is located in the bottom wall (28) of the hinge cup (10) and substantially perpendicular to the rear wall (32) of the hinge cup (10), the positioning hole (40) is located in the rear wall (32) of the hinge cup (10), the guide portion (86) of the damping member (48) extends through the guide groove (80) so that the damping member (48) is linearly movable relative to the hinge cup (10), and the threaded portion (84) of the damping member (48) partially extends through the positioning hole (40). 30

35

40

45

50

**Amended claims in accordance with Rule 137(2)
EPC.**

1. A hinge assembly comprising:

a hinge cup (10) having a first side wall (26a), a second side wall (26b), a bottom wall (28) which is connected between the first and second side

walls (26a, 26b), a front wall (30) connected between two respective front ends of the first and second side walls (26a, 26b), and a rear wall (32) connected between two respective rear ends of the first and second side walls (26a, 26b), a receiving space (34) being defined by the first and second side walls (26a, 26b), the bottom wall (28), the front wall (30) and the rear wall (32), the bottom wall (28) of the receiving space (34) having a first lug (42a), a second lug (42b) and at least one first engaging part (44); an arm (14) pivotably connected between the first and second side walls (26a, 26b) of the hinge cup (10), the arm (14) located adjacent to the front wall (30) of the hinge cup (10); an installation member (12) connected to the arm (14) and installed on a piece of furniture; a damping device (16) located in the receiving space (34) of the hinge cup (10) and having a damping member (48), a slide (50) and a housing (52), the damping member (48) having a piston rod (56) which is connected to the slide (50), the slide (50) having at least one wing (60) which is located corresponding to one of the first and second lugs (42a, 42b), the housing (52) located in the receiving space (34) and the damping member (48) being accommodated in the housing (52), the housing (52) having a room (62), an opening (64) communicating with the room (62), and at least one second engaging part (68), the damping member (48) extending through the room (62) and the opening (64), the second engaging part (68) engaged with the first engaging part (44) on the bottom wall (28) of the hinge cup (10); a first resilient member (18) connected between the first lug (42a) and the first side wall (26a) so as to provide a force to the arm (14); a second resilient member (20) connected between the second lug (42b) and the second side wall (26b) so as to provide a force to the arm (14); a first pin (22) which is a U-shaped pin having two ends which respectively connect the arm (14) and the first resilient member (18) to the hinge cup (10); a second pin (24) connecting the second resilient member (20) to the hinge cup (10); when the arm (14) is located at an open position relative to the hinge cup (10), the at least one wing (60) of the slide (50) contacts one of the first and second lugs (42a, 42b), and when the arm (14) is moved toward a closed position relative to the hinge cup (10), the arm (14) pushes the slide (50) which moves the piston rod (56), the at least one wing (60) of the slide (50) is separated from one of the first and second lugs (42a, 42b).

2. The hinge assembly as claimed in claim 1, wherein the housing (52) has at least one slide slot (70), and the at least one wing (60) of the slide (50) is linearly moved in the slide slot (70). 5

3. The hinge assembly as claimed in claim 1, wherein the housing (52) has a positioning member (66) extending therefrom, the bottom wall (28) of the hinge cup (10) has an installation hole (74) in which the positioning member (66) is inserted. 10

4. The hinge assembly as claimed in claim 1, wherein the housing (52) has two covers (72) which respectively cover the first and second resilient members (18, 20). 15

5. The hinge assembly as claimed in claim 1, wherein the slide (50) has a recess (58), and the hinge cup (10) has a stop (38) which is engaged with the recess (58). 20

6. The hinge assembly as claimed in claim 1, wherein the first side wall (26a) has a first hole (36a) and a second hole (36b), the second side wall (26b) has a third hole (36c), a fourth hole (36d) and a fifth hole (36e), the first lug (42a) has a first through hole (46a) and the second lug (42b) has a second through hole (46b), the two ends of the U-shaped first pin (22) extend through the first and second holes (36a, 36b) and are located in the third hole (36c) and the first through hole (46a) respectively so as to be connected to the arm (14) and the first resilient member (18), the second pin (24) is a U-shaped pin, two ends of the second pin (24) extend through the fourth and fifth holes (36d, 36e), one of the two ends of the second pin (24) extending through the second through hole (46b) and connected with the second resilient member (20). 25

30

35

40

7. The hinge assembly as claimed in claim 1, wherein the rear wall (32) has a positioning hole (40), and the damping member (48) has an engaging portion (54) which is engaged with the positioning hole (40). 45

8. The hinge assembly as claimed in claim 1, wherein the first resilient member (18) and the second resilient member (20) are torsion springs.

9. The hinge assembly as claimed in claim 1, wherein the housing (52) has a reception slot (82) which communicates with the room (62), the damping member (48) has a threaded portion (84), a guide portion (86) and an adjustment member (88), the damping member (48) is linearly movable in the room (62), the adjustment member (88) is located in the reception slot (82) of the housing (52) and is movably and threadedly connected to the threaded portion (84), and the adjustment member (88) is partially exposed from the reception slot (82) of the housing (52). 50

55

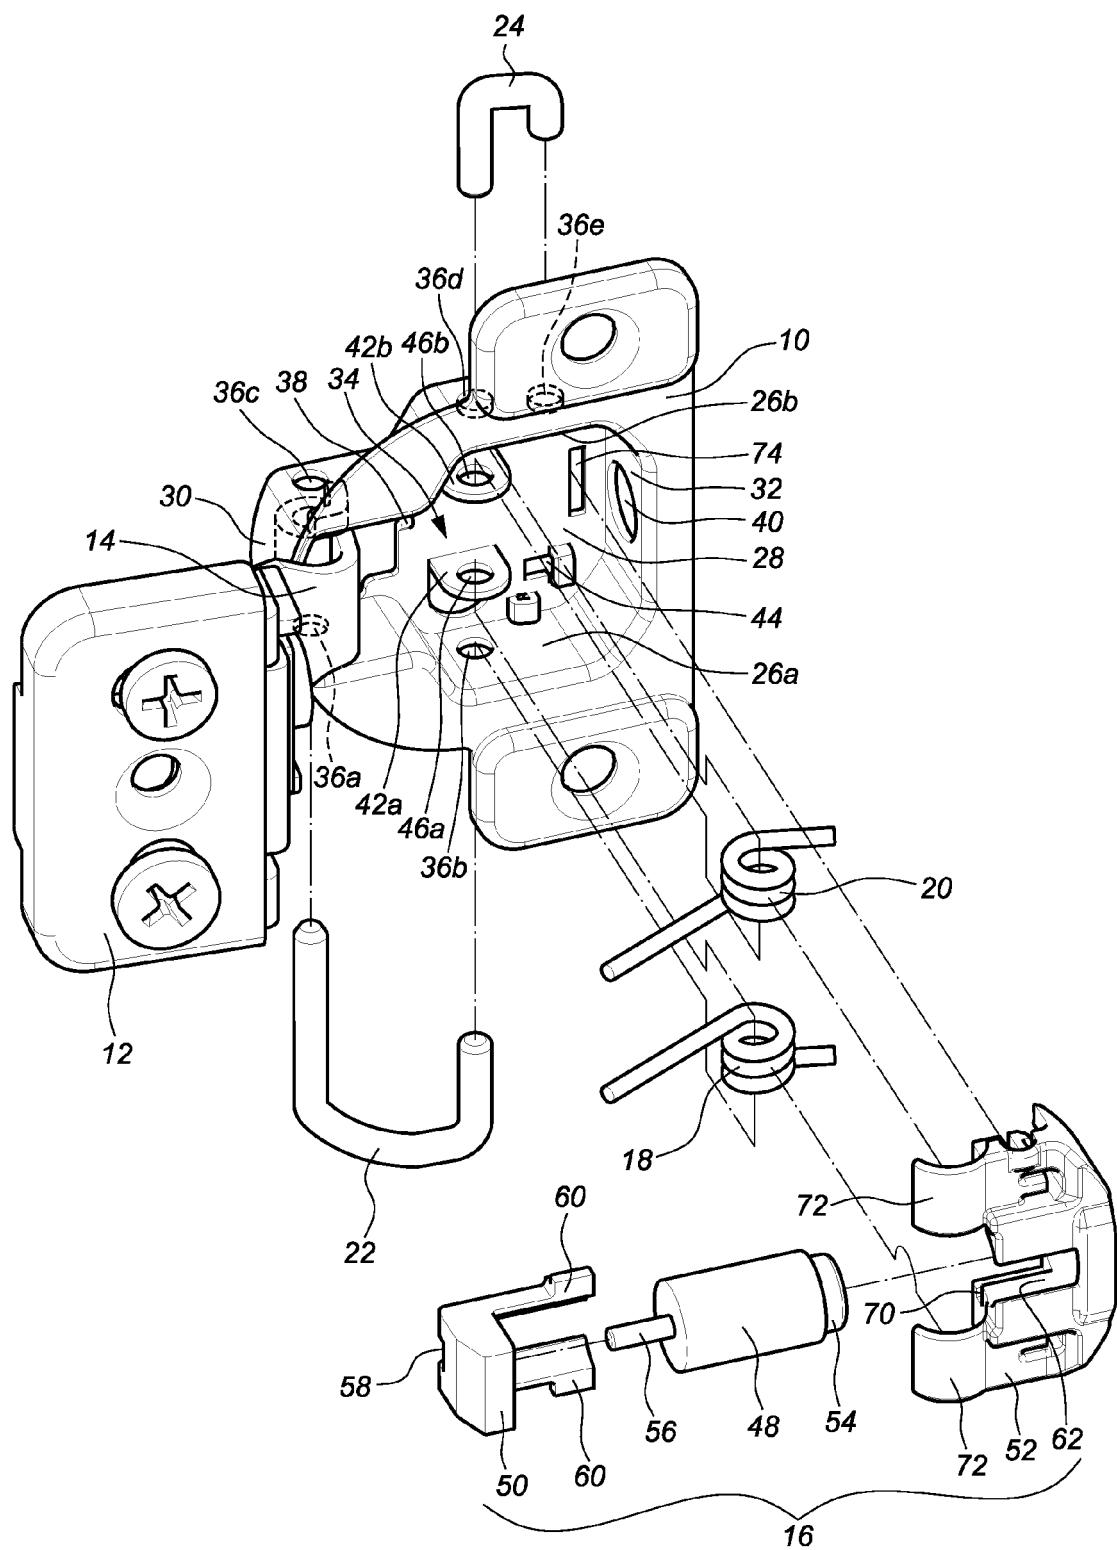


FIG. 1

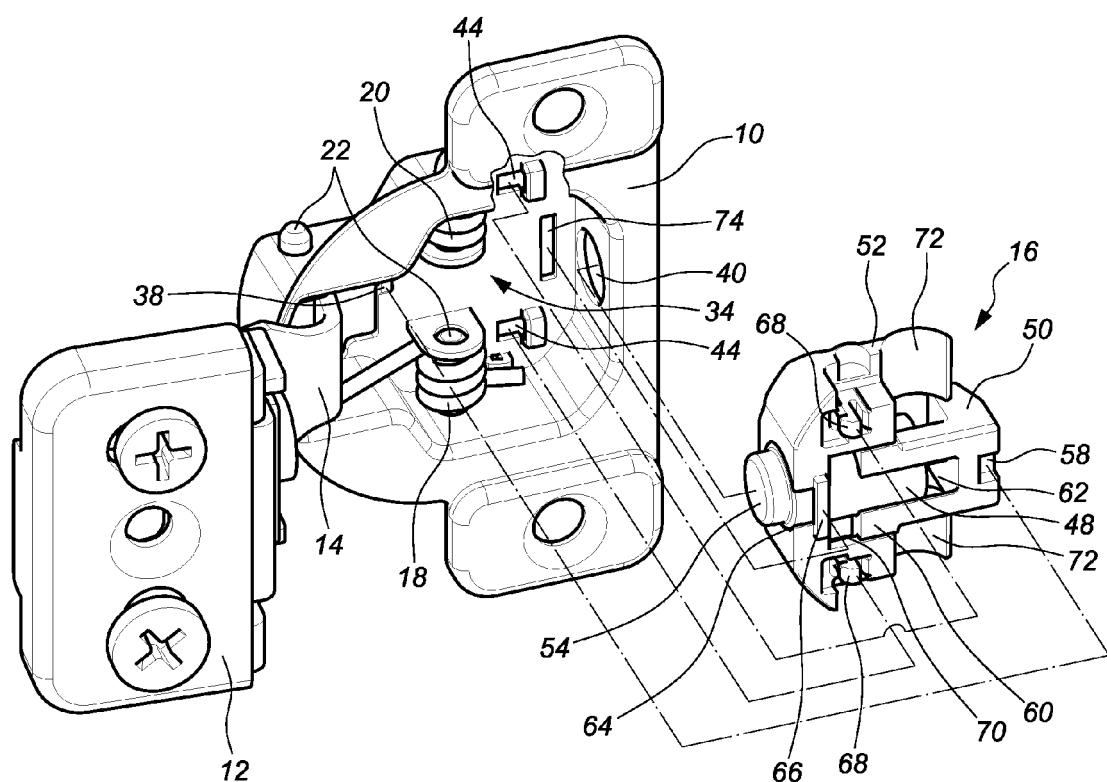


FIG. 2

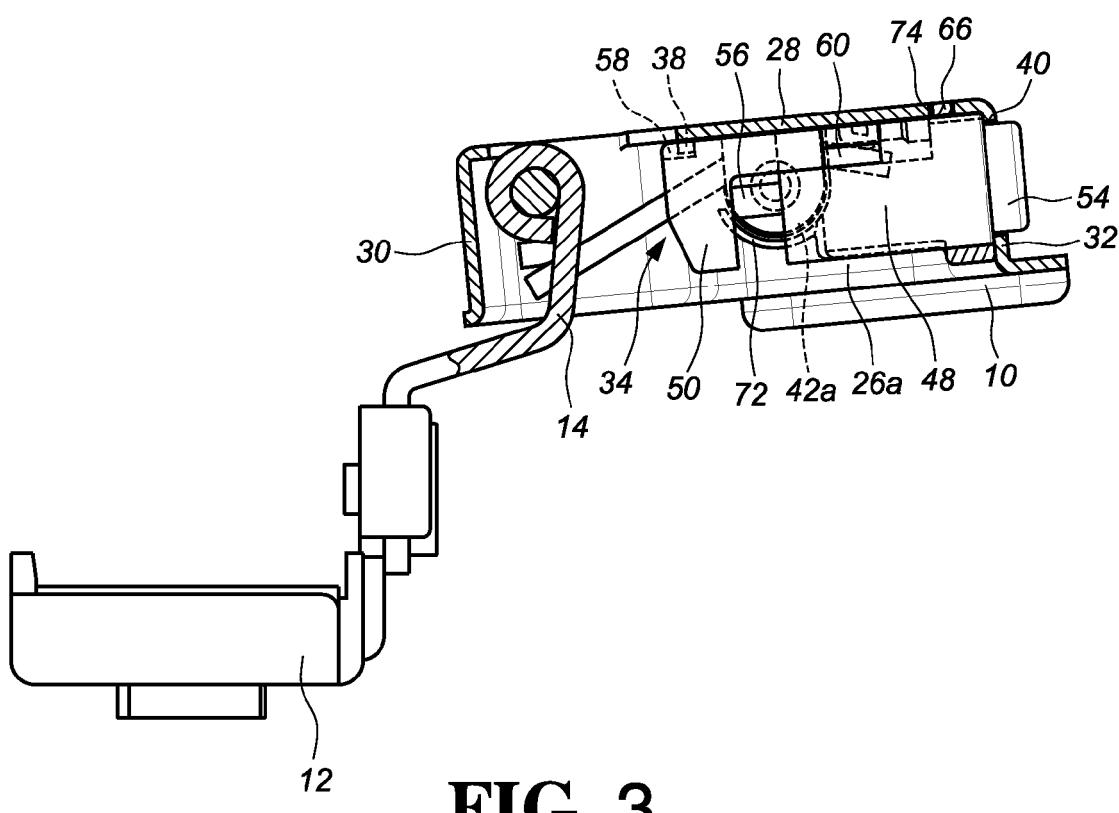


FIG. 3

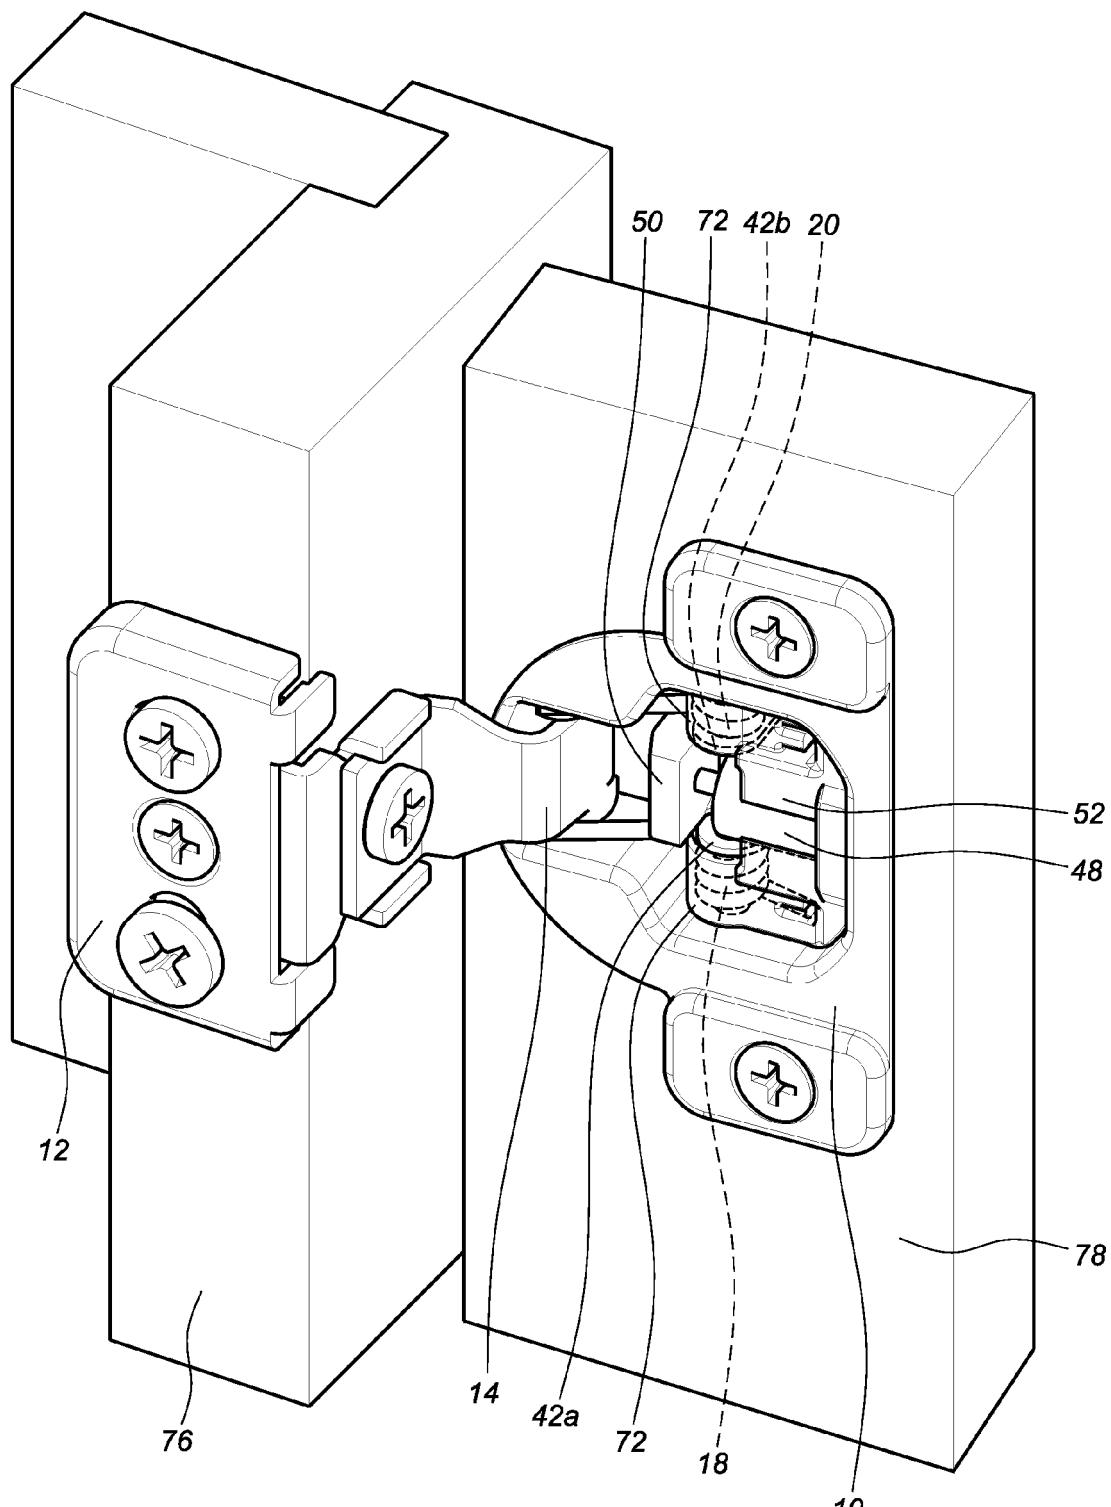


FIG. 4

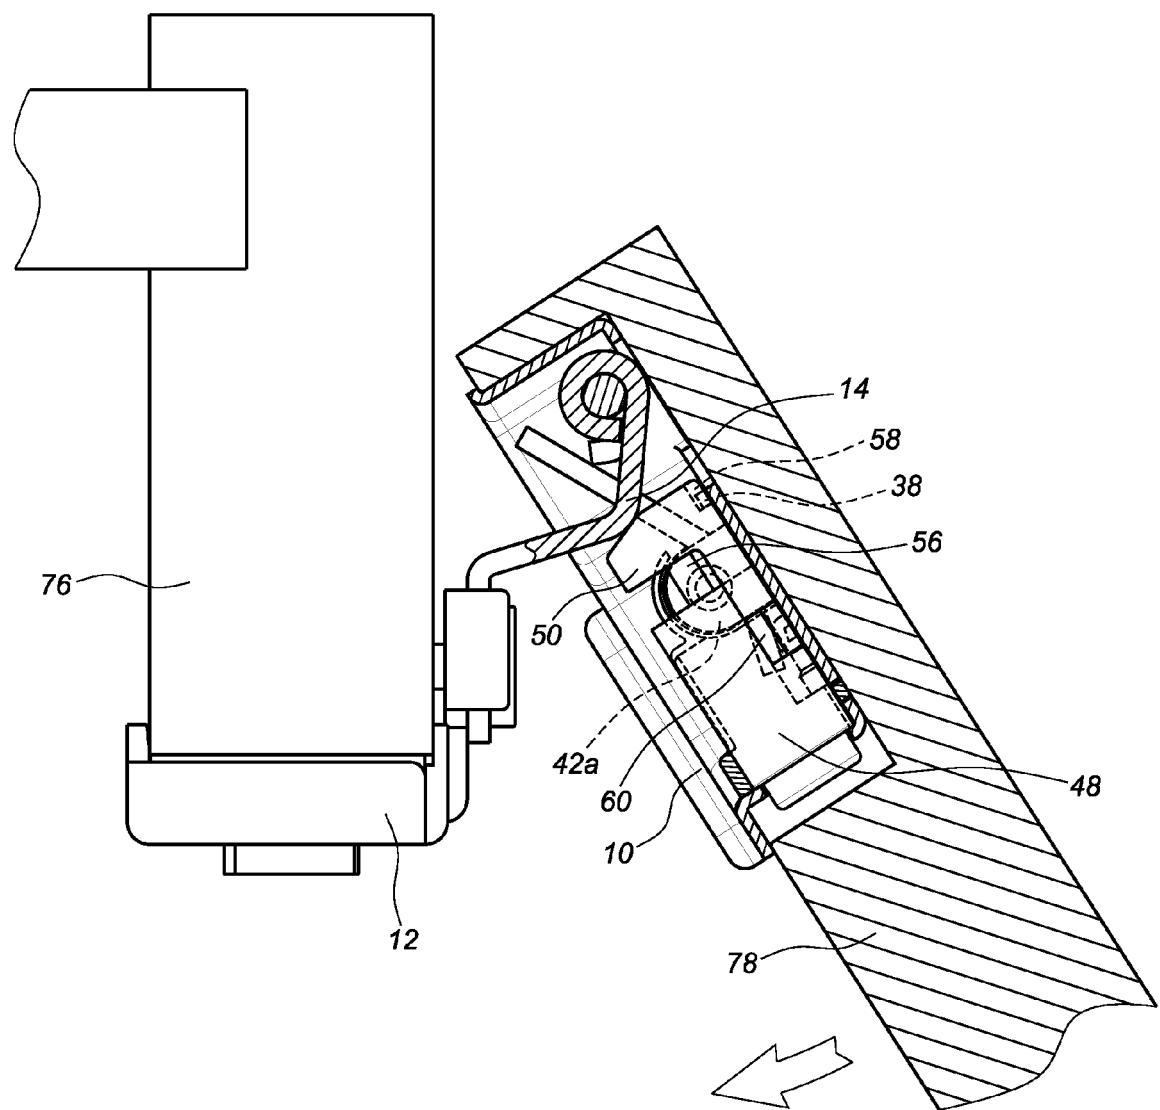


FIG. 5

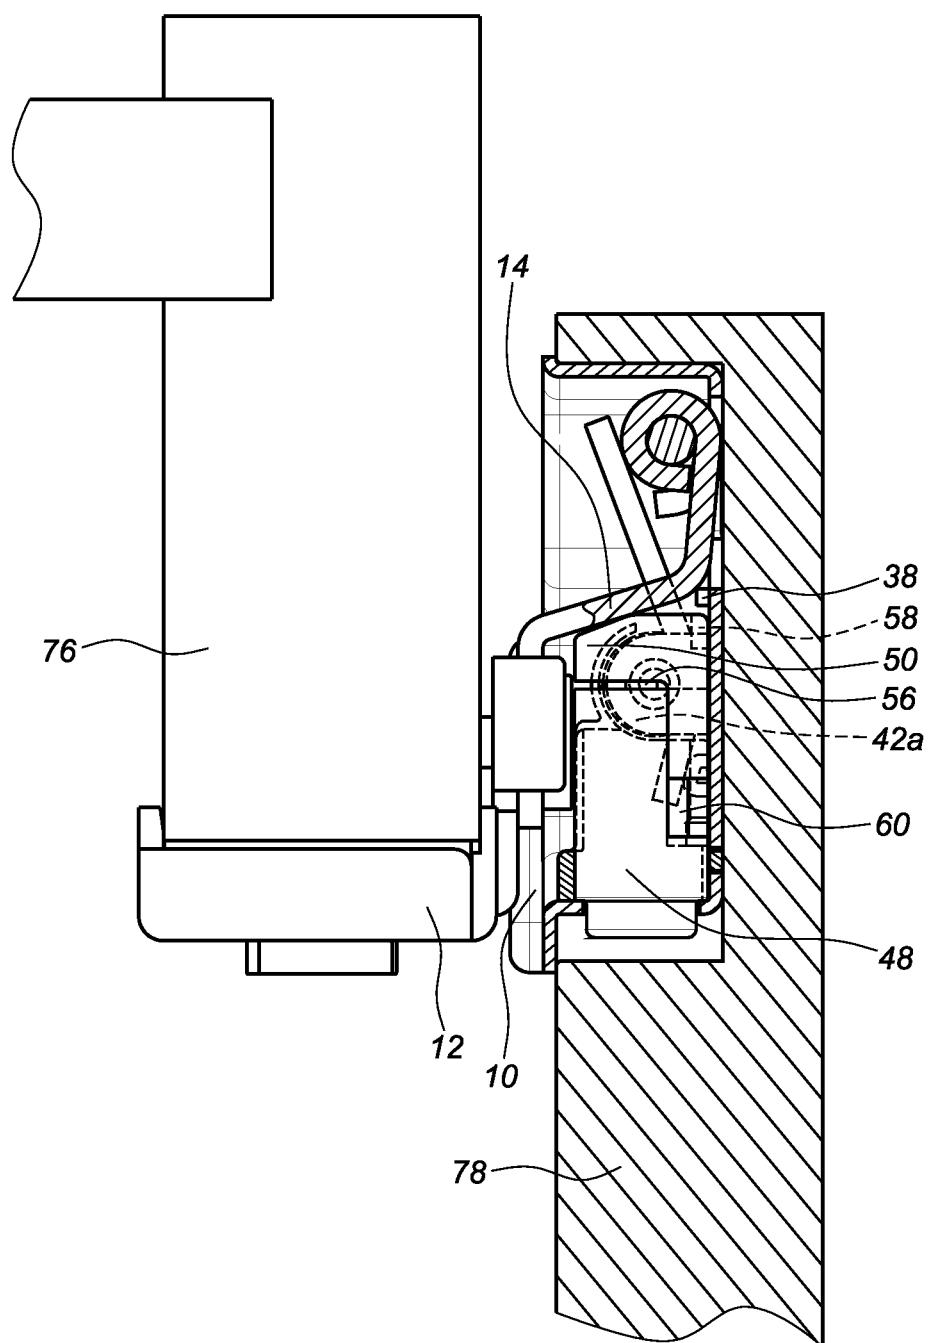


FIG. 6

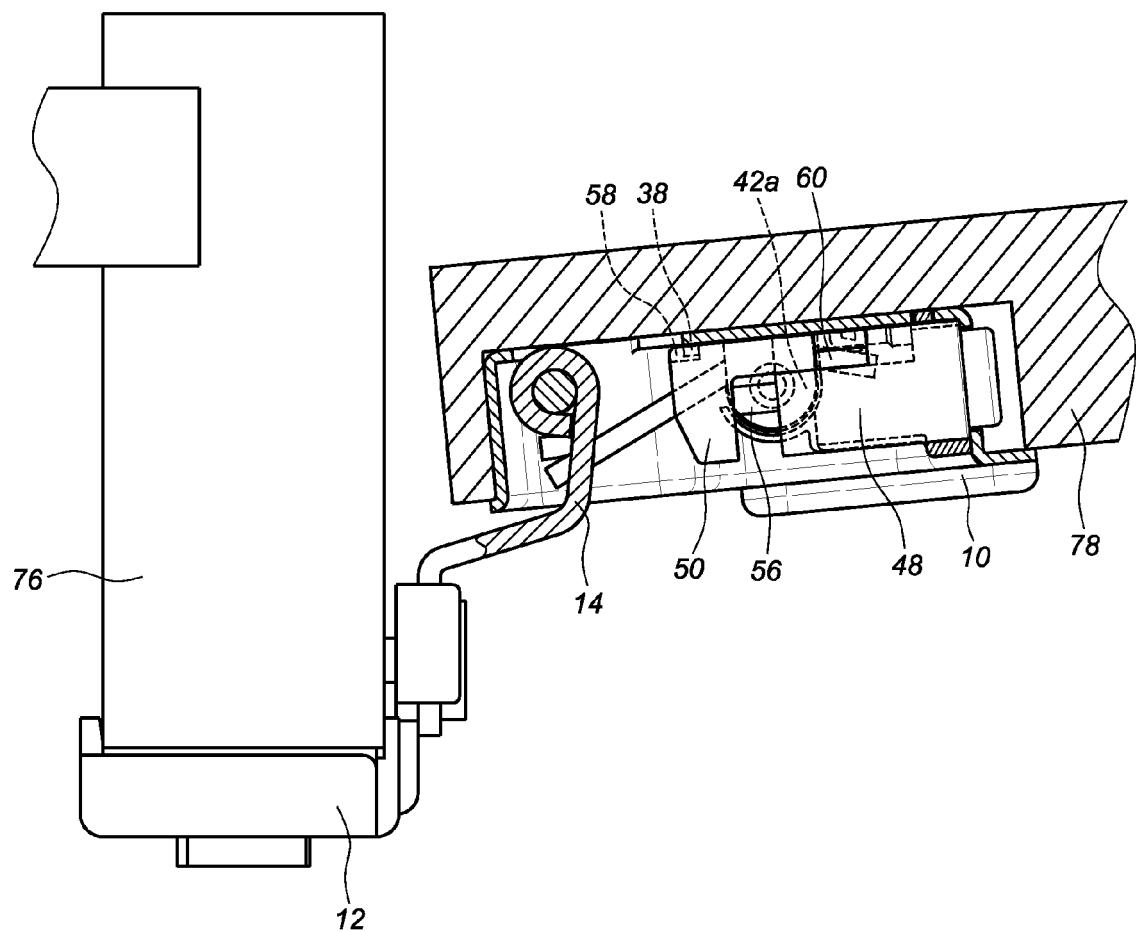


FIG. 7

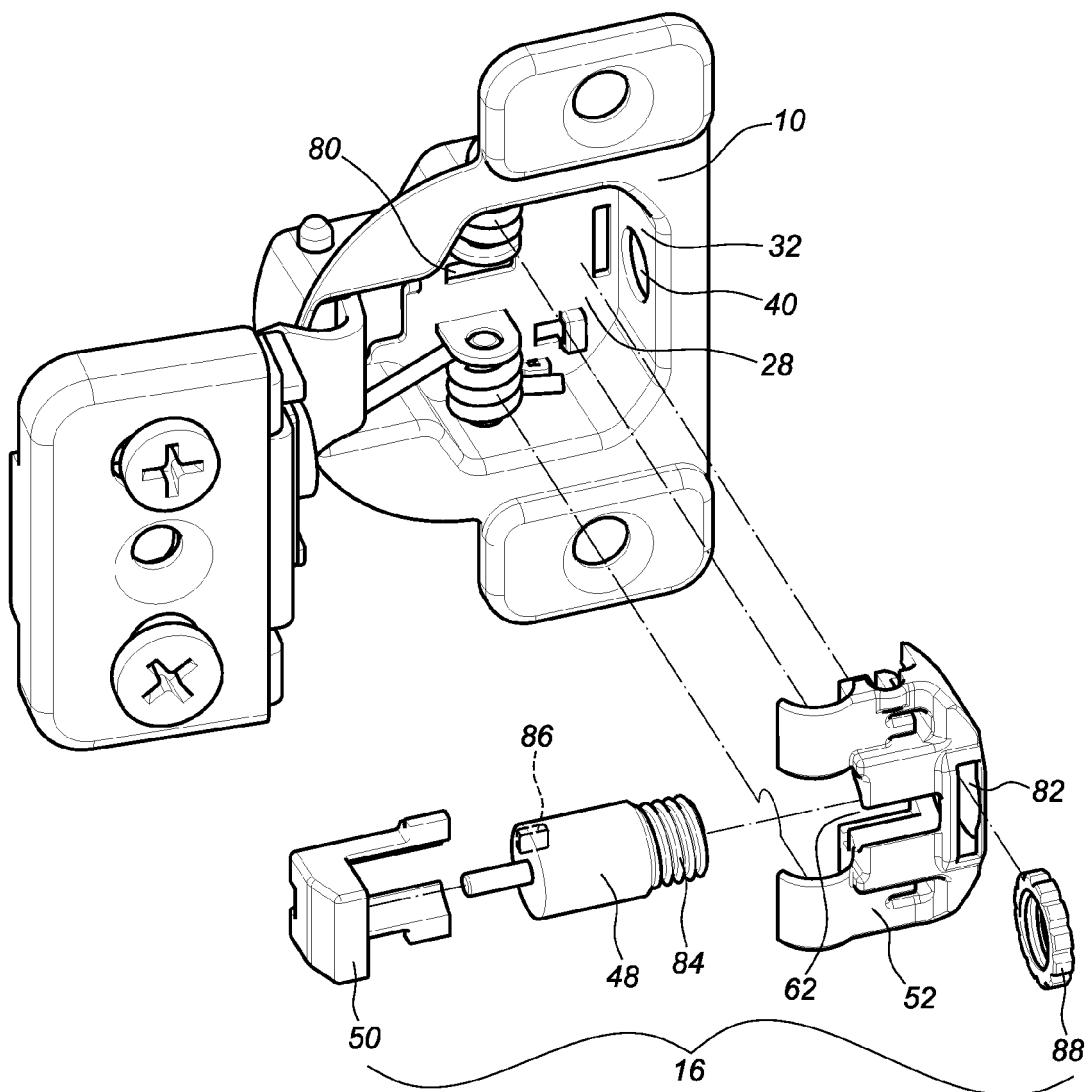


FIG. 8

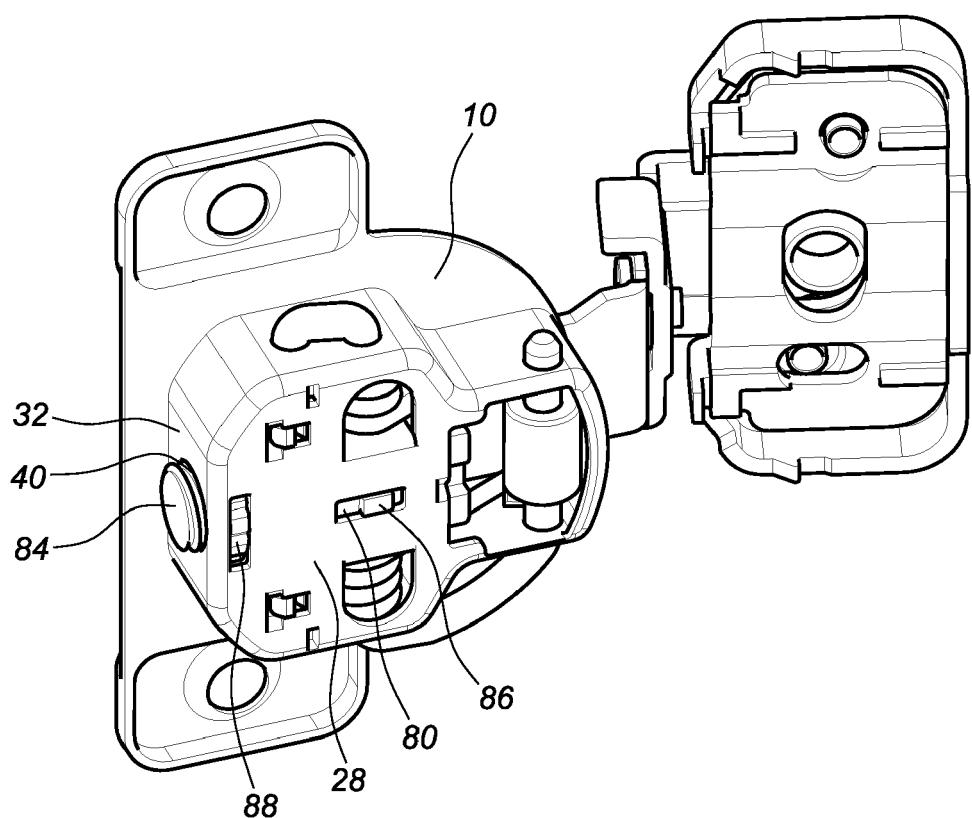


FIG. 9

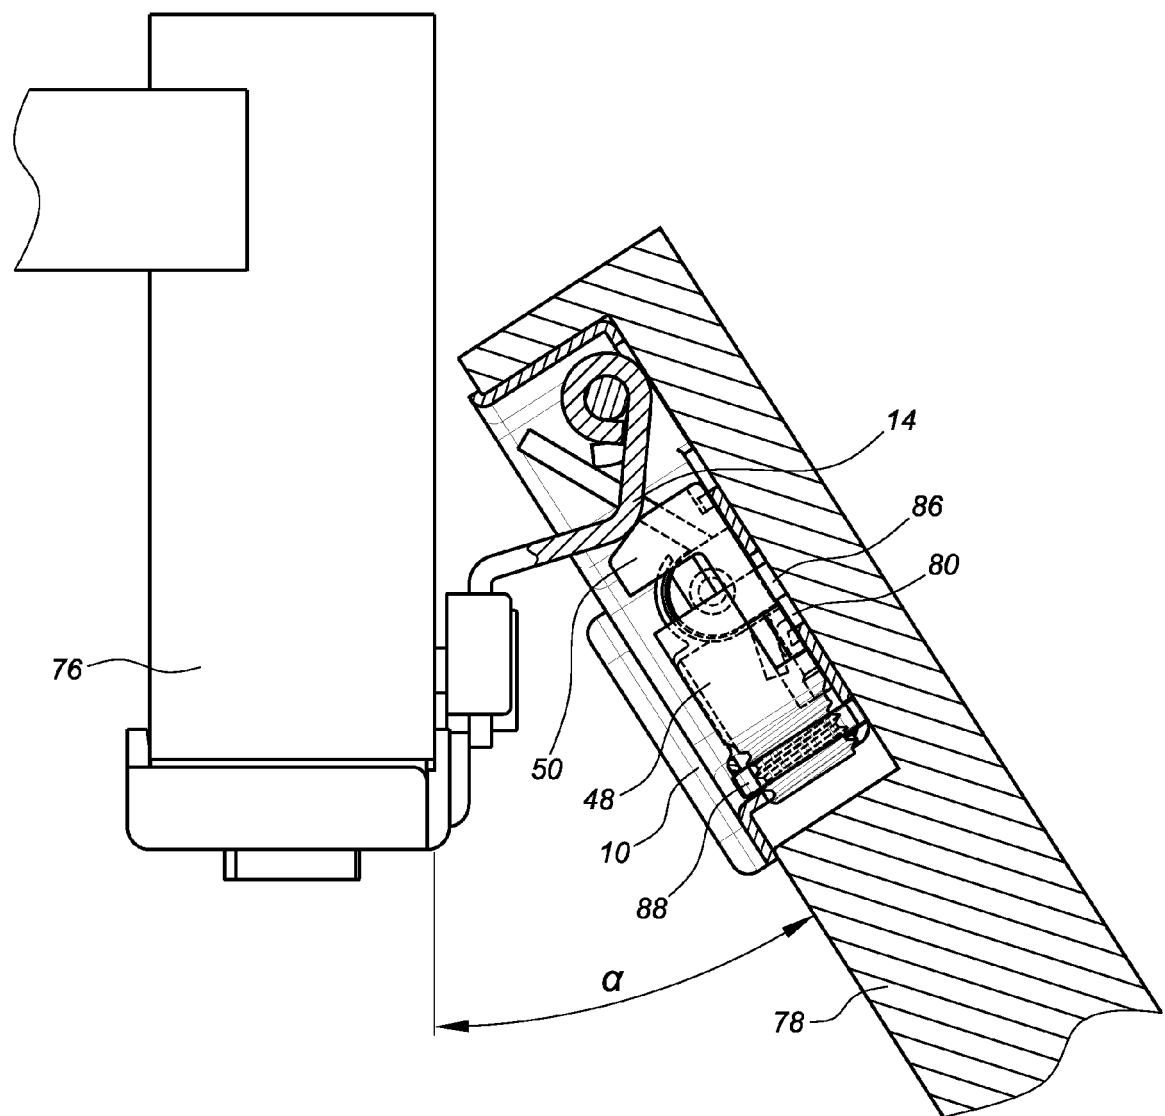


FIG. 10

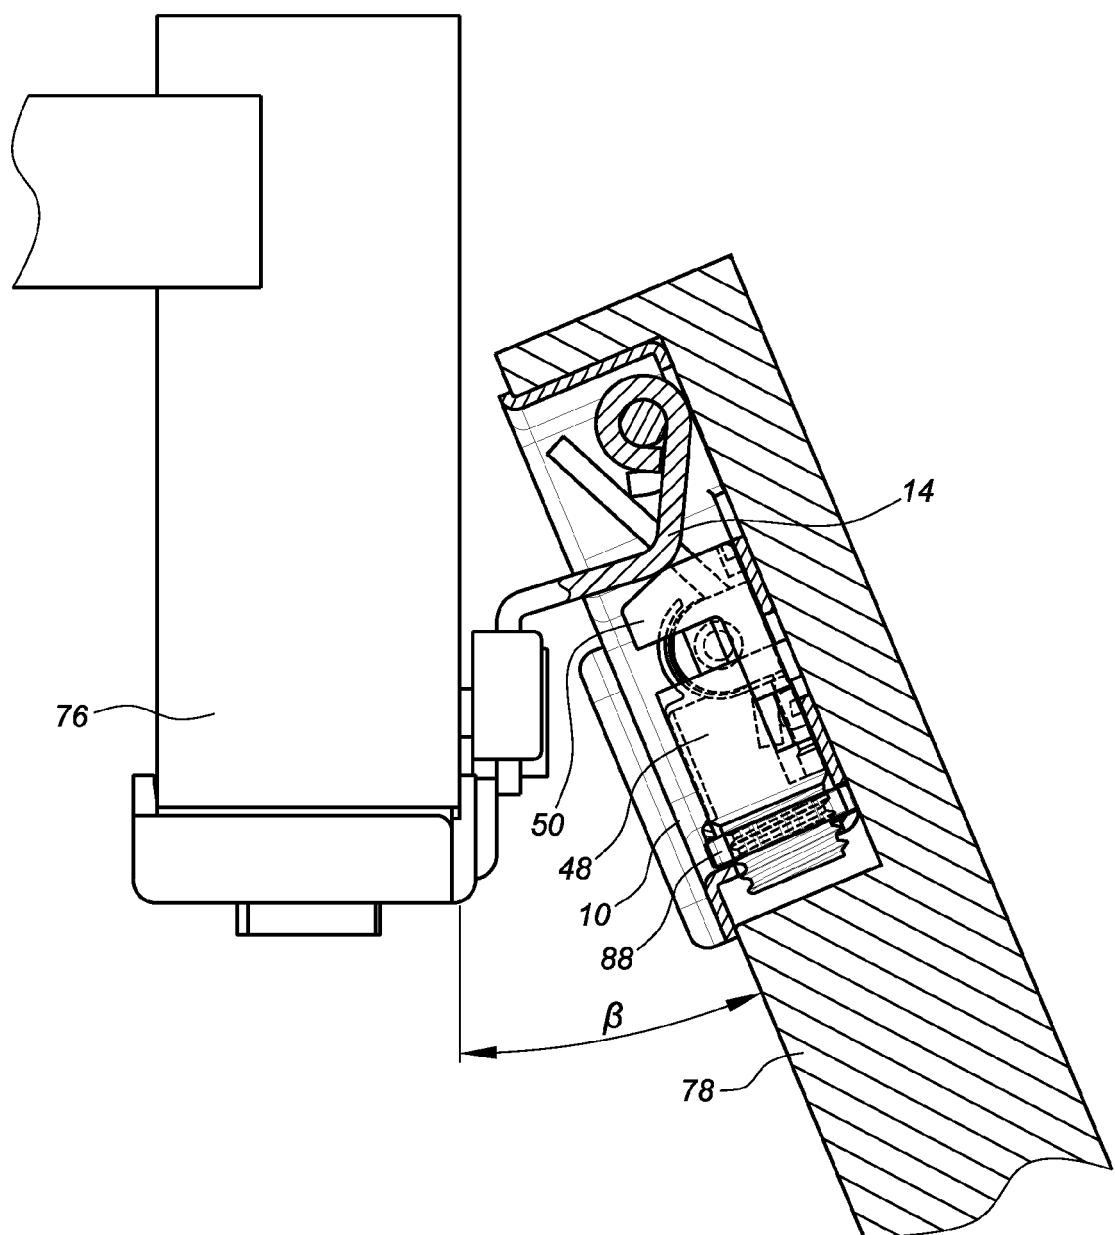


FIG. 11

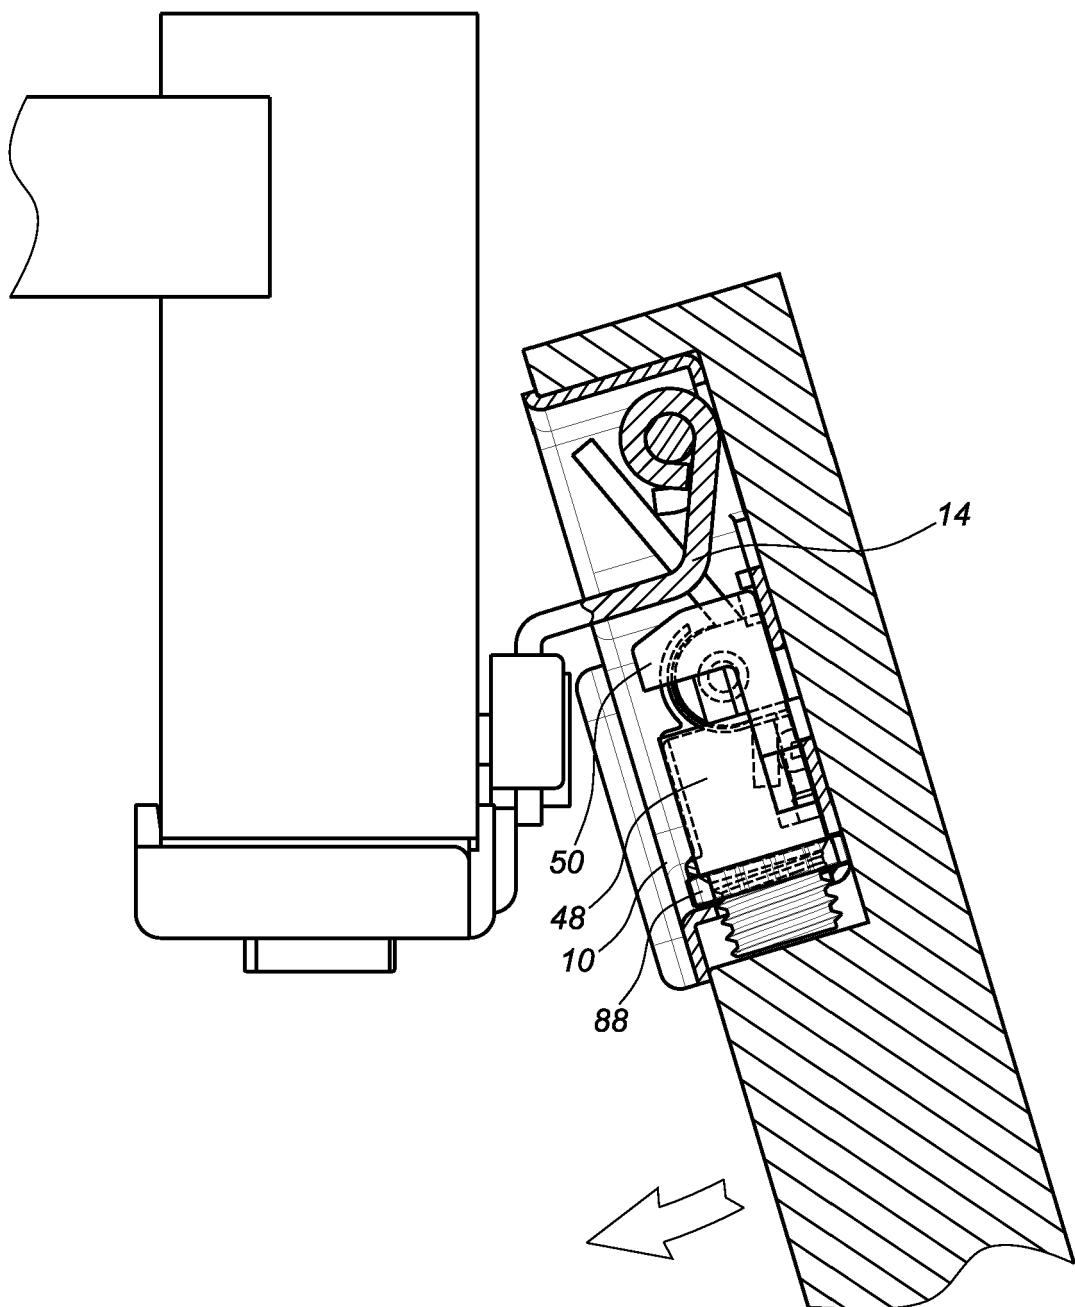


FIG. 12



EUROPEAN SEARCH REPORT

Application Number
EP 12 19 9473

DOCUMENTS CONSIDERED TO BE RELEVANT			CLASSIFICATION OF THE APPLICATION (IPC)
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	
A	WO 2009/094272 A1 (GRASS AMERICA INC [US]; DOMENIG GEORG [US]; MORGAN JEFFERY [US]; HAYES) 30 July 2009 (2009-07-30) * page 9, lines 19-21 * * page 16, lines 10-29 * * figures 8,24,26,30,32 * -----	1-10	INV. E05F5/00 E05F5/02
A,D	US 2011/291538 A1 (BRUNNMAYER HARALD [AT]) 1 December 2011 (2011-12-01) * paragraphs [0047], [0058], [0060], [0064] * * figures 9a,9b,10a,13 * -----	1-10	
A	US 2012/174338 A1 (WU YI TAI [CN] ET AL) 12 July 2012 (2012-07-12) * paragraphs [0025] - [0032], [0035] * * figures 1,5,6 * -----	1-10	
A	US 2009/083939 A1 (WU CHUNG-HSIN [TW]) 2 April 2009 (2009-04-02) * paragraphs [0020] - [0022] * * figure 1 * -----	9,10	TECHNICAL FIELDS SEARCHED (IPC)
			E05F
The present search report has been drawn up for all claims			
1	Place of search The Hague	Date of completion of the search 19 April 2013	Examiner Wagner, Andrea
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 12 19 9473

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

19-04-2013

10

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
WO 2009094272	A1	30-07-2009	CN	101932786 A		29-12-2010
			EP	2235310 A1		06-10-2010
			US	2011005032 A1		13-01-2011
			WO	2009094272 A1		30-07-2009

US 2011291538	A1	01-12-2011	AT	508068 A1		15-10-2010
			AU	2010228096 A1		13-10-2011
			CN	102325953 A		18-01-2012
			EP	2411611 A1		01-02-2012
			JP	2012521499 A		13-09-2012
			KR	20120010223 A		02-02-2012
			US	2011291538 A1		01-12-2011
			WO	2010108201 A1		30-09-2010

US 2012174338	A1	12-07-2012	CN	102587757 A		18-07-2012
			US	2012174338 A1		12-07-2012

US 2009083939	A1	02-04-2009		NONE		

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20110291538 A1 [0002]