



Europäisches
Patentamt
European
Patent Office
Office européen
des brevets



(11)

EP 2 759 414 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
30.07.2014 Bulletin 2014/31

(51) Int Cl.:
B44C 1/18 (2006.01)

(21) Application number: **13000331.2**

(22) Date of filing: **23.01.2013**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**
Designated Extension States:
BA ME

(71) Applicant: **GRATZER! Technologies GmbH & Co.
KG
1130 Wien (AT)**

(72) Inventor: **Gratzer, Roland F.
1130 Wien (AT)**

(74) Representative: **Puchberger, Georg
Puchberger Berger & Partner
Patentanwälte
Reichsratsstraße 13
1010 Wien (AT)**


Remarks:

Amended claims in accordance with Rule 137(2)
EPC.

(54) Transfer strip for accommodating decorative rigid bodies

(57) A transfer strip for accommodating decorative rigid bodies to be transferred onto a substrate has upper and lower faces and an array of openings (12) each having a first, upper end and a second, lower end, wherein a diameter of each opening (12) is larger than a distance between the first and second ends of the opening (12), each opening (12) having an annular reinforcement

structure (26) at the first end, a continuous or discontinuous annular rim (24) formed at an inner circumference of the first end, and at least two, three or four spaced-apart inward hooks (22) as the second end in a mutual arrangement adapted to hold the respective decorative rigid body (14) in the opening.

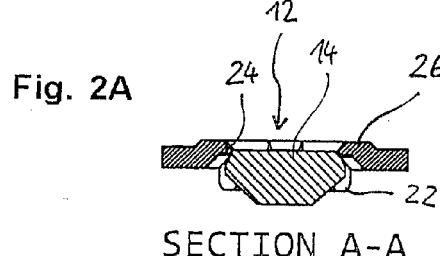

Description

[0001] The present invention relates to a magazine strip for rigid bodies, such as gems or glass crystals or other decorative rigid bodies. In particular, the invention relates to a strip suitable for transferring such decorative rigid bodies onto a substrate e.g. one by one, either manually or by means of a device; and to a method of manufacturing such transfer strip.

[0002] A magazine strip for gems is known from U.S. Patent No. 5,252,377, which magazine strip has a sandwich structure with a middle soft layer and reversibly deformable layers above and under the soft layer. This magazine strip has holes into and out of which gems can be pressed.

[0003] An apparatus for fixing decorative rigid bodies from another transfer strip onto a substrate is known from the present inventor's International application WO 2012/116806 A1.

[0004] It has been found that the transfer strip of US 5,252,377 is not capable of reliably holding and providing the gems.

[0005] It is therefore an object of the present invention to provide a transfer strip, and method of manufacture thereof, which offers a more reliable holding and providing the decorative rigid bodies in particular for automatic transfer by means of an apparatus.

[0006] According to the present inventor's studies, one important factor to be considered in the design of a transfer strip is that the gems or other decorative rigid bodies, such as glass crystals, do not all have the same size, but vary quite a bit in terms of their overall extensions, most notably their largest diameter and their thickness. This is self-evident in the case of naturally occurring gem stones, but also applies to artificial glass crystals, the manufacturers of which sell such items with a specified nominal size, whereas the actual size will differ from this size within a given tolerance.

[0007] This circumstance must have, and indeed has, a marked effect on the magazine strip such as the one of US 5,252,377, which relies on the holding force exerted by the middle soft layer. This holding force will be more or less proportional to the indentation provided by the gem inserted into the hole, which hole naturally must be somewhat smaller than the equatorial diameter of the gem. Clearly, even assuming an identical hole diameter for all the holes, any variation in the gem diameters must materially affect the amount of indentation provided by the individual gems to the soft layer surrounding them, and must therefore lead to an accordingly varying holding force. In relative terms, this effect is much enhanced by the circumstance that it is the individual difference of the gem diameter to the hole size which determines the holding force; assuming the holes to be 10 % smaller than the nominal gem size, this means that an individual gem being only 10 % smaller than the nominal size would fall right through the hole, as there would be no holding force at all. Conversely, a gem having an individual diameter

10 % larger than the nominal size would require about twice the force to introduce it, and to expel it from its hole, than a nominally sized gem. It is difficult to manufacture a transfer device able to properly deal with such variations.

[0008] The present invention accordingly proposes a transfer strip for accommodating decorative rigid bodies to be transferred onto a substrate, which transfer strip has upper and lower faces and comprises an array of openings each having a first, upper end and a second, lower end, wherein a diameter of each opening is larger than a (shortest) distance between the first and second ends of the opening, each opening having an annular reinforcement structure at the first end, a continuous or discontinuous annular rim formed at an inner circumference of the first end, and at least two, three or four spaced-apart inward protrusions such as hooks or struts as the second end in a mutual arrangement adapted to hold the respective rigid body in the opening.

[0009] According to this structure, the decorative rigid bodies can be inserted into, and expelled from, the openings formed in the transfer strip from the second ends, to be held in place by the combined presence of the upper annular rim and lower hooks. The reinforcement structures serve to maintain the relative positions of the upper annular rim and lower hooks even when the transfer strip as a whole is bent or guided along curved paths, in that any bending of the strip takes place between adjacent reinforcement structures. The annular reinforcement structures in an embodiment protrude from the upper face of the transfer strip (i.e., from the first end).

[0010] In some embodiments, the annular rim at the first end is discontinuously formed as at least two, three or four spaced-apart tabs extending radially inwardly from the circumference of the opening. In this case, the tabs and hooks may be spaced apart equidistantly about the opening, and may be staggered around the circumference.

[0011] In some embodiments, the tabs and hooks have inclined outward faces so as to ease proper alignment of the decorative rigid bodies at insertion from the second end, or of an expelling piston entering into the opening from the first end. In either case, the inclination suitably is radially inwardly.

[0012] The decorative rigid bodies accommodated in the openings in some embodiments each have a frusto-pyramidal or an asymmetric bifrustopyramidal shape. The exact shape is not so limited, however, and may likewise have one pyramidal or conical tip.

[0013] In some embodiments, the sloped faces of the frustopyramid, or the more steeply sloped faces of the bifrustopyramid, face the first ends of the openings. In this context, a face shall be understood as "*more sloped*" if its normal forms a smaller angle with the direction of the central axis of the opening.

[0014] In some embodiments, the end faces of the decorative rigid bodies facing the second ends of the openings are coated with an instant bonding adhesive. Ac-

cording to this arrangement, it is feasible to directly adhere the decorative rigid bodies by arranging the transfer strip near the intended substrate and by expelling the decorative rigid bodies exerting a force upon them individually from the first ends. The decorative rigid bodies are thereby pressed onto the substrate, and may adhere thereto. According to a different embodiment, the sloped faces of the frustopyramid, or the more sloped faces of the bifrustopyramid, face the second ends of the openings. In this case, the end faces of the rigid bodies facing the second ends of the openings may be coated with a heat sensitive or melt adhesive. According to this arrangement, it is feasible to temporarily adhere the decorative rigid bodies on an intermediate substrate such as a transfer sheet, e.g. an inverted pattern, by arranging the transfer sheet near the intended substrate and by fixing the decorative rigid bodies applying heat to the entire pattern through the transfer sheet. The decorative rigid bodies are thereby melt-fixed or heat-bonded to the substrate, and may adhere thereto.

[0015] The present invention also proposes a process of injection-molding the transfer strip as described above, the process in some embodiments including manufacturing the mold, injecting the flowable strip material into the mold, solidifying the material and removing the transfer strip from the mold.

[0016] In some embodiments, the process further includes inserting the decorative rigid bodies through the respective second openings so that the sloped faces of the frustopyramid, or the more sloped faces of the bifrustopyramid, face the first ends of the openings. In this case, the decorative rigid bodies may be such ones which are coated with a pressure sensitive adhesive on their larger end faces.

[0017] In other embodiments, the process further includes inserting the rigid decorative bodies through the respective second openings so that the sloped faces of the frustopyramid, or the more sloped faces of the bifrustopyramid, face the second ends of the openings. In this alternative case, the rigid decorative bodies may be such ones which are coated with a heat sensitive adhesive on their larger end faces. They may additionally be coated with a pressure sensitive adhesive on their opposing, smaller end faces, to ease adhering them to a transfer sheet as described above.

[0018] Embodiments of the invention will be described below in more detail, by referring to the following drawings, which show:

Figures 1A-C bottom, side and top view of a transfer strip with two decorative rigid bodies accommodated therein in mutually different orientations;

Figures 2A-D cross-sectional views of the transfer strip.

[0019] Figures 1A through 1C mainly serve to explain

two general ways of accommodating decorative rigid bodies, more clearly shown to have the shape of asymmetric bifrustopyramids having an essentially prismatic equatorial portion between the two pyramidal frustums

5 in Figures 2A through D, in a transfer strip according to the invention. Specifically, in the second opening from the left, a glass crystal is held in an upside-down orientation, i.e. the smaller end face protrudes from the bottom side, whereas in the third opening from the left, a glass 10 crystal is held in an upside-up orientation, i.e. the smaller end face protrudes from the upper side. The outermost openings are shown empty. The skilled person will realize that typically, an actual transfer strip would have all the 15 openings filled with glass crystals oriented in the same, rather than different manner. It will be noted that in this example, the smaller end faces of the glass crystals, which border on the more sloped side faces, protrude from the respective side of the transfer strip, while the other end faces do not. In this context, it may be noted 20 that except in extraordinary cases, the angles between the normals of the sloped side faces and the central axis of the respective opening are larger for the shorter (and less sloped) side faces bordering the larger end faces. One such extreme case is shown in the above-mentioned 25 patent US 5,252,377, according to which the side face angles seem to be all identical (45°). In such a case, the shorter side face necessarily borders on the larger end face. In fact, that crystal only has one end face, the other end being pointed.

30 **[0020]** In this example, the transfer strip 10 extends in a left-right direction. The outermost openings 12 are indicated. The openings form a linear array along the length of the strip. The glass crystals are indicated as 14, although they need not always be present according to the 35 invention. The strip further has U-shaped notches 16 formed in its side rims 18. The bottom side shown in Figure 1A has V-shaped grooves 20 between successive openings. Each opening 12 has four hooks 22 evenly spaced around the circumference of the respective opening. 40 From the bottom side as in Figure 1A, and through the outermost openings 12, four tabs 24 are visible, which are arranged at the top end. In the two central openings accommodating glass crystals, these tabs are not visible.

[0021] The side view according to Figure 1B reveals 45 another feature of the inventive transfer strip 10, namely a protruding ring 26 formed on the top side of the transfer strip surrounding each opening. The hooks 22 are discernible to have radially inwardly inclined faces 28 at their innermost outward faces. As in Figure 1A, the hooks 22 are shown in Figure 1B to touch the sloped faces of the 50 glass crystals 14.

[0022] The annular protrusion 26 is also discernible in Figure 1C, which is a top view of the same transfer strip 10 as above. This view shows the upper side tabs 24 to be directly formed at the inner circumference of the annular protrusion 26. The tabs 24, like the hooks 22 as described above, have radially inwardly inclined faces 30 at their innermost outward faces. The notches 16 have

inner 16' and outer 16" portions.

[0023] Figures 2A through 2D are cross-sectional views taken along different section planes A-A, B-B, C-C and D-D, the latter two of which are oblique to the longitudinal extension of the transfer strip. The rationale is that in some more advanced embodiments, the retaining features at the top (tabs 24) and at the bottom (hooks 22) of the accommodating openings are staggered with respect to one another. Each section plane therefore is chosen to bisect the retaining features at the bottom or else, at the top, respectively. These features are darkly hatched. From the cross-sectional views, it becomes evident that the decorative rigid bodies 14 (lightly hatched) are actually held not at their equatorial portions, and not even necessarily at their end faces (although that would also be feasible), but rather at their sloped side faces. It has been found that this manner is least sensitive to a varying size of the glass crystals (or other decorative rigid body). Figures 2C (section C-C) and 2D (section D-D) show that the cylindrical pouch diameter that accommodates the decorative rigid bodies should be larger than the largest diameter of same. The annular gap should be sufficiently large so as to avoid the bodies getting stuck due to temperature changes and different thermal expansion coefficients of the strip and crystal materials.

[0024] Naturally, particularly small individual glass crystals have quite some space in their opening within which to move. Each opening being less high (in a direction along the central axis of the opening) than wide (across its diameter), there is no danger of even the smallest glass crystals to be held in the openings overturning. Conversely, even the largest glass crystals within a reasonable tolerance of the nominal size will still safely fit within the openings, in some cases with some outward bending of the retaining features. Moreover even such outward bending will hardly affect the required force for expelling the glass crystals from their openings. The underlying reason is that the glass crystals are not held by a frictional force exerted upon them, but by the shape of the openings.

[0025] A prominent feature visible in all the drawings is the ring protruding on the upper side around each opening. Actually, the top side retaining features, shown as tabs, are formed at the inner circumference of this ring. The reinforcement structure provides stability of the transfer strip across the opening, while allowing bending of the transfer strip between adjacent openings (i.e. between the side rim notches). This is advantageous as it keeps the bottom side hook features from moving apart when the transfer strip is guided around curved paths (such as by a guiding or transfer reel). Without such reinforcement structure, the material of the transfer strip had to be chosen inherently stiffer, or thicker, making it more difficult to safely guide the strip around narrowly curved paths. Eventually, this circumstance leads to larger and more costly transfer devices being necessary.

[0026] The different orientations of the glass crystals within the respective openings lend themselves to differ-

ent modes of use as shall be explained in the following:

According to the first, direct use, the glass crystals are accommodated with their larger end faces downward (see Figure 2B). In actual use of the transfer strip, an external force will be applied from above by means of a piston or the like, either automatically or manually. The piston (or other member) will act on the top of the glass crystal, thereby pushing its lower (less sloped) side faces against the inside of the hooks, and accordingly bending the hooks outwards so that the glass crystal can protrude from the bottom side. It will then come into contact with, and be pressed against an intended substrate and adhere thereto, usually because of a pressure sensitive adhesive being present on the larger (downward) end face of the glass crystals. While other schemes of adherence are also possible, the above is quite simple and requires no further device. In one basic example, the piston could even be the tip of a small stick, pressed manually on the glass crystals. In more involved examples, an apparatus moving a piston transversely to moving the transfer strip is used, in order to provide more control over the positioning and adhering of the glass crystals. The apparatus may be hand-held or even mounted in a system which also holds the substrate, and moves the latter in respect to the transfer apparatus.

[0027] According to the second, indirect use, the glass crystals are accommodated the other way round. Regardless of whether they carry a pressure sensitive adhesive on their lower, smaller end faces, they are coated on their opposing, larger end faces with a heat-sensitive or melt adhesive. In actual use, the glass crystals are temporarily fixed on an intermediate transfer sheet (which may itself be sticky or tacky if there is no pressure sensitive adhesive on the lower end faces of the glass crystals). The pattern in which the glass crystals are placed on the intermediate sheet, should be inverted with respect to the eventually desired pattern. After the inverted pattern is completed, the transfer sheet is reversed and placed on the intended substrate. Heat is then applied (e.g. through the transfer sheet) to the melt adhesive in order to thermally bond the glass crystals to the substrate. Usually, this application of heat occurs for the entire pattern at the same time, but in some applications, it may be more suitable to apply the heat (or thermal radiation, for that matter) individually to each of the decorative rigid bodies.

[0028] In the above described examples, there are 4 tabs or hooks, respectively, at each the top and bottom (first and second) ends of the openings, which are evenly spaced and staggered. This arrangement has a particularly high degree of symmetry. In other embodiments, the number of plural tabs (if present) and hooks may individually be any other integral number such as 2 or 3, in particular if combined with even spacings. A staggered arrangement eases the manufacturing independently from the number of retaining features. Any number of features larger than 4 is also feasible, but renders the manufacturing more involved.

[0029] In the above examples, the reinforcement structure is a circular continuous ring. Other suitable structures include non-circular annular ones; or, independently, discontinuous ones. If, in the latter case, there are plural more or less evenly spaced discontinuities, it may be advantageous to place such interruptions between adjacent annular structures rather than between the annular discontinuous structure and the nearest side rim portion of the transfer strip, because such interruptions might enable some undesirable bending flexibility around a transverse axis of the transfer strip passing through the openings reducing the reliability with which the decorative rigid bodies are held in the openings. Bending flexibility around a transverse axis of the transfer strip passing between adjacent openings is more desirable. To this end, as discernible in Figures 1A and 1C, generally U-shaped notches are formed in both side rims of the transfer strip, wherein the notches of one side rim directly oppose those formed in the other side rim, and all are staggered with respect to the openings accommodating the glass crystals or other decorative rigid bodies. Each notch has an outer portion which has generally straight edges, transverse or even perpendicular to the lengthwise extension of the strip; and an inner portion with rounded shape contiguous with the outer straight edges. In this manner, the weakening of the transfer strip by the notches is minimized, while allowing considerable flexibility with regard to bending. At the same time, the notches allow external devices such as toothed gear to engage in the notches for exerting a forwarding force. The symmetry of the notch arrangement renders such forwarding force to be substantially only in the lengthwise direction. In the example shown the depth of the straight-edge portion is about equal to the depth of the rounded-edge portion. This is preferred, but other ratios of the straight-edge depth to the rounded-edge depth (as measured perpendicularly to the strip length direction) within 1:3 to 3:1 or 1:2 to 2:1 (or 1:3 to 2:1, or 1:2 to 3:1) are also feasible in some cases. If the rounding-off is (half-)circular as in Figure 1B, the width of each notch is twice its radius. The ratio of the width of each depth to its overall depth typically lies in the same range 1:3 - 3:1, 1:2 - 2:1, 1:3 - 2:1, or 1:2 - 3:1. A suitable material for the transfer strip is polypropylene, PP.

[0030] The skilled person will notice that various modifications or alteration are possible to the examples described above, without leaving the scope of the appended claims. E.g., the V-shaped notch between adjacent openings, which according to the above examples is formed in the bottom side of the transfer strip, may take other forms, such as a perforation. Similarly, the reinforcing annular protrusion is disclosed as being made of the same material as the remainder of the transfer strip, but may also be made of a different one, such as being a region of the strip surface modified after its shape has been defined, by applying an agent or radiation. The reinforcing structure may be formed at the bottom side of the transfer strip, around the bases of the hooks; or both

on the upper and bottom side of the transfer strip. The decorative rigid bodies may be diamonds or other gem stones; rather than bifrustopyramidal, they may be bifrustoconical or frustoconical. The lower-side hooks may contact the lower end faces in particular of upside-up-oriented crystals or bodies. The hooks may be arcuately bent rather than angled, or there may be struts inclined to the axis of the respective opening or perpendicular thereto. Conversely, the upper-side tabs may likewise be formed as hooks. The openings are generally shown as being cylindrical, but may be prismatic, or somewhat frustoconical, or frustopyramidal. They may also be bifrustoconical or bifrustopyramidal.

15 Claims

1. A transfer strip for accommodating decorative rigid bodies to be transferred onto a substrate, the transfer strip having upper and lower faces and comprising an array of openings each having a first, upper end and a second, lower end, wherein a diameter of each opening is larger than a distance between the first and second ends of the opening, each opening having an annular reinforcement structure at the first end, a continuous or discontinuous annular rim formed at an inner circumference of the first end, and plural spaced-apart inward protrusions, such as hooks or struts, as the second end in a mutual arrangement adapted to hold the respective rigid body in the opening.
2. The transfer strip of claim 1, wherein the annular reinforcement structure protrudes from the upper face of the transfer strip.
3. The transfer strip of claim 1 or 2, wherein the annular rim at the first end is formed as plural spaced-apart tabs extending radially inwardly.
4. The transfer strip of claim 3, wherein the tabs and hooks are spaced apart equidistantly about the opening.
45. The transfer strip of claim 3 or 4, wherein the tabs and hooks are staggered around the circumference.
6. The transfer strip of one of claims 3 to 5, wherein the tabs and hooks have inclined outward faces.
7. The transfer strip of one of the preceding claims, in which the decorative rigid bodies are accommodated, wherein the decorative rigid bodies each have a frustopyramidal or an asymmetric bifrustopyramidal shape.
8. The transfer strip of claim 7, wherein the sloped faces of the frustopyramid, or the more sloped faces of the

bifrustopyramid, face the first ends of the openings. 5

9. The transfer strip of claim 8, wherein the end faces of the rigid bodies facing the second ends of the openings are coated with a pressure sensitive or instant bonding adhesive. 5

10. The transfer strip of claim 7, wherein the sloped faces of the frustopyramid, or the more sloped faces of the bifrustopyramid, face the second ends of the openings. 10

11. The transfer strip of claim 10, wherein the end faces of the rigid bodies facing the first ends of the openings are coated with a heat sensitive or melt adhesive. 15

12. A process of manufacturing the transfer strip of one of the preceding claims, including injection-molding. 20

13. The process of claim 12, further including inserting the rigid decorative bodies through the respective second openings so that the sloped faces of the frustopyramid, or the more sloped faces of the bifrustopyramid, face the first ends of the openings. 25

14. The process of claim 12, further including inserting the rigid decorative bodies through the respective second openings so that the sloped faces of the frustopyramid, or the more sloped faces of the bifrustopyramid, face the second ends of the openings. 30

15. The process of claim 13 or 14, further comprising arranging the transfer strip on the substrate, and exerting an external force onto the decorative rigid bodies individually towards the substrate to expel the respective decorative rigid body from the opening in which it is accommodated, and to bring that end face of the respective decorative rigid body formerly facing the second end of the opening in contact with the substrate. 35

**Amended claims in accordance with Rule 137(2)
EPC.**

45

1. A transfer strip accommodating decorative rigid bodies (14) to be transferred onto a substrate, the transfer strip (10) having upper and lower faces and comprising an array of openings (12) each having a first, upper end and a second, lower end, wherein a diameter of each opening (12) is larger than a distance between the first and second ends of the opening (12), 50

characterized by 55

each opening (12) having an annular reinforcement structure (26) at the first end, a continuous or discontinuous annular rim formed at an inner circum-


ference of the first end, and plural spaced-apart inward protrusions (22), such as hooks or struts, as the second end in a mutual arrangement adapted to hold the respective decorative rigid body (14) in the opening (12).

7. The transfer strip of one of the preceding claims, wherein the decorative rigid bodies (14) each have a frustopyramidal or an asymmetric bifrustopyramidal shape.

12. A process of manufacturing the transfer strip of one of the preceding claims, including injection-molding, and further including inserting the rigid decorative bodies (14) through the respective second ends of the openings (12).

13. The process of claim 12, wherein the rigid decorative bodies (14) are inserted in a manner so that the sloped faces of the frustopyramid, or the more sloped faces of the bifrustopyramid, face the first ends of the openings (12).

14. The process of claim 12, wherein the rigid decorative bodies (14) are inserted in a manner so that the sloped faces of the frustopyramid, or the more sloped faces of the bifrustopyramid, face the second ends of the openings (12).

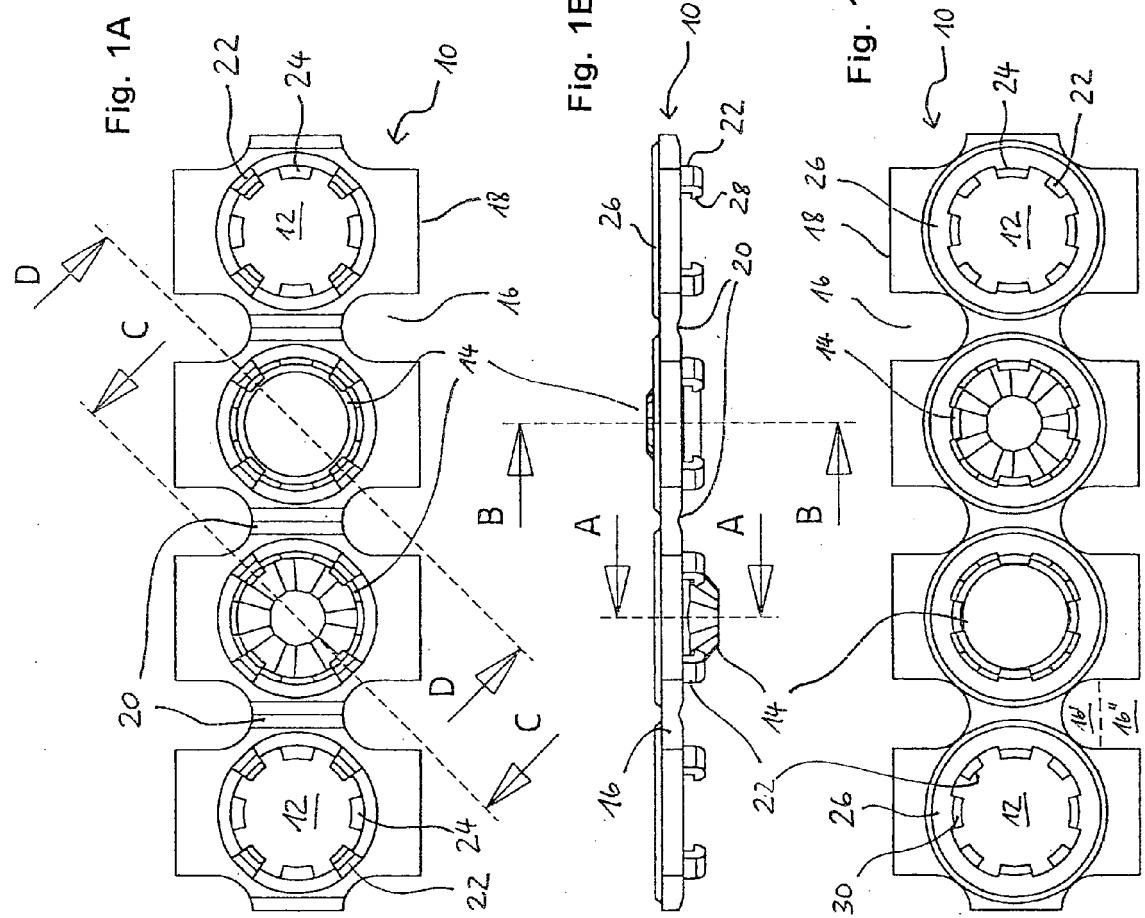



EUROPEAN SEARCH REPORT

Application Number

DOCUMENTS CONSIDERED TO BE RELEVANT			CLASSIFICATION OF THE APPLICATION (IPC)
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	DE 195 35 971 A1 (FRAUNHOFER GES FORSCHUNG [DE]; ACR AUTOMATION IN CLEANROOM [DE]; INST) 10 April 1997 (1997-04-10) * column 4, line 58 - column 5, line 2; figures 1, 6 * ----- EP 1 013 476 A1 (SWAROVSKI & CO [AT]) 28 June 2000 (2000-06-28) * paragraph [0003]; figure 1 * ----- BE 557 702 A (I. D. GLAZER) 11 March 1960 (1960-03-11) * figure 15 * ----- EP 0 888 731 A2 (SWAROVSKI & CO [AT]) 7 January 1999 (1999-01-07) * figure 1 * -----	1,2,12	INV. B44C1/18
A		1,9	
A		1,12	
A		1	
			TECHNICAL FIELDS SEARCHED (IPC)
			B44C B65D
The present search report has been drawn up for all claims			
Place of search	Date of completion of the search		Examiner
Munich	17 June 2013		Balz, Oliver
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone	T : theory or principle underlying the invention		
Y : particularly relevant if combined with another document of the same category	E : earlier patent document, but published on, or after the filing date		
A : technological background	D : document cited in the application		
O : non-written disclosure	L : document cited for other reasons		
P : intermediate document	& : member of the same patent family, corresponding document		

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 13 00 0331

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

17-06-2013

10

	Patent document cited in search report		Publication date		Patent family member(s)		Publication date
	DE 19535971	A1	10-04-1997	DE	19535971 A1		10-04-1997
				DE	59609028 D1		08-05-2002
15				EP	0852556 A1		15-07-1998
				US	6164448 A		26-12-2000
				WO	9711888 A2		03-04-1997
	<hr/>						
	EP 1013476	A1	28-06-2000	AT	226151 T		15-11-2002
20				CN	1257791 A		28-06-2000
				DE	59805994 D1		21-11-2002
				EP	1013476 A1		28-06-2000
				JP	2000175714 A		27-06-2000
				KR	20000048028 A		25-07-2000
25	<hr/>						
	BE 557702	A	11-03-1960		NONE		
	<hr/>						
	EP 0888731	A2	07-01-1999	AT	2566 U1		25-01-1999
30				AT	204142 T		15-09-2001
				DE	59801208 D1		20-09-2001
				EP	0888731 A2		07-01-1999
				US	6067818 A		30-05-2000
35	<hr/>						
40							
45							
50							
55	EPO FORM P458						

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5252377 A [0002] [0004] [0007] [0019]
- WO 2012116806 A1 [0003]