



(11) **EP 2 762 978 A8**

(12) **CORRECTED EUROPEAN PATENT APPLICATION**

(15) Correction information:
Corrected version no 1 (W1 A1)
Corrections, see
Bibliography INID code(s) 30

(51) Int Cl.:
G03G 5/05 ^(2006.01) **G03G 5/06** ^(2006.01)

(48) Corrigendum issued on:
08.10.2014 Bulletin 2014/41

(43) Date of publication:
06.08.2014 Bulletin 2014/32

(21) Application number: **14000184.3**

(22) Date of filing: **17.01.2014**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME

(30) Priority: **31.01.2013 JP 2013017121**

(27) Previously filed application:
10.01.2014 EP 14000082

(71) Applicant: **Canon Kabushiki Kaisha**
Tokyo (JP)


(72) Inventors:
• **Nishida, Tsutomu**
Tokyo (JP)
• **Tanaka, Masato**
Tokyo (JP)
• **Kawahara, Masataka**
Tokyo (JP)

(74) Representative: **Weser, Wolfgang**
Weser & Kollegen
Patentanwälte
Radeckestrasse 43
81245 München (DE)

(54) **Electrophotographic photosensitive member, process cartridge, and electrophotographic apparatus**

(57) A photosensitive layer or a charge generation layer of an electrophotographic photosensitive member (1) contains a gallium phthalocyanine and a particular diamine compound such as 1,2-diaminoethane or 1,3-diaminopropane. The content of the particular diamine compound in the photosensitive layer or the charge generation layer is from 10 ppm to 1,000 ppm (mass ratio) based on the gallium phthalocyanine.

FIG. 2

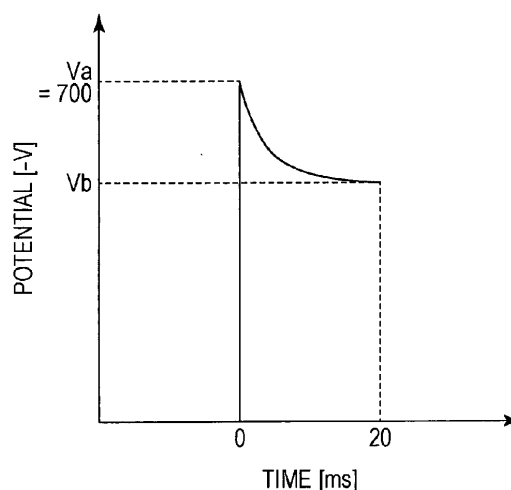

EP 2 762 978 A8