



(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
06.08.2014 Bulletin 2014/32

(51) Int Cl.:
H01Q 1/24 (2006.01)
H01Q 7/00 (2006.01)
H01Q 1/22 (2006.01)

(21) Application number: 14166585.1

(22) Date of filing: 07.06.2010

G06K 19/077 (2006.01)
G06K 19/07 (2006.01)

<div>(84) Designated Contracting States: AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO SE SI SK SM TR</div> <div>(30) Priority: 10.06.2009 KR 20090051475</div> <div>(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC: 10786332.6 / 2 441 115</div> <div>(71) Applicant: LG Innotek Co., Ltd. Seoul 100-714 (KR)</div>	<div>(72) Inventor: Cho, Young Bin Jung-gu, Seoul, 100-714 (KR)</div> <div>(74) Representative: DREISS Patentanwälte PartG mbB Patentanwälte Gerokstrasse 1 70188 Stuttgart (DE)</div> <div> Remarks: This application was filed on 30-04-2014 as a divisional application to the application mentioned under INID code 62. </div>
--	---


(54)

NFC antenna using dual resonance

(57) The present invention relates to a case for a port-
able wireless terminal, the case having a surface and
comprising a relay unit attached to the surface,
wherein the relay unit comprises a closed circuit with a

loop antenna and a capacitor for providing a resonance
to relay a transmission signal of an external reader and
an NFC antenna unit of the portable wireless terminal.

【Figure 5】

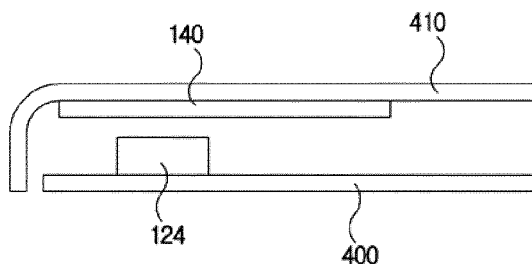

Description

[Technical Field]

[0001] The present invention relates to an NFC (Near Field Antenna) using dual resonance.

[Background Art]

[0002] In general, an RFID (Radio Frequency Identification) concerns to one of the automatic recognition fields using radio waves. The RFID is also called a radio frequency recognition system configured to recognize pre-stored predetermined information wirelessly using radio waves such as ultra short waves or long waves.

[0003] Principle of the RFID system is to recognize information recorded in a tag via a wireless communication. The recorded information belongs to RFID fields for example a bar code label, a magnetic stripe, etc. An RFID reader receives information stored in the tag via an antenna. The RFID reader recognizes and analyzes the received information, and obtains inherent and circumstance information for a product where the tag is applied or, incorporated.

[0004] The RFID system uses signals to be free from ambient environment such as snow, rain, dust and magnetic flux, for example. Furthermore, the recognition speed is fast such that recognition is possible even in transit, and at a predetermined long distance. The RFID system is provided with an intrinsic ID (identification) in the manufacturing process to substantially prevent itself from being fabricated or counterfeited.

[0005] The RFID system includes for example a reader, an antenna, a tag, etc. The antenna performs an intermediation function between the tag and the reader. A power and a signal are sent to the tag via the antenna via a wireless communication, so that the tag is activated. Further, a response from the tag is received via the antenna. Meanwhile, the RFID system uses a NFC (Near Field Communication) scheme and a mobile RFID (mRFID) scheme. In other words, the NFC is a short-range high frequency wireless communication technology which enables the exchange of data between devices over about a short distance. The RFID system of the NFC scheme, for example, uses a frequency (e.g., 13.56 MHz) of a high frequency band with low power to transmit data at a distance between 10 cm and 60 cm. Since the NFC scheme provides high security, the NFC scheme has been used in applications for example a traffic card, mobile payment, etc. The NFC scheme is standardized in ISO/IEC 18092.

[0006] The NFC scheme can perform a short distance radio communication using various frequency signals including 125, 135 and 900 kHz in addition to the 13.56 MHz.

[0007] An NFC device has such advantages of communicating or being compatible with existing information devices including portable wireless terminals and note-

book computers through exchanges of address books, game and MP3 files. The NFC technology using a predetermined frequency band is high in its safety and already in use for public transportation and mobile phone payment. The NFC technology may be utilized as a future information terminal capable of obtaining various information by approaching a tag stored with predetermined information.

[0008] A mobile phone embedded with NFC chips is in an early distribution stage and the NFC technology is expected to be widely adopted in mobile terminals including portable wireless terminals.

[0009] The portable terminals embedded with NFC chips are generally mounted with an antenna through which to communicate with an external reader. However, the NFC antenna mounted on the portable wireless terminal cannot communicate with the reader unless mutually close such that increase of recognition distance with the NFC antenna is required.

[Disclosure]

[Technical Problem]

[0010] The present invention is disclosed to obviate the abovementioned problems, and it is an object of the present invention to provide an NFC antenna using dual resonance capable of increasing a recognition distance of the NFC antenna.

[0011] It should be emphasized that the present invention should not be construed as limited to particular embodiments, but the particular embodiments disclosed herein are illustrative only. Other technical teachings that are not referred to herein may be clearly appreciated by skilled in the art from the following description.

[Technical Solution]

[0012] According to the NFC antenna using a dual resonance, a closed circuit is formed by a capacitor and a loop antenna, and a relay unit is attached to a portable wireless terminal that forms a resonance to a predetermined frequency signal mutually transmitted between a portable wireless terminal reader and an NFC chip.

[0013] In the course of communicating between the NFC chip and the reader, the relay unit serves to relay a signal transmitted by the reader to an NFC antenna unit. The NFC chip serves to relay a signal transmitted through the NFC antenna unit to the reader to increase a recognition distance.

[0014] According to a general aspect of the present invention, an NFC antenna using a dual resonance is characterized by: an NFC antenna unit embedded in a portable wireless terminal, transmitting a signal transmitted by an external reader by communicating with the reader to an NFC chip and transmitting a signal provided by an NFC chip to the reader; and a relay unit embedded in the portable wireless terminal, relaying a signal trans-

mitted by an external reader to the NFC antenna and relaying a signal transmitted through the NFC antenna to the reader.

[0015] In some exemplary embodiments of the present invention, the NFC antenna may include a loop antenna connected to a transmission/reception terminal of the NFC chip by forming a dual resonance with a capacitor.

[0016] In some exemplary embodiments of the present invention, the loop antenna may be attached to a substrate inside the portable wireless terminal, and the relay unit is attached to an inner surface of a case of the portable wireless terminal.

[0017] In some exemplary embodiments of the present invention, the loop antenna may be attached to a substrate inside the portable wireless terminal, and the relay unit is attached to an outer surface of a case of the portable wireless terminal.

[0018] In some exemplary embodiments of the present invention, the loop antenna may be formed at a PCM (Protect Circuit Module) inside a battery pack attachable to and detachable from the portable wireless terminal, and the relay unit is integrally molded by being attached to an inside the battery pack.

[0019] In some exemplary embodiments of the present invention, the loop antenna may be an SMT (Surface Mount Technology) type in which loop antenna patterns are formed at a plurality of sheets, and the plurality of sheets formed with the loop antenna pattern is stacked and the loop antenna patterns are mutually connected through a via hole.

[0020] In some exemplary embodiments of the present invention, the relay unit may be formed by a closed circuit providing a resonance created by the loop antenna and the capacitor to relay a transmission signal of the reader and the NFC antenna unit.

[0021] In some exemplary embodiments of the present invention, the relay unit may be such that the loop antenna patterns are formed on an upper surface of a film, and a capacitor is interconnected across the loop antenna patterns of the relay unit.

[0022] In some exemplary embodiments of the present invention, the capacitor may be such that a distal end and the other distal end of the capacitor are oppositely printed on the upper surface and a rear surface of the film, and a distal end pattern and the other distal end pattern are electrically connected across the loop antenna patterns of the relay unit.

[0023] In some exemplary embodiments of the present invention, the capacitor may be connected across the loop antenna patterns of the relay unit using individual elements.

[0024] In some exemplary embodiments of the present invention, the NFC antenna using dual resonance may include a ferrite seat attached to the relay unit.

[Advantageous Effects]

[0025] An NFC antenna using dual resonance accord-

ing to the present invention is such that a closed circuit is formed by a capacitor and a loop antenna, and a relay unit is attached to a portable wireless terminal that forms a resonance to a predetermined frequency signal mutually transmitted between a portable wireless terminal reader and an NFC chip, and in the course of communicating between the NFC chip and the reader, the relay unit relays a signal transmitted by the reader to an NFC antenna unit, and the NFC chip relays a signal transmitted through the NFC antenna unit to the reader to thereby increase a recognition distance capable of obtaining predetermined information.

[Description of Drawings]

[0026] Reference will now be made in detail to the exemplary embodiments of the present invention, examples of which are illustrated in the accompanying drawings, wherein like reference numerals refer to the like elements throughout. The exemplary embodiments are described below, in order to explain the aspects of the present invention, by referring to the figures.

FIG. 1 is a block diagram illustrating an operation principle of an NFC antenna according to the present invention.

FIG. 2 is a plan view illustrating an exemplary configuration of a magnetic relay unit in an NFC antenna according to the present invention.

FIG. 3 is a cross-sectional view taken along line A-A of FIG. 2.

FIG. 4 is a plan view illustrating another exemplary configuration of a magnetic relay unit in an NFC antenna according to the present invention.

FIG. 5 is a cross-sectional view illustrating a configuration in which an NFC antenna is mounted at a wireless portable terminal according to an exemplary embodiment of the present invention.

FIG. 6 is a cross-sectional view illustrating a configuration in which an NFC antenna is mounted at a wireless portable terminal according to another exemplary embodiment of the present invention.

FIG. 7 is a cross-sectional view illustrating a configuration in which an NFC antenna is mounted at a wireless portable terminal according to still another exemplary embodiment of the present invention.

FIG. 8 is a cross-sectional view illustrating a configuration in which an NFC antenna is mounted at a battery pack of a wireless portable terminal according to still further exemplary embodiment of the present invention.

FIG. 9 is an enlarged cross-sectional view taken along line B-B of FIG. 8.

FIGS. 10 through 13 are schematic views illustrating configurations in which a ferrite sheet is formed at a magnetic field relay unit of an NFC antenna according to still further exemplary embodiments of the present invention.

[Mode for Invention]

[0027] Hereinafter, exemplary embodiments of the present invention are described in detail with reference to the accompanying drawings. Detailed descriptions of well-known functions, configurations or constructions are omitted for brevity and clarity so as not to obscure the description of the present invention with unnecessary detail.

[0028] The particular embodiments disclosed herein are illustrative only, as the invention may be modified and practiced in different but equivalent manners apparent to those skilled in the art having the benefit of the teachings herein. The present invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope and principle of the general inventive concept to those skilled in the art.

[0029] FIG. 1 is a block diagram illustrating an operation principle of an NFC antenna according to the present invention, where reference numeral 100 is an NFC (Near Field Communication) chip. For example, the NFC chip is embedded in various portable terminals such as mobile terminals.

[0030] Reference numeral 110 is a reader. The NFC chip (100) and the reader (110) perform mutual communication, where the reader (110) obtains a predetermined information stored in the NFC chip (100) and processes the obtained information.

[0031] The NFC chip (100) is pre-stored with predetermined information including user information capable of identifying a user using a portable terminal. The reader (110) obtains and processes the predetermined information stored in the NFC chip (100).

[0032] Reference numeral (120) is an NFC antenna unit. The NFC antenna unit (120) is such that a capacitor (122) and a loop antenna (124) are connected to the transmission/reception terminal of the NFC chip (100) to form a parallel resonance.

[0033] The NFC antenna unit (120) forming the parallel resonance operates in such a manner that the loop antenna (124) receives a signal of a predetermined frequency transmitted by the external reader (110) and transmits the signal to the NFC chip (100). Furthermore, the NFC antenna unit (120) transmits to the reader (110) a signal of a predetermined frequency provided by the NFC chip (100).

[0034] Reference numeral 130 is a reader antenna unit. The reader antenna unit (130) such that a capacitor (132) and a loop antenna (134) are connected to the transmission/reception terminal of the reader (110) to form a parallel resonance. The loop antenna (134) transmits a signal of predetermined frequency provided by the reader (110) to the outside. Furthermore, the loop antenna (134) receives a signal of predetermined frequency transmitted by the NFC chip (100) through the loop an-

tenna (124) and outputs to the reader (110).

[0035] Reference numeral 140 is a relay unit. The relay unit (140) is formed in a closed circuit by a capacitor (142) and a loop antenna (144). The relay unit (140) is attached to a portable terminal embedded with the NFC chip (100) and functions to relay a signal of predetermined frequency transmitted by the NFC antenna unit (120) and the reader antenna (130) therebetween.

[0036] The present invention thus configured operates in such a manner that the reader (110) periodically outputs a signal of predetermined frequency to the transmission/reception terminal.

[0037] The signal of predetermined frequency outputted by the reader (110) is applied to the capacitor (132) and the loop antenna (134) of the reader antenna (130). The capacitor (132) and the loop antenna (134) are parallel-resonated to a signal of predetermined frequency outputted by the reader (110) to allow a resonant current to flow to the loop antenna (134), where a magnetic field formed by the resonant current is produced from the loop antenna (134).

[0038] Under this state, in a case a user proximity-touches (approaches) a portable terminal to the reader (110), the magnetic field created by the loop antenna (134) is induced to the loop antenna (144) of the relay unit (140), whereby, the capacitor (142) and the loop antenna (144) are resonated to cause the loop antenna (144) to generate a magnetic field.

[0039] The magnetic field generated by the loop antenna (144) of the relay unit (140) is induced to the loop antenna (124) of the NFC antenna unit (120) to cause parallel resonance to be generated between the capacitor (122) and the loop antenna (124), whereby a resonance current is made to flow. A signal of the resonance current flowing to the capacitor (122) and the loop antenna (124) is inputted to the transmission/reception terminal of the NFC chip (100).

[0040] In a case the signal of the resonance current is inputted to the NFC chip (100), the NFC chip (100) outputs predetermined information pre-stored in the NFC chip (100) to the transmission/reception terminal. For example, the NFC chip (100) may output the predetermined information including the user information of the portable terminal in a signal of a predetermined frequency.

[0041] The output signal of the NFC chip (100) is supplied to the capacitor (122) and the loop antenna (124) of the NFC antenna unit (120), where a resonance current flows to the capacitor (122) and the loop antenna (124) to cause the loop antenna (124) to generate a magnetic field.

[0042] The magnetic field generated by the loop antenna (124) is induced to the loop antenna (144) of the relay unit (140) to allow the capacitor (142) and the loop antenna (144) to resonate, where the magnetic field flows to the loop antenna (144).

[0043] The magnetic field flowing to the loop antenna (144) is transmitted to the loop antenna (134) of the reader antenna unit (130), whereby a resonance current flows

to the capacitor (132) and the loop antenna (134). The signal of the resonance current is inputted to the reader (110), where the reader (110) identifies and processes the predetermined information stored in the NFC chip (100).

[0044] The present invention is such that the relay unit (140) is mounted on the portable terminal. In a case the portable terminal is proximity-touched to (approaches) the reader (110), the relay unit (140) relays a signal that is transmitted between the reader antenna unit (130) and the NFC antenna unit (120), such that the reader (110) can increase the recognition distance of the NFC chip (100).

[0045] FIG. 2 is a plan view illustrating an exemplary configuration of a magnetic relay unit in an NFC antenna according to the present invention, and FIG. 3 is a cross-sectional view taken along line A-A of FIG. 2, where reference numeral 200 is a film. For example, the film (200) may be a PET (Poly Ethylene Terephthalate) film.

[0046] The film (200) is printed with a pattern of the loop antenna (144) in conductive ink. An upper surface and a rear surface of the film (200) are respectively printed with a pattern of a distal end terminal (142a) of the capacitor (142) and printed with a pattern of the other distal end terminal (142b) of the capacitor (142), each pattern facing the other pattern. The pattern of a distal end terminal (142a) of the capacitor (142) is electrically connected to a distal end of the pattern of the loop antenna (144), referred to as loop antenna pattern) through a pattern extension (210). The pattern of the other distal end terminal (142b) may be connected to the other distal end of the pattern of the loop antenna (144) through the pattern extension (220) and the via hole (230).

[0047] FIG. 4 is a plan view illustrating another exemplary configuration of a magnetic relay unit in an NFC antenna according to the present invention.

[0048] Referring to FIG. 4, in the another exemplary embodiment of the present invention, the capacitor (142) may not be formed on the film (200) as a pattern, but may be connected across the pattern of the loop antenna (144) using an individual element.

[0049] The relay unit (140) thus configured may be glued to the portable terminal using adhesive, for example.

[0050] FIG. 5 is a cross-sectional view illustrating a configuration in which an NFC antenna is mounted at a wireless portable terminal according to an exemplary embodiment of the present invention, where reference numeral 400 is a substrate embedded in the portable terminal. The substrate (400) is mounted with the NFC chip (100) by way of conventional method, and concurrently mounted with the capacitor (122) and the loop antenna (124) of NFC antenna unit (120).

[0051] The loop antenna (124) forms an antenna pattern having a predetermined length on a plurality of sheets, and the loop antenna is an SMT (Surface Mount Technology) type in which loop antenna patterns are formed with a plurality of sheets, and the plurality of

sheets formed with the loop antenna pattern is stacked and the loop antenna patterns are mutually connected through a via hole.

[0052] Reference numeral 410 is a case of a portable terminal. For example, the case may be a rear case of the portable terminal, an inner surface of the case (410) may be glued with the film (200) formed with the relay unit (140) using a glue or the like.

[0053] FIG. 6 is a cross-sectional view illustrating a configuration in which an NFC antenna is mounted at a wireless portable terminal according to another exemplary embodiment of the present invention.

[0054] Referring to FIG. 6, the film (200) formed with the relay unit (140) may be glued to an external surface of the case (400) using a glue or the like.

[0055] FIG. 7 is a cross-sectional view illustrating a configuration in which an NFC antenna is mounted at a wireless portable terminal according to still another exemplary embodiment of the present invention.

[0056] Referring to FIG. 7, an inner surface of a protection case (600) for wireless portable terminal may be glued with the film (200) formed with the relay unit (140) using a glue or the like.

[0057] That is, the wireless portable terminal is conventionally attached with the protection case (600) by the user to protect the case (400) against any scratches or the like. Under this circumstance, the user may attach the film (200) formed with the relay unit (140) to an inner surface of the protection case (600) of the wireless portable terminal using the glue.

[0058] Although not illustrated in the figures, the film (200) formed with the relay unit (140) may be glued to an external surface of the protection case (600) using a glue or the like.

[0059] FIG. 8 is a cross-sectional view illustrating a configuration in which an NFC antenna is mounted at a battery pack of a wireless portable terminal according to still further exemplary embodiment of the present invention, and FIG. 9 is an enlarged cross-sectional view taken along line B-B of FIG. 8, where reference numeral 700 is a battery and 710 is a PCM (Protect Circuit Module) for protecting the battery (700).

[0060] For example, the battery (700) may be lithium ion battery, where the PCM (710) removes the risk of explosion, protects against the over-charge and over-discharge, interrupts the short-circuit and prevents inflow of over-current.

[0061] In a battery pack (720) formed with the batteries (700), the PCM (710) is mounted with the SMT type loop antenna (124) of NFC antenna unit (120), and the battery (700) and an upper surface of the PCM (710) are positioned with the relay unit (140) to be integrally molded to form the battery pack (720).

[0062] FIGS. 10 through 13 are schematic views illustrating configurations in which a ferrite sheet is formed at a magnetic field relay unit of an NFC antenna according to still further exemplary embodiments of the present invention.

[0063] Referring to FIGS. 10 through 13, a separate ferrite sheet (800) may be attached to the relay unit (140) to increase the intensity of magnetic field generated by the loop antenna (144) of the relay unit (140), whereby the reader (110) can increase the recognition distance of the NFC chip (100).


[0064] While the present invention has been particularly shown and described with reference to exemplary embodiments thereof, the general inventive concept is not limited to the above-described embodiments. It will be understood by those of ordinary skill in the art that various changes and variations in form and details may be made therein without departing from the spirit and scope of the present invention as defined by the following claims.

Claims


1. A case (400, 410) for a portable wireless terminal, the case (400, 410) having a surface and comprising a relay unit (140) attached to the surface, wherein the relay unit (140) comprises a closed circuit with a loop antenna (144) and a capacitor (142) for providing a resonance to relay a transmission signal of an external reader (110) and an NFC antenna unit (120) of the portable wireless terminal. 20
2. A case according to claim 1, further comprising a battery pack (720) attachable to and detachable from the portable wireless terminal. 25
3. A case according to claim 1 or 2, **characterized in that** the loop antenna (144) is formed at a PCM (Protect Circuit Module) inside a battery pack (720), and the relay unit (140) is integrally formed to be attached to the battery pack. 30
4. A case according to any of the preceding claims, **characterized in that** the loop antenna is an SMT (Surface Mount Technology) type in which loop antenna patterns are formed at a plurality of sheets. 35
5. A case according to preceding claim, **characterized in that** the plurality of sheets formed with the loop antenna pattern are stacked and the loop antenna patterns are mutually connected through a via hole. 40
6. A case according to any of the preceding claims, **characterized in that** loop antenna patterns are formed on an upper surface of a film (200), and the capacitor is interconnected across the loop antenna patterns of the relay unit (140). 45
7. A case according to the preceding claim, **characterized in that** a distal end and an other distal end of the capacitor are oppositely printed on an upper surface and a rear surface of the film, and a distal end 50
8. A case according to claim 6 or 7, **characterized in that** the film (200) is attached to the surface of the case, in particular glued to the surface. 55
9. A case according to any of the preceding claims, further comprising a ferrite sheet (800), which is attached to the relay unit (140).
10. A case according to any of the preceding claims, **characterized in that** the relay unit (140) attached to the inner surface of the case.
11. A case according to claim 1 - 9, **characterized in that** the relay unit (140) attached to the outer surface of the case.
12. A battery pack (720) configured to be attachable to and detachable from a portable wireless terminal, comprising a relay unit (140) integrally formed with the battery pack, wherein the relay unit comprises a closed circuit with a loop antenna and a capacitor for providing a resonance to relay a transmission signal of an external reader and an NFC antenna unit of the portable wireless terminal.
13. A battery pack according to claim 12, further comprising a ferrite sheet (800), which is attached to the relay unit (140).

pattern and the other distal end pattern are electrically connected across the loop antenna patterns of the relay unit.


【Figure 1】

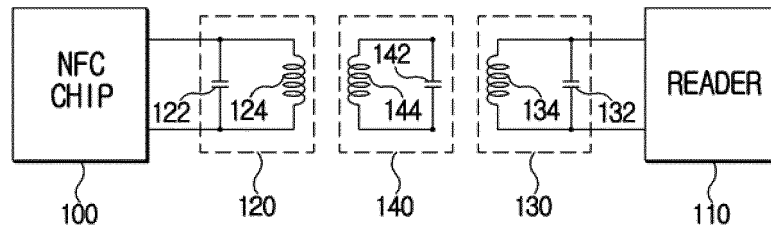


【Figure 2】

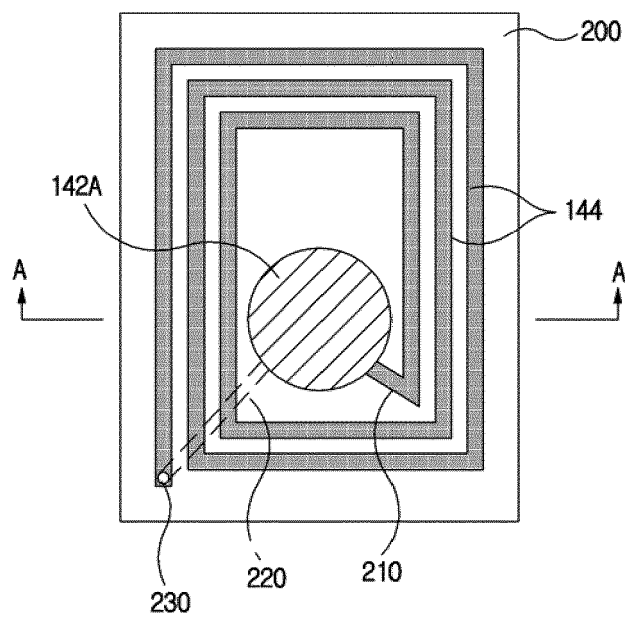


【Figure 3】

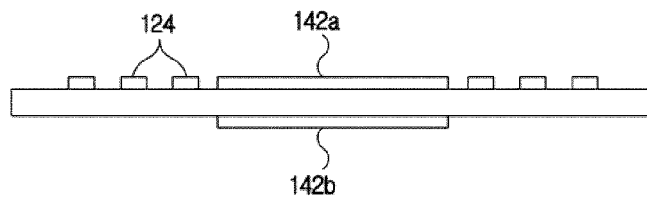


【Figure 4】

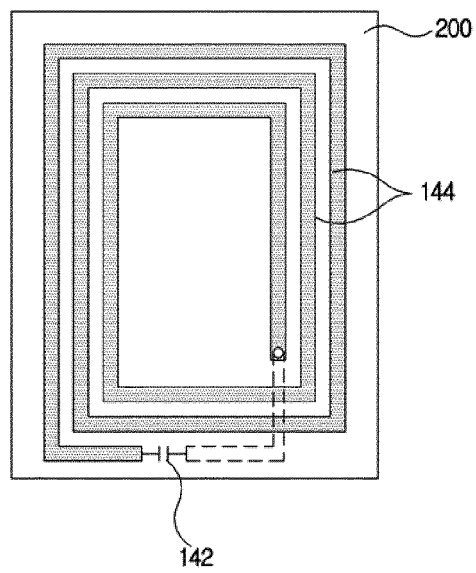


【Figure 5】

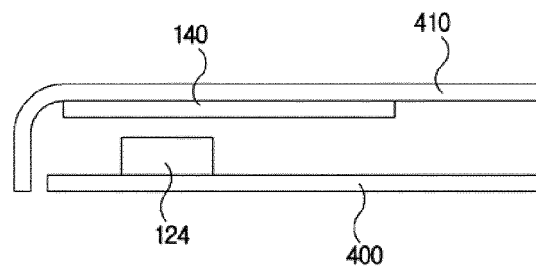


【Figure 6】

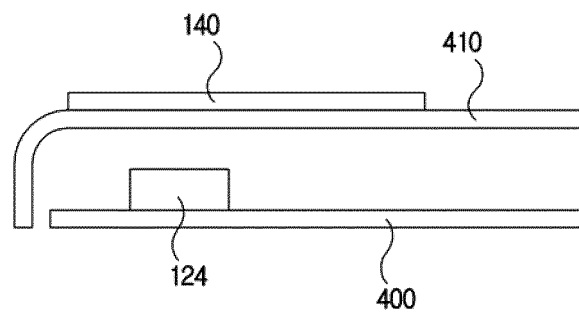


【Figure 7】

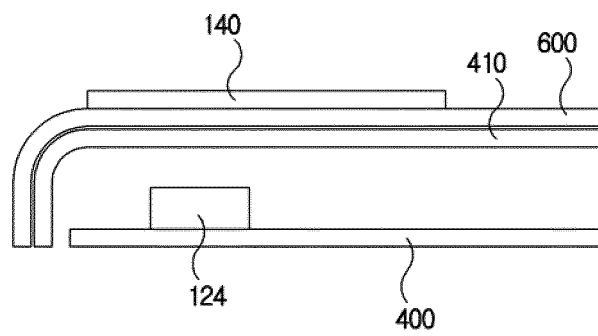


【Figure 8】

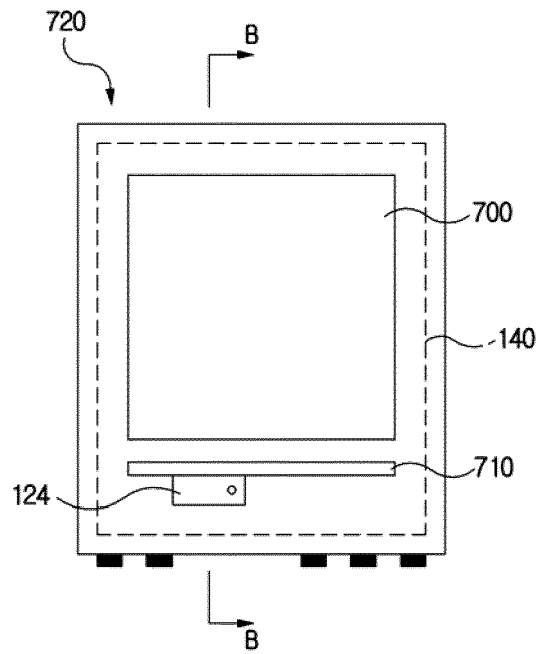


【Figure 9】

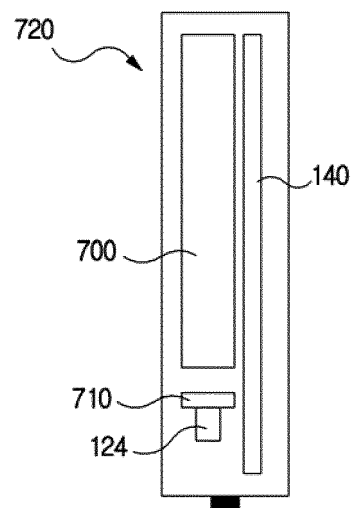


【Figure 10】

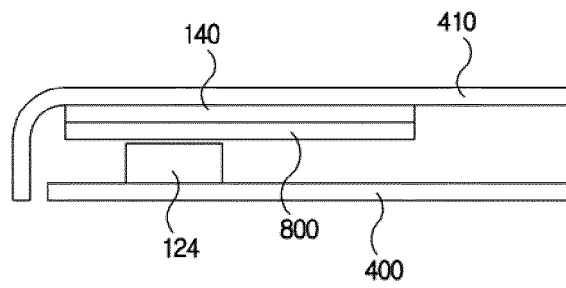


【Figure 11】

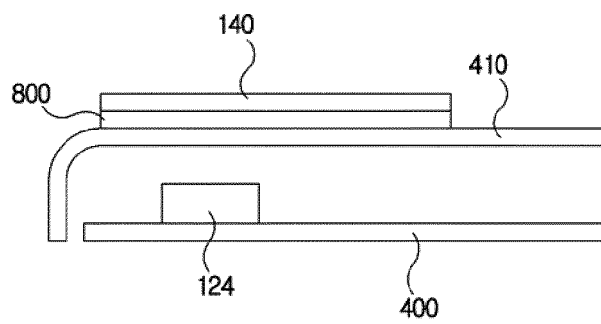

【Figure 12】

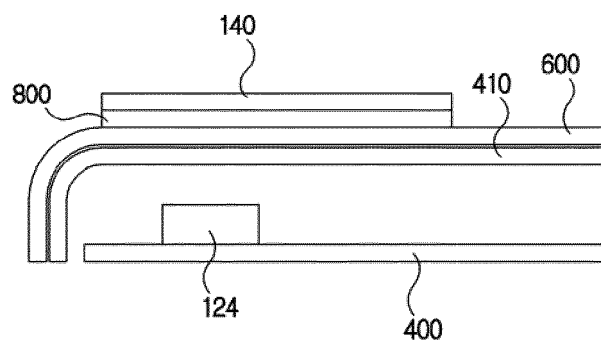

【Figure 13】

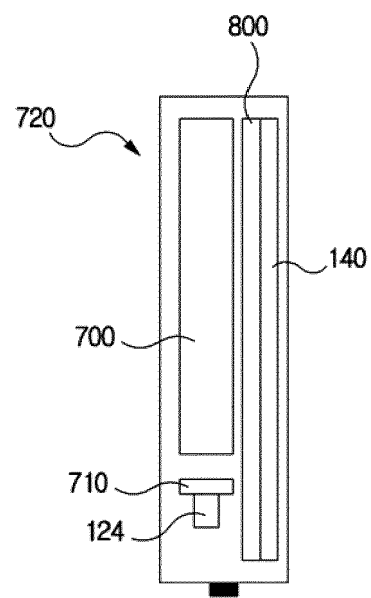



EUROPEAN SEARCH REPORT

Application Number
EP 14 16 6585

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	EP 1 662 428 A2 (TOSHIBA KK [JP]) 31 May 2006 (2006-05-31)	1,2,4-11	INV. H01Q1/24
Y	* paragraphs [0002], [0008], [0021], [0053], [0056]; figures 1,2,9,10 *	3,12,13	G06K19/077 H01Q7/00 G06K19/07 H01Q1/22
X	JP 2008 306689 A (TAMURA SEISAKUSHO KK) 18 December 2008 (2008-12-18) * the whole document *	1,2,6,8-11	
Y	EP 1 439 487 A2 (HITACHI LTD [JP]) 21 July 2004 (2004-07-21) * paragraphs [0001], [0002], [0003], [0006], [0022], [0024], [0029]; figures 1,3 *	3,12,13	
A	JP 2003 249814 A (TECDIA CO LTD) 5 September 2003 (2003-09-05) * figure 4 *	7	
			TECHNICAL FIELDS SEARCHED (IPC)
			G06K H01Q
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 30 June 2014	Examiner Moumen, Abderrahim
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 14 16 6585

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

30-06-2014

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 1662428 A2	31-05-2006	CN 1783894 A	07-06-2006
		EP 1662428 A2	31-05-2006
		JP 4649183 B2	09-03-2011
		JP 2006157603 A	15-06-2006
		KR 20060060545 A	05-06-2006
		US 2006116168 A1	01-06-2006
		US 2009017882 A1	15-01-2009

JP 2008306689 A	18-12-2008	JP 4955465 B2	20-06-2012
		JP 2008306689 A	18-12-2008

EP 1439487 A2	21-07-2004	EP 1439487 A2	21-07-2004
		JP 2004227046 A	12-08-2004
		US 2004140896 A1	22-07-2004

JP 2003249814 A	05-09-2003	NONE	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82