



(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
20.08.2014 Bulletin 2014/34

(51) Int Cl.:
B25D 16/00 (2006.01)

(21) Application number: **13840136.9**

(86) International application number:
PCT/CN2013/085366

(22) Date of filing: **17.10.2013**

(87) International publication number:
WO 2014/090041 (19.06.2014 Gazette 2014/25)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME

(72) Inventor: **The designation of the inventor has not yet been filed**

(74) Representative: **Peterreins, Frank et al**
Fish & Richardson P.C.
Highlight Business Towers
Mies-van-der-Rohe-Strasse 8
80807 München (DE)

(30) Priority: **11.12.2012 CN 201210531228**

(71) Applicant: **Zhejiang Benyu Tools Co. Ltd.**
Zhejiang 318000 (CN)

(54) **TRANSMISSION SWITCHING DEVICE OF ELECTRIC HAMMER**

(57) The present invention discloses a transmission switching device for electric hammers, comprising an intermediate shaft provided thereon with an intermediate shaft gear, a transmission gear, pendulum bar bearings, and an intermediate shaft sleeve. The transmission gear extends outward to form a connection portion sleeved on one end of the intermediate shaft sleeve. The pendulum bar bearings are sleeved on the connection portion and the intermediate shaft sleeve, respectively. Keyway fitting structures are provided between the other end of the intermediate shaft sleeve and the intermediate shaft, the

connection portion and the pendulum bar bearings. On the outer peripheral side of the intermediate shaft sleeve, provided is a displacement bearing, the inner ring of which is the intermediate shaft sleeve while the outer ring of which is provided with a groove inside which a gearshift is connected. The present invention has the following advantages: the transmission mechanism and the gearshift are relatively still, so that there is no friction, wear, heat and oil leakage therebetween, resulting in prolonged service life, reduced amount of maintenance, no tooth breakage and high working efficiency.

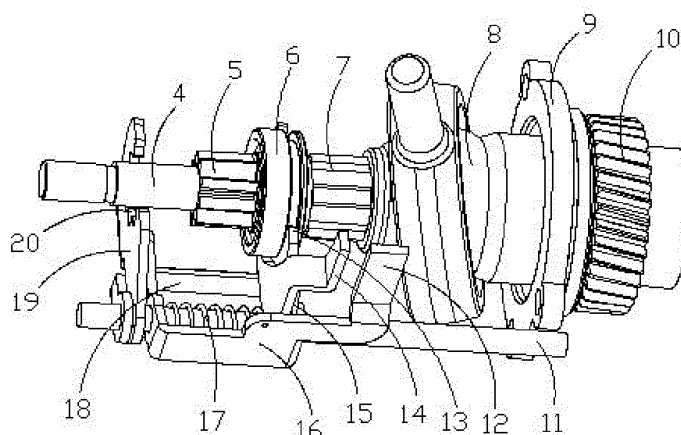


FIG. 2

Description

Technical Field of the Invention

[0001] The present invention relates to electric hammers, in particular to a transmission switching mechanism provided in the electric hammers to drive the electric hammers to complete impacting and drilling operations.

Background of the invention

[0002] Chinese Utility Model Patent No. 201120173533.1 disclosed a transmission mechanism for electric tools, comprising: a shaft driven by a driving mechanism of the electric tools, the shaft comprising a first shaft portion, a second shaft portion and a driving portion disposed between the first shaft portion and the second shaft portion; a gear disposed on the first shaft portion, the gear sliding along the extension direction of the shaft with respect to the first shaft portion, driving members fitted with each other being provided between the gear and the driving portion of the shaft; and a pendulum bar bearing disposed on the second shaft portion, the pendulum bar bearing comprising an inner ring and an outer ring, a raceway between the inner ring and the outer ring being incline disposed with respect to the second shaft portion, driving members fitted with each other being provided between the inner ring and the driving portion, a pendulum bar extending in the inclined plane of the slideway being provided on the outer ring.

[0003] In the structure of such transmission mechanism for electric tools, the intermediate shaft is of a split structure. That is, the intermediate shaft is formed by arranging the first shaft portion and the second shaft portion coaxially. A concave-convex fitting structure is provided between two close end parts of the two shaft portions so that the two shaft portions are fitted with each other by the concave-convex fitting structure to achieve power transmission between the first shaft portion and the second shaft portion. The first shaft portion is circumferentially and fixedly sleeved with a gear and a gear toggle mechanism in the transmission mechanism is directly contact-coupled to the gear, so that the gear toggle mechanism toggles the gear to slide axially on the first shaft portion. During the drilling operation of electric tools with such a transmission mechanism, the gear, as the main transmission part, is always rotating, while the gear toggle mechanism contact-coupled to the gear is relatively still. A large amount of heat will be produced because of friction between the gear toggle mechanism and the gear to lead to the increase of the temperature of the lubricant inside the electric tools, while the flowing of the lubricant will lead to the increase of the overall temperature of the electric tools. On one hand, this may deform the plastic shell; on the other hand, this may also affect the overall sealing effect of the electric tools so that the leakage of lubricant is likely to occur, and as a result, the electric hammers may get dirty after used for a period of

time. In addition, due to the direct contact between the gearshift and the gear, they will be severely worn over long time operation, thus wearing parts need to be frequently replaced and this will influence the operating sensibility of the gear toggle mechanism.

Summary of the Invention

[0004] To overcome the above drawbacks, a technical problem to be solved in the present invention is to provide a transmission switching device for electric hammers, the use of which may effectively improve the operating reliability of the electric hammers.

[0005] To solve the technical problem, the present invention provides the following technical solutions: a transmission switching device for electric hammers is provided, comprising a transmission mechanism, a gearshift and a knob connected with the gearshift, the transmission mechanism comprising an intermediate shaft provided thereon with an intermediate shaft gear, the intermediate shaft being provided with a transmission gear at one end and a pendulum bar bearing between the transmission gear and the intermediate shaft gear; the intermediate shaft is sleeved with a clearance therebetween with an intermediate shaft sleeve between the transmission gear and the intermediate shaft gear; a side face of the transmission gear, close to the intermediate shaft gear, extends outward to form connection portion sleeved with a clearance therebetween on the outer peripheral side of one end of the intermediate shaft sleeve far away from the intermediate shaft gear; an end of the pendulum bar gear, close to the transmission gear, is sleeved with a clearance therebetween on the outer peripheral side of the connection portion, while the other end of the pendulum bar bearing is sleeved with a clearance therebetween on the intermediate shaft sleeve; keyway fitting structures that fit each other are provided between the inner peripheral surface of the other end of the intermediate shaft sleeve and the intermediate shaft, between the outer peripheral surface of one end of the intermediate shaft sleeve and the inner peripheral surface of the connection portion, and between the inner peripheral surface of the other end of the pendulum bar bearing and the intermediate shaft sleeve; on the peripheral side of the other end of the intermediate shaft sleeve, provided is a displacement bearing, the inner ring of which is the intermediate shaft sleeve while the outer ring of which is provided with a groove inside which the gearshift is connected. The large gear in the electric hammers is connected with the intermediate shaft gear and the drill bit shaft, respectively, and the large gear may drive the drill bit shaft to rotate so that the electric hammers achieve drilling. The pendulum bar on the pendulum bar bearing is axially and obliquely disposed with respect to the pendulum bar bearing and connected to a cylinder rod that is connected with the drill bit shaft of the electric hammers. The rotation of the pendulum bar bearing drives the cylinder to act so as to realize impacting of the electric

hammers. The displacement action resulted from the rotation of the knob causes the intermediate shaft sleeve to move back and forth along the intermediate shaft via the gearshift to change the connection way in the transmission mechanism, so that the electrical hammers are allowed to switch among three operating modes, i.e., impacting, drilling and synchronization of impacting and drilling. The gearshift is contact-coupled to the displacement bearing, regardless of whether the intermediate shaft sleeve rotates, the gearshift and the outer ring of the shifting bearing are always relatively still, so there is no friction or wear and thus no heat. The problems in the prior art are fundamentally overcome.

[0006] Preferably, the outer ring of the displacement bearing axially extends outward along the intermediate shaft; the clearance between the inner peripheral surface of the extended portion on the outer ring and the outer peripheral surface of the intermediate shaft sleeve is far less than the diameter of a roll ball; and the groove is located on the outer peripheral surface of the extended portion. As a result, the outer ring of the displacement bearing is relatively large, facilitating the disposition of a structure for coupling to the gear toggle mechanism on the outer ring. The displacement bearing has good stability on the intermediate shaft sleeve, so that the outer ring in the displacement bearing may maintain good position stability during the rotation of the intermediate shaft sleeve.

[0007] Preferably, the inner diameter of the other end of the intermediate shaft sleeve is less than the outer diameter of the intermediate shaft gear and the outer diameter of the displacement bearings is greater than the inner diameter of the other end of the pendulum bar bearing. This facilitates the limit of the intermediate shaft sleeve when it axially moves back and forth on the intermediate shaft.

[0008] The keyway fitting structure may be a single-keyway fitting structure, a double-keyway fitting structure or a cotterway fitting structure, preferably, a spline fitting structure. The spline fitting structure facilitates the switch of connection ways between the key and the slot and it is also advantageous to the stationarity of transmission.

[0009] Preferably, the distance from the end face of an inner end of a spline structure on the inner peripheral surface of the connection portion to the outer end face of a spline structure on the inner peripheral surface of the other end of the pendulum bar bearing is less than the maximum distance from the end face of inner end of the spline structure on the inner peripheral surface of the connection portion to the end face close to one end of the connection portion of a spline structure by which the intermediate shaft sleeve is fitted with the pendulum bar bearing, and the space between two opposite end faces of two spline structures on the outer peripheral surface of the intermediate shift sleeve is greater than the length of a spline structure on the pendulum bar bearing. In this way, when the intermediate shaft sleeve moves to be resisted against the intermediate shaft gear, the spline

connection between the pendulum bar bearing and the intermediate shaft sleeve may be released to realize simply the drilling mode of the electric hammer.

[0010] Preferably, the minimum distance from the end face of the inner end of the spline structure on the inner peripheral surface of the connection portion to the end face of the other end of the intermediate shaft sleeve is less than the distance from the end face of the inner end of the spline structure on the inner peripheral surface of the connection portion to the end face of one end of the spline structure on the intermediate shaft close to the connection portion. In this way, when the intermediate shaft sleeve moves to be resisted against the pendulum bar bearing, the spline connection between the intermediate shaft sleeve and the intermediate shaft may be released to realize simply the impacting mode of the electric hammer.

[0011] Preferably, the pendulum bar bearing is provided with a positioning bearing on one side close to the transmission gear, the inner ring of the pendulum bar bearing being integrated with the inner ring of the positioning bearing, the outer ring of the positioning bearing extending outward to form a positioning plate that is in fixed connection with a positioning seat of an electric hammer. Then, the outside of the pendulum bar bearing is provided with a positioning bearing sharing the inner ring with the pendulum bar bearing, so that the pendulum bar bearing may rotate circumferentially and meanwhile be effectively positioned axially.

[0012] Preferably, the gearshift comprises a first toggle member, a second toggle member, a clamping member, a pin shaft and a spring; the pin shaft is arranged to be parallel to the intermediate shaft; two ends of both the first toggle member and the second toggle member extend along one side respectively to form side walls, so that both the first toggle member and the second toggle member are U-shaped as a whole; the pin shaft passes through the two side walls of the first toggle member and the second toggle member, respectively, with a clearance therebetween, one side wall of the first toggle member being located between the two side walls of the second toggle member while the other side wall of the first toggle member being located on the outside of one side wall of the second toggle member; the spring is sleeved on the pin shaft with a clearance therebetween, one end of the spring being resisted against one side wall of the first toggle member while the other end of the spring being resisted against one side wall of the second toggle member; one end of the clamping member is sleeved on the pin shaft with a clearance therebetween while the other end of the clamping member is provided with a forked foot fitted with the groove, the forked foot being clamped into the groove, the clamping member being located between the other side wall of the first toggle member and one side wall of the second toggle member; and, the first toggle member extends towards the outside of the other side wall to form a first L-shaped toggle foot and the second toggle member extends towards the outside of one

side wall to form a second N-shaped toggle foot, a toggle rod offset by the knob being connected between the first toggle foot and the second toggle foot. The offset toggle rod generates a displacement due to the rotation of the knob. The displacement of the toggle rod is transferred to the clamping member via the spring to push the intermediate shaft sleeve to axially move back and forth along the intermediate shaft and thus to change the connection relation between the spline structure on the intermediate shaft sleeve and the spline structures on the intermediate shaft, the pendulum bar bearing and the connection portion, further to realize functions of drilling, hammering, and synchronization of drilling and hammering. As the spring has good elasticity controllability and fast response speed so that it may push the intermediate shaft sleeve to act instantaneously, there is no tooth breakage when the spline fitting structures restore to be engaged with each other. Consequently, the service life of various fitting members can be prolonged and no manual adjustment of the operating personnel is required during the gear shifting, so that the working efficiency is improved and the personal safety of the operating personnel is ensured.

[0013] Preferably, between one side wall of the first toggle member and the other side wall of the second toggle member, the pin shaft is also provided with a positioning member, one end of which is sleeved on the pin shaft with a clearance therebetween while the other end of which is provided with a tooth groove fitted with the profile of teeth of the intermediate shaft gear. In the hammering state of the electric hammer, the tooth groove of the positioning member is engaged with the intermediate shaft gear so as to ensure that the intermediate shaft gear will not rotate and thus to improve the quality of work.

[0014] Therefore, the present invention has the following advantages. First, as the intermediate gear has no friction with the gear toggle mechanism during the transmission, the first bearing generates a small amount of friction heat during the rotation so that a large amount of heat will not be generated inside the electric hammer when the electric hammer operates in the drilling mode. This will help maintain the shape of the plastic shell of the electric hammer and the whole electric hammer is not likely to get hot. As the temperature of lubricant will not increase a lot during the operating of the electric hammer, the sealing performance of the liquid sealing structure inside the electric hammer will not be greatly influenced and the electric hammer is no likely to suffer oil leakage. Therefore, the service life of the electric hammer can be prolonged effectively and thus frequent maintenance to the electric hammer is not required. The gear toggle mechanism will not have friction with the intermediate gear during the operating of the electric hammer, thus the gear toggle mechanism has low wear and the operating sensibility of the gear toggle mechanism can be effectively ensured.

[0015] Second, the present invention has simple structure, rational design and convenient manufacturing, and

may complete gear shifting even the electric hammer does not shut down. This may not only avoid tooth breakage, but also ensure the personal safety of the operating personnel. Thus both the productivity and the quality of work are improved.

Brief Description of the Drawings

[0016]

Fig. 1 is a sectional view of an electric hammer with the transmission switching device according to the present invention;

Fig. 2 is a three-dimensional view of the transmission switching device according to the present invention; and,

Fig. 3 is a sectional view of the transmission mechanism according to the present invention.

[0017] In the drawings: 1-Transmission mechanism; 2-Gearshift; 3-Positioning seat; 4-Intermediate shaft; 5-Intermediate shaft gear; 6-Displacement bearing; 7-Intermediate shaft sleeve; 8-Pendulum bearing; 9-Positioning bearing; 10-Transmission gear; 11-Pin shaft; 12-First toggle foot; 13-Forked foot; 14-Second toggle foot; 15-Clamping member; 16-First toggle member; 17-Spring; 18-Second toggle member; 19-Positioning member; 20-Tooth groove; 21-Groove; 22-Connection portion; 23-Positioning plate; 24-Extended portion.

Detailed Description of the Invention

[0018] The technical solutions of the present invention will be further described in details as below by preferred embodiments with reference to the accompanying drawings.

Embodiment

[0019] As shown in Fig.1, the transmission switching device for electric hammers of the present invention is disposed in an electric hammer, comprising a transmission mechanism 1, gearshift 2 and a knob connected with the gearshift 2 (not shown).

[0020] As shown in Fig. 2 and Fig. 3, the transmission mechanism 1 includes an intermediate shaft 4 on which an intermediate shaft gear 5 integrated with the intermediate shaft 4 is provided. The intermediate shaft 4 is provided with a transmission gear 10 at one end and a pendulum bar bearing 8 between the transmission gear 10 and the intermediate shaft gear 5. The intermediate shaft 4 is sleeved with a clearance therebetween with an intermediate shaft sleeve 7 between the transmission gear 10 and the intermediate shaft gear 5; one side face of the transmission gear 10, close to the intermediate shaft gear 5, extends outward to form connection portion 22 sleeved with a clearance therebetween on the outer peripheral side of one end of the intermediate shaft sleeve

7 far away from the intermediate shaft gear 5; an end of the pendulum bar gear 8, close to the transmission gear 10, is sleeved with a clearance therebetween on the outer peripheral side of the connection portion 22, while the other end of the pendulum bar bearing 8 is sleeved with a clearance therebetween on the intermediate shaft sleeve 7; keyway fitting structures that fit each other are provided between the inner peripheral surface of the other end of the intermediate shaft sleeve 7 and the intermediate shaft 4, between the outer peripheral surface of one end of the intermediate shaft sleeve 7 and the inner peripheral surface of the connection portion 22, and between the inner peripheral surface of the other end of the pendulum bar bearing 8 and the intermediate shaft sleeve 7. The distance from the end face of an inner end of a spline structure on the inner peripheral surface of the connection portion 22 to the outer end face of a spline structure on the inner peripheral surface of the other end of the pendulum bar bearing 8 is less than the maximum distance from the end face of the inner end of the spline structure on the inner peripheral surface of the connection portion 22 to the end face close to one end of the connection portion 22 of a spline structure by which the intermediate shaft sleeve 7 is fitted with the pendulum bar bearing 8, and the space between two opposite end faces of two spline structures on the outer peripheral surface of the intermediate shift sleeve 7 is greater than the length of a spline structure on the pendulum bar bearing 8; and the minimum distance from the end face of the inner end of the spline structure on the inner peripheral surface of the connection portion 22 and the end face of the other end of the intermediate shaft sleeve 7 is less than the distance from the end face of the inner end of the spline structure on the inner peripheral surface of the connection portion 22 to the end face of one end of the spline structure on the intermediate shaft 4 close to the connection portion 22. The inner diameter of the other end of the intermediate shaft sleeve 7 is less than the outer diameter of the intermediate shaft gear 5. On the peripheral side of the other end of the intermediate shaft sleeve 7, provided is a displacement bearing 6, the inner ring of which is the intermediate shaft sleeve 7. The outer ring of the displacement bearing 6 axially extends outward towards one side of the pendulum bar bearing 8 along the intermediate shaft 4; the clearance between the inner peripheral surface of the extended portion 24 on the outer ring and the outer peripheral surface of the intermediate shaft sleeve 7 is far less than the diameter of a roll ball; the outer diameter of the displacement bearing 6 is greater than the inner diameter of the other end of the pendulum bar bearing 8; and the groove 21 is located on the outer peripheral surface of the extended portion 24.

[0021] As shown in Fig.2, the gearshift comprises a first toggle member 16, a second toggle member 18, a clamping member 15, a pin shaft 11 and a spring 17; the pin shaft 11 is arranged to be parallel to the intermediate shaft 4; two ends of both the first toggle member 16 and

the second toggle member 18 extend along one side respectively to form side walls, so that both the first toggle member 16 and the second toggle member 18 are U-shaped as a whole; the pin shaft 11 passes through the two side walls of the first toggle member 16 and the second toggle member 18, respectively, with a clearance therebetween, one side wall of the first toggle member 16 being located between the two side walls of the second toggle member 18, while the other side wall of the first toggle member 16 being located on the outside of one side wall of the second toggle member 18; the spring 17 is sleeved on the pin shaft 11 with a clearance therebetween, one end of the spring 17 being resisted against one side wall of the first toggle member 16 while the other end of the spring 17 being resisted against one side wall of the second toggle member 18; one end of the clamping member 15 is sleeved on the pin shaft 11 with a clearance therebetween while the other end of the clamping member 15 is provided with a forked foot 13 fitted with the groove 21, the forked foot 13 being clamped into the groove 21; the clamping member 15 is located between the other side wall of the first toggle member 16 and one side wall of the second toggle member 18; and, the first toggle member 16 extends towards the outside of the other side wall to form a first L-shaped toggle foot 12 and the second toggle member 18 extends towards the outside of one side wall to form a second N-shaped toggle foot 14, a toggle rod offset by the knob being connected between the first toggle foot 12 and the second toggle foot 14. Between one side wall of the first toggle member 16 and the other side wall of the second toggle member 18, the pin shaft 11 is also provided with a positioning member 19, one end of which is sleeved on the pin shaft 11 with a clearance therebetween while the other end of which is provided with a tooth groove 20 fitted with the profile of teeth of the intermediate shaft gear 5.

[0022] As shown in Fig. 1, Fig. 2 or Fig. 3, one side of the pendulum bar bearing 8, close to the transmission gear 10, is provided with a positioning bearing 9, and the inner ring of the pendulum bar bearing 8 is integrated with the inner ring of the positioning bearing 9 while the outer ring of the positioning bearing 9 extends outward to form a positioning plate 23 that is in fixed connection with a positioning seat 3 for the electric hammer.

[0023] In the electric hammer, the intermediate shaft gear 5 is engaged with a large gear that is in fixed connection with the drill bit shaft of the electric hammer, and the pendulum bar on the pendulum bar bearing 8 is connected with a cylinder connected to the drill bit shaft of the electric hammer.

[0024] The operating principles of the transmission switching device for electric hammers are as follows: the offset toggle rod generates a displacement due to the rotation of the knob; the displacement of the toggle rod is transferred to the first toggle member 16 via the first toggle foot 12, then transferred from the first toggle member 16 to the second toggle member 18 via the spring 17, and then transferred from the second toggle member

18 to a forked foot 13 via the clamping member 15; and, as the forked foot 13 is clamped into the groove 21 of the displacement bearing 6, the intermediate shaft sleeve 7 is pushed to move towards one side of the pendulum bar bearing 8, and simultaneously, the positioning member 19 moves in the same direction as the intermediate shaft sleeve 7 under the driving of the second toggle member 18. Alternatively, the displacement of the toggle rod is transferred to the second toggle member 18 via the second toggle foot 14, then transferred from the second toggle member 18 to the first toggle member 16 via the spring 17, and then transferred from the first toggle member 16 to the forked foot 13 via the clamping member 15; and, as the forked foot 13 is clamped into the groove 21 of the displacement bearing 6, the intermediate shaft sleeve 7 is pushed to move towards one side of the intermediate shaft gear 5, and simultaneously the positioning member 19 moves in the same direction as the intermediate shaft sleeve 7 under the driving of the first toggle member 16. When the intermediate shaft sleeve 7 moves to be resisted against the pendulum bar bearing 8, the spline connection between the intermediate shaft sleeve 7 and the intermediate shaft 4 is released, the tooth groove 20 on the positioning member 19 is engaged with the intermediate shaft gear 5, and the intermediate shaft sleeve 7 is engaged with the pendulum bar bearing 8 and the transmission gear 10 only. In this way, the power of the transmission gear 10 is transferred to the pendulum bar 8 only, and the pendulum bar on the pendulum bar bearing 8 thus pushes the drill bit shaft of the electric hammer to realize simply the impacting mode. When the intermediate shaft sleeve 7 moves to be resisted against the intermediate shaft gear 5, the spline connection between the pendulum bar bearing 8 and the intermediate shaft sleeve 7 is released, the tooth groove 20 on the positioning member 19 is disengaged from the intermediate shaft gear 5, and the intermediate shaft sleeve 7 is engaged with the intermediate shaft 4 and the transmission gear 10 only. In this way, the power of the transmission gear 10 is transferred to the intermediate shaft 4 only, and then transferred from the intermediate shaft 4 to the large gear engaged with the intermediate shaft gear 5 via the intermediate shaft gear 5. The rotation of the large gear pushes the drill bit shaft of the electric hammer to realize simply the drilling mode. When the intermediate shaft sleeve 7 is in the intermediate state, the intermediate shaft sleeve 7 is engaged with the intermediate shaft 4, the pendulum bar bearing 8 and the transmission gear 10, respectively, and the tooth groove 20 on the positioning member 19 is disengaged from the intermediate shaft gear 5. In this way, the drill bit shaft of the electric hammer may realize both the hammering mode and the drilling mode. In addition, during the rotation of the intermediate shaft sleeve 7, the outer ring of the displacement bearing 6 and the forked foot 13 are relatively still.

[0025] The embodiments described above are just preferred solutions of the present invention, and shall not be

understood to form any limit in any form to the present invention. Various variants and modifications may be also possible without departing from the technical solutions described in the claims.

[0026] Those contents not described in details in the description belong to the prior art well known by those skilled in the art.

10 Claims

1. A transmission switching device for electric hammers, comprising a transmission mechanism, a gearshift and a knob connected with the gearshift, the transmission mechanism comprising an intermediate shaft provided thereon with an intermediate shaft gear, the intermediate shaft being provided with a transmission gear at one end and a pendulum bar bearing between the transmission gear and the intermediate shaft gear, **characterized in that** the intermediate shaft is sleeved with an intermediate shaft sleeve between the transmission gear and the intermediate shaft gear with a clearance therebetween; a side face of the transmission gear, close to the intermediate shaft gear, extends outward to form connection portion sleeved with a clearance therebetween on the outer peripheral side of one end of the intermediate shaft sleeve far away from the intermediate shaft gear; an end of the pendulum bar bearing, close to the transmission gear, is sleeved with a clearance therebetween on the outer peripheral side of the connection portion, while the other end of the pendulum bar bearing is sleeved with a clearance therebetween on the intermediate shaft sleeve; keyway fitting structures that fit each other are provided between the inner peripheral surface of the other end of the intermediate shaft sleeve and the intermediate shaft, between the outer peripheral surface of one end of the intermediate shaft sleeve and the inner peripheral surface of the connection portion, and between the inner peripheral surface of the other end of the pendulum bar bearing and the intermediate shaft sleeve; on the peripheral side of the other end of the intermediate shaft sleeve, provided is a displacement bearing the inner ring of which is the intermediate shaft sleeve while the outer ring of which is provided with a groove inside which the gearshift is connected.
2. The transmission switching device for electric hammers according to claim 1, **characterized in that** the outer ring of the displacement bearing axially extends outward along the intermediate shaft; the clearance between the inner peripheral surface of the extended portion on the outer ring and the outer peripheral surface of the intermediate shaft sleeve is far less than the diameter of a roll ball; and the groove is positioned on the outer peripheral surface

of the extended portion.

3. The transmission switching device for electric hammers according to claim 2, **characterized in that** the inner diameter of the other end of the intermediate shaft sleeve is less than the outer diameter of the intermediate shaft gear and the outer diameter of the displacement bearing is greater than the inner diameter of the other end of the pendulum bar bearing. 5
4. The transmission switching device for electric hammers according to claims 1 or 2 or 3, **characterized in that** the keyway fitting structures are spline fitting structures. 10
5. The transmission switching device for electric hammers according to claim 4, **characterized in that** the distance from the end face of an inner end of a spline structure on the inner peripheral surface of the connection portion to the outer end face of a spline structure on the inner peripheral surface of the other end of the pendulum bar bearing is less than the maximum distance from the end face of inner end of the spline structure on the inner peripheral surface of the connection portion to the end face close to one end of the connection portion of a spline structure by which the intermediate shaft sleeve is fitted with the pendulum bar bearing, and the space between two opposite end faces of two spline structures on the outer peripheral surface of the intermediate shift sleeve is greater than the length of a spline structure on the pendulum bar bearing. 20 25 30
6. The transmission switching device for electric hammers according to claim 4, **characterized in that** the minimum distance from the end face of the inner end of the spline structure on the inner peripheral surface of the connection portion to the end face of the other end of the intermediate shaft sleeve is less than the distance from the end face of the inner end of the spline structure on the inner peripheral surface of the connection portion to the end face of one end of the spline structure on the intermediate shaft close to the connection portion. 35 40
7. The transmission switching device for electric hammers according to claim 1, **characterized in that** the pendulum bar bearing is provided with a positioning bearing on one side close to the transmission gear, the inner ring of the pendulum bar bearing being integrated with the inner ring of the positioning bearing, the outer ring of the positioning bearing extending outward to form a positioning plate that is in fixed connection with a positioning seat of an electric hammer. 50
8. The transmission switching device for electric hammers according to claims 1, 2, 3, or 7, **characterized** 55

in that the gearshift comprises a first toggle member, a second toggle member, a clamping member, a pin shaft and a spring; the pin shaft is arranged to be parallel to the intermediate shaft; two ends of both the first toggle member and the second toggle member extend along one side respectively to form side walls, so that both the first toggle member and the second toggle member are U-shaped as a whole; the pin shaft passes through the two side walls of the first toggle member and the second toggle member, respectively, with a clearance therebetween; one side wall of the first toggle member being located between the two side walls of the second toggle member while the other side wall of the first toggle member being located on the outside of one side wall of the second toggle member; the spring is sleeved on the pin shaft with a clearance therebetween, one end of the spring being resisted against one side wall of the first toggle member, while the other end of the spring being resisted against one side wall of the second toggle member; one end of the clamping member is sleeved on the pin shaft with a clearance therebetween while the other end of the clamping member is provided with a forked foot fitted with the groove, the forked foot being clamped into the groove, the clamping member being located between the other side wall of the first toggle member and one side wall of the second toggle member; and, the first toggle member extends towards the outside of the other side wall to form a first L-shaped toggle foot and the second toggle member extends towards the outside of one side wall to form a second N-shaped toggle foot, a toggle rod offset by the knob being connected between the first toggle foot and the second toggle foot.

9. The transmission switching device for electric hammers according to claim 8, **characterized in that**, between one side wall of the first toggle member and the other side wall of the second toggle member, the pin shaft is also provided with a positioning member, one end of which is sleeved on the pin shaft with a clearance therebetween while the other end of which is provided with a tooth groove fitted with the profile of teeth of the intermediate shaft gear. 45

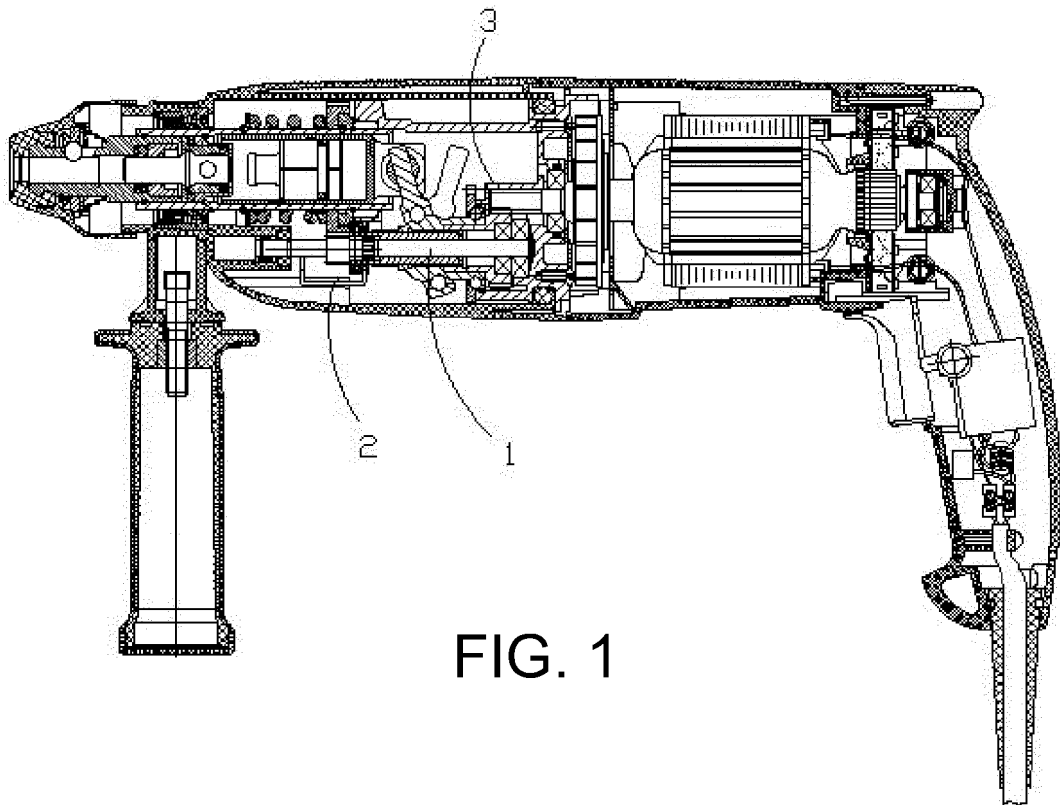


FIG. 1

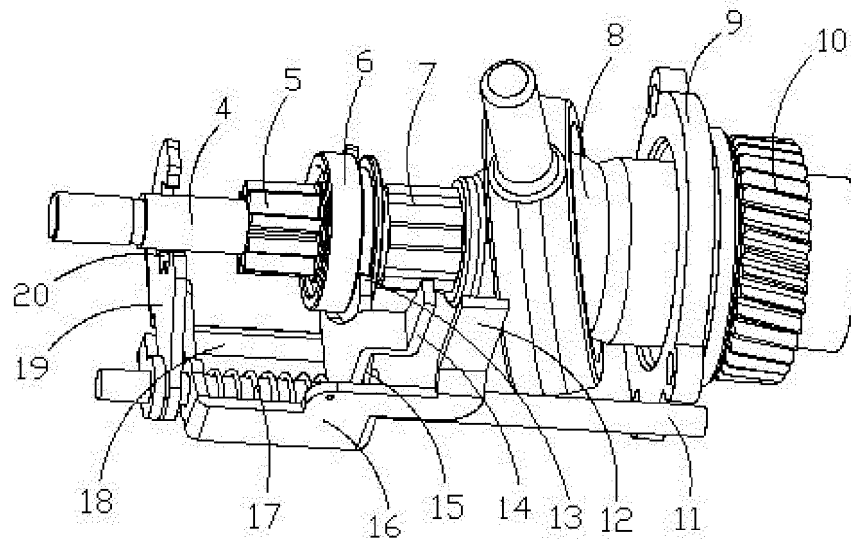


FIG. 2

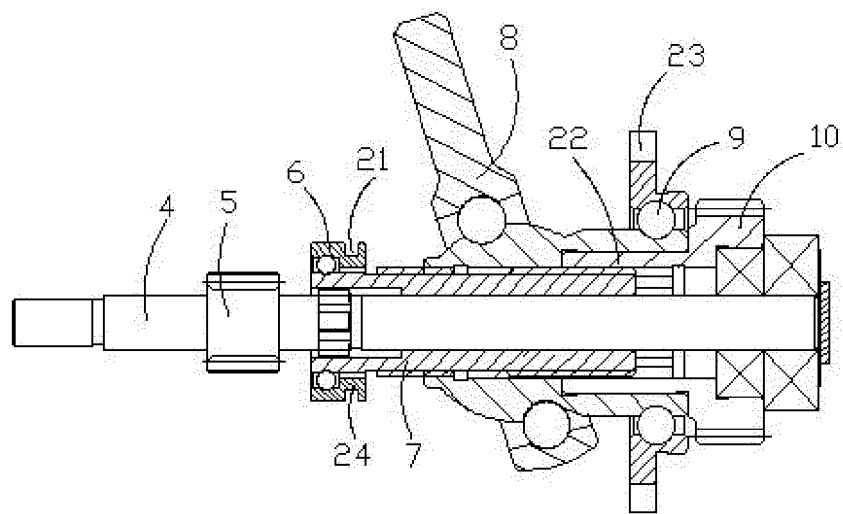


FIG. 3

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2013/085366

A. CLASSIFICATION OF SUBJECT MATTER

See the extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: B25D, B23B, B25F, F16H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI; EPODOC; CNPAT; CNKI: shift, hammer, gear, heat; transmission, switch, gear, bearing, wear, friction

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	CN 202318260 U (BOSCH POWER TOOLS (CHINA) CO., LTD.), 11 July 2012 (11.07.2012), see description, pages 3-10, and figures 1, 2a-2c, 3a-3c, 4a-4c and 5a-5b	1-19
A	CN 102794751 A (BOSCH POWER TOOLS (CHINA) CO., LTD.), 28 November 2012 (28.11.2012), see description, pages 3-10, and figures 1, 2a-2c, 3a-3c, 4a-4c and 5a-5b	1-19
A	CN 1621205 A (ROBERT BOSCH GMBH), 01 June 2005 (01.06.2005), see the whole document	1-19
A	CN 101312807 A (ROBERT BOSCH GMBH), 26 November 2008 (26.11.2008), see the whole document	1-19
A	CN 2707439 Y (HAMMER ELECTRIC POWER TOOLS COMPANY), 6 July 2005 (06.07.2005), see the whole document	1-19

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search
22 November 2013 (22.11.2013)Date of mailing of the international search report
16 January 2014 (16.01.2014)Name and mailing address of the ISA/CN:
State Intellectual Property Office of the P. R. China
No. 6, Xitucheng Road, Jimenqiao
Haidian District, Beijing 100088, China
Facsimile No.: (86-10) 62019451

Authorized officer

LI, Xingxing

Telephone No.: (86-10) 62085398

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2013/085366

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP 7328954 A (HITACHI KOKI KK), 19 December 1995 (19.12.1995), see the whole document	1-9
P, X	CN 102975174 A (ZHEJIANG BENYU TOOLS CO., LTD.), 20 March 2013 (20.03.2013), see claims 1-9, and figures 1-3	1-9
P, X	CN 203045678 U (ZHEJIANG BENYU TOOLS CO., LTD.), 10 July 2013 (10.07.2013), see claims 1-7, description, page 4, and figures 1-3	1-9

Form PCT/ISA/210 (continuation of second sheet) (July 2009)

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2013/085366

Patent Documents referred in the Report	Publication Date	Patent Family	Publication Date
CN 202318260 U	11.07.2012	None	
CN 102794751 A	28.11.2012	WO 2012159559 A1	29.11.2012
CN 1621205 A	01.06.2005	CN 100436076 C	26.11.2008
		DE 10355812 A1	09.06.2005
		GB 2408476 B	25.01.2006
		GB 2408476 A	01.06.2005
		JP 2005161517 A	23.06.2005
CN 101312807 A	26.11.2008	US 2008169111 A1	17.07.2008
		EP 1957240 A1	20.08.2008
		DE 102005056205 A9	16.09.2010
		WO 2007060043 A1	31.05.2007
		JP 2009517227 A	30.04.2009
		CN 101312807 B	16.05.2012
		US 8281872 B2	09.10.2012
		DE 102005056205 A1	06.06.2007
CN 2707439 Y	06.07.2005	None	
JP 7328954 A	19.12.1995	None	
CN 102975174 A	20.03.2013	None	
CN 203045678 U	10.07.2013	None	

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2013/085366

5
10
15
20
25
30
35
40
45
50
55

CONTINUATION OF SECOND SHEET A. CLASSIFICATION OF SUBJECT MATTER

B25D 16/00 (2006.01) i

B25D 17/00 (2006.01) i

F16H 59/02 (2006.01) i

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- CN 201120173533 [0002]