(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) EP 2 770 080 B1

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
14.12.2016 Bulletin 2016/50

(51) Int Cl.:
C22F 1/10 *(2006.01)* ***C22C 19/05*** *(2006.01)*

(21) Application number: **14168514.9**

(22) Date of filing: **28.09.2004**

(54) **Nickel-base alloys and methods of heat treating nickel base alloys**

Nickelbasislegierungen und Verfahren zur Wärmebehandlung von Nickelbasislegierungen

Alliages à base de nickel et procédés de traitement thermique de tels alliages

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LI LU MC NL PL PT RO SE SI SK TR

(30) Priority: **06.10.2003 US 679899**

(43) Date of publication of application:
27.08.2014 Bulletin 2014/35

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
04785174.6 / 1 680 525

(73) Proprietor: **ATI Properties LLC**
Albany OR 97321 (US)

(72) Inventors:
- **Cao, Wei-Di**
  Charlotte, NC North Carolina 28227 (US)
- **Kennedy, Richard L**
  Monroe, NC North Carolina 28112 (US)

(74) Representative: **Potter Clarkson LLP**
The Belgrave Centre
Talbot Street
Nottingham NG1 5GG (GB)

(56) References cited:
EP-A1- 0 147 616 **EP-A2- 0 234 172**
US-A- 3 046 108

- **T Connolley ET AL: "EFFECT OF OXIDATION ON HIGH TEMPERATURE FATIGUE CRACK INITIATION AND SHORT CRACK GROWTH IN INCONEL 7 18", Superalloys 2000, 1 January 2000 (2000-01-01), pages 435-443, XP055142848, Retrieved from the Internet: URL:http://www.tms.org/superalloys/10.7449 /2000/Superalloys_2000_435_444.pdf [retrieved on 2014-09-26]**
- **ANDRIEU E ET AL: "Influence of compositional modifications on thermal stability of alloy 718", SUPERALLOYS 718, 625, 706 AND VARIOUS DERIVATIVES: PROCEEDINGS OF THE INTERNATIONAL SYMPOSIUM ON SUPERALLOYS 718, 625, 706 AND VARIOUS DERIVATIVES, XX, XX, 1994, pages 695-710, XP002969125,**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 770 080 B1

Description

[0001] This patent application is a divisional application of European Patent Application number 04785174.6, which claims methods of heat treating nickel-base alloys, as described herein.

BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

[0002] Embodiments of the present invention generally relate to nickel-base alloys and methods of heat treating nickel-base alloys. More specifically, certain embodiments of the present invention relate to nickel-base alloys having a desired microstructure and having thermally stable mechanical properties (such as one or more of tensile strength, yield strength, elongation, stress-rupture life, and low notch sensitivity). Other embodiments of the present invention relate to methods of heat treating nickel-base alloys to develop a desired microstructure that can impart thermally stable mechanical properties at elevated temperatures, especially tensile strength, stress-rupture life, and low notch-sensitivity, to the alloys.

DESCRIPTION OF RELATED ART

[0003] Alloy 718 is one of the most widely used nickel-base alloys, and is described generally in U.S. Patent No. 3,046,108.

[0004] The extensive use of Alloy 718 stems from several unique features of the alloy. For example, Alloy 718 has high strength and stress-rupture properties up to about 1200°F. Additionally, Alloy 718 has good processing characteristics, such as castability and hot-workability, as well as good weldability. These characteristics permit components made from Alloy 718 to be easily fabricated and, when necessary, repaired. As discussed below, Alloy 718's unique features stem from a precipitation-hardened microstructure that is predominantly strengthened by γ"-phase precipitates.

[0005] In precipitation-hardened, nickel-base alloys, there are two principal strengthening phases: γ'-phase (or "gamma prime") precipitates and γ"-phase (or "gamma double prime") precipitates. Both the γ'-phase and the γ"-phase are stoichiometric, nickel-rich intermetallic compounds. However, the γ'-phase typically comprises aluminum and titanium as the major alloying elements, i.e. $Ni_3(Al,Ti)$; while the γ"-phase contains primary niobium, i.e., Ni_3Nb. While both the γ'-phase and the γ"-phaseform coherent precipitates in the face centered cubic austenite matrix, because there is a larger misfit strain energy associated with the γ"-phase precipitates (which have a body centered tetragonal crystal structure) than with the γ'-phase precipitates (which have a face centered cubic crystal structure), γ"-phase precipitates tend to be more efficient strengtheners than γ'-phase precipitates. That is, for the same precipitate volume fraction and particle size, nickel-base alloys strengthened by γ"-phase precipitates are generally stronger than nickel alloys that are strengthened primarily by γ'-phase precipitates.

[0006] However, one disadvantage to such a γ"-phase precipitate strengthened microstructure is that at temperatures higher than 649°C (1200°F), the γ'-phase is unstable and will transform into the more stable δ-phase (or "delta-phase"). While δ-phase precipitates have the same composition as γ"-phase precipitates (i.e. Ni_3Nb), δ-phase precipitates have an orthorhombic crystal structure and are incoherent with the austenite matrix. Accordingly, the strengthening effect of δ-phase precipitates on the matrix is generally considered to be negligible. Therefore, as a result of this transformation, the mechanical properties of Alloy 718, such as stress-rupture life, deteriorate rapidly at temperatures above 649°C (1200°F). Therefore, the use of Alloy 718 typically is limited to applications below this temperature.

[0007] In order to form the desired precipitation-hardened microstructure, the nickel-base alloys must be subjected to a heat treatment or precipitation hardening process. The precipitation hardening process for a nickel-base alloy generally involves solution treating the alloy by heating the alloy at a temperature sufficient to dissolve substantially all of the γ'-phase and γ"-phase precipitates that exist in the alloy (i.e., a temperature near, at or above the solvus temperature of the precipitates), cooling the alloy from the solution treating temperature, and subsequently aging the alloy in one or more aging steps. Aging is conducted at temperatures below the solvus temperature of the gamma precipitates in order to permit the desired precipitates to develop in a controlled manner.

[0008] The development of the desired microstructure in the nickel-base alloy depends upon both the alloy composition and precipitation hardening process (i.e., the solution treating and aging processes) employed. For example, a typical precipitation hardening procedure for Alloy 718 for high temperature service involves solution treating the alloy at a temperature of 954°C (1750°F) for 1 to 2 hours, air cooling the alloy, followed by aging the alloy in a two-step aging process. The first aging step involves heating the alloy at a first aging temperature of 718°C (1325°F) for 8 hours, cooling the alloy at about 28 to 56°C (50 to 100°F) per hour to a second aging temperature of 621°C (1150°F), and aging the alloy at the second aging temperature for 8 hours. Thereafter, the alloy is air cooled to room temperature. The precipitation-hardened microstructure that results after the above-described heat treatment is comprised of discrete γ' and γ"-phase precipitates, but is predominantly strengthened by the γ"-phase precipitates with minor amounts of the γ'-phase precip-

itates playing a secondary strengthening role.

[0009] Due to the foregoing limitations, many attempts have been made to improve upon Alloy 718. For example, modified Alloy 718 compositions that have controlled aluminum, titanium, and niobium alloying additions have been developed in order to improve the high temperature stability of the mechanical properties of the alloy. In particular, these alloys were developed in order to promote the development of a "compact morphology" microstructure during the precipitation hardening process. The compact morphology microstructure consists of large, cubic γ'-phase precipitates with γ"-phase precipitates being formed on the faces of the cubic γ'-phase precipitates. In other words, the γ"-phase forms a shell around the γ'-phase precipitates.

[0010] In addition to modified chemistry, a specialized heat treatment or precipitation hardening process is necessary to achieve the compact morphology microstructure, instead of the discrete γ'-phase and γ"-phase precipitate hardened microstructure previously discussed. One example of a specialized heat treatment that is useful in developing the compact morphology microstructure involves solution treating the alloy at a temperature around 982°C (1800°F), air cooling the alloy, and subsequently aging the alloy at a first aging temperature of approximately 850°C (1562°F) for about a half an hour, in order to precipitate coarse γ'-phase precipitates. After aging at the first aging temperature, the alloy is rapidly cooled to a second aging temperature by air cooling, and held at the second aging temperature, which is around 649°C (1200°F), for about 16 hours in order to form the γ"-phase shell. Thereafter, the alloy is air cooled to room temperature. As previously discussed, after this precipitation hardening process, the alloy will have the compact morphology microstructure described above and will have improved high temperature stability. However, the tensile strength of alloys having the compact morphology microstructure is generally significantly lower than for standard Alloy 718.

[0011] Many γ'-phase strengthened nickel-base alloys exist, for example, Waspaloy® nickel alloy, which is commercially available from Allvac of Monroe, North Carolina. However, because Waspaloy® nickel alloy contains increased levels of alloying additions as compared to Alloy 718, such as nickel, cobalt, and molybdenum, this alloy tends to be more expensive than Alloy 718. Further, because of the relatively fast precipitation kinetics of the γ'-phase precipitates as compared to the γ"-phase precipitates, the hot workability and weldability of this alloy is generally considered to be inferior to Alloy 718.

[0012] The paper "Effect of Oxidation on High Temperature Fatigue Crack Initiation and Short Crack Growth in Inconel 718", by T Connolley et al, published in Superalloys 2000, January 2000, pages 435-443 describes a process for heating treating material from an Inconel 718 turbine disc forging containing in weight percent: B 0.003, C 0.031, Mg 0.002, Al 0.46, Si 0.08, P 0.01, S 0.0004, Ti 1.02, Cr 18.0, Mn 0.06, Fe 18.6, Co 0.43, Ni 52.9, Cu 0.10, Mo 3.02 and Nb+Ta 5.22. The forging was solution treated at 955°C for 1 hour followed by an air cool. It was then aged at 720°C for 8 hours, cooled at 50°C/h to 620°C, then aged at 650°C for a further 8 hours, finishing with an air cool.

[0013] Accordingly, it would be desirable to develop an affordable, precipitation-hardened 718-type nickel-base alloy having a microstructure that is predominantly strengthened by the more thermally stable γ'-phase precipitates, that possesses thermally stable mechanical properties at temperatures greater than 649°C (1200°F), and that has comparable hot-workability and weldability to γ"-phase strengthened alloys. Further, it is desirable to develop methods of heat treating nickel-base alloys to develop a microstructure that is predominantly strengthened by thermally stable γ'-phase precipitates and that can provide nickel-base alloys with thermally stable mechanical properties and comparable hot-workability and weldability to γ"-phase strengthened alloys.

BRIEF SUMMARY OF THE INVENTION

[0014] The invention provides a method of heat treating a nickel-base alloy in accordance with claim 1 of the appended claims.

[0015] Certain embodiments of the present invention are directed toward methods of heat treating nickel-base alloys.

[0016] One non-limiting embodiment provides a method of heat treating a nickel-base alloy, the nickel-base alloy comprising, in weight percent, up to 0.1 carbon, from 12 to 20 chromium, up to 4 molybdenum, up to 6 tungsten, from 5 to 12 cobalt, up to 14 iron, from 4 to 8 niobium, from 0.6 to 2.6 aluminum, from 0.4 to 1.4 titanium, from 0.003 to 0.03 phosphorus, from 0.003 to 0.015 boron, and nickel; wherein a sum of the weight percent of molybdenum and the weight percent of tungsten is at least 2 and not more than 8, and wherein a sum of atomic percent aluminum and atomic percent titanium is from 2 to 6, a ratio of atomic percent aluminum to atomic percent titanium is at least 1.5, and the sum of atomic percent aluminum and atomic percent titanium divided by atomic percent niobium is from 0.8 to 1.3. The method comprises pre-solution treating the nickel-base alloy at a temperature ranging from 815°C (1500°F) to 899°C (1650°F) for a time ranging from 2 to 16 hours, solution treating the nickel-base alloy for no greater than 4 hours at a solution temperature ranging from 940°C (1725°F) to 1010°C (1850°F); cooling the nickel-base alloy at a first cooling rate of at least 444°C (800°F) per hour after solution treating the nickel-base alloy; aging the nickel-base alloy in a first aging treatment for a time ranging from 2 hours to 8 hours at a temperature ranging from 718°C (1325-F) to 788°C (1450°F); and aging the nickel-base alloy in a second aging treatment at least 8 hours at a second aging temperature, the second aging temperature ranging from 621°C (1150°F) to 704°C (1300°F).

[0017] Other embodiments of the present invention contemplate nickel-base alloys having a desired microstructure. For example, in one embodiment described, there is provided a heat-treated nickel-base alloy comprising a matrix comprising at least about 20 volume percent γ'-phase precipitates and no more than about 5 volume percent γ"-phase precipitates, wherein the γ'-phase precipitates are predominant strengthening precipitates in the nickel-base alloy, and an amount of at least one grain boundary precipitate selected from the group consisting of δ-phase precipitates and η-phase precipitates, wherein the at least one grain boundary precipitate has a short, generally rod-shaped morphology; and wherein the nickel-base alloy has a yield strength at 704°C (1300°F) of at least 827.4MPa (120 ksi), a percent elongation at 704°C (1300°F) of at least 12 percent, a notched stress-rupture life of at least 300 hours as measured at 704°C (1300°F) and 551.6MPa (80 ksi), and a low notch-sensitivity.

[0018] The invention provides a heat-treated nickel-base alloy in accordance with claim 12 of the appended claims.

[0019] Articles of manufacture and methods of forming article of manufacture are also contemplated by various embodiments of the present invention.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING(S)

[0020] Embodiments of the present invention will be better understood if read in conjunction with the figures, in which:

Fig. 1 is an SEM micrograph of a nickel-base alloy according to embodiments of the present invention;
Fig. 2 is an optical micrograph of a nickel-base alloy according to embodiments of the present invention;
Fig. 3 is an SEM micrograph of a nickel-base alloy having excessive grain boundary phase development; and
Fig.4 is an optical micrograph of a nickel-base alloy having excessive grain boundary phase development.

DETAILED DESCRIPTION OF THE INVENTION

[0021] Certain non-limiting embodiments of the present invention can be advantageous in providing nickel-base alloys having a desired microstructure and thermally stable mechanical properties at elevated temperatures. As used herein, the phrase "thermally stable mechanical properties" means that the mechanical properties of the alloy (such as tensile strength, yield strength, elongation, and stress-rupture life) are not substantially decreased after exposure at 760°C (1400°F) for 100 hours as compared to the same mechanical properties before exposure. As used herein the term "low notch-sensitivity" means that samples of the alloy, when tested according to ASTM E292, do not fail at the notch. Further, the non-limiting embodiments of the present invention may be advantageous in providing predominantly γ'-phase strengthened nickel-base alloys comprising at least one grain boundary phase precipitate and having comparable hot-workability and weldability to γ"-phase strengthened alloys.

[0022] Methods of heat treating nickel-base alloys according to various non-limiting embodiments of the present invention will now be described. Although not limiting herein, the methods of heat treating nickel-base alloys discussed herein can be used in conjunction with a variety of nickel-base alloy compositions, and are particularly suited for use with 718-type nickel-base alloys and derivatives thereof. As used herein the term "nickel-base alloy(s)" means alloys of nickel and one or more alloying elements. As used herein the term "718-type nickel-base alloy(s)" means nickel-base alloys comprising chromium and iron that are strengthened by one or more of niobium, aluminum, and titanium alloying additions.

[0023] One specific, non-limiting example of a 718-type nickel-base alloy for which the heat treating methods of the various non-limiting embodiments of the present invention are particularly well suited is a 718-type nickel-base alloy including up to 14 weight percent iron. Although not meant to be limiting herein, 718-type nickel-base alloys including up to 14 weight percent iron are believed to be advantageous in producing alloys having good stress-rupture life. While not intending to be bound by any particular theory, it is believed by the inventors that when the iron content of the alloy is high, for example 18 weight percent, the effectiveness of cobalt in lowering stacking fault energy may be reduced. Since low stacking fault energies are associated with improved stress-rupture life, in certain embodiments of the present invention, the iron content of the nickel-base alloy is desirably maintained at or below 14 weight percent.

[0024] The specific example of a 718-type nickel-base alloy for which the heat treating methods according to the various non-limiting embodiments of the present invention are particularly well suited is a nickel-base alloy comprising, in percent by weight: up to 0.1 carbon, from 12 to 20 chromium, up to 4 molybdenum, up to 6 tungsten, from 5 to 12 cobalt, up to 14 iron, from 4 to 8 niobium, from 0.6 to 2.6 aluminum, from 0.4 to 1.4 titanium, from 0.003 to 0.03 phosphorus, from 0.003 to 0.015 boron, and nickel; wherein a sum of the weight percent of molybdenum and the weight percent of tungsten is at least 2 and not more than 8, and wherein a sum of atomic percent aluminum and atomic percent titanium is from 2 to 6, a ratio of atomic percent aluminum to atomic percent titanium is at least 1.5, and the sum of atomic percent aluminum and atomic percent titanium divided by atomic percent niobium is from 0.8 to 1.3. Such alloys are described in detail in co-pending U.S. Application Serial Number 10/144,369 (WO 03/097888).

[0025] A method of heat treating a nickel-base alloy described comprises pre-solution treating the nickel-base alloy,

solution treating the nickel-base alloy, and aging the nickel-base alloy to form a nickel-base alloy having a microstructure wherein γ'-phase precipitates are the predominant strengthening precipitates and δ-phase and/or η-phase precipitates having a desired morphology are present in one or more of the grain boundaries of the alloy.

[0026] More specifically, the method of heat treating a nickel-base alloy described comprises pre-solution treating the nickel-base alloy wherein an amount of at least one grain boundary precipitate is formed within the nickel-base alloy. As used herein the term "pre-solution treating" means heating the nickel-base alloy, prior to solution treating the nickel-base alloy, at a temperature such that an amount of at least one grain boundary precipitate is formed within the nickel-base alloy. As used herein, the term "form" with respect to any phase means nucleation and/or growth of the phase. For example, pre-solution treating the nickel-base alloy comprises heating the nickel-base alloy in a furnace at a temperature ranging from about 815°C (1500°F) to about 899°C (1650°F) for about 2 hours to about 16 hours. In one specific, non-limiting example of a pre-solution treatment that can be particularly useful in processing wrought nickel-base alloys, the pre-solution treatment can comprise heating the alloy at a temperature ranging from about 843°C (1550°F) to 871°C (1600°F) for about 4 to 16 hours.

[0027] As discussed above, during the pre-solution treatment, an amount of at least one grain boundary precipitate is formed in the nickel-base alloy, According to the first non-limiting embodiment, the at least one grain boundary precipitate formed during the pre-solution treatment is selected from the group consisting of δ-phase ("delta-phase") precipitates and η-phase ("eta-phase") precipitates. Delta-phase precipitates are known in the art to consist of the ordered intermetallic phase Ni_3Nb and have an orthorhombic crystal structure. Eta-phase precipitates are known in the art to consist of the ordered intermetallic phase Ni_3Ti and have a hexagonal crystal structure. Further, according to this embodiment, during pre-solution treatment both δ-phase and η-phase grain boundary precipitates can be formed.

[0028] While generally the formation of δ-phase and/or η-phase precipitates (hereinafter "δ/η-phase" precipitates) in nickel-base alloys due to the overaging of γ"-phase precipitates is undesirable because these precipitates are incoherent and do not contribute to the strengthening of the austenite matrix, the inventors have observed that the precipitation of a controlled amount of δ/η-phase precipitates having a desired morphology and location in grain boundaries of the nickel-base alloy (as discussed in more detail below) can strengthen the grain boundaries and contribute to reduced notch-sensitivity, and improved stress-rupture life and ductility in the alloy at elevated temperatures. Further, as discussed below in more detail, when the controlled amount of at least one grain boundary precipitate is combined with γ'-phase and γ"-phase precipitates having the desired size distribution, nickel-base alloys having low notch-sensitivity, good tensile strength, stress-rupture life, and thermally stable mechanical properties to at least 704°C (1300°F) can be achieved.

[0029] Referring now to the figures, in Fig. 1, there is shown an SEM micrograph of a nickel-base alloy according to embodiments of the present invention taken at 3000X magnification. In Fig. 2 there is shown an optical micrograph of the same nickel-base alloy taken at 500X magnification. The nickel-base alloy shown in Figs. 1 and 2 comprises an amount of at least one grain boundary precipitate having the desired morphology and location according to certain non-limiting embodiments of the present invention. As shown in Fig. 1, the nickel-base alloy comprises δ/η-phase precipitates 110, the majority of which have a short, generally rod-shaped morphology and are located within the grain boundaries of the alloy. As used herein the phrase "short, generally rod-shaped" with reference to the precipitates means the precipitates having a length to thickness aspect ratio no greater than about 20, for example as shown in Figs. 1 and 2. In certain non-limiting embodiments of the present invention, the aspect ratio of the short, generally rod-shaped precipitates ranges from 1 to 20. While δ/η-phase precipitates at twin boundaries in the nickel-base alloy can occasionally be present (for example, as shown in Fig. 1, δ/η-phase precipitates 111 can be observed at twin boundary 121), no significant formation of intragranular, needle-shaped δ/η-phase precipitates should be present in the nickel-base alloys processed in accordance with the various non-limiting embodiments of the present invention.

[0030] Although not meaning to be bound by any particular theory, it is believed by the inventors that both the morphology of the precipitates and location of precipitates at the grain boundaries, shown in Figs. 1 and 2, are desirable in providing a nickel-base alloy having low notch-sensitivity and improved tensile ductility and stress- rupture life because these grain boundary precipitates can restrict grain boundary sliding in the alloy at elevated temperatures. In other words, because of their morphology and location, the grain boundary precipitates according to embodiments of the present invention effectively strengthen the grain boundaries by resisting movement of the grain boundaries by "locking" or "pinning" the grain boundaries in place. Since grain boundary sliding contributes substantially to creep deformation and the formation of inter-granular cracks, which can decrease stress-rupture life and increase notch-sensitivity of the alloy, by restricting grain boundary sliding in the nickel-base alloys according to embodiments of the present invention, the grain boundary precipitates can increase the tensile ductility and stress-rupture life of the alloy and decrease the notch-sensitivity of the alloy. In contrast, when no grain boundary phase is present, or when excessive precipitation occurs (as shown in Figs. 3 and 4, which are discussed below), the grain boundaries will not be strengthened and the stress-rupture life of the alloy will not be improved.

[0031] In certain non-limiting embodiments of the present invention, after heat treating the nickel-base alloy a majority of grain boundaries of the nickel-base alloy are pinned by at least one short, generally rod-shaped grain boundary precipitate, such as precipitate 210 shown in Fig. 2. In other embodiments of the present invention, at least two-thirds

(2/3) of the grain boundaries are pinned by at least one short, generally rod-shaped grain boundary phase precipitate. Thus, according to these non-limiting embodiments, although pinning of all of the grain boundaries by at least one grain boundary precipitate is contemplated, it is not necessary that all of the grain boundaries be pinned.

[0032] In contrast, Figs. 3 and 4 are micrographs of a nickel-base alloy having excessive formation of δ/η-phase precipitates. As shown in Fig. 3, the majority of the precipitates 310 have a sharp, needle-like morphology with a much larger aspect ratio than those shown in Figs. 1 and 2, and extend a significant distance into the grains, and in some cases, extend across an individual grain. Although not meant to be bound by any particular theory, it is believed by the inventors that the δ/η-phase precipitate morphology and the location of the precipitates in the grains shown in Figs. 3 and 4 is undesirable because the δ/η-phase precipitates (310 and 410, shown in Figs. 3 and 4 respectively) do not strengthen the grain boundaries as discussed above. Instead, the interface between the precipitate and the grain matrix becomes the easiest path for crack propagation. Further, the excessive formation of δ/η-phase precipitates reduces the amount of strengthening precipitates (i.e., γ' and γ") in the alloy, thereby reducing the strength of the alloy (as previously discussed). Accordingly, although the precipitates such as those shown in Figs. 3 and 4 can contribute to an increase in elevated temperature ductility, such precipitation will significantly reduce alloy tensile strength and stress-rupture life.

[0033] While not intending to be bound by any particular theory, the inventors have also observed that the morphology of δ/η-phase grain boundary precipitates is related to precipitation temperature and the grain size of the alloy. Thus, for example, although not limiting herein, for certain wrought alloys when the precipitation temperature is greater than about 871°C (1600°F), and for certain cast alloys when the precipitation temperature is greater than about 899°C (1650°F), generally the δ/η-phase precipitates will form both on grain boundaries and intragranularly as high aspect ratio needles. As discussed above, this typically decreases the tensile strength and stress-rupture life of the alloy. However, when precipitation of the δ/η-phase occurs in these alloys at temperatures below about 871°C (1600°F) and 899°C (1650°F), respectively, δ/η-phase precipitates having a relatively short, generally rod-shaped morphology form at the grain boundaries, with little intragranular precipitation. As previously discussed, the formation of these grain boundary precipitates in the nickel-base alloy is desirable because these grain boundary precipitates can lock or pin the grain boundaries, thereby improving the tensile strength and ductility, and stress-rupture life, while decreasing notch-sensitivity of the alloy.

[0034] After pre-solution treating, according to the first non-limiting embodiment of the present invention, the nickel-base alloy can be cooled to 538°C (1000°F) or less prior to solution-treating. For example, although not limiting herein, the alloy can be cooled to room temperature prior to solution treating. As used herein, the term "solution treating" means heating the nickel-base alloy at a solution temperature near (i.e., a temperature no less than about 56°C (100°F) below), at or above the solvus temperature of the γ' and γ"-phase precipitates, but below the solvus temperature for the grain boundary precipitates. Thus, as discussed above, during solution treatment of the nickel-base alloy, substantially all the y'- and γ"-phase precipitates that exist in the nickel-base alloy are dissolved. As used herein, the term "substantially all" with respect to the dissolution of the γ' and γ"-phase precipitates during solution treating means at least a majority of the γ' and γ"-phase precipitates are dissolved. Accordingly, dissolving substantially all of the γ'- and γ"-phase precipitates during solution treating includes, but is not limited to, dissolving all of the γ'- and γ"-phase precipitates. However, since the solution temperature is below the solvus temperature for the grain boundary precipitates (i.e., the δ/η-phase precipitates formed during pre-solution treatment), at least a portion of the amount of the at least one grain boundary precipitate is retained in the nickel-base alloy during solution treatment.

[0035] Although not limiting herein, according to this non-limiting embodiment, solution treating the nickel-base alloy can comprise heating the nickel-base alloy at a solution temperature no greater than 1010°C (1850°F) for no more than 4 hours. More particularly, solution treating the nickel-base alloy comprises heating the nickel- base alloy at a solution temperature ranging from 940°C (1725°F) to 1010°C (1850°F), and more preferably comprises heating the nickel-base alloy from 954°C (1750°F) to 982°C (1800°F) for a time ranging from 1 to 4 hours, and more preferably from 1 to 2 hours. However, it will be appreciated by those skilled in the art that the exact solution treatment time required to dissolve substantially all of the y'- and γ"-phase precipitates will depend on several factors, including but not limited to, the size of the nickel-base alloy being solution treated. Thus, the bigger the nickel-base alloy (or work piece comprising the nickel- base alloy) being treated, generally the longer the solution time required to achieve the desired result will be.

[0036] Although not meaning to be bound by any particular theory, it has been observed by the inventors that if the solution temperature is above about 1010°C (1850°F), a less than desired amount of grain boundary precipitates may be retained in the nickel-base alloy after solution treating. Accordingly, the notch-sensitivity, elevated temperature stress-rupture life and ductility of the alloy can be detrimentally affected.

[0037] Further, it has been observed by the inventors that if the solution temperature is below about 940°C (1725°F), substantially all of the γ'-phase and γ"-phase precipitates will not dissolve during solution treatment. Accordingly, undesirable growth and coarsening of the undissolved γ'-phase and γ"-phase precipitates can occur, leading to lower tensile strength and stress-rupture life.

[0038] After solution treating the nickel-base alloy, the nickel-base alloy is cooled at a first cooling rate sufficient to suppress formation of γ'-phase and γ"-phase precipitates in the nickel-base alloy during cooling. Although not meant to be limiting herein, the inventors have observed that if the nickel-base alloy is cooled too slowly after solution treatment,

in addition to the undesired precipitation and coarsening of γ'-phase and γ"-phase precipitates, the formation of excessive grain boundary precipitates can occur. As discussed above, the formation of excessive grain boundary precipitates can detrimentally impact the tensile strength and stress-rupture life of the alloy. Thus, according to the present invention, the first cooling rate is at least 444°C (800°F) per hour, and can be at least 556°C (1000°F) per hour or greater. Cooling rates in excess of 444°C (800°F) or 556°C (1000°F) can be achieved, for example by air cooling the alloys from the solution temperature. After solution treating and cooling the nickel-base alloy according to the first non-limiting embodiment of the present invention, the nickel-base alloy is aged in a first aging treatment. As used herein the term "aging" means heating the nickel-base alloy at a temperature below the solvus temperatures for the γ'-phase and γ"-phase to form γ'-phase and γ"-phase precipitates. During the first aging treatment, primary precipitates of γ'-phase and γ"-phase are formed in the nickel-base alloy. The first aging treatment comprises heating the nickel-base alloy at temperatures ranging from 718°C (1325°F) to 788°C (1450°F) for a time period ranging from 2 to 8 hours. More particularly, the first aging treatment can comprise heating the nickel-base alloy at a temperature ranging from 740°C (1365°F) to 788°C (1450°F) for 2 to 8 hours. Although not meant to be limiting herein, aging at a first aging temperature greater than about 788°C (1450°F) or less than about 718°C (1325°F) can result in overaging or underaging of the alloy, respectively, with an accompanying loss of strength.

[0039] After the first aging treatment, the nickel-base alloy is cooled to a second aging temperature and aged in a second aging treatment. Although not required, according to this embodiment of the present invention the second cooling rate can be 28°C (50°F) per hour or greater. For example, a cooling rate ranging from about 28°C (50°F) per hour to about 56°C (100°F) per hour can be achieved by allowing the nickel-base alloy to cool in the furnace while the furnace cools to a desired temperature or after the power to the furnace is turned off (i.e., furnace cooling the alloy). Alternatively, although not limiting herein, the nickel-base alloy can be more rapidly cooled, for example by air cooling to room temperature, and then subsequently heated to the second aging temperature. However, if a more rapid cooling rate is employed, longer aging times may be required in order to develop the desired microstructure.

[0040] The nickel-base alloy is aged at the second aging temperature to form secondary precipitates of γ'-phase and γ"-phase in the nickel-base alloy. The secondary precipitates of γ'-phase and γ"-phase formed during the second aging treatment are generally finer than the primary precipitates formed during the first aging treatment. That is, the size of the precipitates formed during the second aging treatment will generally be smaller than the size of the primary precipitates formed during the first aging treatment. Although not meaning to be bound by any particular theory, the formation of γ'-phase precipitates and γ"-phase precipitates having a distribution of sizes, as opposed to a uniform precipitate size, is believed to improve the mechanical properties of the nickel-base alloy.

[0041] Further, according to the invention, the second aging treatment can comprise heating the nickel-base alloy at a second aging temperature ranging from 621°C (1150°F) to 704°C (1300°F), and more specifically can comprise heating the nickel-base alloy at a second aging temperature ranging from 621°C (1150°F) to 649°C (1200°F) for at least 8 hours.

[0042] As previously discussed, after heat treating the nickel-base alloy according to the first non-limiting embodiment of the present invention, the γ'-phase precipitates are predominant strengthening precipitates in the nickel-base alloy. As used herein, the phrase "predominant strengthening precipitates" with respect to the γ'-phase precipitates means the nickel-base alloy comprises at least about 20 volume percent γ'-phase and no more than about 5 volume percent γ"-phase. Further, after heat treating, the nickel-base alloy according to this non-limiting embodiment comprises an amount of at least one grain boundary precipitate selected from the group consisting of δ-phase precipitates and η-phase precipitates and having a short, generally rod-shaped morphology.

[0043] In a second non-limiting embodiment of the present invention, the nickel-base alloy is heated to a pre-solution temperature ranging from about 815°C (1500°F) to 871°C (1600°F) for a period of time in order to precipitate a controlled amount of at least one grain boundary precipitate selected from the group consisting of δ-phase precipitates and η-phase precipitates. As discussed above with respect to the first non-limiting embodiment, desirably, the at least one precipitate has a short, generally rod-shaped morphology and is located at the grain boundaries of the alloy.

[0044] Thereafter, the temperature is increased to a solution temperature ranging from 940°C (1725°F) to about 1010°C (1850°F), without cooling, and the nickel-base alloy is solution treated (i.e. the alloy is directly heated to the solution temperature). The nickel-base alloy is held at the solution temperature for a time period sufficient to dissolve substantially all of the γ'-phase and γ"-phase precipitates as discussed above. For example, the nickel-base alloy is held at the solution temperature for no greater than 4 hours. In one specific, non-limiting example according to the second non-limiting embodiment, the solution temperature ranges from 954°C (1750°F) to about 982°C (1800°F) and the alloy is held at the solution temperature for no greater than 2 hours. Thereafter, the nickel-base alloy can be cooled to room temperature and aged as discussed above with respect to the first non-limiting embodiment of the present invention.

[0045] A further embodiment described provides a method of heat treating a 718-type nickel-base alloy including up to 14 weight percent iron in accordance with claim 1, the method comprising pre-solution treating the nickel-base alloy at a temperature ranging from 815°C (1500°F) to 899°C (1650°F) for a time ranging from 2 to 16 hours. After pre-solution treatment, the nickel-base alloy is solution treated for no greater than 4 hours at a solution temperature ranging from 940°C (1725°F) to 1010°C (1850°F), and preferably for no greater than 2 hours at a solution temperature ranging from

954°C (1750°F) to 982°C (1800°F). Thereafter, the nickel-base alloy can be cooled to room temperature and aged as discussed above with respect to the first non-limiting embodiment of the present invention. After heat treating the nickel-base alloy according to this non-limiting embodiment of the present invention, the nickel-base alloy desirably has a microstructure comprising γ'-phase precipitates and γ"-phase precipitates, wherein the γ '-phase precipitates are predominant strengthening precipitates in the nickel-base alloy, and an amount of at least one grain boundary precipitate selected from the group consisting of δ-phase precipitates and η-phase precipitates, the at least one grain boundary precipitate having a short, generally rod-shaped morphology.

[0046] A further embodiment according to the present invention provides a method of heat treating a nickel-base alloy, the nickel-base alloy comprising, in weight percent, up to 0.1 carbon, from 12 to 20 chromium, up to 4 molybdenum, up to 6 tungsten, from 5 to 12 cobalt, up to 14 iron, from 4 to 8 niobium, from 0.6 to 2.6 aluminum, from 0.4 to 1.4 titanium, from 0.003 to 0.03 phosphorus, from 0.003 to 0.015 boron, and nickel; wherein a sum of the weight percent of molybdenum and the weight percent of tungsten is at least 2 and not more than 8, and wherein a sum of atomic percent aluminum and atomic percent titanium is from 2 to 6, a ratio of atomic percent aluminum to atomic percent titanium is at least 1.5, and the sum of atomic percent aluminum and atomic percent titanium divided by atomic percent niobium is from 0.8 to 1.3. The method comprises solution treating the nickel-base alloy by heating the nickel-base alloy for no greater than 4 hours at a solution temperature ranging from 940°C (1725°F) to 1010°C (1850°F), and more particularly comprises solution treating the nickel-base alloy by heating the nickel-base alloy for not greater than 2 hours at a solution temperature ranging from 954°C (1750°F) to 982°C (1800°F). The method further comprises cooling the nickel-base alloy after solution treating at a first cooling rate, and aging the nickel-base alloy as discussed above with respect to the first non-limiting embodiment of the present invention. After heat treating the nickel-base alloy according to the fourth non-limiting embodiment of the present invention, the nickel-base alloy desirably has a microstructure that is predominantly strengthened by γ'-phase precipitates and may comprise an amount of at least one grain boundary precipitate selected from the group consisting of δ-phase precipitates and η-phase precipitates, the at least one grain boundary precipitate having a short, generally rod-shaped morphology.

[0047] The method according to the present invention further comprises pre-solution treating the nickel-base alloy at a temperature ranging from 815°C (1500°F) to 899°C (1650°F) for a time period ranging from 2 to 16 hours prior to solution treating the nickel-base alloy. As previously discussed, by pre-solution treating the nickel-base alloy, a controlled amount of at least one grain boundary precipitate can be formed in the alloy. Accordingly, after heat treating the nickel-base alloy, the nickel-base alloy desirably has a microstructure that is primarily strengthened by y'-phase precipitates and comprises an amount of at least one grain boundary precipitate selected from the group consisting of δ-phase precipitates and η-phase precipitates, wherein the at least one grain boundary precipitate has a short, generally rod-shaped morphology.

[0048] Although not limiting herein, after heat treating the nickel-base alloy according to the various non-limiting embodiments of the present invention discussed above, the nickel-base alloy can have a yield strength at 704°C (1300°F) of at least 827.4MPa (120 ksi), a percent elongation at 704°C (1300°F) of at least 12 percent, a notched stress-rupture life of at least 300 hours as measured at 704°C (1300°F) and 551.6MPa (80 ksi), and a low notch-sensitivity. Although not required, after heat treating the alloy can have a grain size of ASTM 5-8.

[0049] Nickel-base alloys having a desired microstructure according to certain non-limiting embodiments of the present invention will now be discussed. In one non-limiting embodiment of the present invention, there is provided a nickel-base alloy comprising a matrix comprising γ'-phase precipitates and γ"-phase precipitates, wherein the γ'-phase precipitates are predominant strengthening precipitates in the nickel-base alloy, and a controlled amount of at least one grain boundary precipitate, the at least one grain boundary precipitate being selected from the group consisting of δ-phase precipitates and η-phase precipitates; and wherein the nickel-base alloy has a yield strength at 704°C (1300°F) of at least 827.4MPa (120 ksi), a percent elongation at 704°C (1300°F) of at least 12 percent, a notched stress-rupture life of at least 300 hours as measured at 704°C (1300°F) and 551.6MPa (80 ksi), and a low notch-sensitivity.

[0050] According to this non-limiting embodiment, the nickel-base alloy can be a 718-type nickel-base alloy, such as a 718-type nickel-base alloy comprising up to 14 weight percent iron. In particular, the 718-type nickel-base alloy is a nickel-base alloy comprising, in weight percent, up to 0.1 carbon, from 12 to 20 chromium, up to 4 molybdenum, up to 6 tungsten, from 5 to 12 cobalt, up to 14 iron, from 4 to 8 niobium, from 0.6 to 2.6 aluminum, from 0.4 to 1.4 titanium, from 0.003 to 0.03 phosphorus, from 0.003 to 0.015 boron, and nickel; wherein a sum of the weight percent of molybdenum and the weight percent of tungsten is at least 2 and not more than 8, and wherein a sum of atomic percent aluminum and atomic percent titanium is from 2 to 6, a ratio of atomic percent aluminum to atomic percent titanium is at least 1.5, and the sum of atomic percent aluminum and atomic percent titanium divided by atomic percent niobium is from 0.8 to 1.3.

[0051] The nickel-base alloy according to this non-limiting embodiment can be a cast or wrought nickel-base alloy. For example, although not limiting herein, the nickel- base alloy can be manufactured by melting raw materials having the desired composition in a vacuum induction melting ("VIM") operation, and subsequently casting the molten material into an ingot. Thereafter, the cast material can be further refined by remelting the ingot. For example, the cast material can be remelted via vacuum arc remelting ("VAR"), electro-slag remelting ("ESR"), or a combination of ESR and VAR,

all of which are known in the art. Alternatively, other methods known in the art for melting and remelting can be utilized.

[0052] For example, although not limiting herein, the nickel-base alloy can be heat treated according to the methods of heat treating discussed in the various non-limiting embodiments of the present invention discussed above to form the desired microstructure after melting. Alternatively, the alloy can be first forged or hot or cold worked prior to heat treating.

[0053] One specific, non-limiting embodiment of a nickel-base alloy according to the present invention provides a 718-type nickel-base alloy including up to 14weight percent iron, as claimed in claim 12, and comprising γ'-phase precipitates and γ"-phase precipitates, wherein the γ'-phase precipitates are predominant strengthening precipitates in the nickel-base alloy, and an amount of at least one grain boundary precipitate selected from the group consisting of 5-phase precipitates and η-phase precipitates, the at least one grain boundary precipitate having a short, generally rod-shaped morphology. According to this non-limiting embodiment, the nickel-base alloy is formed by pre-solution treating the nickel-base alloy by heating the nickel-base alloy at a temperature ranging from 815°C (1500°F) to 899°C (1650°F) for a time ranging from 4 to 16 hours, solution treating the nickel-base alloy by heating the nickel-base alloy for no greater than 4 hours at a solution temperature ranging from 940°C (1725°F) to 1010°C (1850°F), cooling the nickel-base alloy at a first cooling rate of at least 444°C (800°F) per hour after solution treating the nickel-base alloy, aging the nickel-base alloy in a first aging treatment by heating the nickel-base alloy for 2 to 8 hours at a temperature ranging from 718°C (1325°F) to 788°C (1450°F), and aging the nickel-base alloy in a second aging treatment by heating the nickel-base alloy for at least 8 hours at the second aging temperature, the second aging temperature ranging from 621°C (1150°F) to 704°C (1300°F).

[0054] Embodiments of the present invention further contemplate articles of manufacture made using the nickel-base alloys and methods of heat treating nickel-base alloys of the present invention. Non-limiting examples of articles of manufacture that can be made using the nickel-base alloys and methods of heat treating nickel-base alloys according to the various embodiments of the present invention include, but are not limited to, turbine or compressor disks, blades, cases, shafts, and fasteners.

[0055] For example, although not limiting herein, one embodiment of the present invention provides an article of manufacture comprising a nickel-base alloy in accordance with the invention, the nickel-base alloy comprising a matrix comprising γ'-phase precipitates and γ"-phase precipitates, wherein the γ'-phase precipitates are predominant strengthening precipitates in the nickel-base alloy, and an amount of at least one grain boundary precipitate selected from the group consisting of 5-phase precipitates and η-phase precipitates; and wherein the nickel-base alloy has a yield strength at 704°C (1300°F) of at least 827.4MPa (120 ksi), a percent elongation at 704°C (1300°F) of at least 12 percent, a notched stress-rupture life of at least 300 hours as measured at 704°C (1300°F) and 551.6MPa (80 ksi), and a low notch-sensitivity. Although not required, the nickel-base alloy can have a grain size of ASTM 5-8.

[0056] Although not limiting herein, the articles of manufacture according to this non-limiting embodiment of the present invention can be formed, for example, by forming a cast or wrought nickel-base alloy having the desired composition into the desired configuration, and then subsequently heat treating the nickel-base alloy to form the desired microstructure discussed above. More particularly, although not limiting herein, according to certain embodiments of the present invention the articles of manufacture can be formed from cast or wrought 718-type nickel-base alloys, and more particularly 718-type nickel-base alloys that include up to 14 weight percent iron. In accordance with the present invention, the article of manufacture is formed from a nickel-base alloy comprising, in percent by weight, up to 0.1 carbon, from 12 to 20 chromium, up to 4 molybdenum, up to 6 tungsten, from 5 to 12 cobalt, up to 14 iron, from 4 to 8 niobium, from 0.6 to 2.6 aluminum, from 0.4 to 1.4 titanium, from 0.003 to 0.03 phosphorus, from 0.003 to 0.015 boron, and nickel; wherein a sum of the weight percent of molybdenum and the weight percent of tungsten is at least 2 and not more than 8, and wherein a sum of atomic percent aluminum and atomic percent titanium is from 2 to 6, a ratio of atomic percent aluminum to atomic percent titanium is at least 1.5, and the sum of atomic percent aluminum and atomic percent titanium divided by atomic percent niobium is from 0.8 to 1.3.

[0057] Various non-limiting embodiments of the present invention will now be illustrated in the following non-limiting examples.

EXAMPLES

Example 1

[0058] A 718-type nickel-base alloy was melted prepared using a VIM operation and subsequently cast into an ingot. Thereafter, the case material was remelted using VAR. The cast material was then forged into a 20.3cm (8") diameter, round billet and test samples were cut the billet. The alloy has a grain size ranging from ASTM 6 to ASTM 8, with an average grain size of ASTM 7, as determined according to ASTM E 112, as determined according to ASTM E 112. The composition of alloy is given below.

Element	Weight Percent
C	0.028
W	1.04
Co	9.17
Nb	5.50
Al	1.47
B	0.005
Mo	2.72
Cr	17.46
Fe	9.70
Ti	0.71
P	0.014
Ni + residual elements	Balance

[0059] The test samples were then divided into sample groups and the sample groups were subjected the pre-solution treatment indicated below in Table 1.

Table 1

Sample Group	Pre-Solution Treatment
1	None
2	843°C (1550°F) for 8 hours
3	871°C (1600°F) for 8 hours
4	899°C (1650°F) for 8 hours

[0060] After pre-solution treatment, each of the sample groups were solution treated at 954°C (1750°F) for 1 hour, air cooled, aged for 2 hours at 788°C (1450°F), furnace cooled, aged for 8 hours at 649°C (1200°F), and air cooled to room temperature. After heat treating the following tests were performed. At least 2 samples from each sample group were subjected to tensile testing at 704°C (1300°F) according to ASTM E21 and the tensile strength, yield strength, percent elongation, and percent reduction in area for each sample were determined. At least 2 samples from each sample group were subjected to stress-rupture life testing at 704°C (1300°F) and 551.6MPa (80 ksi) according to ASTM 292 and the stress-rupture life and percent elongation at rupture for each sample were determined. At least 2 samples from each sample group were subjected to Charpy testing at room temperature according to ASTM E262 and the impact strength and lateral expansion ("LE") of each sample were determined.

[0061] The results of the aforementioned tests are indicated below in Table 2, wherein the tabled value is the average value of the samples tested from each sample group.

Table 2

Sample Group	Tensile Strength at 704°C (1300°)F (ksi)	YieldStrength at 704°C (1300°F) (ksi)	Percent Elongation at 704°C (1300°F)	Percent Reduction in Area at 704°C (1300°F)	Stress-Rupture Life at 704°C (1300°F) (Hours)	Percent Elongation at Rupture at 704°C (1300°F)	Impact Strength at Room Temp. (Ftlbs)	LE at Room Temp (mils)
1	170.3	145.7	19.3	18.1	433.1	35.4	13.5	8.5
2	172.3	149.2	28.9	52.3	581.4	29.4	33.5	19.0
3	169.3	143.9	17.7	23.9	NT*	NT	NT	NT
4	162.5	124.9	18.2	17.4	403.7	49.6	25.5	14.5

*NT = No test performed

[0062] As can be seen from Table 2, the samples that were pre-solution treated at 843°C (1550°F) for 8 hours (i.e., Sample Group 2) had better tensile strength, yield strength, elongation, and reduction in area, significantly better stress-rupture life and impact strength than the samples that were not pre-solution treated (i.e. Sample Group 1), as well as those that were pre-solution treated at 871°C (1600°F) and 899°C (1650°F) for 8 hours (i.e. Sample Groups 3 and 4). Further, the properties of the Sample Group 4 samples were slightly lower than for the samples that were not pre-solution treated, but were still considered to be acceptable.

[0063] As previously discussed, pre-solution treating wrought nickel-base alloys at a temperature ranging from 843°C (1550°F) to 871°C (1600°F) can result in the advantageous precipitation of the at least one grain boundary phase. Further, as previously discussed, the grain boundary phase, when present in the desired amount and form, is believed to strengthen the grain boundaries of the nickel-base alloy and thereby cause an improvement in the elevated temperature properties of the alloys.

Example 2

[0064] Test samples were prepared as discussed above in Example 1. The test samples were then divided into sample groups and the sample groups were subjected to the solution and aging treatments indicated below in Table 3.

Table 3

Sample Group	Solution Treatment	First Aging Treatment	Second Aging Treatment
5	954°C (1750°F) for 1 hour	718°C (1325°F) for 8 hours	621°C (1150°F)for 8 hours
6	954°C (1750°F) for 1 hour	788°C (1450°F) for 2 hours	649°C (1200°F) for 8 hours
7	982°C (1800°F) for 1 hour	718°C (1325°F) for 8 hours	621°C (1150°F) for 8 hours
8	982°C (1800°F) for 1 hour	788°C (1450°F) for 2 hours	649°C (1200°F) for 8 hours

[0065] Between solution treating and the first aging treatment, the samples were air cooled, while a cooling rate of about 56°C (100°F) per hour (i.e., furnace cooling) was employed between the first and second aging treatments. After the second aging treatment, the samples were cooled to room temperature by air cooling. After heat treating, the samples from each group were tested as described above in Example 1, except that instead of the room temperature Charpy tests conducted above in Example 1, the samples of Sample Groups 5-8 were subjected to additional tensile testing at room temperature ("T_{rm}"). The results of these tests are given below in Table 4, wherein the tabled values are average values for the samples tested.

Table 4

Sample Group	UTS at Trm (ksi)	YS at Trm (ksi)	% EL at Trm	% RA at Trm	UTS at 704°C (1300°F) (ksi)	YS at 704°C (1300°F) (ksi)	% EL at 704°C (1300°F)	% RA at 704°C (1300°F)	Stress-Rupture Life at 704°C (1300°F) (Hours)	% EL at Rupture at 704°C (1300°F)
5	205.9	158.9	25.5	38.2	164.1	135.1	16.3	17.8	386.2	36.4
6	218.8	174.7	21.9	35.7	170.3	145.7	19.3	18.1	433.1	35.4
7	205.1	155.6	27.4	44.8	147.6	114,7	14.4	21.0	330	49.0
8	205.3	149.9	27.8	44.0	160.7	125.2	12.4	14.1	1.9*	*

*Notch Break Observed

[0066] As can be seen from the results in Table 4, all of the Sample Groups had yield strengths of at least about 827.4MPa (120 ksi) at 704°C (1300°F), and percent elongations of at least about 12 percent at 704°C (1300°F). Further, Sample Groups 5-7 also had stress-rupture lives at 704°C (1300°F) and 551.6MPa (80 ksi) of at least about 300 hours and low notch sensitivity.

[0067] Between the two sample groups that were solution treated at 954°C (1750°F) (i.e., Sample Group 5 and Sample Group 6), the tensile and yield strength, both at room temperature and at 704°C (1300°F), the elevated temperature ductility, and the stress-rupture life of the Sample Group 6 test samples were generally improved as compared to the Sample Group 5 samples. Although not meant to be limiting herein, this is believed to be attributable to the higher aging temperatures used in aging the Sample Group 6 samples.

[0068] As further indicated in Table 4, notch breaks were observed in Sample Group 8. However, as indicated in Table 5, when stress-rupture testing was repeated on 10.2cm (4") round forged billet samples that were heat treated in a manner similar to the Sample Group 8 samples, notch breaks were not observed. Although the repeat testing was performed on 10.2cm (4") round forged billet samples as opposed to 20.3cm (8") round forged billet samples, the absence of notch breaking is not believed to be attributable to the different size of the sample. Accordingly, heat treatments such as the one used to heat treat Sample Group 8 are believed to be suitable in developing nickel-base alloys having desirable stress-rupture properties.

Table 5

Solution Treatment*	First Aging Treatment**	Second Aging Treatment***	Stress-Rupture Life at 704°C (1300°F) and 80 ksi	EL% at Rupture at 704°C (1300°F)
954°C (1750°F) for 1 Hour	788°C (1450°F) for 2 Hours	649°C (1200°F) for 8 Hours	558.4	27.6
982°C (1800°F) for 1 Hour	788°C (1450°F) for 2 Hours	649°C (1200°F) for 8 Hours	525.5	32.2
*between solution treating and the first aging treatment, the samples were air cooled. **between the first and second aging treatments, the samples were furnace cooled at a rate of about 56°C (100°F) per hour ***After the second aging treatment, the samples were cooled to room temperature by air cooling.				

Example 3

[0069] Test samples were prepared as discussed above in Example 1. The test samples were then divided into sample groups and the sample groups were then solution treated at 954°C (1750°F) for the times indicated below for each sample group in Table 6. After solution treatment, each of the test samples was air cooled to room temperature, and subsequently aged at 788°C (1450°F) for 2 hours, furnace cooled to 649°C (1200°F), and aged for 8 hours before being air cooled to room temperature.

Table 6

Sample Group	Solution Treatment Time
9	1 hour
10	3 hours
11	4 hours

[0070] After heat treating, the samples from each sample group were tested as described above in Example 1, except that Charpy impact testing was not conducted on the test samples. The results of these tests are given below in Table 7, wherein the tabled values are average values for the samples tested.

Table 7

Sample Group	Tensile Strength at 704°C (1300°F) (ksi)	Yield Strength at 704°C (1300°F) (ksi)	Percent Elongation at 704°C (1300°F)	Percent Reduction in Area at 704°C (1300°F)	Stress-Rupture Life at 704°C (1300°F) (Hours)	Percent Elongation at Rupture at 704°C (1300°F)
9	170.3	145.7	19.3	18.1	433.1	35.4
10	162.5	132.6	27.8	33.8	190.4	32.8
11	162.6	136.7	25.8	30.6	185.1	47.5

[0071] As can be seen from the data in Table 7, while only Sample Group 9 had a stress-rupture life of at least 300 hours at 704°C (1300°F) and 551.6MPa (80 ksi), all of the samples had yield strengths at 704°C (1300°F) of at least 827.4MPa (120 ksi) and percent elongations at 704°C (1300°F) of at least 12 percent. Although the stress-rupture properties of Sample Groups 10 and 11 are lower than those of Sample Group 9, it is believed that solution treatment times greater than 2 hours may, nevertheless, be useful in certain applications. Further, as previously discussed, when larger sized samples or work-pieces are heat treated, solution times greater than 2 hours may be required in order to dissolve substantially all of the γ' and γ"-phase precipitates.

Example 4

[0072] Test samples were prepared from a 10.2cm (4") diameter, round-cornered, square reforged billet having a grain size ranging from ASTM 4.5 to ASTM 5.5, with an average grain size of ASTM 5, as determined according to ASTM E 112. The test samples were then divided into sample groups and the sample groups were solution treated at 954°C (1750°F) for 1 hour and cooled to room temperature at the cooling rates indicated below for each sample group in Table 8. After cooling to room temperature, the samples were aged at 788°C (1450°F) for 2 hours, furnace cooled to 649°C (1200°F), and aged for 8 hours before being air cooling to room temperature.

Table 8

Sample Group	Cooling Rate after Solution Treatment
12	about 12500°C (22,500°F)/hour (air cool)
13	556°C (1000°F)/hour
14	233°C (400°F)/hour

After heat treating, the samples from each sample group were tested as described above in Example 3. The results of these tests are given below in Table 9, wherein the tabled values are average values for the samples tested.

Table 9

Sample Group	Tensile Strength at 704°C (1300°F) (ksi)	Yield Strength at 704°C (1300°F) (ksi)	Percent Elongation at 704°C (1300°F)	Percent Reduction in Area at 704°C (1300°F)	Stress-Rupture Life at 704°C (1300°F) (Hours)	Percent Elongation at Rupture at 704°C (1300°F)
12	154.7	127.2	22.6	28.1	315.5	35.4
13	155.0	122.9	34.0	54.9	591.4	40.3
14	144.8	110.0	38.3	75.5	363.5	26.3

[0073] As can be seen from the data in Table 9, when the cooling rate after solution treatment was low (e.g., 233°C (400°F) per hour for Sample Group 14), yield strengths less than 827.4MPa (120 ksi) at 704°C (1300°F) were achieved. At higher cooling rates (e.g., 556°C (1000°F) per hour for Sample Group 13 and 12500°C (22,500°F) per hour for sample group 14), yield strengths of at least 827.4MPa (120 ksi) at 704°C (1300°F) were observed. However, percent elongations at 704°C (1300°F) of at least 12 percent and stress-rupture lives of at least 300 hours at 704°C (1300°F) and 551.6MPa

(80 ksi) were observed for all samples.

Example 5

[0074] Test samples were prepared as discussed above in Example 1. Thereafter, the test samples were divided into Sample Groups 15-21. The samples were solution treated at 954°C (1750°F) for 1 hour. After solution treatment, the samples were cooled to room temperature at a rate of about 12500°C (22,500°F) per hour (air cool) prior to aging as indicated in Table 10.

[0075] After the first aging treatment, all of the samples were furnace cooled to the second aging temperature, resulting in an average cooling rate of about 28°C (50°F) to about 56°C (100°F per hour). Further, after the second aging treatment was completed, the samples were air cooled to room temperature.

Table 10

	First Aging Treatment		Second Aging Treatment	
Sample Group #	Aging Temperature °C (°F)	Aging Time (Hours)	Aging Temperature °C (°F)	Aging Time (Hours)
15	740 (1365)	8	621 (1150)	8
16	740 (1365)	8	649 (1200)	8
17	760 (1400)	8	621 (1150)	8
18	760 (1400)	8	649 (1200)	8
19	788 (1450)	8	649 (1200)	8
20	788 (1450)	2	621 (1150)	8
21	788 (1450)	2	649 (1200)	8

[0076] After heat treating, at least 2 samples from each sample group were tested as described above in Example 3. The results from these tests are given below in Table 11, wherein the tabled values are average values for the samples tested.

Table 11

Sample Group	Tensile Strength at 704°C (1300°F) (ksi)	Yield Strengthat 704°C (1300°F) (ksi)	Percent Elongation at 704°C (1300°F)	Percent Reduction in Area at 704°C (1300°F)	Stress-Rupture Life at 704°C (1300°F) (Hours)	Percent Elongation at Rupture at 704°C (1300°F)
15	165.4	138.8	19.1	20.6	342.5	30.6
16	165.6	135.5	18.9	24.5	349.0	37.5
17	169.5	141.0	16.3	21.8	311.5	36.5
18	162.2	123.6	16.6	19.8	313.7	47.0
19	165.2	141.2	30.5	48.7	312.5	34.5
20	165.7	135.2	16.9	18.6	361.3	32.7
21	170.3	145.7	19.3	18.1	433.1	35.4

[0077] The thermal stability of the mechanical properties at elevated temperatures of the test samples was also tested by exposing at least 2 samples from each sample group to 760°C (1400°F) for 100 hours prior to testing as indicated above. The results of these tests are given in Table 12 below.

Table 12

Sample Group	*Tensile Strength at 704°C (1300°F) (ksi)	*Yield Strength at 704°C (1300°F) (ksi)	*Percent Elongation at 704°C (1300°F)	*Percent Reduction in Area at 704°C (1300°F)	*Stress-Rupture Life at 704°C (1300°F) (Hours)	*Percent Elongation at Rupture at 704°C (1300°F)
15	161.4	134.3	28.1	32.3	452.5	21.9
16	163.3	131.2	18.8	17.5	382.1	40.8
17	154.3	127.9	38.0	70.0	367.0	34.6
18	153.3	125.3	34.9	46.2	418.1	33.7
19	157.5	131.0	40.2	60.2	276.8	33.0
20	150.9	132.6	35.5	50.9	507.2	31.8
21	161.7	138.1	33.2	49.1	517.1	42.8
*Exposed at 760°C (1400°F) for 100 hours prior to testing.						

[0078] As can be seen from the data of Tables 11 and 12, samples aged at a first aging temperature of about 788°C (1450°F) for 2 hours and a second aging temperature of about 649°C (1200°F) for 8 hours (i.e. Sample Group 21) had the highest combination of 704°C (1300°F) ultimate tensile and yield strengths and the highest stress-rupture life. After thermal exposure at 760°C (1400°F) (Table 11), the samples of Sample Group 21 had the highest 704°C (1300°F) yield strength and stress-rupture life. These results were followed closely by samples from Groups 15, 16, and 20.

[0079] Further, it can be seen that the ductility of the alloys was improved after long-term thermal exposure. Although not meant to be bound by any particular theory, it is believed that because the samples were not pre-solution treated and the cooling rate employed in cooling the samples from the solution temperature was high (about 22,500°F/hour), formation of desirable grain boundary δ/η-phase precipitates, as previously discussed in detail, was not achieved until after thermal exposure.

[0080] It is to be understood that the present description illustrates aspects of the invention relevant to a clear understanding of the invention. Certain aspects of the invention that would be apparent to those of ordinary skill in the art and that, therefore, would not facilitate a better understanding of the invention have not been presented in order to simplify the present description. Although the present invention has been described in connection with certain embodiments, the present invention is not limited to the particular embodiments disclosed, but is intended to cover modifications that are within the scope of the invention, as defined by the appendent claims.

Claims

1. A method of heat treating a nickel-base alloy comprising in percent by weight, up to 0.1 carbon, from 12 to 20 chromium, up to 4 molybdenum, up to 6 tungsten, from 5 to 12 cobalt, up to 14 iron, from 4 to 8 niobium, from 0.6 to 2.6 aluminum, from 0.4 to 1.4 titanium, from 0.003 to 0.03 phosphorus, from 0.003 to 0.015 boron, and balance nickel; wherein a sum of the weight percent of molybdenum and the weight percent of tungsten is at least 2 and not more than 8, and wherein a sum of atomic percent aluminium and atomic percent titanium is from 2 to 6, a ratio of atomic percent aluminum to atomic percent titanium is at least 1.5, and the sum of atomic percent aluminum and atomic percent titanium divided by atomic percent niobium is from 0.8 to 1. 3;
the method comprising:

pre-solution treating the nickel-base alloy, wherein pre-solution heat treating comprises heating the nickel-base alloy at a temperature ranging from 815°C (1500°F) of to 899°C (1650°F) for a time ranging from 2 hours to 16 hours;
solution treating the nickel-base alloy wherein solution treating the nickel-base alloy comprises heating the nickel-base alloy at a temperature ranging from 940°C (1725°F) to 1010°C (1850°F) for no greater than 4 hours;
cooling the nickel-base alloy after solution treating the nickel-base alloy at a first cooling rate wherein the first cooling rate is at least 444°C (800°F) per hour;
aging the nickel-base alloy in a first aging treatment wherein the first aging treatment comprises heating the

nickel-base alloy at a temperature ranging from 718°C (1325°F) to 788°C (1450°F) for a time ranging from 2 hours to 8 hours; and
aging the nickel-base alloy in a second aging treatment wherein the second aging treatment comprises heating the nickel-base alloy at a temperature ranging from 621°C (1150°F) to 704°C (1300°F) for at least 8 hours.

2. The method of claim 1 wherein pre-solution treating the nickel-base alloy comprises heating the nickel-base alloy at a temperature ranging from 843°C (1550°F) to 871°C (1600°F) for a time ranging from 2 to 16 hours.

3. The method of claim 1 or claim 2 wherein solution treating the nickel-base alloy comprises heating the nickel-base alloy at a temperature ranging from 954°C (1750°F) to 982°C (1800°F) for no greater than 2 hours.

4. The method of any one of the preceding claims wherein cooling the nickel-base alloy after solution treating comprises cooling the nickel-base alloy to 538°C (1000°F) or less.

5. The method of any one of the preceding claims wherein the first aging treatment comprises heating the nickel-base alloy at a temperature ranging from 740°C (1365°F) to 788°C (1450°F) for a time ranging from 2 hours to 8 hours.

6. The method of any one of the preceding claims wherein the second aging treatment comprises heating the nickel-base alloy at a temperature ranging from 621°C (1150°F) to 649°C (1200°F) for at least 8 hours.

7. The method of any one of the preceding claims further comprising cooling the nickel-base alloy to 538°C (1000°F) or less after pre-solution treating and prior to solution treating the nickel-base alloy.

8. The method of any one of the preceding claims further comprising cooling the nickel-base alloy after the first aging treatment to a second aging temperature at a cooling rate ranging from 28°C (50°F) per hour to 56°C (100°F) per hour.

9. The method of any one of the preceding claims wherein after pre-solution treating the nickel-base alloy, the nickel-base alloy is directly heated to the solution temperature.

10. The method of any one of the preceding claims wherein solution treating the nickel-base alloy comprises heating the nickel-base alloy for no greater than 2 hours at a solution temperature ranging from 954°C (1750°F) to 982°C (1800°F).

11. A method of forming an article of manufacture comprising a nickel-base alloy comprising, in percent by weight, up to 0.1 carbon, from 12 to 20 chromium, up to 4 molybdenum, up to 6 tungsten, from 5 to 12 cobalt, up to 14 iron, from 4 to 8 niobium, from 0.6 to 2.6 aluminum, from 0.4 to 1.4 titanium, from 0.003 to 0.03 phosphorus, from 0.003 to 0.015 boron, and balance nickel; wherein a sum of the weight percent of molybdenum and the weight percent of tungsten is at least 2 and not more than 8, and wherein a sum of atomic percent aluminium and atomic percent titanium is from 2 to 6, a ratio of atomic percent aluminum to atomic percent titanium is at least 1.5, and the sum of atomic percent aluminum and atomic percent titanium divided by atomic percent niobium is from 0.8 to 1. 3, the method comprising:

forming the nickel-base alloy into a desired configuration; and
heat-treating the nickel-base alloy in accordance with the method of claim 1.

12. A heat treated nickel-base alloy comprising in percent by weight, up to 0.1 carbon, from 12 to 20 chromium, up to 4 molybdenum, up to 6 tungsten, from 5 to 12 cobalt, up to 14 iron, from 4 to 8 niobium, from 0.6 to 2.6 aluminum, from 0.4 to 1.4 titanium, from 0.003 to 0.03 phosphorus, from 0.003 to 0.015 boron, and balance nickel; wherein a sum of the weight percent of molybdenum and the weight percent of tungsten is at least 2 and not more than 8, and wherein a sum of atomic percent aluminium and atomic percent titanium is from 2 to 6, a ratio of atomic percent aluminum to atomic percent titanium is at least 1.5, and the sum of atomic percent aluminum and atomic percent titanium divided by atomic percent niobium is from 0.8 to 1.3,
wherein the nickel-base alloy is heat treated by:

pre-solution treating the nickel-base alloy at a temperature ranging from 816°C (1500°F) of to 899°C (1650°F) of for a time ranging from 2 to 16 hours;
solution treating the nickel-base alloy for no greater than 4 hours at a solution temperature ranging from 941°C (1725°F) to 1010°C (1850°F);

cooling the nickel-base alloy at a first cooling rate of at least 444°C (800°F) per hour after solution treating the nickel-base alloy;
aging the nickel-base alloy in a first aging treatment from 2 hours to 8 hours at a temperature ranging from 718°C (1325°F) to 788°C (1450°F); and
aging the nickel-base alloy in a second aging treatment for at least 8 hours at a second aging temperature, the second aging temperature ranging from 621°C (1150°F) to 704°C (1300°F).

13. The nickel-base alloy of claim 12, the alloy microstructure comprising:

a matrix comprising at least about 20 volume percent γ'-phase precipitates and no more than about 5 volume percent γ"-phase precipitates, wherein the γ'-phase precipitates are predominant strengthening precipitates in the nickel-base alloy; and
at least one grain boundary precipitates, wherein the at least one grain boundary precipitate is sufficient to pin at least two thirds of the grain boundaries in the nickel-base alloy, the grain boundary precipitates being selected from the group consisting of δ-phase precipitates, η-phase precipitates and mixtures thereof, and having short, generally rod-shaped morphologies; and
the nickel-base alloy having a yield strength at 704°C (1300°F) of at least 827.4 MPa (120 ksi), a percent elongation at 704°C (1300°F) of at least 12 percent, a notched stress-rupture life of at least 300 hours as measured at 704°C (1300°F) and 551.6 MPa (80 ksi), and a low notch sensitivity.

14. An article of manufacture comprising a nickel-base alloy in accordance with claim 12 or claim 13.

15. The article of manufacture of claim 14 wherein the article of manufacture is selected from the group consisting of a turbine or compressor disk, a blade, a case, a shaft, and a fastener.

Patentansprüche

1. Verfahren für die Hitzebehandlung einer Nickelbasislegierung, die, in Gewichtsprozent, bis zu 0,1 Kohlenstoff, 12 bis 20 Chrom, bis zu 4 Molybdän, bis zu 6 Wolfram, 5 bis 12 Kobalt, bis zu 14 Eisen, 4 bis 8 Niob, 0,6 bis 2,6 Aluminium, 0,4 bis 1,4 Titan, 0,003 bis 0,03 Phosphor, 0,003 bis 0,015 Bor umfasst, wobei der Rest aus Nickel besteht; wobei eine Summe der Gewichtsprozente Molybdän und der Gewichtsprozente Wolfram mindestens 2 und nicht mehr als 8 beträgt und wobei eine Summe von Atomprozent Aluminium und Atomprozent Titan 2 bis 6 beträgt, ein Verhältnis von Atomprozent Aluminium zu Atomprozent Titan mindestens 1,5 beträgt und die Summe von Atomprozent Aluminium und Atomprozent Titan, durch Atomprozent Niob geteilt 0,8 bis 1,3 beträgt,
wobei das Verfahren Folgendes umfasst:

das Lösungsvorbehandeln der Nickelbasislegierung, wobei das Lösungsvorbehandeln das Erhitzen der Nickelbasislegierung bei einer Temperatur im Bereich von 815 °C (1500 °F) bis 899 °C (1650 °F) für eine Zeitspanne im Bereich von 2 bis 16 Stunden umfasst;
das Lösungsbehandeln der Nickelbasislegierung, wobei das Lösungsbehandeln der Nickelbasislegierung das Erhitzen der Nickelbasislegierung bei einer Temperatur im Bereich von 940 °C (1725 °F) bis 1010 °C (1850 °F) nicht länger als 4 Stunden lang umfasst;
das Kühlen der Nickelbasislegierung nach dem Lösungsbehandeln der Nickelbasislegierung mit einer ersten Kühlrate, wobei die erste Kühlrate mindestens 444 °C (800 °F) pro Stunde beträgt;
das Altern der Nickelbasislegierung durch eine erste Alterungsbehandlung, wobei die erste Alterungsbehandlung das Erhitzen der Nickelbasislegierung bei einer Temperatur im Bereich von 718 °C (1325 °F) bis 788 °C (1450 °F) für eine Zeitspanne im Bereich von 2 Stunden bis 8 Stunden umfasst; und
das Altern der Nickelbasislegierung durch eine zweite Alterungsbehandlung, wobei die zweite Alterungsbehandlung das Erhitzen der Nickelbasislegierung bei einer Temperatur im Bereich von 621 °C (1150 °F) bis 704 °C (1300 °F) mindestens 8 Stunden lang umfasst.

2. Verfahren nach Anspruch 1, wobei die Lösungsvorbehandlung der Nickelbasislegierung das Erhitzen der Nickelbasislegierung bei einer Temperatur im Bereich von 843 °C (1550 °F) bis 871 °C (1600 °F) für eine Zeitspanne im Bereich von 2 bis 16 Stunden umfasst.

3. Verfahren nach Anspruch 1 oder 2, wobei die Lösungsbehandlung der Nickelbasislegierung das Erhitzen der Nickelbasislegierung bei einer Temperatur im Bereich von 954 °C (1750 °F) bis 982 °C (1800 F) nicht länger als 2

Stunden lang umfasst.

4. Verfahren nach irgendeinem der vorhergehenden Ansprüche, wobei das Kühlen der Nickelbasislegierung nach dem Lösungsbehandeln das Kühlen der Nickelbasislegierung auf 538 °C (1000 °F) oder weniger umfasst.

5. Verfahren nach irgendeinem der vorhergehenden Ansprüche, wobei die erste Alterungsbehandlung das Erhitzen der Nickelbasislegierung bei einer Temperatur im Bereich von 740 °C (1365 °F) bis 788 °C (1450 °F) für eine Zeitspanne im Bereich von 2 Stunden bis 8 Stunden umfasst.

6. Verfahren nach irgendeinem der vorhergehenden Ansprüche, wobei die zweite Alterungsbehandlung das Erhitzen der Nickelbasislegierung bei einer Temperatur im Bereich von 621 °C (1150 °F) bis 649 °C (12A00 °F) mindestens 8 Stunden lang umfasst.

7. Verfahren nach irgendeinem der vorhergehenden Ansprüche, ferner das Kühlen der Nickelbasislegierung auf 538 °C (1000 °F) oder weniger nach dem Lösungsvorbehandeln und vor dem Lösungsbehandeln der Nickelbasislegierung umfassend.

8. Verfahren nach irgendeinem der vorhergehenden Ansprüche, ferner das Kühlen der Nickelbasislegierung nach der ersten Alterungsbehandlung auf eine zweite Alterungstemperatur mit einer Kühlrate im Bereich von 28 °C (50 °F) pro Stunde bis 56 °C (100 °F) pro Stunde umfassend.

9. Verfahren nach irgendeinem der vorhergehenden Ansprüche, wobei nach der Lösungsvorbehandlung der Nickelbasislegierung die Nickelbasislegierung direkt auf die Lösungstemperatur erhitzt wird.

10. Verfahren nach irgendeinem der vorhergehenden Ansprüche, wobei das Lösungsbehandeln der Nickelbasislegierung das Erhitzen der Nickelbasislegierung nicht länger als 2 Stunden lang bei einer Lösungstemperatur im Bereich von 954 °C (1750 °F) bis 982 °C (1800 °F) umfasst.

11. Verfahren zum Bilden eines Herstellungsartikels umfassend eine Nickelbasislegierung umfassend, in Gewichtsprozent, bis zu 0,1 Kohlenstoff, 12 bis 20 Chrom, bis zu 4 Molybdän, bis zu 6 Wolfram, 5 bis 12 Kobalt, bis zu 14 Eisen, 4 bis 8 Niob, 0,6 bis 2,6 Aluminium, 0,4 bis 1,4 Titan, 0,003 bis 0,03 Phosphor, 0,003 bis 0,015 Bor, wobei der Rest aus Nickel besteht, wobei eine Summe der Gewichtsprozente Molybdän und der Gewichtsprozente Wolfram mindestens 2 und nicht mehr als 8 beträgt und wobei eine Summe von Atomprozent Aluminium und Atomprozent Titan 2 bis 6 beträgt, ein Verhältnis von Atomprozent Aluminium zu Atomprozent Titan mindestens 1,5 beträgt und die Summe von Atomprozent Aluminium und Atomprozent Titan, durch Atomprozent Niob geteilt 0,8 bis 1,3 beträgt, wobei das Verfahren Folgendes umfasst:

das Bilden der Nickelbasislegierung in eine erwünschte Konfiguration; und
das Hitzebehandeln der Nickelbasislegierung dem Verfahren von Beispiel 1 entsprechend.

12. Hitzebehandelte Nickelbasislegierung umfassend, in Gewichtsprozent, bis zu 0,1 Kohlenstoff, 12 bis 20 Chrom, bis zu 4 Molybdän, bis zu 6 Wolfram, 5 bis 12 Kobalt, bis zu 14 Eisen, 4 bis 8 Niob, 0,6 bis 2,6 Aluminium, 0,4 bis 1,4 Titan, 0,003 bis 0,03 Phosphor, 0,003 bis 0,015 Bor umfasst, wobei der Rest aus Nickel und zufälligen Verunreinigungen besteht, wobei eine Summe der Gewichtsprozente Molybdän und der Gewichtsprozente Wolfram mindestens 2 und nicht mehr als 8 beträgt und wobei eine Summe von Atomprozent Aluminium und Atomprozent Titan 2 bis 6 beträgt, ein Verhältnis von Atomprozent Aluminium zu Atomprozent Titan mindestens 1,5 beträgt und die Summe von Atomprozent Aluminium und Atomprozent Titan, durch Atomprozent Niob geteilt 0,8 bis 1,3 beträgt, wobei die Nickelbasislegierung hitzebehandelt wird durch:

das Lösungsvorbehandeln der Nickelbasislegierung bei einer Temperatur im Bereich von 816 °C (1500 °F) bis 899 °C (1650 °F) für eine Zeitspanne im Bereich von 2 bis 16 Stunden;
das Lösungsbehandeln der Nickelbasislegierung nicht länger als 4 Stunden lang bei einer Lösungstemperatur im Bereich von 941 °C (1725 °F) bis 1010 °C (1850 °F);
das Kühlen der Nickelbasislegierung mit einer ersten Kühlungsrate von mindestens 444 °C (800 °F) pro Stunde nach dem Lösungsbehandeln der Nickelbasislegierung;
das Altern der Nickelbasislegierung durch eine erste Alterungsbehandlung von 2 Stunden bis 8 Stunden bei einer Temperatur im Bereich von 718 °C (1325 °F) bis 788 °C (1450 °F); und
das Altern der Nickelbasislegierung durch eine zweite Alterungsbehandlung mindestens 8 Stunden lang bei

einer zweiten Alterungstemperatur, wobei die zweite Alterungstemperatur im Bereich von 621 °C (1150 °F) bis 704 °C (1300 °F) liegt.

13. Nickelbasislegierung nach Anspruch 12, wobei die Legierungsmikrostruktur Folgendes umfasst:

eine Matrix umfassend mindestens etwa 20 Volumenprozent γ'-Phasenpräzipitate und nicht mehr als etwa 5 Volumenprozent γ"-Phasenpräzipitate, wobei die γ'-Phasenpräzipitate hauptsächlich verstärkende Präzipitate in der Nickelbasislegierung sind; und mindestens ein Korngrenzenpräzipitat, wobei das mindestens eine Korngrenzenpräzipitat ausreicht, um mindestens zwei Drittel der Korngrenzen in der Nickelbasislegierung festzulegen, wobei das Korngrenzenpräzipitat aus der Gruppe ausgewählt wird bestehend aus δ-Phasenpräzipitaten, π-Phasenpräzipitaten und Mischungen davon und kurze, im Allgemeinen stabförmige Morphologien aufweist und
die Nickelbasislegierung eine Streckfestigkeit bei 704 °C (1300 °F) von mindestens 827,4 MPa (120 ksi), eine Prozentdehnung bei 704 °C (1300 °F) von mindestens 12 Prozent, eine Kerbbruchbelastungsdauer von mindestens 300 Stunden, wie bei 704 °C (1300 °F) und 551,6 MPa (80 ksi) gemessen und eine geringe Kerbempfindlichkeit aufweist.

14. Herstellungsartikel umfassend eine Nickelbasislegierung nach Anspruch 12 oder 13.

15. Herstellungsartikel nach Anspruch 14,
wobei der Herstellungsartikel aus der Gruppe ausgewählt ist bestehend aus einer Turbine oder Kompressorscheibe, einer Schaufel, einem Gehäuse, einer Welle und einer Befestigungsvorrichtung.

Revendications

1. Procédé de traitement thermique d'un alliage à base de nickel comprenant en pour cent en poids, jusqu'à 0,1 de carbone, de 12 à 20 de chrome, jusqu'à 4 de molybdène, jusqu'à 6 de tungstène, de 5 à 12 de cobalt, jusqu'à 14 de fer, de 4 à 8 de niobium, de 0,6 à 2,6 d'aluminium, de 0,4 à 1,4 de titane, de 0,003 à 0,03 de phosphore, de 0,003 à 0,015 de bore, et le reste étant du nickel ; dans lequel une somme du pourcentage en poids de molybdène et du pourcentage en poids de tungstène est d'au moins 2 et pas plus de 8, et dans lequel une somme du pourcentage atomique d'aluminium et du pourcentage atomique de titane est de 2 à 6, un rapport entre le pourcentage atomique d'aluminium et le pourcentage atomique de titane est d'au moins 1,5, et la somme du pourcentage atomique d'aluminium et du pourcentage atomique de titane divisée par le pourcentage atomique de niobium est de 0,8 à 1,3 ; le procédé comprenant :

le traitement en présolution de l'alliage à base de nickel, le traitement en présolution comprenant le chauffage de l'alliage à base de nickel à une température allant de 815 °C (1 500 °F) à 899 °C (1 650 °F) pendant une durée allant de 2 heures à 16 heures ;
le traitement en solution de l'alliage à base de nickel, le traitement en solution de l'alliage à base de nickel comprenant le chauffage de l'alliage à base de nickel à une température allant de 940 °C (1 725 °F) à 1 010 °C (1 850 °F) pendant pas plus de 4 heures ;
le refroidissement de l'alliage à base de nickel après le traitement en solution de l'alliage à base de nickel à une première vitesse de refroidissement, la première vitesse de refroidissement étant au moins de 444 °C (800 °F) par heure,
le vieillissement de l'alliage à base de nickel dans un premier traitement de vieillissement, le premier traitement de vieillissement comprenant le chauffage de l'alliage à base de nickel à une température allant de 718 °C (1 325 °F) à 788 °C (1 450 °F) pendant une durée allant de 2 heures à 8 heures ; et
le vieillissement de l'alliage à base de nickel dans un second traitement de vieillissement, le second traitement de vieillissement comprenant le chauffage de l'alliage à base de nickel à une température allant de 621 °C (1 150 °F) à 704 °C (1 300 °F) pendant au moins 8 heures.

2. Procédé selon la revendication 1, dans lequel le traitement en présolution de l'alliage à base de nickel comprend le chauffage de l'alliage à base de nickel à une température allant de 843 °C (1 550 °F) à 871 °C (1 600 °F) pendant une durée allant de 2 heures à 16 heures.

3. Procédé selon la revendication 1 ou la revendication 2, dans lequel le traitement en solution de l'alliage à base de nickel comprend le chauffage de l'alliage à base de nickel à une température allant de 954 °C (1 750 °F) à 982 °C

(1 800 °F) pendant pas plus de 2 heures.

4. Procédé selon l'une quelconque des revendications précédentes, dans lequel le refroidissement de l'alliage à base de nickel après traitement en solution comprend le refroidissement de l'alliage à base de nickel à 538 °C (1 000 °F) ou moins.

5. Procédé selon l'une quelconque des revendications précédentes, dans lequel le premier traitement de vieillissement comprend le chauffage de l'alliage à base de nickel à une température allant de 740 °C (1 365 °F) à 788 °C (1 450 °F) pendant une durée allant de 2 heures à 8 heures.

6. Procédé selon l'une quelconque des revendications précédentes, dans lequel le second traitement de vieillissement comprend le chauffage de l'alliage à base de nickel à une température allant de 621 °C (1 150 °F) à 649 °C (1 200 °F) pendant au moins 8 heures.

7. Procédé selon l'une quelconque des revendications précédentes, comprenant en outre le refroidissement de l'alliage à base de nickel à 538 °C (1 000 °F) ou moins après traitement en présolution et avant traitement en solution de l'alliage à base de nickel.

8. Procédé selon l'une quelconque des revendications précédentes, comprenant en outre le refroidissement de l'alliage à base de nickel avant le premier traitement de vieillissement à une seconde température de vieillissement à une vitesse de refroidissement allant de 28 °C (50 °F) par heure à 56 °C (100 °F) par heure.

9. Procédé selon l'une quelconque des revendications précédentes, dans lequel après le traitement en présolution de l'alliage à base de nickel, l'alliage à base de nickel est directement chauffé à la température de solution.

10. Procédé selon l'une quelconque des revendications précédentes, dans lequel le traitement en solution de l'alliage à base de nickel comprend le chauffage de l'alliage à base de nickel pendant pas plus de 2 heures à une température de solution allant de 954 °C (1 750 °F) à 982 °C (1 800 °F).

11. Procédé de formation d'un article de fabrication comprenant un alliage à base de nickel comprenant, en pour cent en poids, jusqu'à 0,1 de carbone, de 12 à 20 de chrome, jusqu'à 4 de molybdène, jusqu'à 6 de tungstène, de 5 à 12 de cobalt, jusqu'à 14 de fer, de 4 à 8 de niobium, de 0,6 à 2,6 d'aluminium, de 0,4 à 1,4 de titane, de 0,003 à 0,03 de phosphore, de 0,003 à 0,015 de bore, et le reste étant du nickel ; dans lequel une somme du pourcentage en poids de molybdène et du pourcentage en poids de tungstène est d'au moins 2 et pas plus de 8, et dans lequel une somme du pourcentage atomique d'aluminium et du pourcentage atomique de titane est de 2 à 6, un rapport entre le pourcentage atomique d'aluminium et le pourcentage atomique de titane est d'au moins 1,5, et la somme du pourcentage atomique d'aluminium et du pourcentage atomique de titane divisée par le pourcentage atomique de niobium est de 0,8 à 1,3 ; le procédé comprenant :

la formation de l'alliage à base de nickel en une configuration souhaitée ; et
le traitement thermique de l'alliage à base de nickel en conformité avec le procédé de la revendication 1.

12. Alliage à base de nickel traité thermiquement comprenant en pour cent en poids, jusqu'à 0,1 de carbone, de 12 à 20 de chrome, jusqu'à 4 de molybdène, jusqu'à 6 de tungstène, de 5 à 12 de cobalt, jusqu'à 14 de fer, de 4 à 8 de niobium, de 0,6 à 2,6 d'aluminium, de 0,4 à 1,4 de titane, de 0,003 à 0,03 de phosphore, de 0,003 à 0,015 de bore, et le reste étant du nickel ; dans lequel une somme du pourcentage en poids de molybdène et du pourcentage en poids de tungstène est d'au moins 2 et pas plus de 8, et dans lequel une somme du pourcentage atomique d'aluminium et du pourcentage atomique de titane est de 2 à 6, un rapport entre le pourcentage atomique d'aluminium et le pourcentage atomique de titane est d'au moins 1,5, et la somme du pourcentage atomique d'aluminium et du pourcentage atomique de titane divisée par le pourcentage atomique de niobium est de 0,8 à 1,3,
dans lequel l'alliage à base de nickel est traité thermiquement par :

un traitement en présolution de l'alliage à base de nickel à une température allant de 816 °C (1 500 °F) à 899 °C (1 650 °F) pendant une durée allant de 2 heures à 16 heures ;
un traitement en solution de l'alliage à base de nickel pendant pas plus de 4 heures à une température de solution allant de 941 °C (1 725 °F) à 1 010 °C (1 850 °F) ;
un refroidissement de l'alliage à base de nickel à une première vitesse de refroidissement d'au moins de 444 °C (800 °F) par heure après le traitement en solution de l'alliage à base de nickel ;

un vieillissement de l'alliage à base de nickel dans un premier traitement de vieillissement de 2 heures à 8 heures à une température allant de 718 °C (1 325 °F) à 788 °C (1 450 °F) ; et
un vieillissement de l'alliage à base de nickel dans un second traitement de vieillissement pendant au moins 8 heures à une seconde température de vieillissement, la seconde température de vieillissement allant de 621 °C (1 150 °F) à 704 °C (1 300 °F).

13. Alliage à base de nickel selon la revendication 12, la microstructure d'alliage comprenant :

une matrice comprenant au moins environ 20 pour cent en volume de précipités de phase γ' et pas plus d'environ 5 pour cent en volume de précipités de phase γ", les précipités de phase γ' sont des précipités de renforcement prédominants dans l'alliage à base de nickel ; et
au moins un précipité de frontière de grain, l'au moins un précipité de frontière de grain est suffisant pour épingler au moins deux tiers des frontières de grain dans l'alliage à base de nickel, les précipités de frontière de grain étant choisis dans le groupe consistant en des précipités de phase δ, des précipités de phase η et des mélanges de ceux-ci, et ayant des morphologies courtes, généralement en forme de tige ; et
l'alliage à base de nickel ayant une limite d'élasticité à 704 °C (1 300 °F) d'au moins 827,4 MPa (120 ksi), un pourcentage d'allongement à 704 °C (1 300 °F) d'au moins 12 pour cent, une durée de vie avant rupture sous contrainte par entaille d'au moins 300 heures telle que mesurée à 704 °C (1 300 °F) et 551,6 MPa (80 ksi), et une faible sensibilité à l'entaille.

14. Article de fabrication comprenant un alliage à base de nickel en conformité avec la revendication 12 ou la revendication 13.

15. Article de fabrication selon la revendication 14
dans lequel l'article de fabrication est choisi dans le groupe consistant en une turbine ou un disque du compresseur, une lame, un boîtier, un arbre et une fixation.

Fig. 1

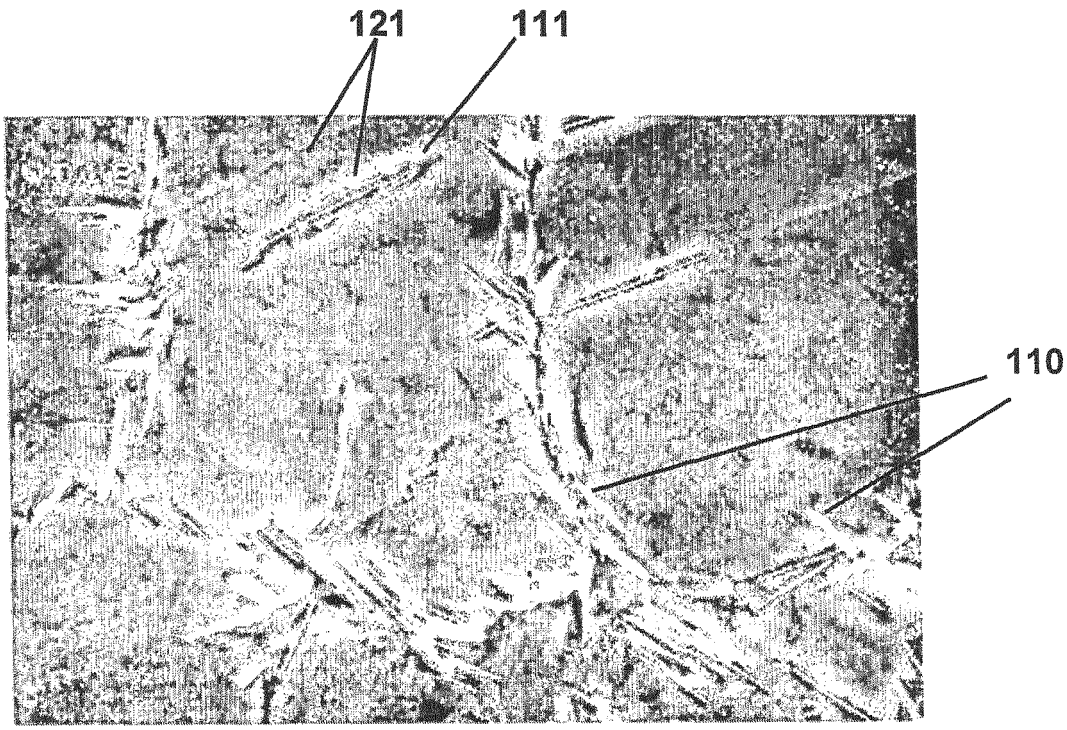


Fig. 2

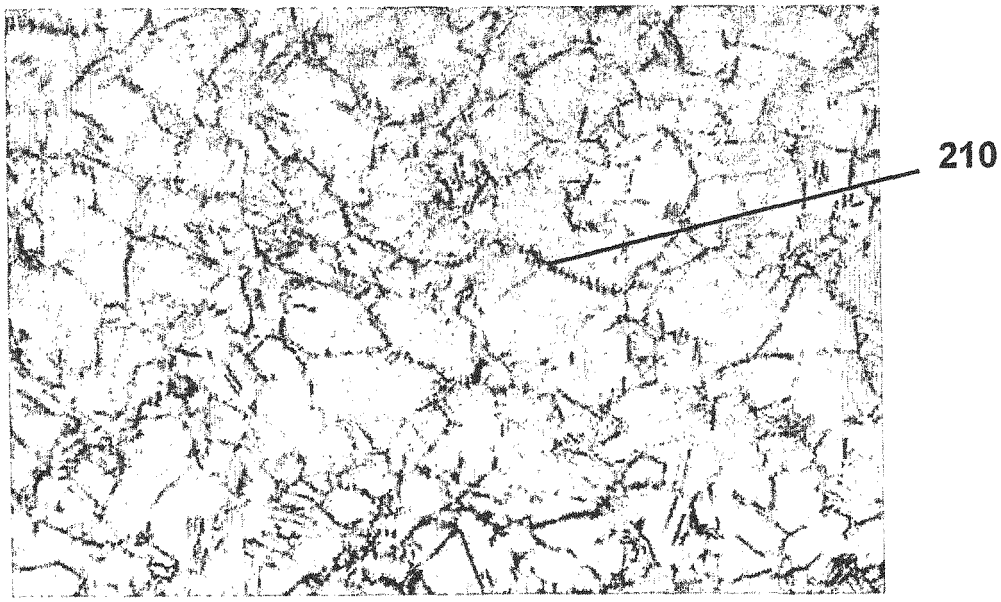


Fig. 3


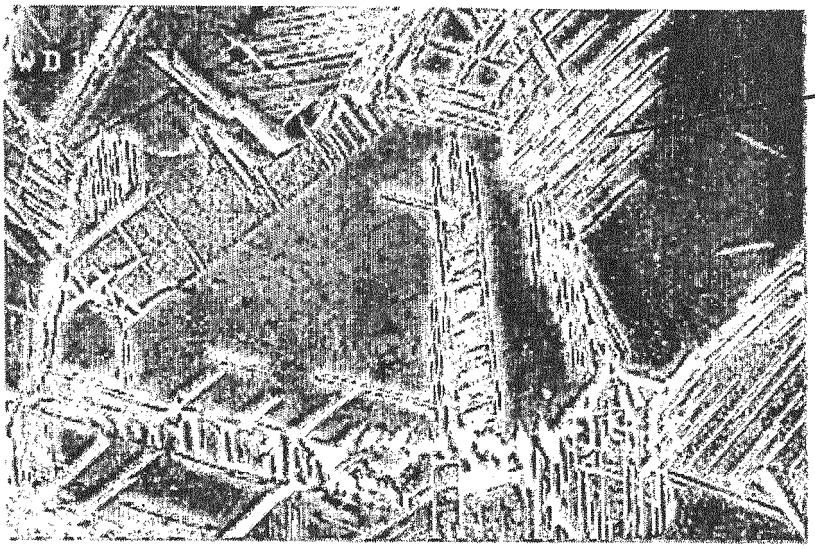


Fig. 4

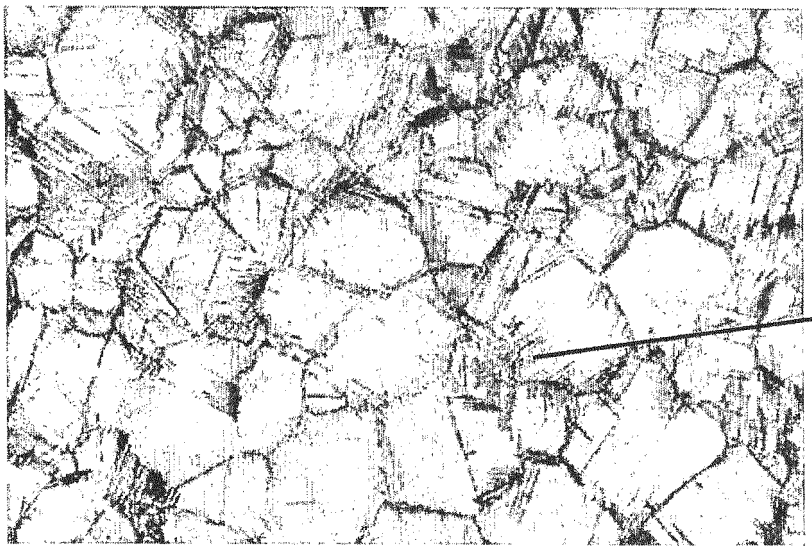

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 04785174 A **[0001]**
- US 3046108 A **[0003]**
- US 144369 A **[0024]**
- WO 03097888 A **[0024]**

Non-patent literature cited in the description

- **T CONNOLLEY et al.** Effect of Oxidation on High Temperature Fatigue Crack Initiation and Short Crack Growth in Inconel 718. *Superalloys,* January 2000, 435-443 **[0012]**