

(19)



(11)

EP 2 803 624 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
01.02.2017 Bulletin 2017/05

(51) Int Cl.:
B67C 3/00 (2006.01) B67C 3/28 (2006.01)

(21) Application number: **14001722.9**

(22) Date of filing: **15.05.2014**

(54) Filling unit of a container filling machine, having improved sensing capability

Abfülleinheit einer Behälterfüllmaschine mit verbesserter Messkapazität

Unité de remplissage d'une machine de remplissage de récipients, dotée d'une capacité de détection améliorée

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **15.05.2013 EP 13167937**

(43) Date of publication of application:
19.11.2014 Bulletin 2014/47

(73) Proprietor: **Sidel S.p.A. Con Socio Unico
43126 Parma (IT)**

(72) Inventors:
• **Cocchi, Enrico
43126 Parma (IT)**
• **Cortesi, Andrea
43126 Parma (IT)**

(56) References cited:
**EP-A1- 1 127 835 EP-A1- 1 288 125
WO-A1-02/068266 WO-A1-2006/013746
WO-A1-2011/091956 DE-A1-102008 016 235**

EP 2 803 624 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to a filling unit of a filling machine, designed for filling containers with a product, for example a carbonated liquid. In particular, the present invention relates to a filling unit with improved sensing capability for quality monitoring and data analysis with respect to the filling operations being performed.

[0002] In the field of bottling of carbonated liquid, like beer, in containers, like glass bottles or aluminum cans, a system is known comprising a feed line for feeding a succession of empty bottles to a filling machine, in turn comprising a filling rotating wheel (so called "carousel"), carrying a number of filling units. The filling units are mounted to rotate continuously about a longitudinal axis, engage the empty bottles, feed pressurized gas into the bottles, fill the bottles with the product, decompress the filled bottles, and then feed the bottles to a capping machine, which is connected to the filling machine by at least one transfer wheel and closes the bottles with respective caps.

[0003] The Applicant has realized that known filling machines may suffer from some drawbacks concerning the accuracy and generally the quality of the filling operations.

[0004] Indeed, it may prove difficult to ensure that the correct filling parameters are satisfied during each step of the filling recipe; in this regard, controls and checks performed after the filling process has been completed may not be sufficient to guarantee that the bottled fluid product has the desired properties.

[0005] Known from EP-1127835-A1, is a filling unit as defined in the preamble of claim 1.

[0006] The aim of the present invention is consequently to solve, at least in part, the problem previously highlighted, and in general to provide an improved solution for a filling unit in a filling machine, particularly with respect to control and monitoring of its operation.

[0007] According to the present invention, a filling unit, and a related filling machine, are thus provided, as defined in the appended claims.

[0008] For a better understanding of the present invention, preferred embodiments thereof are now described, purely by way of a non-limiting example, with reference to the attached drawings, wherein:

- Figure 1 is a schematic view of a filling machine;
- Figure 2 is a schematic block diagram of a filling unit of the filling machine of Figure 1;
- Figure 3 to 5 are perspective views of a filling unit of the filling machine of Figure 1, according to a possible embodiment of the present solution;
- Figure 6 is a schematic block diagram of an electronic control module of the filling unit of the filling machine, according to an embodiment of the present solution;
- Figure 7 is a plot of the pressure in a container being filled, during execution of filling operations;

- Figure 8 is a schematic block diagram of a digital communication system in the filling machine; and
- Figure 9 is a further plot of the pressure in a container being filled, during execution of the filling operations.

[0009] Figure 1 schematically shows a machine, denoted as a whole with 1, for filling liquid into containers 2, for example glass bottles or aluminum cans.

[0010] Filling machine 1 comprises a conveying device, including a carousel 4, which is mounted to rotate continuously (anticlockwise in Figure 1) about a substantially vertical longitudinal axis A.

[0011] The carousel 4 receives a succession of empty containers 2 from an input wheel 5, which is coupled to carousel 4 at a first transfer station 6 and is mounted to rotate continuously about a respective vertical longitudinal axis B, parallel to axis A.

[0012] The carousel 4 releases a succession of filled containers 2 to an output wheel 8, which is coupled to carousel 4 at a second transfer station 9 and is mounted to rotate continuously about a respective vertical longitudinal axis C, parallel to axes A and B.

[0013] Filling machine 1 comprises a number of filling units 10, which are equally spaced about axis A, are mounted along a peripheral edge of carousel 4, and are moved by the same carousel 4 along a path P extending about axis A and through transfer stations 6 and 9.

[0014] Each filling unit 10 is designed to receive at least one container 2 to be filled, and to perform, during its rotation along path P, a number of filling operations according to a filling "recipe", in order to fill the container 2 with a fluid (e.g. a carbonated liquid).

[0015] The filling unit 10 is configured to engage the container 2, at an opening of a neck 2' thereof, and includes one or more fluidic conduits, which are designed to selectively couple the container 2 to one or more feed devices.

[0016] In a possible embodiment, schematically shown in Figure 2 (which refers to a single filling unit 10, for clarity of illustration), filling unit 10 includes: a first fluidic conduit 11a, coupled to a first feed device 12a, designed to supply the liquid that is to fill the container 2, such as beer, from a first feed tank (not shown); a second fluidic conduit 11b, coupled to a second feed device 12b, designed to supply a gas, such as carbon dioxide, from a second feed tank (not shown); and a third fluidic conduit 11c, coupled to an air-suction device 12c (e.g. including a vacuum pump), providing a suction action to extract gases from the bottle during a vacuum phase.

[0017] Each filling unit 10 also comprises at least one flow regulator device 14, designed to define one or more filling passages 15 (only one of which is schematically shown in Figure 2) communicating with the opening at the neck 2' of the container 2, and including a valve group 16, coupled to the above first, second and third fluidic conduits 11a, 11b, 11c, and operable to selectively couple one or more of the same first, second and third fluidic conduits 11a, 11b, 11c (and thus the first feed device

12a, the second feed device 12b and/or the air-suction device 12c) with the one or more filling passages 15, during filling of the container 2.

[0018] Filling of the container 2 is performed according to a desired plan, the so called "recipe", which may for example envisage one or more of the following operations, e.g. performed in a preset sequence:

a first air-extraction operation to remove air from the container 2 by fluidically coupling the container 2 to the air-suction device 12c;

flushing the container 2, by feeding a stream of carbon dioxide to container 2, via the second feed device 12b;

a second air-extraction operation to remove any remaining air from the container 2, again by fluidically coupling the container 2 to the air-suction device 12c (so called "sniff" operation);

pressurizing the container 2, by feeding a stream of carbon dioxide into container 2 via the second feed device 12b;

filling the container 2, by feeding a stream of filling liquid, via the first feed device 12a; and

depressurizing the container 2, by fluidically coupling the container 2 to the air-suction device 12c.

[0019] According to an aspect of the present solution, each filling unit 10 is integrally provided with a sensor element 17, which is arranged so as to be fluidically coupled to the filling passage 15, during filling of the container 2, thereby being able to monitor parameters and quantities associated to the environment within the same container 2; for example, sensor element 17 may be arranged in the flow regulator device 14, within the filling passage 15, or so as to be in fluidic communication with the same filling passage 15.

[0020] In particular, sensor element 17 includes a pressure sensor, which is configured to monitor the pressure (or vacuum condition) within the container 2 during each step of the filling recipe; the presence of the sensor element 17 allows to collect relevant diagnostic information for the analysis and monitoring of the filling operations, and also to perform control actions and adjustments in real time during the same filling operations.

[0021] The presence of sensor element 17 allows to perform a number of operations, among which:

- detecting pressure values during all the steps of the recipe, storing these values, and, e.g. after the filling operations are completed, draw pressure plots, which may displayed on an operator panel, in order to allow analysis of the performance of the filling operations;
- monitoring the occurrence of failures, such as bursting of a container 2, during execution of the recipe steps, e.g. by checking if the sensed pressure values overcome a preset absolute maximum pressure threshold Th_1 , or a preset differential pressure

threshold Th_2 , relating to the difference of pressure between the container 2 and a respective feed tank; in case any one of the absolute or differential pressure thresholds Th_1 , Th_2 , is overcome (this being indicative of a possible failure), the filling operations may be immediately stopped and suitable actions performed in order to safeguard the filling machine 1. As an alternative, a sudden variation of the sensed pressure associated with burst of the container 2 may be detected by monitoring the pattern of the derivative of the sensed pressure signal;

- monitoring the correctness of the vacuum level during the recipe steps envisaging vacuum within the containers 2, in particular with respect to glass bottles for beer;
- monitoring the correct depressurization of the containers 2 during the recipe steps envisaging depressurization (e.g. during a sniff operation). In this case, the sensed pressure values are compared to a decompression pressure threshold Th_3 , and decompression is considered successful only if the sensed pressure is found to be below the decompression pressure threshold Th_3 at the end of the recipe step.

[0022] Moreover, the presence of sensor element 17 proves useful also in different operating conditions of the filling machine 1, e.g. during a cleaning/sterilization operation, when dummy containers (e.g. dummy bottles) are placed in the filling machine 1 and a cleaning fluid is introduced.

[0023] Monitoring pressure values at the flow regulator devices 14 allows in this case to check the correct passage of the cleaning fluid through the flow regulator devices 14 into the dummy bottles (and this is particularly useful in case no flow-meters are present at the openings of the containers 2).

[0024] According to a further aspect of the present solution, the sensor element 17 arranged in at least one of the filling units 10 further includes a temperature sensor, which may for example be integrated with the pressure sensor, in order to detect the temperature of the filling fluid during filling operations, and/or of the cleaning fluid during cleaning operations.

[0025] Also in this case, monitoring of the temperature values within the containers 2 allows to perform controls and adjustments in real time during execution of the operations of the filling machine 1, e.g. during filling or recirculation of the filling fluid, or during cleaning/sanitizing of the flow regulator devices 14, in general providing important diagnostic information to be used in real time or at a later stage (during a post-processing stage) to control the filling machine 1.

[0026] A possible embodiment of a filling unit 10 of the filling machine 1 will now be discussed with reference to Figures 3 to 5.

[0027] In this solution, filling unit 10 includes a main body 20, having a vertical extension along a longitudinal

axis D, that is substantially parallel to axis A of carousel 4.

[0028] The main body 20 has a bottom part 20a, which ends at a flange 22, that is mechanically coupled to the periphery of the carousel 4, and an upper part 20b, which is coupled to the first fluidic conduit 11a, in order to receive the filling liquid from the first feed device 12a (here not shown).

[0029] The bottom part 20a of the main body 20 defines a container receiving part 24 of the filling unit 10, coupled to the flange 22 and designed to receive the neck 2' of the container 2 that is to be filled.

[0030] The main body 20 internally defines filling passage 15 (not shown in Figures 3-5), from the first fluidic conduit 11a to the opening of the container 2, at the container receiving part 24, which selectively allows the passage of the filling fluid towards the container 2, during preset steps of the filling recipe. Suitable actuatable elements, such as a valve or shutter element (here not shown), are provided within the main body 20, cooperating with the filling passage 15 in order to modify the section of passage to the fluid, e.g. between a fully open, a partially open, or a closed condition, according to the different requirements envisaged by the filling operations.

[0031] The second fluidic conduit 11b of the filling unit 10 is coupled to the container receiving part 24, below flange 22, and allows to receive gas, such as carbon dioxide, from the second feed device 12b (here not shown).

[0032] The flow regulator device 14 of the filling unit 10 includes a housing 26, which has a vertical extension substantially parallel to longitudinal axis D, and is mechanically coupled to main body 20.

[0033] In a manner not shown in detail, within housing 26 of the flow regulator device 14 suitable actuator elements are provided, which are configured to cooperate with the actuatable elements within the body 20, in order to fully open, partially open, or close the filling passage 15.

[0034] Moreover, the flow regulator device 14 carries, at a bottom part 14a thereof, the third fluidic conduit 11c (operating as a decompression channel), having one end coupled to the air-suction device 12c, and the other end fitted into the opening of the container 2, through flange 22.

[0035] According to an aspect of the proposed embodiment, the sensor element 17 (of a known type, here not discussed in detail) is mounted to the flow regulator device 14, so as to continuously monitor the pressure within the internal environment of the container 2.

[0036] For example, the sensor element 17 may be coupled to the third fluidic conduit 11c. In more detail, the sensor element 17 includes a sensing part 17a, housing a suitable sensing arrangement (of a known type), and an input port 17b, coupled to the third fluidic conduit 11c, and allowing fluidic connection between the sensing part 17a and the same third fluidic conduit 11c. Moreover, the sensor element 17 has an end part 17c, coupled to,

and extending towards the outside of, the housing 26, carrying suitable electrical connection elements (e.g. in the form of electrical contacts or pads), in order to output the transduced electrical quantity (e.g. a capacitive or resistive variation), indicative of the sensed pressure. The housing 26 of the flow regulator device 14 carries, at an outer surface thereof, a wiring element 28, electrically coupled to end part 17c, and extending along the longitudinal axis toward a top part 14b of the same flow regulator device 14.

[0037] The top part 14b may be releasably coupled to the housing 26, via a suitable mechanical connection, and may house an electronic board of a control module 30 of the filling unit 10 (here schematically shown), integrating suitable electronic circuitry (as discussed in more details below); the wiring element 28 in this case ends at the control module 30, being electrically connected thereto.

[0038] A further aspect of the present solution, which will now be discussed in connection with Figure 6, envisages the filling unit 10 having both electronic intelligence and storage capacity, integrated in suitable electronic circuitry of the control module 30. It is to be noted that some (at least one), or all, of the filling units 10 of the filling machine 1 may be made as it will now be discussed.

[0039] In particular, control module 30 includes:

- a computing unit 32, including a microcontroller, or any other processing unit;
- a storage memory 34, coupled to the computing unit 32, and configured to store operating data relating to the filling operations being performed, e.g. samples of the pressure or temperature values detected by sensor element 17 and/or other sensed data, such as flow rate measures or electrical current measures from a resistive probe, or in general any other operating data available to the computing unit 32, originated from sensors at the flow regulator device 14 or received from external components. For example, storage memory 34 may be a buffer memory, which stores operating data relating to execution of a number of filling recipes, circularly overwriting data previously stored;
- a sensor interface module 35, coupled to the computing unit 32, configured to acquire the electrical signals from the sensor element 17, related to the pressure and temperature readings, to process the same electrical signals (in case it is required, e.g. via an analog to digital conversion), and to provide the same signals to the computing unit 32, which then generates the operating data (e.g. pressure and temperature data) to be stored in the storage memory 34. Sensor interface module 35 may acquire the sensed signals at a preset sampling period;
- an actuator interface module 36, coupled to the computing unit 32 and to actuator elements of the flow regulator device 14, configured to transmit to the same actuator elements commands to actuate the

actuatable elements within the main body 20 of the filling unit 10, these commands being e.g. generated by the computing unit 32 based on the operations to be performed according to the filling recipe;

- a communication interface module 38, coupled to the computing unit 32, operable to receive and transmit data from/to the external environment, in particular from/to a central control unit (here not shown) of the filling machine 1 via a digital communication bus (such as a CAN bus). The central control unit may be able to further process the data, e.g. in order to diagnose faults and problems of the filling unit 10.

[0040] In more details, computing unit 32 may store in storage memory 34 pressure and temperature operating data relating to the filling operations in real time, i.e. during execution of the same operations; to this end, signals from the sensor element 17 may be sampled with a desired sampling frequency and processed to generate the operating data to be stored.

[0041] The stored pressure and temperature operating data may be transferred to the external environment via the communication interface module 38, again in real time, during execution of the filling operations, or after the filling recipe has been completed, for processing and analysis, e.g. by central computing unit, again in real time or as post-processing operations.

[0042] Figure 7 shows an exemplary result of the processing of the stored operating data, i.e. a plot of the pressure values sensed during the various steps of the filling recipe.

[0043] In particular, the plot shows the succession in time of: a first air-extraction operation (denoted with S_1); a first pressurization operation (denoted with S_2); a second air-extraction operation (denoted with S_3); a second pressurization operation (denoted with S_4); the filling operation at a substantially constant pressure (denoted with S_5); and a final depressurization operation (denoted with S_6).

[0044] This plot may be displayed on a user panel at the filling machine 1, or at a remote location from the filling machine, e.g. at a supervisory facility.

[0045] Computing unit 32 may also be configured (e.g. via suitable software and program instructions) to process in real time the operating data, in order e.g. to detect a fault in the filling unit 10, or a serious failure event, such as bursting of the container 2 being filled.

[0046] An alarm signal may thus be promptly generated and suitable corrective actions performed, such as stopping of the filling machine 1.

[0047] In general, the intelligence on-board the filling unit 10 allows to more reliably and promptly identify any problem or anomaly occurring in the filling machine 1, so as to achieve a desired quality control of the operations performed.

[0048] According to a further aspect of the present solution, which will now be discussed with reference to Figure 8, the control modules 30 of a number of filling units

10 in the filling machine 1 communicate with a central control unit 40 of the same filling machine 1 over a communication bus 42.

[0049] In a possible embodiment, central control unit 40 includes an industrial programmable controller (PLC), and communication bus 42 is a digital communication bus (e.g. a CAN bus), transferring digital information, signals and commands.

[0050] As shown in Figure 8, the control modules 30 communicate with the communication bus 42, and thereby with the central control unit 40, via the respective communication interface modules 38 coupled to the respective computing unit 32.

[0051] The central control unit 40 is coupled to the communication bus 42 and may also be coupled with a supervisor unit 45, e.g. located remotely with respect to the filling machine 1, via a remote wireless link 46.

[0052] The central control unit 40 is thus able to receive operating data from the various filling units 10, in real time during execution of the filling recipe, and/or after the same filling recipe has been completed, reading the operating data stored in the respective storage memories 34.

[0053] The communication bus 42 also allows the central control unit 40 to transmit to the various control modules 30 data relating to the operating condition of the filling machine 1 and data regarding the operations to be performed, in order to assist execution of the filling recipe; for example, these data may include pressure values in the feed tanks, relating to the pressure of the filling liquid and/or gas within the same feed tanks (these data may be used by the slave units to control the filling operations and diagnose possible faults and anomalies).

[0054] The central control unit 40 is also provided with suitable software and program instructions in order to process the received operating data, either in real time or as post-processing operations, in order to determine the occurrence of faults, the correctness of the filling operations, the need of performing adjustments, etc.

[0055] For example, the central control unit 40 may be able to execute further plots of the received operating data, such as sensed pressure values, possibly with different time scales and number of samples involved.

[0056] Figure 9 shows an exemplary plot executed by the central control unit 40, which may be displayed on a related display and/or sent wirelessly to the supervisor unit 45. The shown plot relates to a filling step of the recipe, at a substantially constant pressure.

[0057] The advantages that the described solution allows to achieve are clear from the foregoing description.

[0058] In particular, it is again underlined that an improved analysis capability and control on the quality of the filling operations are achieved in the filling machine 1.

[0059] Indeed, the provision of sensor elements 17 integrated in the filling units 10 allows to collect operating data relating to the performance of the individual filling units 10, during the filling operations, thus allowing to closely monitor the performance of the filling machine 1.

[0060] Furthermore, the provision of processing and/or storage capability in the filling units 10 allows to simplify transmission and post-processing of the operating data that are collected during the filling operations.

[0061] In this respect, only a portion of the collected data may be transmitted to the central control unit 40 of the filling machine 1, e.g. only data that are considered relevant for the quality checks, thus saving storage capacity.

[0062] Moreover, historical trends may be easily generated, in order to further improve quality assessment.

[0063] Finally it is clear that modifications and variations may be applied to the solution described and shown, without departing from the scope of the appended claims.

[0064] For example, it is clear that the discussed solution may advantageously be adopted also for different kind of containers, e.g. PET containers, to be filled and/or different kind of filling fluids, e.g. different from food products.

[0065] Moreover, each intelligent filling unit 10 may be configured to control filling of more than one container (e.g. having a corresponding number of flow regulator devices 14 and filling means).

Claims

1. A filling unit (10) of a filling machine (1), designed to engage at least one container (2) having a neck with an opening to carry out filling thereof with a liquid product, including a flow regulator device (14) defining at least one filling passage (15), which communicates with the opening at the neck of the container and is supplied with liquid product from a feed tank, and configured to regulate flow of the product within the container (2) during filling operations, and integrally provided with a sensor element (17) configured to detect at least one operating parameter related to the filling operations, during the filling operations, the at least one operating parameter being associated to a pressure within the container (2) being filled, and an electronic control module (30), integrating a computing unit (32), operatively coupled to the sensor element (17) and configured to acquire operating data during the filling operations, designed for quality control over the filling operations, and configured to process the operating data, in order to detect the occurrence of a failure in the filling of the container (2), whenever the pressure within the container (3) is found to exceed a first pressure threshold (Th1); **characterized in that** the computing unit (32) communicates over a communication bus (42) with a central control unit (40) of the same filling machine, the central control unit (40) transmits operating data including the pressure of the filling liquid and/or gas within the feed tank to the computing unit (32) which processes the operating data, in order to detect the

occurrence of a failure in the filling of the container (2), whenever the differential pressure between the container (3) and the feed tank supplying the liquid product is found to exceed a second pressure threshold (Th2).

2. The filling unit according to claim 1, wherein the sensor element (17) includes a pressure sensor (17a) arranged so as to be fluidically coupled with the internal environment of the container (2) during the filling operations, thereby detecting the pressure within the same container (2), and wherein the sensor element (17) is further configured to detect a temperature within the container (2) being filled, during the filling operations.
3. The filling unit according to claim 1 or 2, wherein the control module (30) integrates a storage memory (34), coupled to said computing unit (32), and configured to store the operating data relating to the filling operations being performed, wherein the operating data stored in the storage memory (34) are designed to be sent to the central control unit (40), during the filling operations, and/or after the filling operations for further processing thereof.
4. The filling unit according to any of claim 1 or 3, wherein the control module (30) includes a communication interface (38), configured to be coupled to the communication bus (42), which is a digital communication bus, for communication with the central control unit (40) of a filling machine (1).
5. A filling machine (1), including a number of filling units (10) according to claims 1-4, configured to fill one or more containers (2) with a carbonated liquid, the carbonated liquid being a food product.

Patentansprüche

1. Füllereinheit (10) einer Füllmaschine (1), die ausgelegt ist, mit mindestens einem Behälter (2) in Eingriff zu gelangen, der eine Verengung mit einer Öffnung, um seine Befüllung mit einem flüssigen Produkt auszuführen, besitzt, und die eine Durchflussregulierungsvorrichtung (14) enthält, die mindestens einen Fülldurchgang (15) definiert, der mit der Öffnung an der Verengung des Behälters kommuniziert und mit einem flüssigen Produkt von einem Zuführtank beliefert wird, und die konfiguriert ist, den Durchfluss des Produkts innerhalb des Behälters (2) während der Füllvorgänge zu regulieren, und einteilig ausgestattet ist mit:

einem Sensorelement (17), das konfiguriert ist, mindestens einen Betriebsparameter, der sich auf die Füllvorgänge bezieht, während der Füll-

- vorgänge zu detektieren, wobei der mindestens eine Betriebsparameter einem Druck innerhalb des Behälters (2), der gefüllt wird, zugeordnet ist,
- und einem elektronischen Steuermodul (30), das eine Recheneinheit (32) einbindet, die an das Sensorelement (17) betriebstechnisch gekoppelt ist und konfiguriert ist, Betriebsdaten während der Füllvorgänge zu erfassen, die für eine Qualitätskontrolle der Füllvorgänge ausgelegt ist und konfiguriert ist, die Betriebsdaten zu verarbeiten, um das Auftreten eines Fehlers beim Füllen des Behälters (2) zu detektieren, wann immer festgestellt wird, dass der Druck innerhalb des Behälters (3) einen ersten Druckschwellenwert (Th1) übersteigt; **dadurch gekennzeichnet, dass** die Recheneinheit (32) über einen Kommunikationsbus (42) mit einer zentralen Steuereinheit (40) derselben Füllmaschine kommuniziert, wobei die zentrale Steuereinheit (40) Betriebsdaten, die den Druck der Füllflüssigkeit und/oder des Gases innerhalb des Zuführtanks enthalten, an die Recheneinheit (32) sendet, die die Betriebsdaten verarbeitet, um das Auftreten eines Fehlers beim Füllen des Behälters (2) zu detektieren, wann immer festgestellt wird, dass der Differenzdruck zwischen dem Behälter (3) und dem Zuführtank, der das flüssige Produkt zuführt, einen zweiten Druckschwellenwert (Th2) übersteigt.
2. Fülleinheit nach Anspruch 1, wobei das Sensorelement (17) einen Drucksensor (17a) enthält, der so angeordnet ist, dass er mit der inneren Umgebung des Behälters (2) während der Füllvorgänge fluidtechnisch gekoppelt ist, wodurch der Druck innerhalb desselben Behälters (2) detektiert wird, und wobei das Sensorelement (17) ferner konfiguriert ist, während der Füllvorgänge eine Temperatur innerhalb des Behälters (2), der gefüllt wird, zu detektieren.
 3. Fülleinheit nach Anspruch 1 oder 2, wobei das Steuermodul (30) einen Ablagedatenspeicher (34) einbindet, der an die Recheneinheit (32) gekoppelt ist und konfiguriert ist, die Betriebsdaten, die sich auf die Füllvorgänge, die ausgeführt werden, beziehen, zu speichern, wobei die in dem Ablagedatenspeicher (34) gespeicherten Betriebsdaten während der Füllvorgänge und/oder nach den Füllvorgängen zu ihrer weiteren Verarbeitung an die zentrale Steuereinheit (40) gesendet werden können.
 4. Fülleinheit nach einem von Anspruch 1 oder 3, wobei das Steuermodul (30) eine Kommunikationsschnittstelle (38) enthält, die konfiguriert ist, an den Kommunikationsbus (42), der ein digitaler Kommunikationsbus ist, für eine Kommunikation mit der zentralen

Steuereinheit (40) einer Füllmaschine (1) gekoppelt zu sein.

5. Füllmaschine (1), die eine Anzahl von Fülleinheiten (10) nach den Ansprüchen 1-4 enthält, die konfiguriert sind, einen oder mehrere Behälter (2) mit einer kohlenensäurehaltigen Flüssigkeit zu füllen, wobei die kohlenensäurehaltige Flüssigkeit ein Nahrungsmittel ist.

Revendications

1. Unité de remplissage (10) d'une machine de remplissage (1), conçue de façon à s'engager avec au moins un récipient (2) ayant col avec une ouverture pour effectuer le remplissage de celui-ci avec un produit liquide, comprenant un dispositif régulateur d'écoulement (14) définissant au moins un passage de remplissage (15), qui communique avec l'ouverture au niveau du col du récipient et qui est alimenté en produit liquide à partir d'un réservoir d'alimentation, et configuré de façon à réguler l'écoulement du produit à l'intérieur du récipient (2) pendant les opérations de remplissage, et pourvu d'un élément capteur (17) faisant partie intégrante, configuré de façon à détecter au moins un paramètre de fonctionnement lié aux opérations de remplissage, pendant les opérations de remplissage, cet au moins un paramètre de fonctionnement étant associé à une pression à l'intérieur du récipient (2) en train d'être rempli, et un module de commande électronique (30), incorporant une unité informatique (32), couplée de manière opérationnelle à l'élément capteur (17) et configurée de façon à acquérir des données de fonctionnement pendant les opérations de remplissage, conçue pour le contrôle de la qualité sur les opérations de remplissage, et configurée de façon à traiter les données de fonctionnement, afin de détecter l'occurrence d'une défaillance dans le remplissage du récipient (2), chaque fois que la pression à l'intérieur du récipient (3) s'avère dépasser un premier seuil de pression (Th1) ; **caractérisé en ce que** l'unité informatique (32) communique sur un bus de communication (42) avec une unité de commande centrale (40) de cette même machine de remplissage, cette unité de commande centrale (40) transmettant des données de fonctionnement, y compris la pression du liquide de remplissage et/ou du gaz à l'intérieur du réservoir d'alimentation à l'unité informatique (32) qui traite les données de fonctionnement, de façon à détecter l'occurrence d'une défaillance dans le remplissage du récipient (2), chaque fois que la pression différentielle entre le récipient (3) et le réservoir d'alimentation alimentant le produit liquide s'avère dépasser un deuxième seuil de pression (Th2).
2. Unité de remplissage selon la revendication 1, dans

lequel l'élément capteur (17) comprend un capteur de pression (17a) agencé de façon à être relié de façon fluïdique avec l'environnement interne du récipient (2) pendant les opérations de remplissage, détectant ainsi la pression à l'intérieur de ce même récipient (2), et dans lequel l'élément capteur (17) est configuré en outre de façon à détecter une température à l'intérieur du récipient (2) en train d'être rempli, pendant les opérations de remplissage.

5

10

3. Unité de remplissage selon la revendication 1 ou 2, dans laquelle le module de commande (30) incorpore une mémoire de stockage (34), couplée à ladite unité informatique (32), et configurée de façon à stocker les données de fonctionnement liées aux opérations de remplissage étant effectuées, dans laquelle les données de fonctionnement stockées dans la mémoire de stockage (34) sont conçues de façon à être envoyées à l'unité de commande centrale (40), pendant les opérations de remplissage, et/ou après les opérations de remplissage pour qu'elles soient traitées plus avant.

15

20

4. Unité de remplissage selon l'une quelconque des revendications 1 ou 3, dans laquelle le module de commande (30) comprend une interface de communication (38), configurée de façon à être couplée au bus de communication (42), qui est un bus de communication numérique, pour permettre la communication avec l'unité de commande centrale (40) d'une machine de remplissage (1).

25

30

5. Machine de remplissage (1) comprenant un certain nombre d'unités de remplissage (10) selon les revendications 1 à 4, configurée de façon à remplir un ou plusieurs récipients (2) avec un liquide gazéifié, ce liquide gazéifié étant un produit alimentaire.

35

40

45

50

55

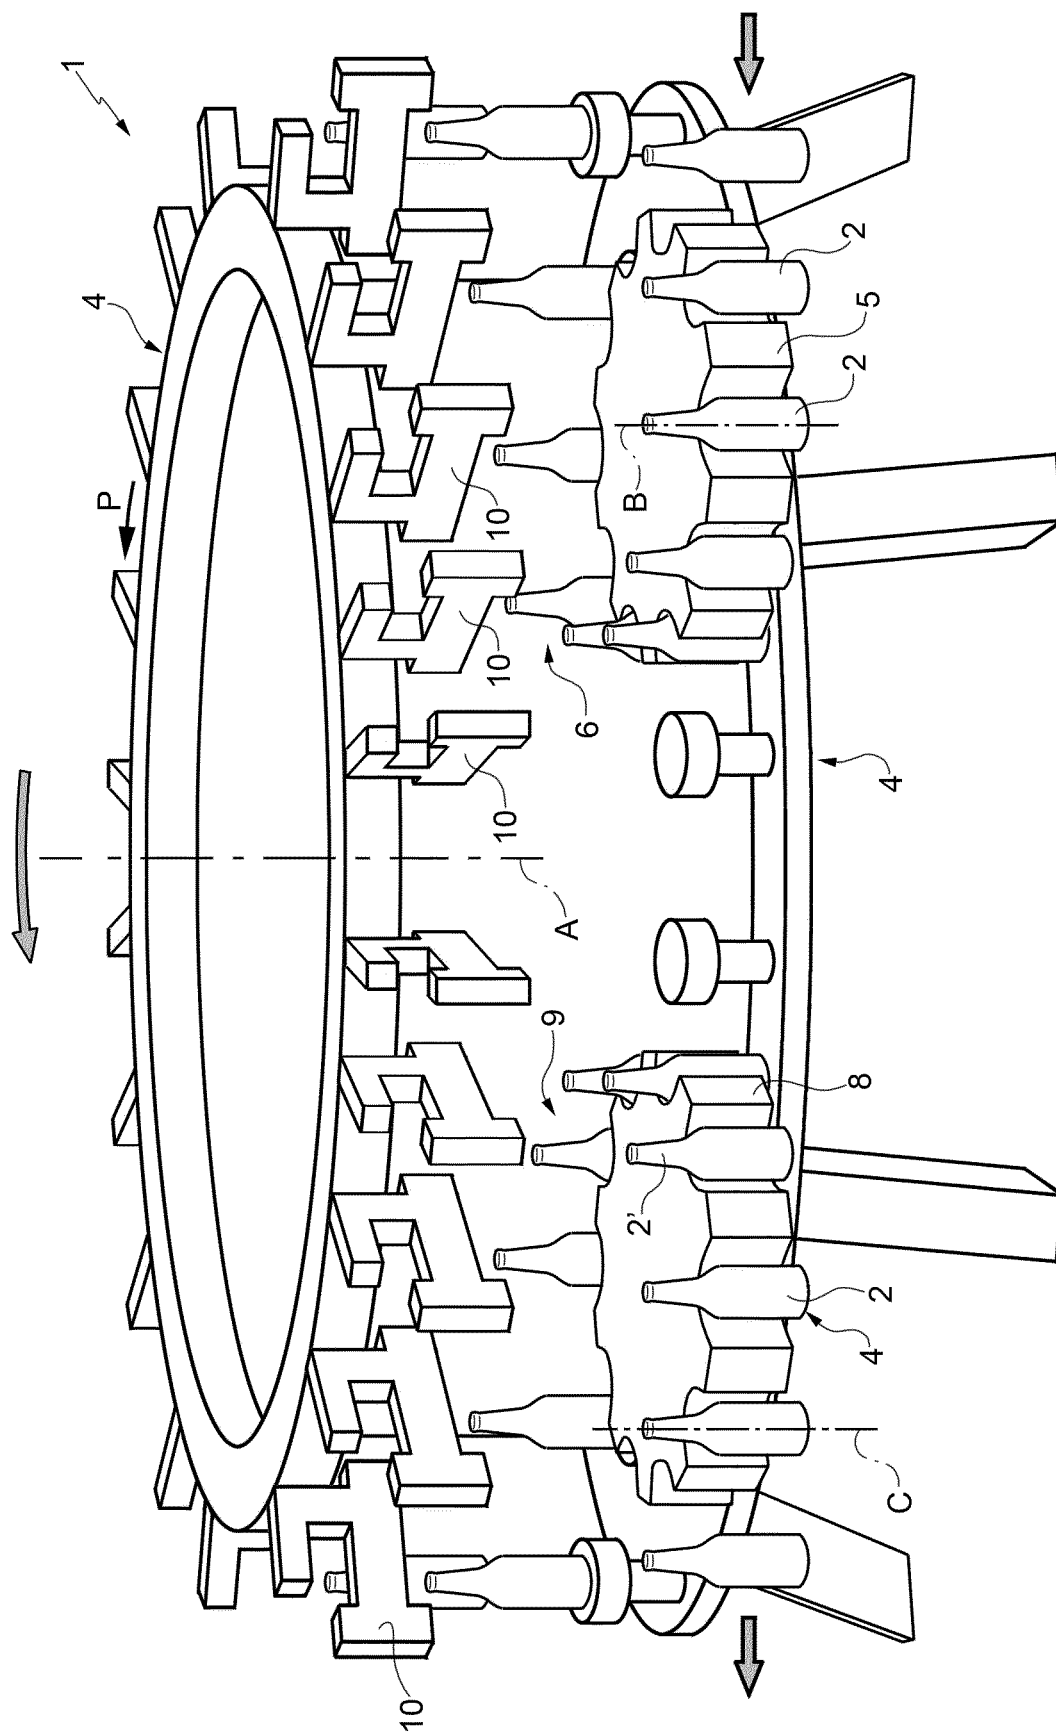
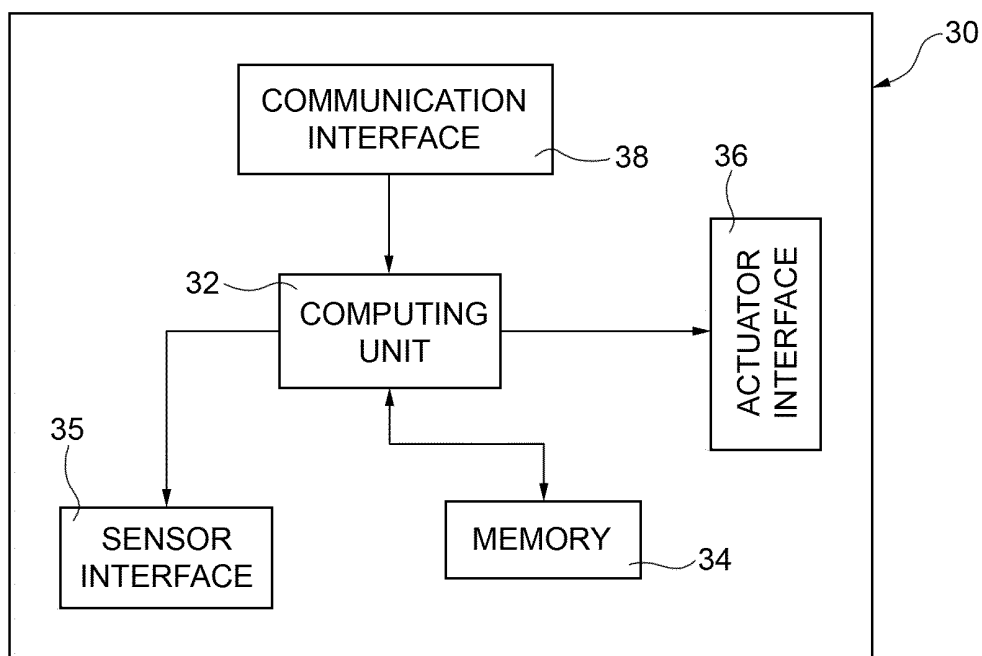
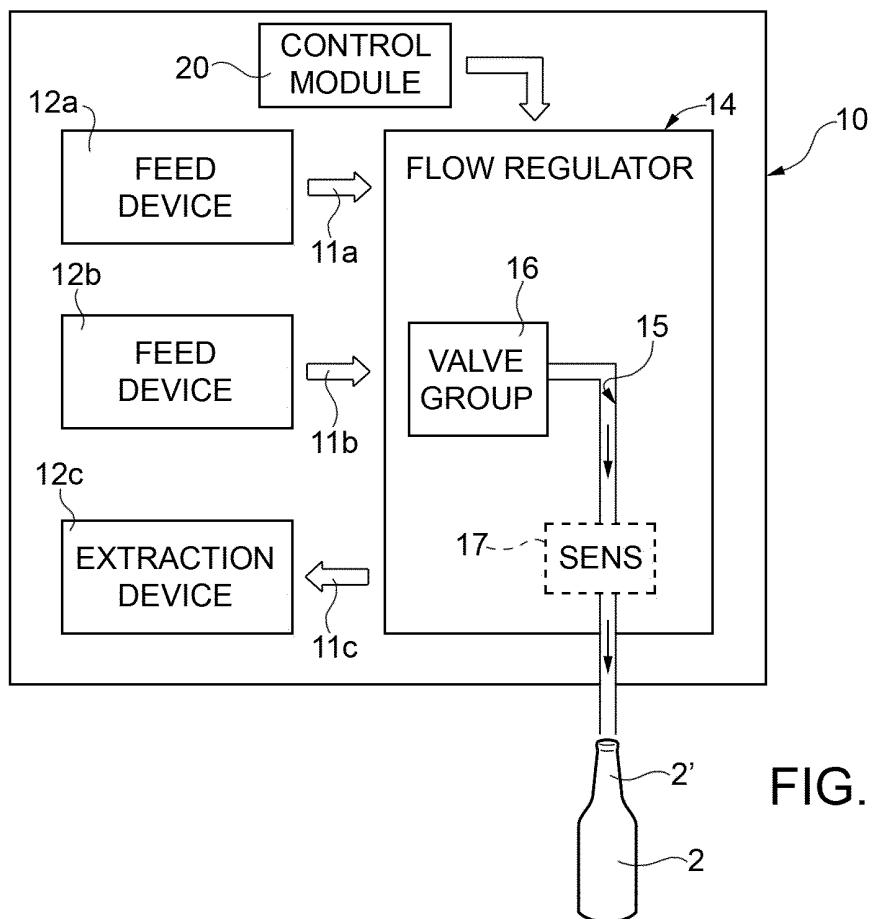


FIG. 1



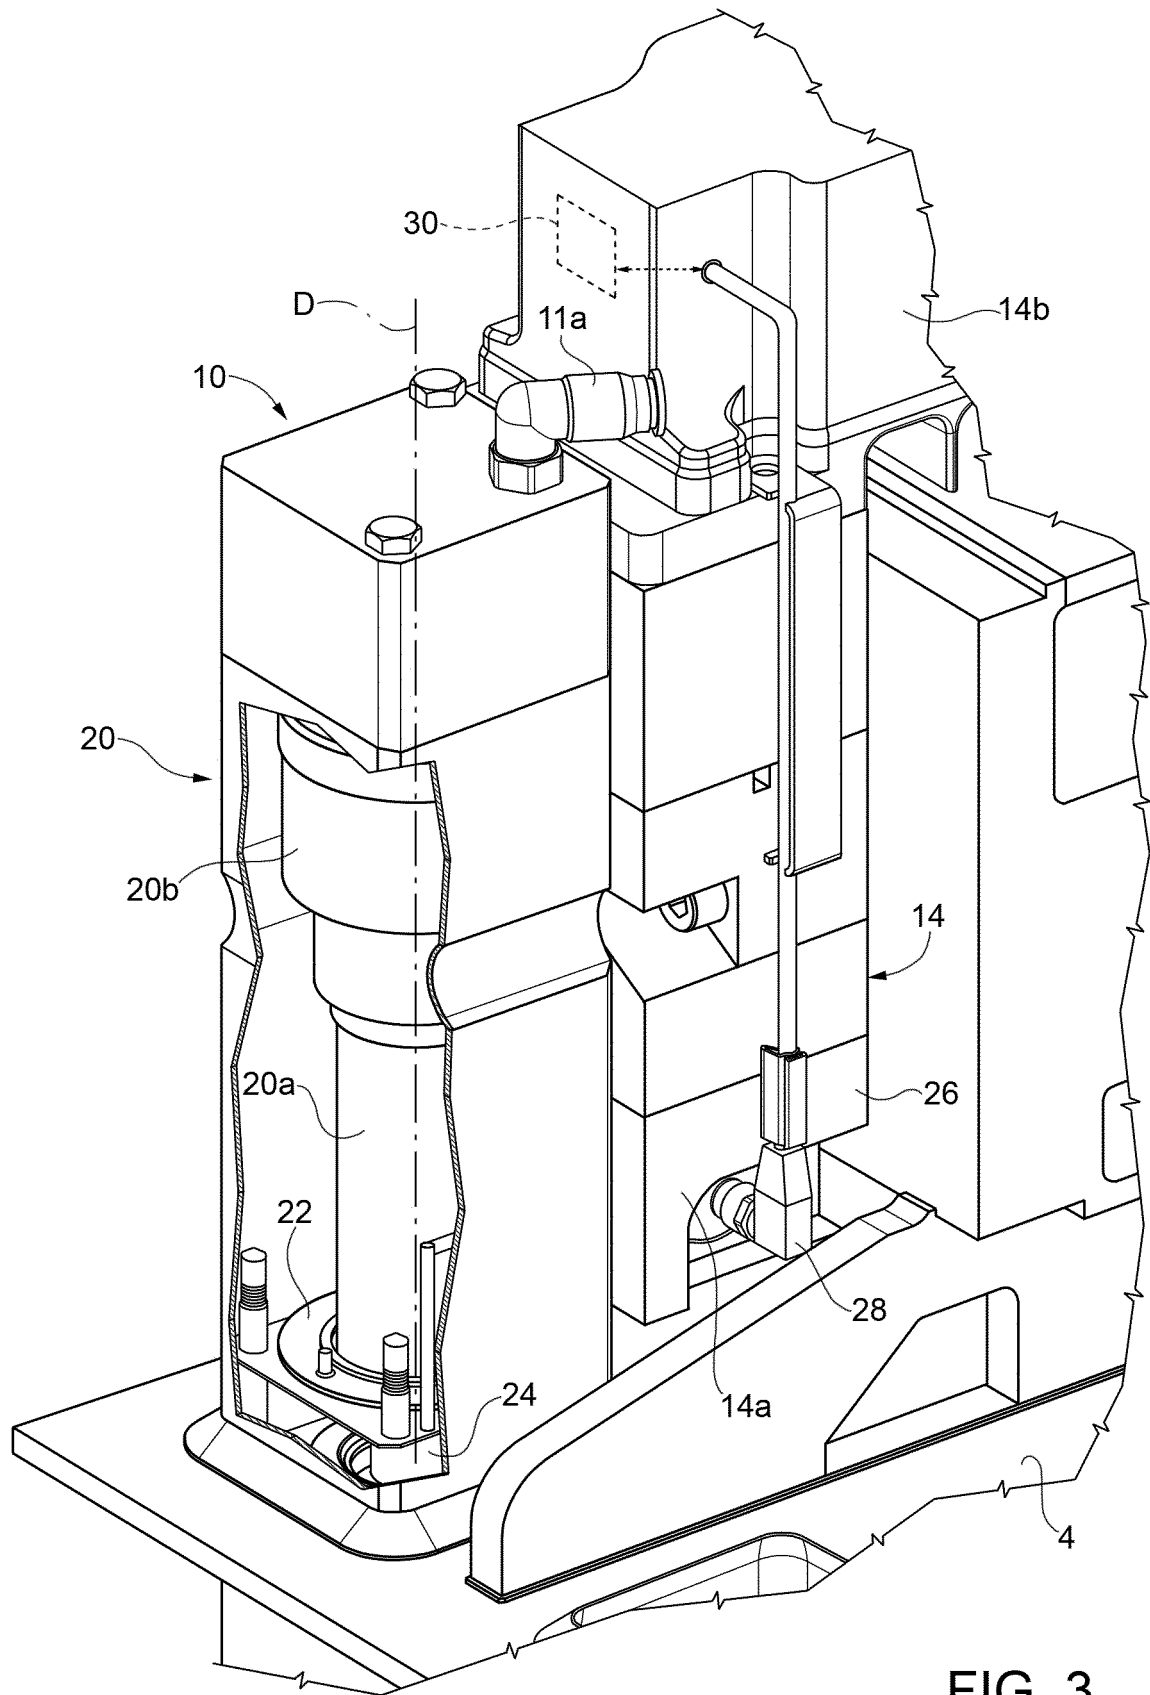


FIG. 3

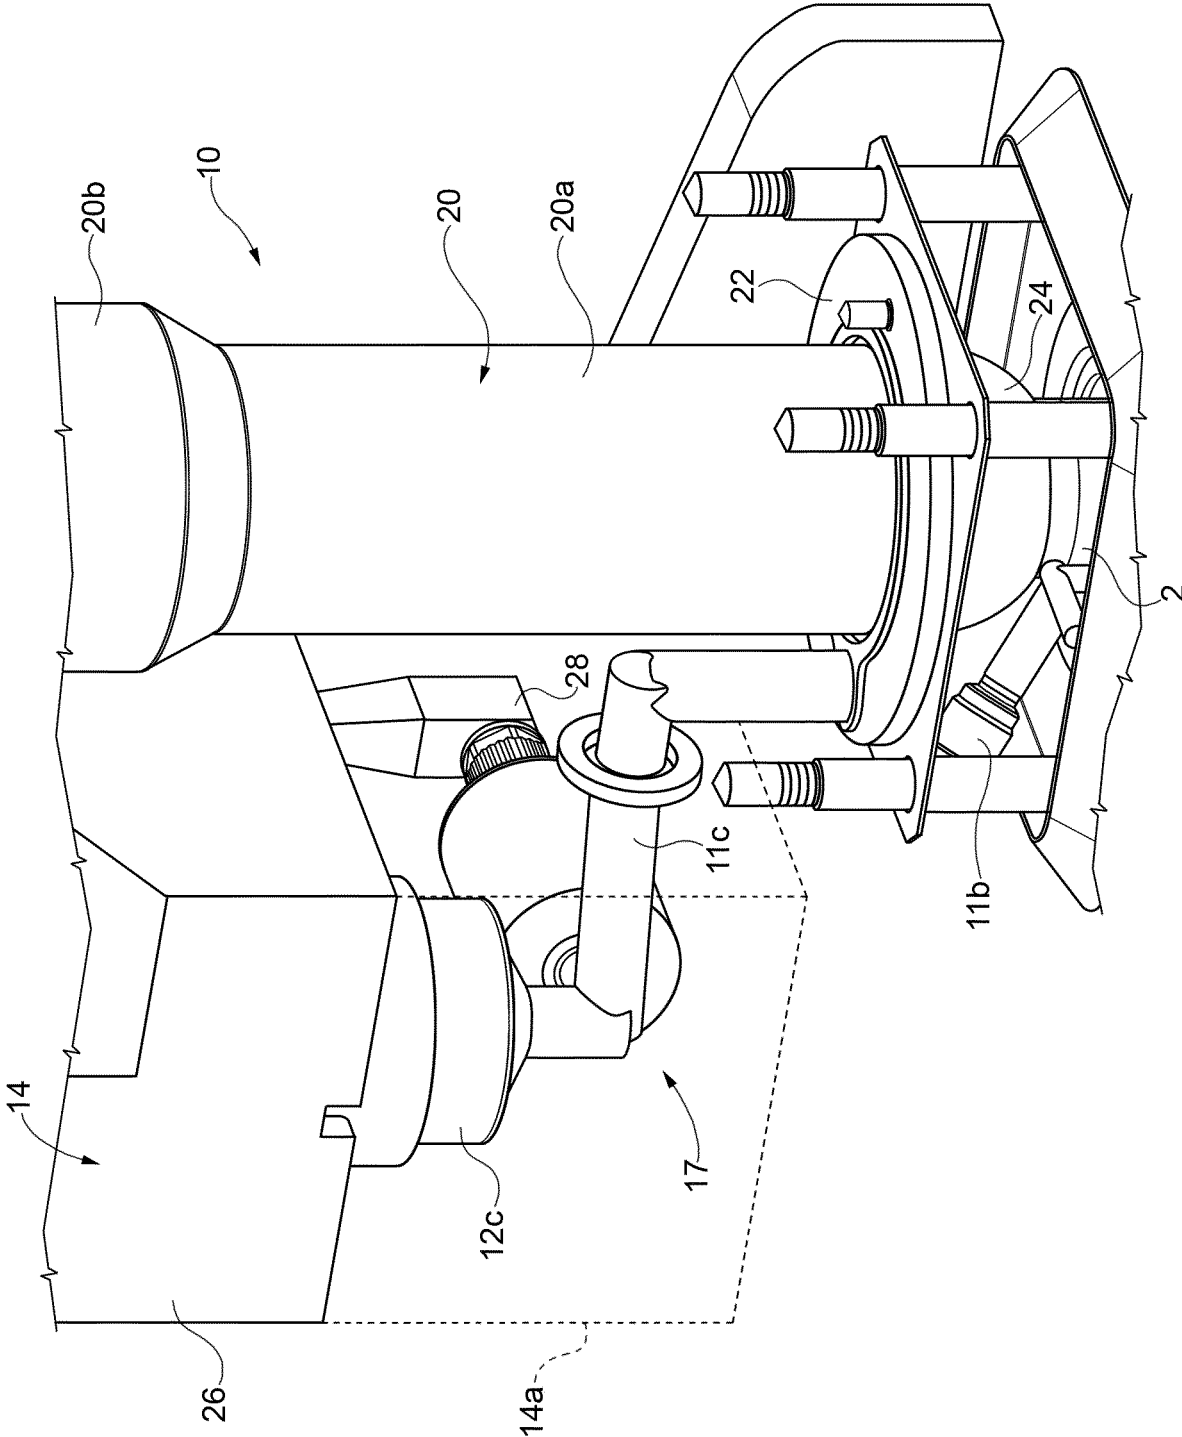


FIG. 4

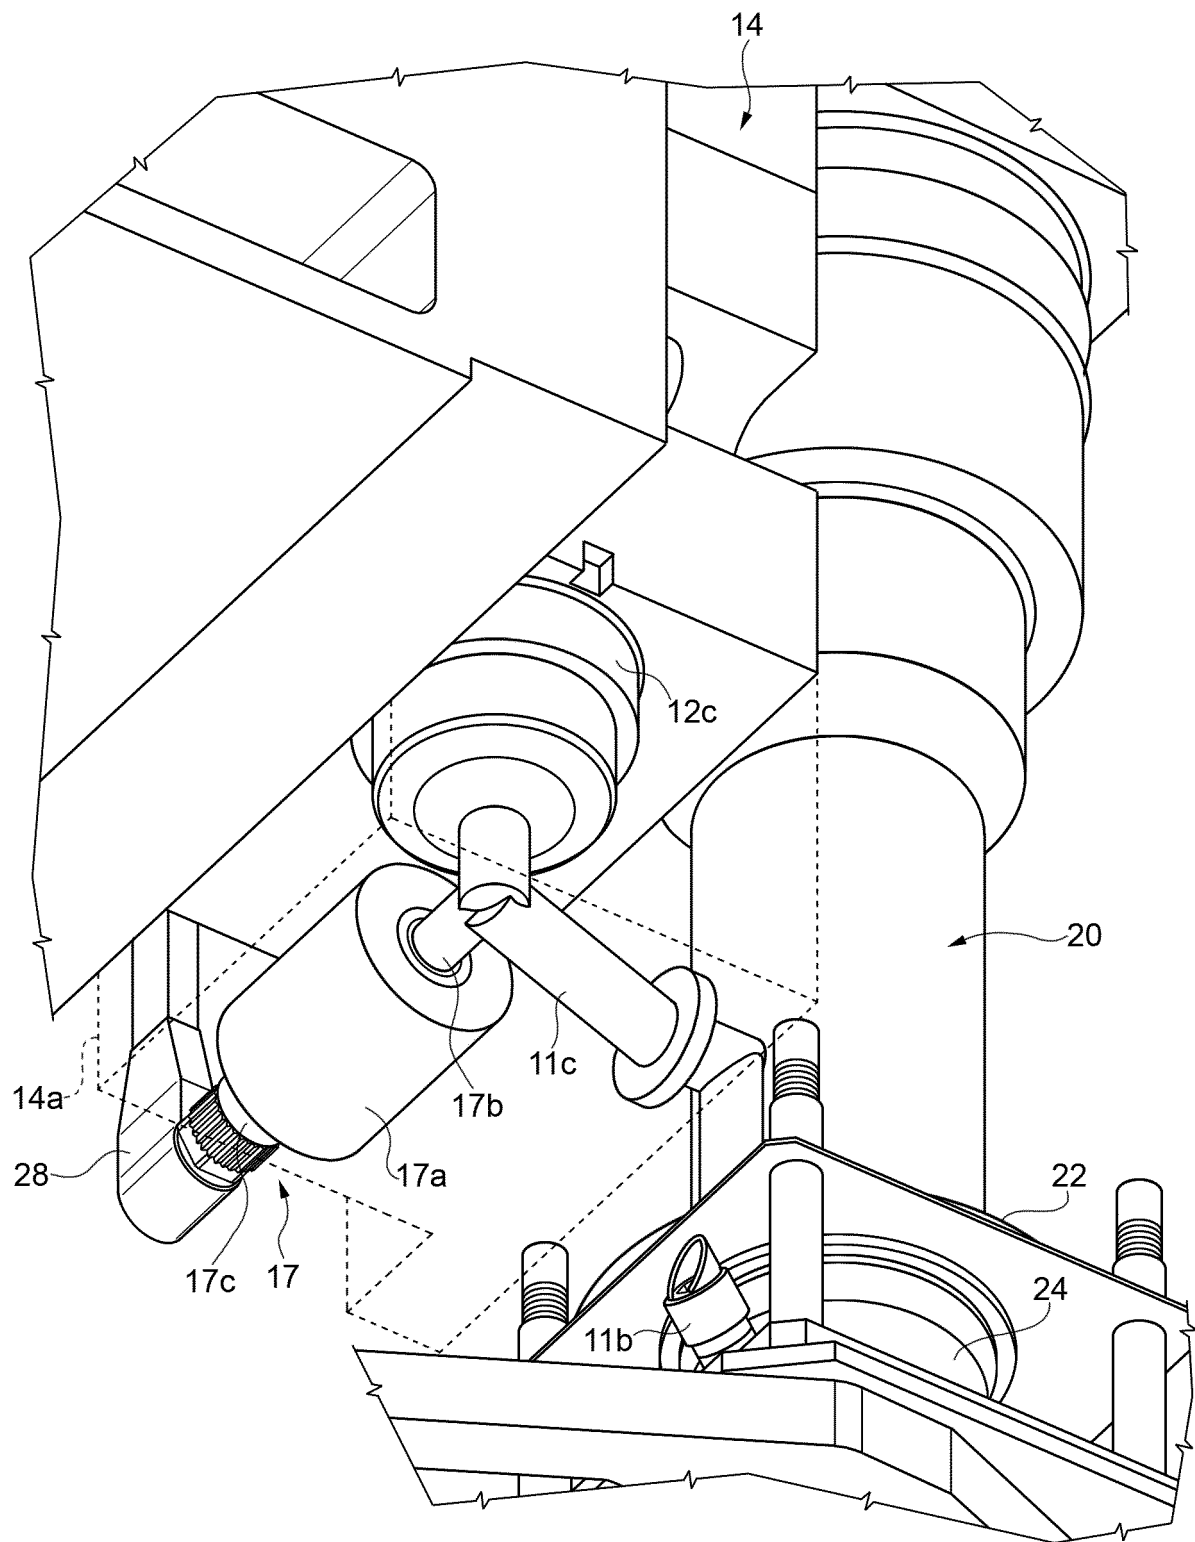


FIG. 5

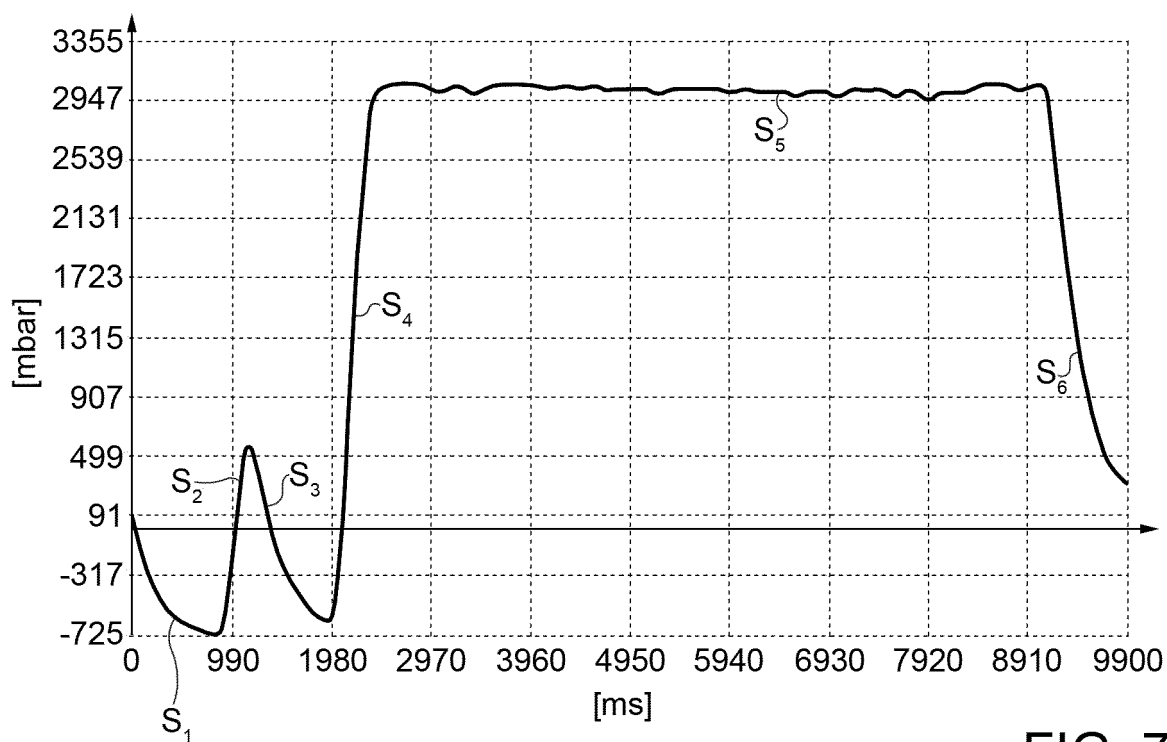


FIG. 7

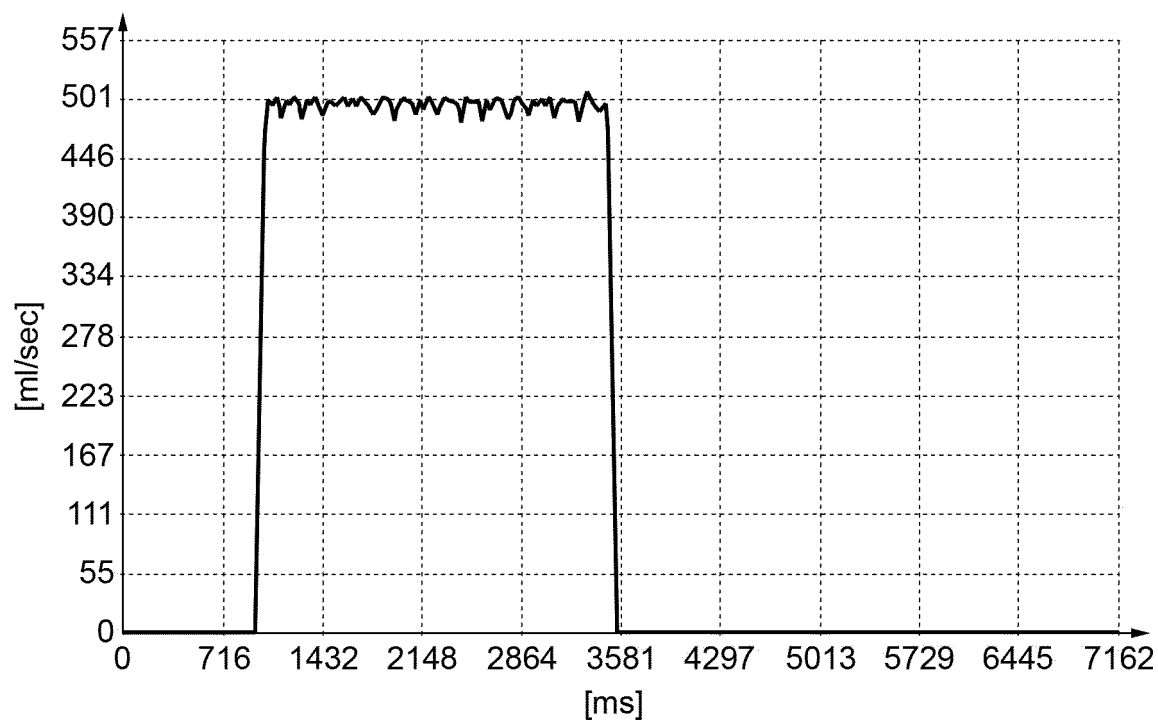


FIG. 9

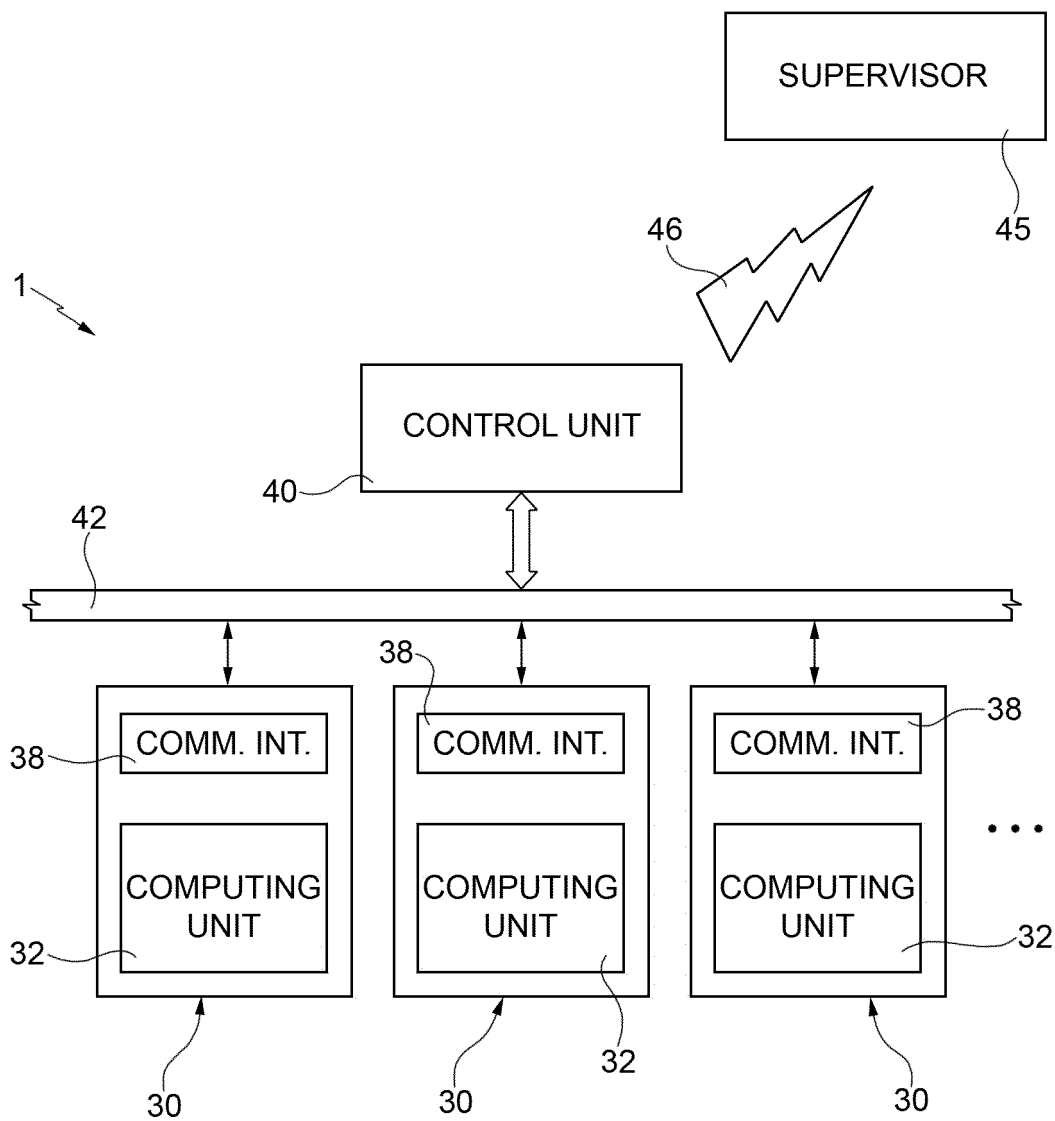


FIG. 8

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 1127835 A1 [0005]