



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
17.12.2014 Bulletin 2014/51

(51) Int Cl.:
B65D 81/32 (2006.01) **B65D 81/34** (2006.01)
B65D 75/00 (2006.01) **B65D 77/06** (2006.01)

(21) Application number: **14167992.8**

(22) Date of filing: **12.05.2014**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME

(71) Applicant: **Goglio S.p.A.**
20144 Milano (IT)

(72) Inventor: **Galbasini, Roberto**
21020 Casale Litta (Varese) (IT)

(74) Representative: **Petruzzello, Aldo**
Racheli S.r.l.
Viale San Michele del Carso, 4
20144 Milano (IT)


(30) Priority: **13.06.2013 IT MI20130977**

(54) **Packaging in flexible material for food products to be consumed after heating in the oven**

(57) Packaging (10) in flexible material, comprising a supporting base (11) wherefrom two opposite side walls (12) rise up, each one sealed to a half-perimeter (13) of the base (11) and sealed one to the other along respective side edges (14) and along the upper edge with a head sealing (16), characterised in that in an intermediate area of the packaging (10) at least one continuous transverse sealing (17) is provided, suitable for dividing the

interior of the packaging (10) into two separate chambers, a lower chamber (20) and an upper chamber (21), suitable for containing two different components of a product to be heated and brought into contact at the time of consumption, said transverse sealing (17) being such as to open when a certain pressure is reached in said lower chamber (20), thus forming a single chamber inside the packaging (10).

FIG. 1

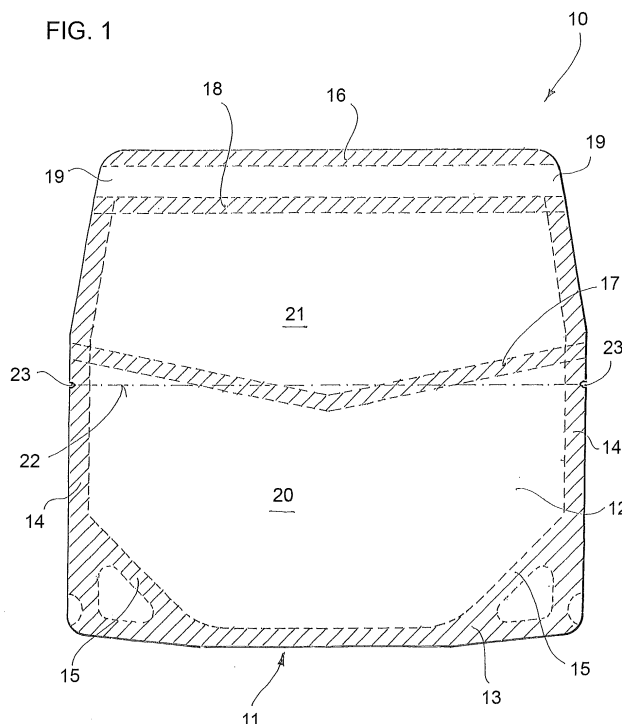

Description

[0001] The object of the present invention is packaging in flexible material of the stand-up type, i.e. self-supporting, suitable for containing a food product made up of at least two components kept separate, and to be mixed and heated before consumption. For example in the lower part of the packaging a solid wet component is contained, such as filled and unfilled fresh pasta, and in the upper part a liquid component which could be the pasta condiment.

[0002] The invention also relates to a kit comprising such a flexible packaging, a substantially rigid outer case and optional disposable cutlery, such as to make the heating in the oven and the consumption of the product easy.

[0003] Currently, due to the frenetic pace of modern living, which allows increasingly limited time for the consumption of meals, packagings of food products ready for consumption are becoming increasingly widespread, after heating in the oven, in particular in the microwave oven.

[0004] The packagings currently existing on the market consist, in the majority of cases, of rigid containers where the liquid component is already in contact with the solid component and all this is housed in an outer cardboard case. These solutions, in addition to a greater use of material, involve the solid component, for example the pasta, on the base of the packaging, remaining immersed in the liquid component, for example sauce, for the whole period between packaging and consumption, causing a possible deterioration of the quality of the product.

[0005] Other solutions exist which provide a tray, containing for example a condiment, placed or formed in a larger tray, containing for example pasta, both closed with a peelable film, and all this placed inside a cardboard case. These packagings, in addition to also requiring a greater use of material, are somewhat complicated in the phase of use, the consumer having to perform manually the mixing between the two components of the product.

[0006] WO 2007/142887 A1 describes a packaging with multiple compartments, in particular two compartments containing two liquid substances to be mixed in order to form a drink. The two compartments are separated by a fragile heat seal suitable for being broken by manual crushing of the packaging. A heating of the packaging is not foreseen.

[0007] The object of the invention is that of eliminating the disadvantages of the systems of the prior art relating to products to be mixed and heated before consumption.

[0008] More particularly one object of the invention is that of allowing that the components of the product come into contact, without manual intervention, only when they are warm and shortly before being consumed.

[0009] Another object of the invention is that of providing such a packaging which requires less use of packing material with respect to the packagings of the prior art.

[0010] Another object again of the invention is that of

providing such a packaging which is simple to use.

[0011] Yet another object of the invention is that of providing such a packaging which is simple and economical to manufacture.

[0012] These and other objects are achieved according to the invention with the features of the appended independent claim 1.

[0013] Advantageous embodiments of the invention are disclosed by the dependent claims.

[0014] Substantially the packaging in flexible material of the stand-up type according to the invention, comprising a reinforced supporting base wherefrom two opposite side walls rise up, each one sealed to a respective half-perimeter of the base and sealed one to the other along the side edges and the upper edge, has in an intermediate area a continuous transverse sealing such as to divide up the interior of the packaging into two separate chambers, suitable for containing two different components of a food product to be heated and brought into contact at the time of consumption.

[0015] The abovementioned transverse sealing is such as to open due to the increase in pressure following heating in the oven, due to the expansion of the inner atmosphere of the lower chamber, normally containing a wet solid, causing the fall thereon of the component, normally liquid, contained in the upper chamber, thus determining a single chamber inside the packaging.

[0016] The aforesaid transverse sealing has preferably a V shape, with the top turned downwards, to facilitate the opening of the sealing during the expansion of the atmosphere in the lower chamber.

[0017] A second continuous transverse sealing is provided a short distance from the upper or head sealing of the packaging and between said second transverse sealing and the head sealing side openings are provided, determined for example by a lack of sealing between the side edges of the packaging in these areas.

[0018] Said second transverse sealing is such as to open with a sound effect following the further heating of the packaging, which causes further expansion of the atmosphere which pressurises the inner chamber.

[0019] The provision of the two side openings between the double head sealing allows the release of gas without the interior of the oven being soiled by possible sprays of liquid.

[0020] On the side walls of the packaging, above the level of the solid component, a weakening is created in the material in transverse direction with the laser engraving technique, or by means of an abrasion. At one end at least of the pre-engraving a notch is provided to facilitate the tearing, the depth of which must not obviously exceed the width of the corresponding side sealing of the packaging. With such a system the packaging will be easily opened, removing the upper part, in order to make it similar to a plate from which to consume the meal.

[0021] The packaging is conveniently made in a plastic laminate with two or more layers, where the outer layer is for example polyester (PET) with the possibility of of-

fering a barrier to the gases, and the inner heat-sealing layer in contact with the product is in polyethylene (PE), polypropylene (PP), co-extruded films obtained from PE-EVOH, PE-PA (polyamide), PP-EVOH, PP-PA and the like, provided it is able to guarantee the opening of the sealing by means of the pressure which is created inside the packaging.

[0022] This effect can be obtained by means of peelable layers or by lacquering, with openable and heat-sealable products, the inner surface of the laminate at the sealings to be opened.

[0023] For structures with more than two layers, between the outer film and the inner sealing one a film of OPA or of PET can be inserted.

[0024] A packaging of this type is suitable for being heated in a microwave oven.

[0025] A use in electric oven with temperatures up to approximately 130°C cannot however be excluded, in which case laminates will be able to be used containing for example an aluminium film with barrier effect, immediately inside the outermost PET film.

[0026] Advantageously the packaging in flexible material according to the invention is provided housed in an outer cardboard case, for greater practicality of use, both in the phase of heating of the packaging and of consumption of the product, in fact the insulating action of the cardboard avoids the risk of burns to the hands in the case of excess heat.

[0027] Further features of the invention will be made clearer by the following detailed description, referred to a purely non-limiting example thereof, illustrated in the accompanying drawings in which:

Figure 1 is a schematic front view of a flexible packaging according to the invention, whereon the various sealing lines are given;

Figure 2 is a schematic perspective view of the packaging of Figure 1 filled with the product, before use;

Figure 3 is an axonometric view of the flexible packaging of Figure 2 inserted in an outer cardboard case; Figures 4-7 are schematic front views, illustrating the phases of filling of the packaging;

Figure 8 is a schematic perspective view illustrating the opening of the outer case;

Figure 9 is a perspective view showing the opening of the flexible packaging;

Figure 10 shows finally how the product can be consumed directly from the packaging.

[0028] Referring to these drawings, and for the time being in particular to Figures 1 and 2, a packaging according to the invention has been denoted overall by reference numeral 10. This is a packaging known by the name of stand-up packaging, formed in flexible material, with one or more layers, heat sealable at least on one face.

[0029] The packaging 10 has a reinforced supporting base 11 and two opposite side walls 12, each one sealed

to a respective half-perimeter 13 of the base 11, and sealed one to the other at the side edges 14.

[0030] In order to allow a widening of the supporting base 11 of the packaging each lower sealing 13 is joined to the side sealings or edges 14 by means of respective pairs of slanted sealing sections 15. The packaging 10 structured in this way takes on an upward tapering shape and, after having been filled with the product, is closed above by means of a head sealing 16.

[0031] A packaging of this type can be considered in itself substantially known.

[0032] According to the invention in an intermediate zone of the packaging a continuous transverse sealing 17 is provided which, in the example illustrated, has a very wide V configuration, with the top turned downwards, such as to divide the interior of the packaging 10 into two separate chambers, a lower one 20 and an upper one 21.

[0033] At a short distance from the upper head sealing 16 of the packaging 10 a second continuous transverse sealing 18 is provided, which develops parallel thereto, and between said sealings 16 - 18 side openings 19 are provided, determined, for example, by an interruption of side sealings 14 in these zones.

[0034] On the side walls 12 of the packaging 10, at approximately the top of the lower chamber 20, a transverse weakening line 22 is formed of the material with the laser engraving technique or by means of an abrasion. At the ends of the weakening lines 22 a respective notch 23 is provided to facilitate the tearing, the depth of which does not exceed the width of the corresponding side sealing 14 of the packaging.

[0035] The intermediate transverse sealing 21 and the second upper head transverse sealing 18 are such as to open, making the side walls 12 of the packaging 10 separate on reaching a certain pressure inside the packaging, as will be explained in greater detail here below.

[0036] This can be obtained by providing, at the zones occupied by these openable sealings, peelable layers, or by lacquering with openable and heat-sealable products the inner surface of the laminate with which the packaging is made.

[0037] Referring to the schematic views of Figures 4 to 7 the step of filling and closure of the packaging 10 is now described briefly.

[0038] In Figure 4 the packaging is open above and in it a wet solid component is inserted, for example pasta which is placed on the base of the packaging. Subsequently the V-shaped transverse sealing 17 is performed, which confines the aforesaid solid component in the lower chamber 20 (Figure 5).

[0039] In the upper chamber 21 a liquid or pasty component is then inserted, in this case a sauce serving as condiment for the pasta (Figure 6).

[0040] Finally the two head sealings 18 and 16 are formed, leaving the side vents or openings 19.

[0041] Figure 3 shows the flexible packaging 10 according to the invention housed in a substantially rigid

outer cardboard case 30.

[0042] The case 30 has a base 31 in the form of a rectangular tray in which the packaging 10 is placed, wherefrom two side walls 32 rise up with width decreasing upwards which are joined one to the other with known means, for example tab and slot, to close the packaging 10 above, as shown in Figure 3.

[0043] The aforesaid side walls 32 are joined to the base 31 by means of respective preperforated lines 33 suitable, if necessary, for facilitating the separation thereof.

[0044] Moreover cutlery 34 can also be inserted in the case 30 for the consumption of the product, as will now be described.

[0045] Figure 8 shows schematically the opening of the outer cardboard case 30 with removal of the side walls 32 facilitated by the pre-perforated lines 33, in such a way that the flexible packaging 10 remains housed in the base tray 31 and can be placed for example in a microwave oven for heating.

[0046] During the first phase of heating the synergic action of expansion between the steam developed by the wet solid component placed in the lower chamber 20 and the inner atmosphere of the same chamber cause the opening of the transverse sealing 17 and the fall onto the solid component of the liquid component contained in the upper chamber 21, determining in this way a single chamber inside the packaging.

[0047] Continuing the heating, the steam generated by the components mixed in the single expansion chamber, again synergically with the inner atmosphere, will pressurise this chamber, causing the opening of the head sealing 18, opening which will be able to be perceived by a sound effect, like a light explosion, with the release of the gases through the side vents or openings 19, which avoid soiling of the oven due to possible sprays of liquid.

[0048] Having ended the step of heating, the packaging 10 contained in the base 31 of the external cardboard case can be extracted from the oven and opened along the weakening lines 22, as schematised in Figure 9.

[0049] At this point the meal can be consumed directly in the packaging 10 using the cutlery 34 optionally provided, as shown schematically in Figure 10.

[0050] The laminates which can be used for the flexible packaging 10 can be with two or more layers, where the outer layer is for example PET with barrier to the gases and the inner layer of the heat-sealing type, in contact with the product, in PE, PP, co-extruded films obtained from PE-EVOH, PE-PA, PP-EVOH, PP-PA and the like, provided it is able to guarantee the opening of the transverse sealings 17 and 18 by means of the pressure which is created inside the packaging 10. This effect can be obtained by means of peelable layers or by lacquering, with openable and heat-sealable products, the inner surface of the laminate of the packaging at the sealings to be opened.

[0051] Laminates of the aforesaid type are suitable for packagings 10 suitable for being heated in a microwave

oven.

[0052] A use of the packaging 10 according to the invention in an electric or gas oven with temperatures up to approximately 130°C cannot be excluded, in which case laminates will also be able to be used with aluminium, interposing for example an aluminium film immediately inside the outermost PET film.

[0053] From what has been disclosed the advantages appear clear of the packaging according to the invention with respect to the similar packagings of the prior art.

[0054] One advantage comes from the fact that the liquid product (in the example given the condiment) comes into contact with the wet solid product (in the example pasta) automatically only when the two components are warm and shortly before being consumed, thus preserving the aroma of the product.

[0055] A further advantage comes from the extreme simplicity of use of the packaging, which stands out by its lightness.

[0056] In the preferred embodiment described previously the lower chamber 20 contains a fresh solid component and the upper chamber 21 a liquid component.

[0057] However the packaging according to the invention could also be used by placing in the lower chamber 20 a liquid component and in the upper chamber 21 a dry solid component, such as pasta.

[0058] In this case, following the opening of the transverse sealing 17, the solid component falls into the liquid component, mixing with it.

[0059] Although the transverse sealing 17 has preferably a V shape with top turned downwards, without departing from the scope of the invention, the top of the V could be turned upwards.

[0060] A further advantage again comes from the lower use of packing material.

Naturally the invention is not limited to the particular embodiment previously described and illustrated in the accompanying drawings, but numerous detailed changes may be made thereto, within the reach of the person skilled in the art, without thereby departing from the scope of the invention itself as defined by the appended claims.

Claims

1. Packaging (10) in flexible material, comprising a supporting base (11) wherefrom two opposite side walls (12) rise up, each one sealed to a half-perimeter (13) of the base (11) and sealed one to the other along respective side edges (14) and along the upper edge with a head sealing (16), in an intermediate area of the packaging (10) at least one continuous transverse sealing (17) being provided, suitable for dividing the interior of the packaging (10) into two separate chambers, a lower chamber (20) and an upper chamber (21), suitable for containing two different components of a product to be brought into contact at the time of consumption, **characterised in that**

said transverse sealing (17) is such as to open when a certain pressure is reached in said lower chamber (20), following heating, thus forming a single chamber inside the packaging (10) and **in that** at a short distance from said upper or head sealing (16) a second transverse head sealing (18) is provided, and between said head sealings (16, 18) at least one side vent or opening (19) is provided, said second transverse head sealing (18) being such as to open when a certain pressure is reached in said unified chamber (20, 21).

2. Packaging (10) according to claim 1, **characterised in that** said transverse sealing (17) has a V shape. 5
3. Packaging (10) according to claim 1 or 2, wherein said at least one side vent or opening (19) is obtained by interrupting the corresponding side sealing (14) of the packaging in the area between said head sealings (16, 18). 10
4. Packaging (10) according to any one of the preceding claims, **characterised in that** on the side walls (12) of the packaging, approximately at the top of said chamber (20), respective weakening lines (22) of the material are provided, suitable for facilitating the opening of the packaging. 15
5. Packaging (10) according to claim 4, **characterised in that** at least at one end of said weakening lines (22) a notch (23) is provided to facilitate the tearing, the depth of which does not exceed the width of the corresponding side sealing (14) of the packaging (10). 20
6. Packaging (10) according to any one of the preceding claims, **characterised in that** it is contained in a substantially rigid outer cardboard case (30) having a base (31) shaped as a tray and suitable for housing and supporting the flexible packaging (10), from which base two opposite side walls (32) rise up with width decreasing upwards, suitable for joining and covering the packaging. 25
7. Packaging (10) according to claim 6, wherein said opposite side walls (32) of the outer cardboard case (30) are joined to said base (31) by means of respective preperforated lines (33), suitable for facilitating the removal thereof. 30
8. Packaging (10) according to claim 6 or 7, **characterised in that** inside said cardboard case (30) disposable cutlery (34) is provided for consumption of the product. 35
9. Kit comprising a packaging in flexible material for food products to be consumed after heating in the oven according to any one of the preceding claims, 40

an outer cardboard case (30) and disposable cutlery (34).

10. Method of filling and use of the flexible packaging (10) according to any one of the preceding claims, comprising the following steps: 45

- insertion in the packaging open above of a first component suitable for positioning on the bottom of the packaging;
- formation of said continuous transverse sealing (17) such as to divide the packaging into a lower chamber (20) and an upper chamber (21);
- insertion of a second component in said upper chamber (21);
- formation of the double head sealing (16, 18), leaving at least one side vent or opening (19);
- first step of heating of the packaging in the oven until opening of said transverse sealing (17);
- second step of heating until opening of said head sealing (18) and exiting of gases through said at least one side opening (19);
- opening of the packaging by breaking of said weakening lines (22);
- consumption of the product by means of the cutlery (34) optionally provided. 50

FIG. 1

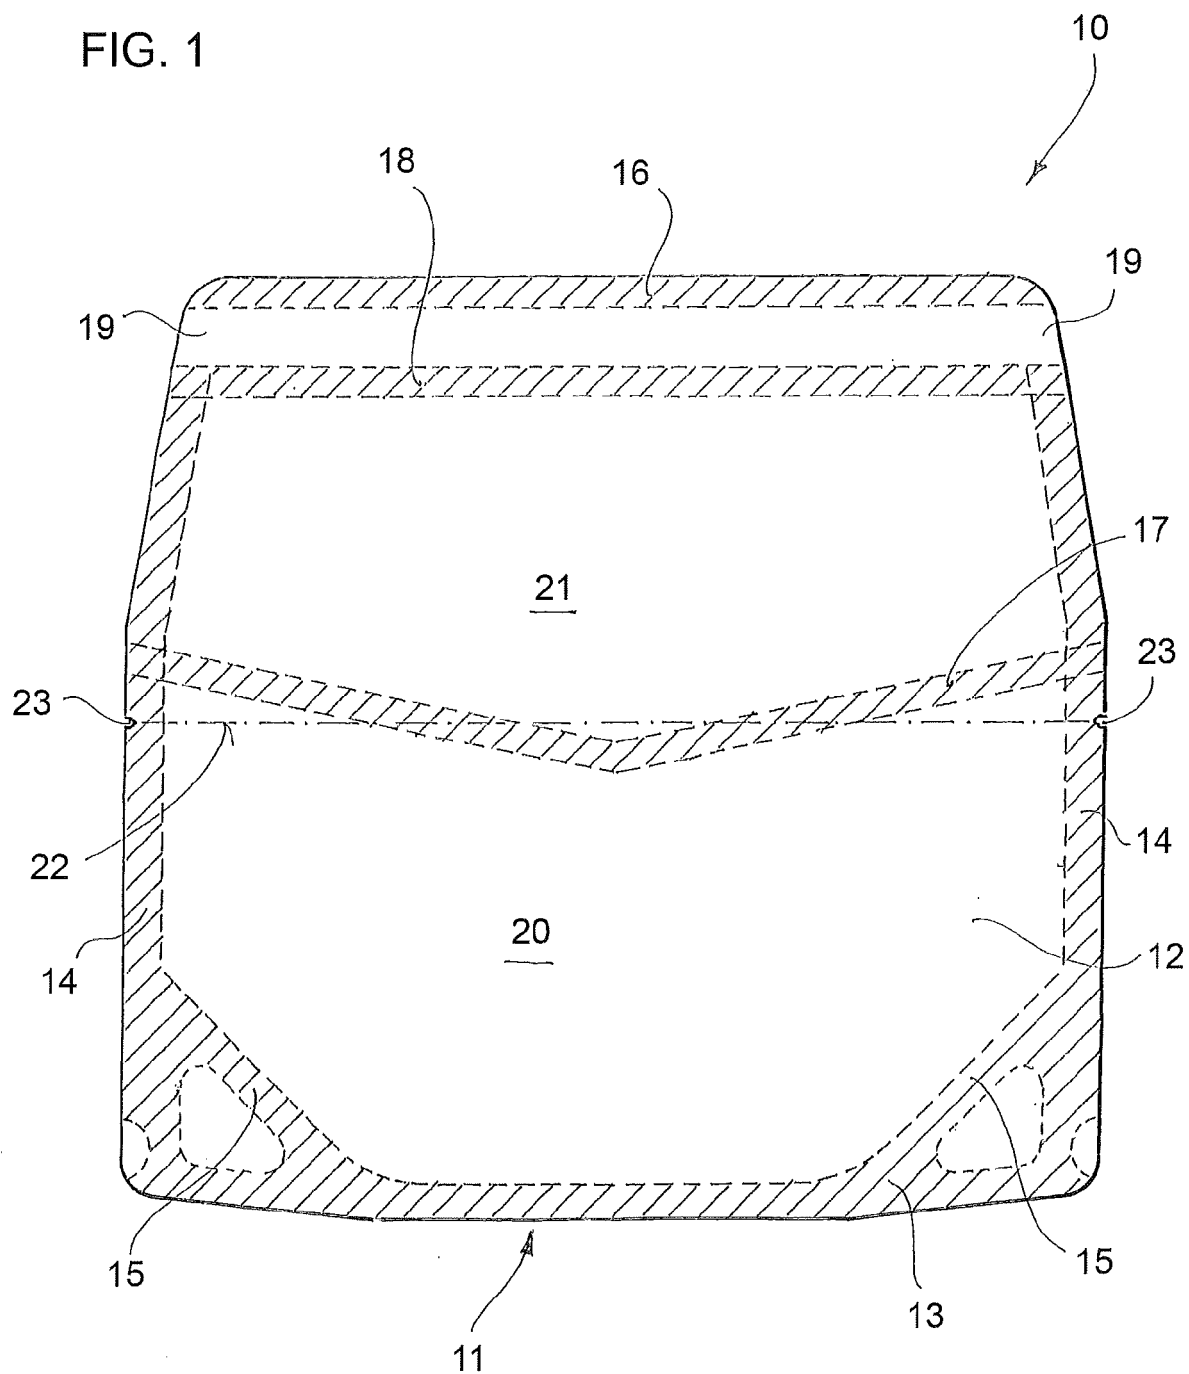
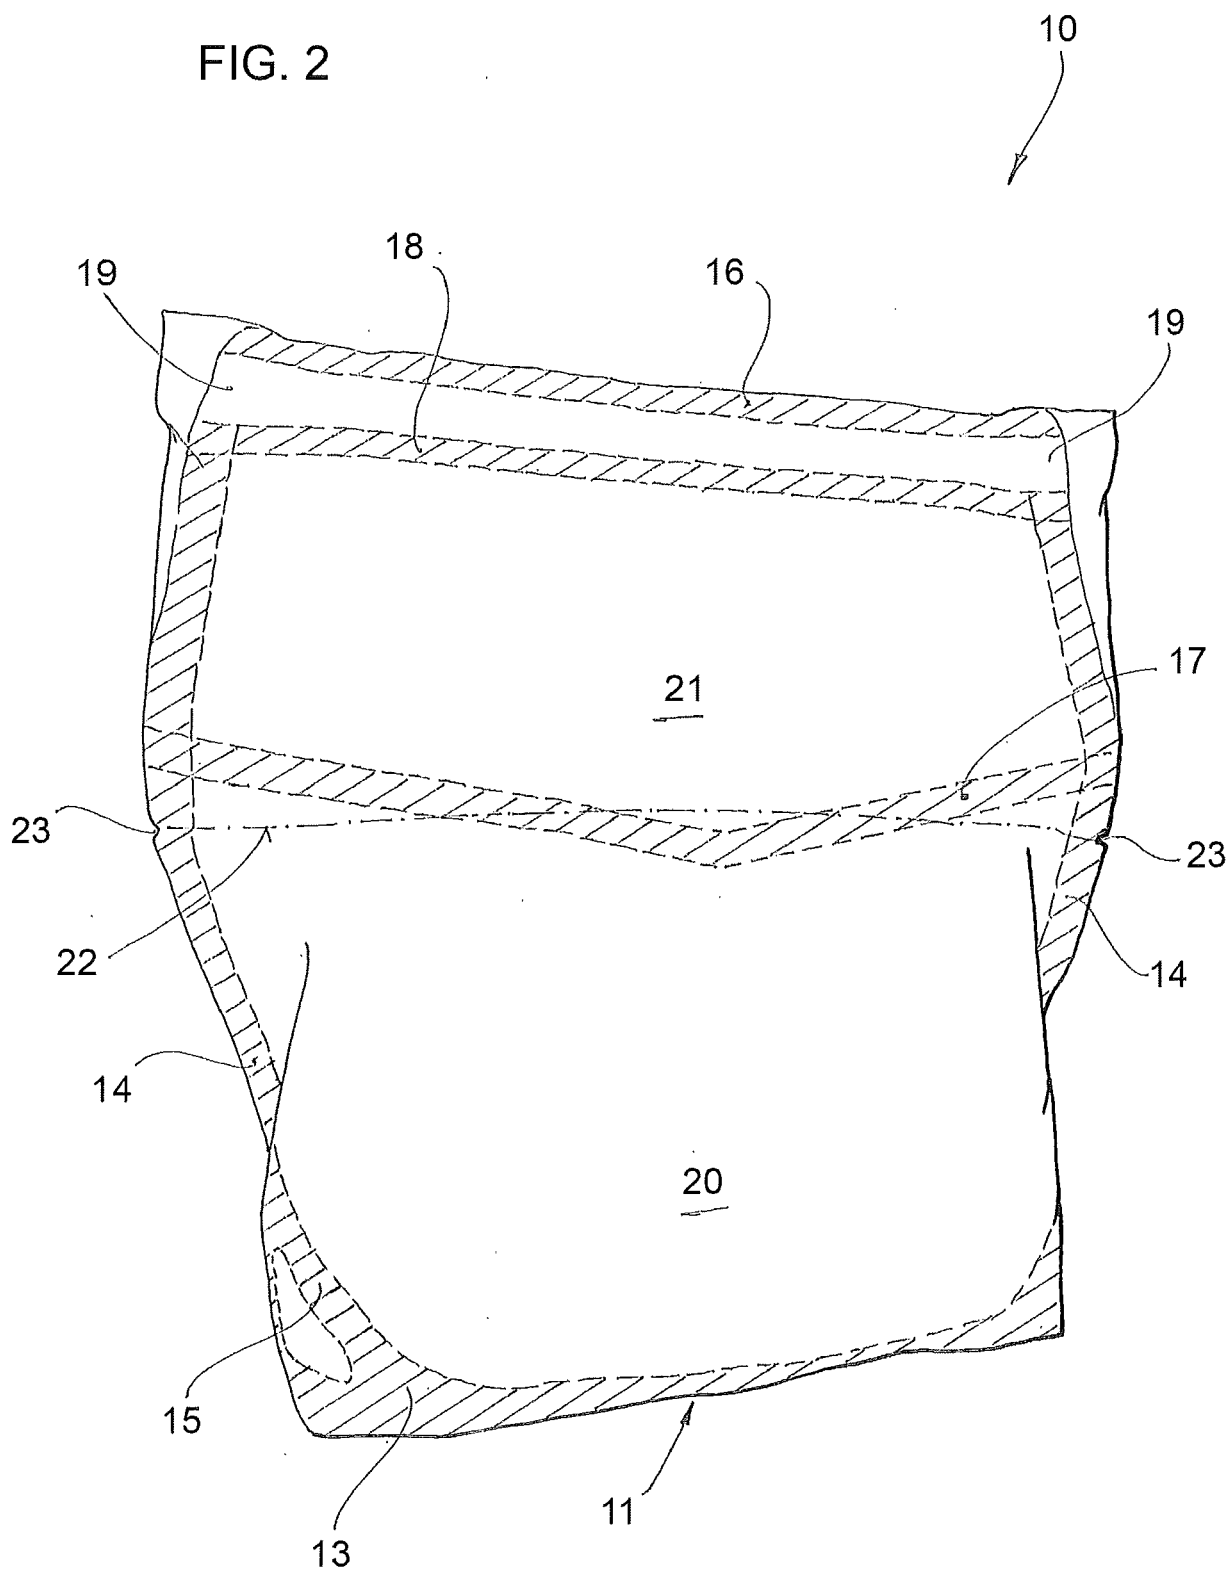


FIG. 2



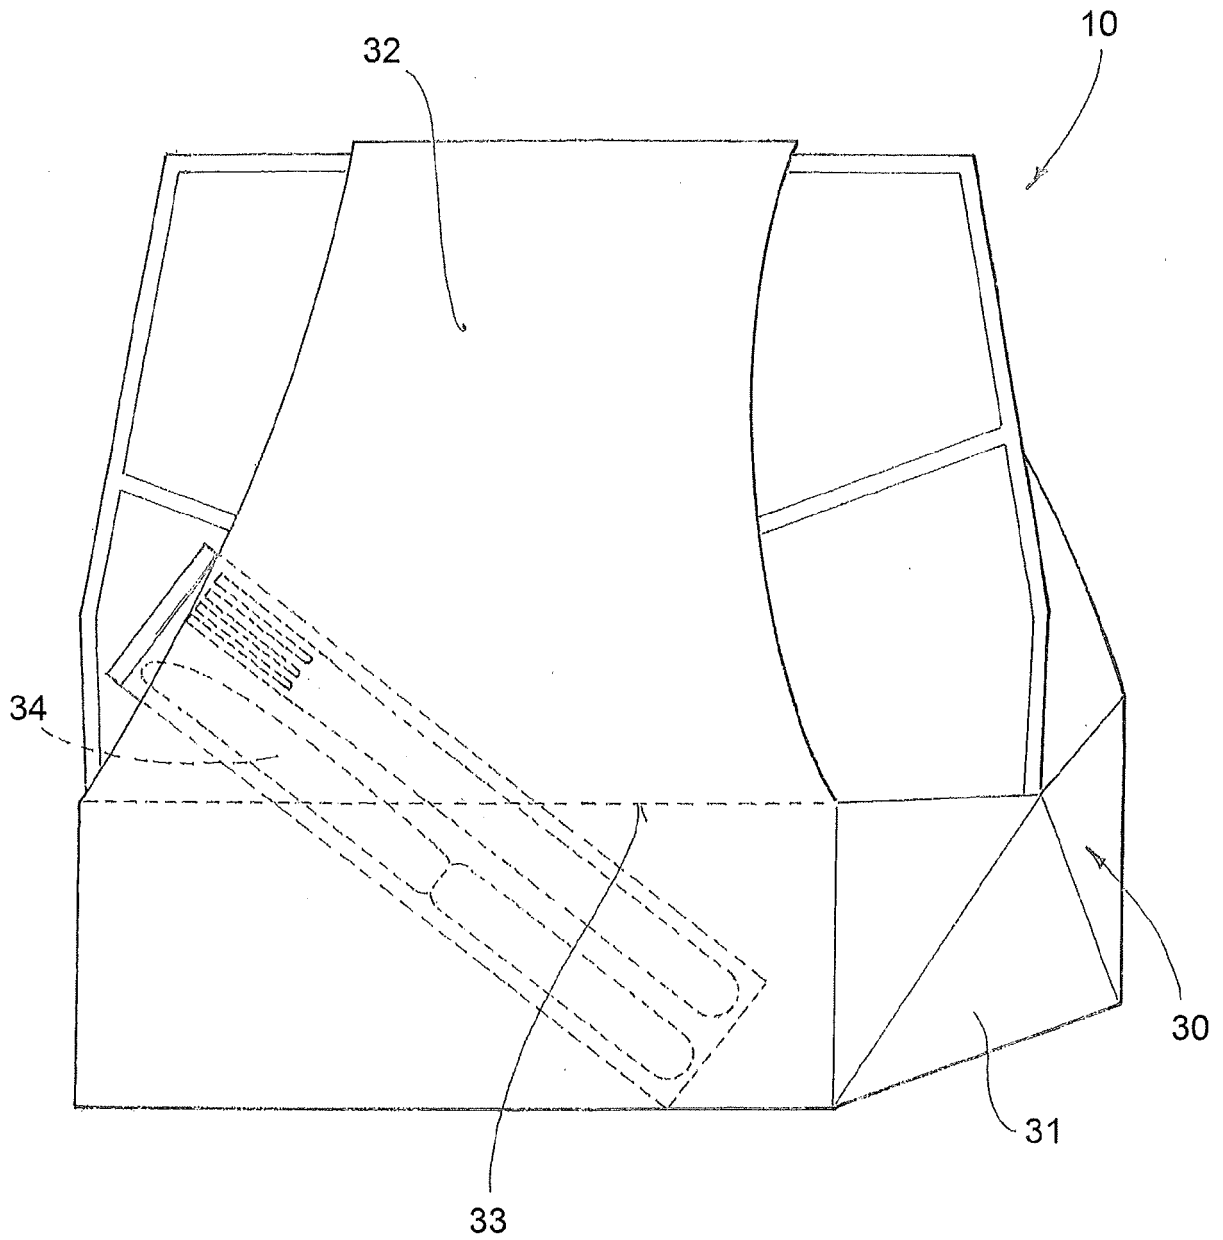


FIG. 3



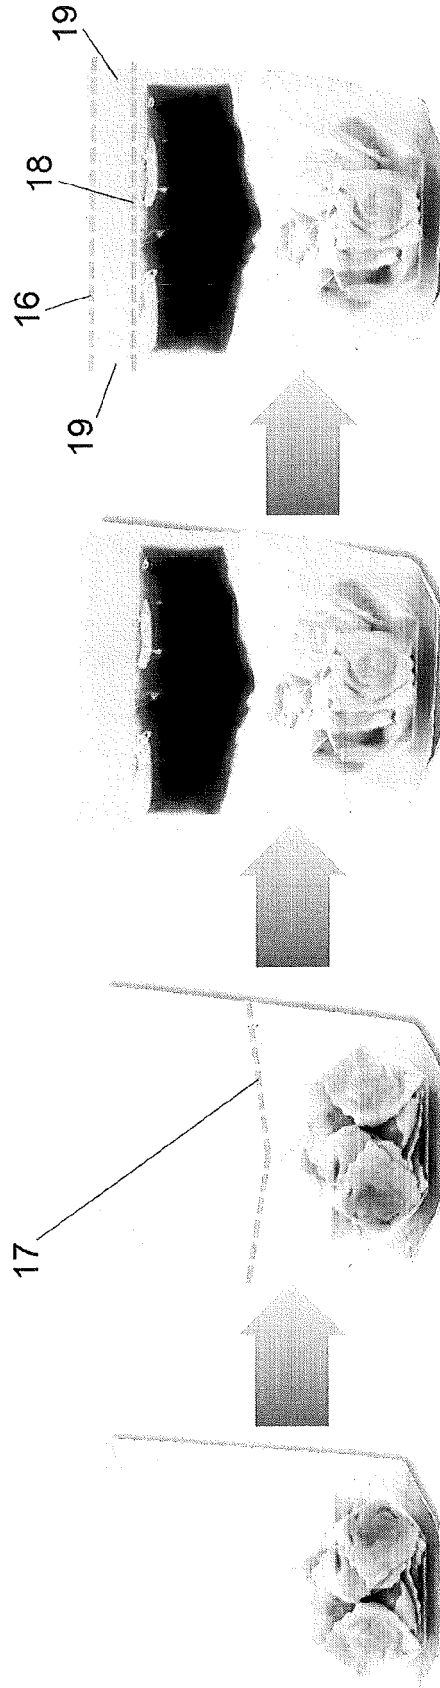


FIG. 4

FIG. 5

FIG. 6

FIG. 7

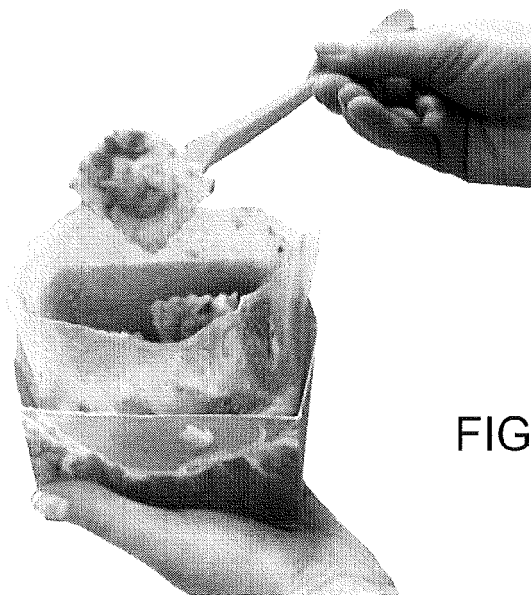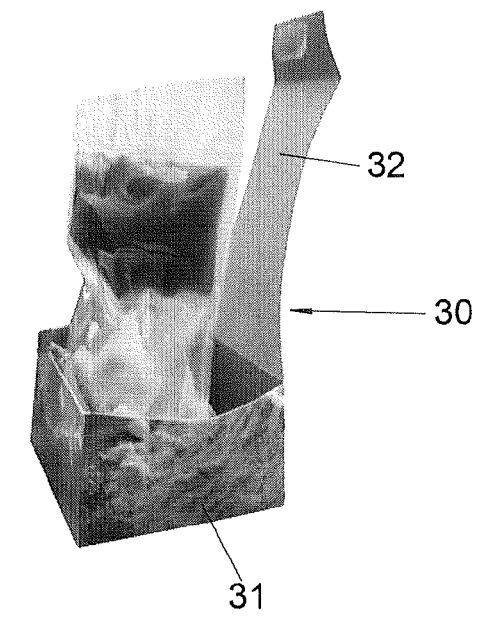



EUROPEAN SEARCH REPORT

Application Number
EP 14 16 7992

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	WO 2007/142887 A1 (DU PONT [US]; KANE JAMES P JR [US]; LEE I-HWA [US]; VISIOLI DONNA LYNN) 13 December 2007 (2007-12-13) * page 10, lines 4-5; figure 8 * * page 21 *	1,10	INV. B65D81/32 B65D81/34 B65D75/00 B65D77/06
A	CA 2 826 010 A1 (AJINOMOTO KK [JP]) 9 August 2012 (2012-08-09) * paragraph [0032]; figure 20 *	1	
A	JP 2003 081356 A (ORIHIRO ENG CO LTD) 19 March 2003 (2003-03-19) * the whole document *	1	
A	GB 2 337 978 A (BROCKLESBY STEPHEN ROY [ZA]) 8 December 1999 (1999-12-08) * figures *	1	
A	GB 2 427 601 A (STEAMFAST EUROP LTD [GB]) 3 January 2007 (2007-01-03) * figures *	1	
A	EP 0 838 412 A1 (NEUENSCHWANDER MARKUS [CH]) 29 April 1998 (1998-04-29) * figures *	1	
A	US 2005/276885 A1 (BENNETT JAMES A [US]) 15 December 2005 (2005-12-15) * figures *	1	
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
The Hague		5 September 2014	Fournier, Jacques
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 14 16 7992

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

05-09-2014

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2007142887 A1	13-12-2007	BR PI0711245 A2	30-08-2011
		CN 101626963 A	13-01-2010
		EP 2040997 A1	01-04-2009
		JP 5007742 B2	22-08-2012
		JP 2009538800 A	12-11-2009
		US 2007278114 A1	06-12-2007
		WO 2007142887 A1	13-12-2007
CA 2826010 A1	09-08-2012	AU 2012211812 A1	22-08-2013
		CA 2826010 A1	09-08-2012
		CN 103338738 A	02-10-2013
		EA 201300864 A1	30-12-2013
		EP 2671562 A1	11-12-2013
		KR 20130140053 A	23-12-2013
		MA 34924 B1	01-02-2014
		TW 201235033 A	01-09-2012
		US 2013304016 A1	14-11-2013
		WO 2012105524 A1	09-08-2012
JP 2003081356 A	19-03-2003	JP 4815076 B2	16-11-2011
		JP 2003081356 A	19-03-2003
GB 2337978 A	08-12-1999	NONE	
GB 2427601 A	03-01-2007	EP 1896344 A1	12-03-2008
		GB 2427601 A	03-01-2007
		US 2010159083 A1	24-06-2010
		WO 2006136825 A1	28-12-2006
EP 0838412 A1	29-04-1998	NONE	
US 2005276885 A1	15-12-2005	US 2005276885 A1	15-12-2005
		WO 2005123196 A2	29-12-2005

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2007142887 A1 [0006]