



(11) **EP 2 816 098 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**24.12.2014 Bulletin 2014/52**

(51) Int Cl.:  
**C10M 135/00 (2006.01) C10M 135/18 (2006.01)**

(21) Application number: **13172544.2**

(22) Date of filing: **18.06.2013**

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB  
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO  
PL PT RO RS SE SI SK SM TR**  
Designated Extension States:  
**BA ME**

(71) Applicant: **Shell Internationale Research  
Maatschappij B.V.  
2596 HR The Hague (NL)**

(72) Inventor: **Matthews, Sarah Jane  
Ince, CH2 4NU  
Chester (GB)**

(74) Representative: **Matthezing, Robert Maarten  
Shell International B.V.  
Intellectual Property Services  
P.O. Box 384  
2501 CJ The Hague (NL)**

(54) **Use of a sulfur compound for improving the oxidation stability of a lubricating oil composition**

(57) Use of a sulphur compound having at least one  
-C-S-C-bond for reducing the loss in oxidative stability of  
a lubricating oil composition for the crankcase of an in-  
ternal combustion engine when the internal combustion

engine is fuelled with a biofuel, preferably wherein the  
biofuel is a biodiesel fuel which comprises a fatty acid  
alkyl ester.

**EP 2 816 098 A1**

**Description**Field of the Invention

**[0001]** The present invention relates to a lubricating oil composition for particular use in the crankcase of a diesel (compression-ignited) internal combustion engine, wherein the internal combustion engine is fuelled at least in part with a biodiesel fuel, and to the improvement in resistance to oxidation of such lubricating oil compositions.

Background of the Invention

**[0002]** Government regulations and market demands continue to emphasize conservation of fossil fuels in the transportation industry. There is therefore an increasing demand for vehicles which are fuelled, either exclusively or partly with fuels from renewable or bio-derived sources (e.g. biodiesel fuels).

**[0003]** It is known to include fatty acid alkyl esters (FAAEs), in particular fatty acid methyl esters (FAMEs), in diesel fuel compositions. FAME is produced via a chemical process called transesterification with methanol in the presence of a catalyst to yield methyl esters. FAME can be produced from various oil-derived feedstocks such as soybean, rapeseed, sunflower seed, coconut and used vegetable oils. FAAEs may be added for a variety of reasons, including to reduce the environmental impact of the fuel production and consumption process or to improve lubricity.

**[0004]** However, it has been found that the lubricant compositions used for lubricating an internal combustion engine can often become diluted with the biofuel which is used to fuel the engine. Biodiesel fuels include components of low volatility which are slow to vaporize after injection of the fuel into the engine. Typically, an unburnt portion of the biodiesel and some of the resulting partially combusted decomposition products become mixed with the lubricating oil composition on the cylinder wall and are washed down into the oil sump, thereby contaminating the crankcase lubricant. The biodiesel fuel in the contaminated lubricant may form further decomposition products due to the extreme conditions during lubrication of the engine. In particular, it has been found that dilution of a lubricating composition with a FAAE, such as a FAME, can lead to an undesirable effect on a lubricating oil composition's ability to control oxidative stability. The presence of olefinic double bonds and ester functionality in the biodiesel results in the biodiesel fuels being susceptible to oxidative degradation, and renders the lubricating oil composition oxidatively unstable and more susceptible to sludge and deposit formation. The higher the biodiesel contamination in the oil the lower the oxidative stability of the lubricating oil composition.

**[0005]** Moreover it has been found that this problem of reduced oxidative stability is significantly worse in diesel engines which employ a late post-injection of fuel into the cylinder (e.g. light duty, medium duty and passenger car diesel engines) to regenerate an exhaust gas after-treatment device. This mode of after-treatment device regeneration can lead to higher levels of FAME dilution in the oil.

**[0006]** Accordingly, it would be desirable to provide a lubricating oil composition for use in the crankcase of an internal combustion engine which reduces the loss in oxidative stability which occurs when the internal combustion engine is fuelled with a biofuel.

**[0007]** EP2248876 discloses a lubricating oil composition used in an internal combustion engine, the internal combustion engine using a fuel that contains at least one fat and oil of natural fat and oil, hydrotreated natural fat and oil, transesterified natural fat and oil and hydrotreated transesterified natural fat and oil, wherein a sulphur compound containing at least one -C-S-C- bond is added to base oil, and a content of sulphur contained in the -C-S-S- bond is 0.3 mass% or less based on a total amount of the composition. The lubricating oil composition is capable of reducing corrosion of engine parts.

**[0008]** It has now surprisingly been found by the present inventors that certain sulphur compounds containing at least one -C-S-S- bond, such as a thiocarbamate compound, can be used to reduce the loss in oxidative stability of a lubricating oil composition for the crankcase of an internal combustion engine when the internal combustion engine is fuelled with a biofuel composition, in particular a biofuel composition which comprises a fatty acid alkyl ester.

Summary of the Invention

**[0009]** According to a first aspect of the present invention there is provided the use of a sulphur compound containing at least one -C-S-C- bond for reducing the loss in oxidative stability of a lubricating oil composition for the crankcase of an internal combustion engine, when the internal combustion engine is fuelled with a biofuel composition, preferably wherein the biofuel composition is a biodiesel comprising a fatty acid alkyl ester.

**[0010]** According to another aspect of the present invention there is provided the use of a sulphur compound containing at least one -C-S-C- bond for improving the oxidative stability of a lubricating oil composition for the crankcase of an internal combustion engine when the internal combustion engine is fuelled with a biofuel composition, preferably wherein the biofuel composition comprises a fatty acid alkyl ester.

**[0011]** The present invention is especially useful for the case wherein the lubricating oil composition is contaminated

with at least 0.3 weight%, based on the total weight of the lubricating oil composition, of a biofuel or a decomposition product thereof, or mixtures thereof.

**[0012]** According to another aspect of the present invention there is provided a method for improving the resistance to oxidation of lubricating oil compositions used to lubricate engines fuelled with biofuels comprising adding to the lubricating oil composition an additive amount of one or more sulphur compounds containing at least one -C-S-C- bonds.

#### Detailed Description of the Invention

**[0013]** As used herein, the term "biofuel" means a fuel derived at least in part from a renewable biological resource, preferably biodiesel fuel.

**[0014]** As mentioned above, it is known that a diesel fuel composition used to fuel a compression ignition engine may incorporate a fatty acid alkyl ester (FAAE) such as a fatty acid methyl ester (FAME) as a fuel component. Unfortunately, however, FAME is much less volatile than conventional diesel so has a much higher tendency to accumulate in the lubricant relative to fossil-derived diesel fuel. Consequently, higher levels of FAME in diesel fuel can lead to higher level of fuel dilution in the lubricant, which can lead in turn to an undesirable loss in oxidation stability of the lubricant.

**[0015]** The present invention is especially useful for the case wherein the lubricating oil composition is contaminated with at least 0.3 weight%, based on the total weight of the lubricating oil composition, of a biofuel or a decomposition product thereof, or mixtures thereof.

**[0016]** As used herein, the term "reducing the loss in oxidative stability" means reducing the loss in oxidative stability which is experienced when a lubricating composition is diluted with a biofuel, e.g. fatty acid alkyl ester (FAAE) such as a FAME.

**[0017]** As used herein, the term "improving oxidative stability" means increasing the onset time to oxidation of a lubricating oil composition which has been diluted with a biofuel, e.g. fatty acid alkyl ester (FAAE) such as a FAME, as measured by ASTM D6186 which is a standard test method for measuring oxidation induction time of a lubricating oil composition by Pressure Differential Scanning Calorimetry (pDSC).

**[0018]** As used herein, the term "improving the resistance to oxidation" means (i) reducing the loss in oxidative stability which is experienced when a lubricating oil composition is diluted with a biofuel, and/or (ii) improving the oxidative stability of a FAME-diluted lubricating composition beyond that of an equivalent FAME-diluted lubricating composition which does not contain a sulphur compound containing at least one -C-S-C- bond.

**[0019]** In a preferred embodiment, the improvement in oxidative stability is at least a 50% improvement in loss in oxidative stability, more preferably at least a 100% improvement in oxidative stability, even more preferably at least a 150% improvement in oxidative stability compared to the oxidative stability of an equivalent lubricating oil composition which has been diluted with FAME but which doesn't contain a sulphur compound containing at least one -C-S-C- bond.

**[0020]** As used herein, the term "improving the resistance to oxidation" means (i) reducing the loss in oxidative stability which is experienced when a lubricating composition is diluted with a biofuel, and/or (ii) improving the oxidative stability of a lubricating composition beyond that of the lubricating composition when it does not contain a sulphur compound containing at least one -C-S-C- bond.

**[0021]** In a preferred embodiment of the present invention, the oxidative stability of the lubricating composition is measured according to ASTM D6186 which is a standard test method for measuring oxidation induction time of a lubricating oil composition by Pressure Differential Scanning Calorimetry (pDSC).

**[0022]** The FAAE will typically be added to the fuel composition as a blend (i.e. a physical mixture), conveniently before the composition is introduced into an internal combustion engine or other system which is to be run on the composition. Other fuel components and/or fuel additives may also be incorporated into the composition, either before or after addition of the FAAE and either before or during use of the composition in a combustion system.

**[0023]** The amount of FAAE added will depend on the nature of the base fuel and FAAE in question and on the target cetane number. In general, the volume fraction  $v$  of FAAE in the resultant base fuel/FAAE mixture will be less than the volume fraction  $v'$  which would be required if linear blending rules applied, wherein  $v'$  would be defined by the equation:

$$X = A + v' (B-A) .$$

**[0024]** The volume fractions  $v$  and  $v'$  must each have a value between 0 and 1. When carrying out the method of the present invention the actual volume fraction of FAAE,  $v$ , is preferably at least 0.02 lower than the "linear" volume fraction  $v'$ , more preferably at least 0.05 or 0.08 or 0.1 lower, most preferably at least 0.2, 0.3 or 0.5 lower and in cases up to 0.6 or 0.8 lower than  $v'$ . In absolute terms, the actual volume fraction  $v$  is preferably 0.25 or less, more preferably 0.2 or less, yet more preferably 0.15 or 0.1 or 0.07 or less. It may for example be from 0.01 to 0.25, preferably from 0.05 to 0.25, more preferably from 0.05 or 0.1 to 0.2.

**[0025]** The concentration of the FAAE in the overall fuel composition (or at least in the base fuel/FAAE mixture) is preferably 25% v/v or less, more preferably 20% v/v or less, yet more preferably 15 or 10 or 7% v/v or less. As a minimum it may be 0.05% v/v or greater, preferably 1% v/v or greater, more preferably 2% or 5% v/v or greater, most preferably 7 or 10% v/v or greater.

**[0026]** Fatty acid alkyl esters, of which the most commonly used in the present context are the methyl esters, are already known as renewable diesel fuels (so-called "biodiesel" fuels). They contain long chain carboxylic acid molecules (generally from 10 to 22 carbon atoms long), each having an alcohol molecule attached to one end. Organically derived oils such as vegetable oils (including recycled vegetable oils) and animal fats can be subjected to a transesterification process with an alcohol (typically a C<sub>1</sub> to C<sub>5</sub> alcohol) to form the corresponding fatty esters, typically mono-alkylated. This process, which is suitably either acid- or base-catalysed, such as with the base KOH, converts the triglycerides contained in the oils into fatty acid esters and free glycerol, by separating the fatty acid components of the oils from their glycerol backbone.

**[0027]** In the present invention, the FAAE may be any alkylated fatty acid or mixture of fatty acids. Its fatty acid component(s) are preferably derived from a biological source, more preferably a vegetable source. They may be saturated or unsaturated; if the latter, they may have one or more double bonds. They may be branched or un-branched. Suitably they will have from 10 to 30, more suitably from 10 to 22 or from 12 to 22, carbon atoms in addition to the acid group(s) -CO<sub>2</sub>H. A FAAE will typically comprise a mixture of different fatty acid esters of different chain lengths, depending on its source. For instance the commonly available rapeseed oil contains mixtures of palmitic acid (C<sub>16</sub>), stearic acid (C<sub>18</sub>), oleic, linoleic and linolenic acids (C<sub>18</sub>, with one, two and three unsaturated carbon-carbon bonds respectively) and sometimes also erucic acid (C<sub>22</sub>) - of these the oleic and linoleic acids form the major proportion. Soybean oil contains a mixture of palmitic, stearic, oleic, linoleic and linolenic acids. Palm oil usually contains a mixture of palmitic, stearic and linoleic acid components.

**[0028]** The FAAE used in the present invention is preferably derived from a natural fatty oil, for instance a vegetable oil such as rapeseed oil, soybean oil, coconut oil, sunflower oil, palm oil, peanut oil, linseed oil, camelina oil, safflower oil, babassu oil, tallow oil or rice bran oil. It may in particular be an alkyl ester (suitably the methyl ester) of rapeseed, soy, coconut or palm oil.

**[0029]** The FAAE is preferably a C<sub>1</sub> to C<sub>5</sub> alkyl ester, more preferably a methyl, ethyl or propyl (suitably isopropyl) ester, yet more preferably a methyl or ethyl ester and in particular a methyl ester.

**[0030]** It may for example be selected from the group consisting of rapeseed methyl ester (RME, also known as rape oil methyl ester or rape methyl ester), soy methyl ester (SME, also known as soybean methyl ester), palm oil methyl ester (POME), coconut methyl ester (CME) (in particular unrefined CME; the refined product is based on the crude but with some of the higher and lower alkyl chains (typically the C<sub>6</sub>, C<sub>8</sub>, C<sub>10</sub>, C<sub>16</sub> and C<sub>18</sub>) components removed) and mixtures thereof. In general it may be either natural or synthetic, refined or unrefined ("crude").

**[0031]** The FAAE suitably complies with specifications applying to the rest of the fuel composition, and/or to the base fuel to which it is added, bearing in mind the intended use to which the composition is to be put (for example, in which geographical area and at what time of year). In particular, the FAAE preferably has a flash point (IP 34) of greater than 101°C; a kinematic viscosity at 40°C (IP 71) of 1.9 to 6.0 centistokes, preferably 3.5 to 5.0 centistokes; a density from 845 to 910 kg/m<sup>3</sup>, preferably from 860 to 900 kg/m<sup>3</sup>, at 15°C (IP 365, EN ISO 12185 or EN ISO 3675); a water content (IP 386) of less than 500 ppm; a T95 (the temperature at which 95% of the fuel has evaporated, measured according to IP 123) of less than 360°C; an acid number (IP 139) of less than 0.8 mgKOH/g, preferably less than 0.5 mgKOH/g; and an iodine number (IP 84) of less than 125, preferably less than 120 or less than 115, grams of iodine (I<sub>2</sub>) per 100g of fuel. It also preferably contains (eg, by NMR) less than 0.2% w/w of free methanol, less than 0.02% w/w of free glycerol and greater than 96.5% w/w esters. In general it may be preferred for the FAAE to conform to the European specification EN 14214 for fatty acid methyl esters for use as diesel fuels.

**[0032]** The measured cetane number of the FAAE (ASTM D613) is suitably 55 or greater, preferably 58 or 60 or 65 or even 70 or greater.

**[0033]** Two or more FAAEs may be added to the base fuel in accordance with the present invention, either separately or as a pre-prepared blend, so long as their combined effect is to increase the cetane number of the resultant composition to reach the target number X. In this case the total amount x' of the two or more FAAEs must be less than the amount of that same combination of FAAEs which would need to be added to the base fuel in order to achieve the target cetane number X if linear blending rules applied for both or all of the FAAEs.

**[0034]** The FAAE preferably comprises (i.e. either is or includes) RME or SME.

**[0035]** The FAAE may be added to the fuel composition for one or more other purposes in addition to the desire to increase cetane number, for instance to reduce life cycle greenhouse gas emissions, to improve lubricity and/or to reduce costs.

**[0036]** The lubricating oil composition herein typically comprises a base oil and one or more additives, in addition to one or more sulphur compounds comprising at least one -C-S-C- bond.

**[0037]** There are no particular limitations regarding the base oil used in the lubricating oil compositions herein, and

various conventional mineral oils, synthetic oils as well as naturally derived esters such as vegetable oils may be conveniently used.

**[0038]** The base oil used in the present invention may conveniently comprise mixtures of one or more mineral oils and/or one or more synthetic oils; thus, the term "base oil" herein may refer to a blend containing more than one base oil.

**[0039]** Suitable base oils for use in the lubricating oil composition of the present invention are Group I-III mineral base oils (preferably Group III), Group IV poly-alpha olefins (PAOs), Group II-III Fischer-Tropsch derived base oils (preferably Group III), Group V base oils, and mixtures thereof.

**[0040]** By "Group I", "Group II", "Group III" and "Group IV" and "Group V" base oils in the present invention are meant lubricating oil base oils according to the definitions of American Petroleum Institute (API) for categories I, II, III, IV and V. These API categories are defined in API Publication 1509, 15th Edition, Appendix E, April 2002.

**[0041]** Mineral oils include liquid petroleum oils and solvent-treated or acid-treated mineral lubricating oil of the paraffinic, naphthenic, or mixed paraffinic/naphthenic type which may be further refined by hydrofinishing processes and/or dewaxing.

**[0042]** A preferred base oil for use in the lubricating oil compositions herein is a Fischer-Tropsch derived base oil. Fischer-Tropsch derived base oils are known in the art. By the term "Fischer-Tropsch derived" is meant that a base oil is, or is derived from, a synthesis product of a Fischer-Tropsch process. A Fischer-Tropsch derived base oil may also be referred to as a GTL (Gas-To-Liquids) base oil. Suitable Fischer-Tropsch derived base oils that may be conveniently used as the base oil in the lubricating oil composition of the present invention are those as for example disclosed in EP 0 776 959, EP 0 668 342, WO 97/21788, WO 00/15736, WO 00/14188, WO 00/14187, WO 00/14183, WO 00/14179, WO 00/08115, WO 99/41332, EP 1 029 029, WO 01/18156 and WO 01/57166.

**[0043]** Typically, the aromatics content of a Fischer-Tropsch derived base oil, suitably determined by ASTM D 4629, will typically be below 1 wt.%, preferably below 0.5 wt.% and more preferably below 0.1 wt.%. Suitably, the base oil has a total paraffin content of at least 80 wt.%, preferably at least 85, more preferably at least 90, yet more preferably at least 95 and most preferably at least 99 wt.%. It suitably has a saturates content (as measured by IP-368) of greater than 98 wt.%. Preferably the saturates content of the base oil is greater than 99 wt.%, more preferably greater than 99.5 wt.%. It further preferably has a maximum n-paraffin content of 0.5 wt.%. The base oil preferably also has a content of naphthenic compounds of from 0 to less than 20 wt.%, more preferably of from 0.5 to 10 wt.%.

**[0044]** Typically, when present in the lubricating oil compositions herein, the Fischer-Tropsch derived base oil or base oil blend has a kinematic viscosity at 100°C (as measured by ASTM D 7042) in the range of from 1 to 30 mm<sup>2</sup>/s (cSt), preferably from 1 to 25 mm<sup>2</sup>/s (cSt), and more preferably from 2 mm<sup>2</sup>/s to 12 mm<sup>2</sup>/s. Preferably, the Fischer-Tropsch derived base oil has a kinematic viscosity at 100°C (as measured by ASTM D 7042) of at least 2.5 mm<sup>2</sup>/s, more preferably at least 3.0 mm<sup>2</sup>/s. In one embodiment of the present invention, the Fischer-Tropsch derived base oil has a kinematic viscosity at 100°C of at most 5.0 mm<sup>2</sup>/s, preferably at most 4.5 mm<sup>2</sup>/s, more preferably at most 4.2 mm<sup>2</sup>/s (e.g. "GTL 4"). In another embodiment of the present invention, the Fischer-Tropsch derived base oil has a kinematic viscosity at 100°C of at most 8.5 mm<sup>2</sup>/s, preferably at most 8 mm<sup>2</sup>/s (e.g. "GTL 8").

**[0045]** Further, the Fischer-Tropsch derived base oil when present in the lubricating oil composition herein typically has a kinematic viscosity at 40°C (as measured by ASTM D 7042) of from 10 to 100 mm<sup>2</sup>/s (cSt), preferably from 15 to 50 mm<sup>2</sup>/s.

**[0046]** Also, a preferred Fischer-Tropsch derived base oil for use herein has a pour point (as measured according to ASTM D 5950) of below -30°C, more preferably below -40°C, and most preferably below -45°C.

**[0047]** The flash point (as measured by ASTM D92) of the Fischer-Tropsch derived base oil is preferably greater than 120°C, more preferably even greater than 140°C.

**[0048]** A preferred Fischer-Tropsch derived base oil for use herein has a viscosity index (according to ASTM D 2270) in the range of from 100 to 200. Preferably, the Fischer-Tropsch derived base oil has a viscosity index of at least 125, preferably 130. Also it is preferred that the viscosity index is below 180, preferably below 150.

**[0049]** In the event the Fischer-Tropsch derived base oil contains a blend of two or more Fischer-Tropsch derived base oils, the above values apply to the blend of the two or more Fischer-Tropsch derived base oils.

**[0050]** The lubricating oil composition herein preferably comprises 80 wt% or greater of Fischer-Tropsch derived base oil.

**[0051]** Synthetic oils include hydrocarbon oils such as olefin oligomers (including polyalphaolefin base oils; PAOs), dibasic acid esters, polyol esters, polyalkylene glycols (PAGs), alkyl naphthalenes and dewaxed waxy isomerates. Synthetic hydrocarbon base oils sold by the Shell Group under the designation "Shell XHVI" (trade mark) may be conveniently used.

**[0052]** Poly-alpha olefin base oils (PAOs) and their manufacture are well known in the art. Preferred poly-alpha olefin base oils that may be used in the lubricating oil compositions of the present invention may be derived from linear C<sub>2</sub> to C<sub>32</sub>, preferably C<sub>6</sub> to C<sub>16</sub>, alpha olefins. Particularly preferred feedstocks for said poly-alpha olefins are 1-octene, 1-decene, 1-dodecene and 1-tetradecene.

**[0053]** There is a strong preference for using a Fischer-Tropsch derived base oil over a PAO base oil, in view of the

high cost of manufacture of the PAOs. Thus, preferably, the base oil contains more than 50 wt.%, preferably more than 60 wt.%, more preferably more than 70 wt.%, even more preferably more than 80 wt.%, most preferably more than 90 wt.% Fischer-Tropsch derived base oil. In an especially preferred embodiment not more than 5 wt.%, preferably not more than 2 wt.%, of the base oil is not a Fischer-Tropsch derived base oil. It is even more preferred that 100 wt% of the base oil is based on one or more Fischer-Tropsch derived base oils.

**[0054]** The total amount of base oil incorporated in the lubricating oil composition of the present invention is preferably in the range of from 60 to 99 wt.%, more preferably in the range of from 65 to 90 wt.% and most preferably in the range of from 70 to 85 wt.%, with respect to the total weight of the lubricating oil composition.

**[0055]** Typically the base oil (or base oil blend) as used according to the present invention has a kinematic viscosity at 100°C (according to ASTM D445) of above 2.5 cSt and up to 8 cSt. According to a preferred embodiment of the present invention the base oil has a kinematic viscosity at 100°C (according to ASTM D445) of between 3.5 and 8 cSt. In the event the base oil contains a blend of two or more base oils, it is preferred that the blend has a kinematic viscosity at 100°C of between 3.5 and 7.5 cSt.

**[0056]** The lubricating oil composition herein preferably has a Noack volatility (according to ASTM D 5800) of below 15 wt.%. Typically, the Noack volatility (according to ASTM D 5800) of the composition is between 1 and 15 wt.%, preferably below 14.6 wt.% and more preferably below 14.0 wt.%.

**[0057]** The lubricating oil composition herein comprises one or more sulphur compounds containing at least one -C-S-C-bond.

**[0058]** The one or more sulphur compounds containing at least one -C-S-C- bond is preferably present in an amount of from 0.01 wt% to 10 wt%, more preferably from 0.05 wt% to 5 wt%, and even more preferably from 0.1 wt% to 2 wt%, and especially from 0.5 wt% to 2 wt%, by weight of the total lubricating oil composition.

**[0059]** Such a sulphur compound is preferably dissolved or uniformly dispersed in the base oil of the lubricating oil composition. Examples of such sulphur compound include, but are not necessarily limited to, sulfurized fat and oil, a sulfurized fatty acid, an ester sulphide, an olefin sulphide, a dihydrocarbyl monosulfide, a thiadiazole compound, a thiophosphate ester (thiophospite, thiophosphate), an alkylthiocarbamoyl compound, a thiocarbamate compound, a thioterpene compound and a dialkyl thiodipropionate compound, and mixtures thereof.

**[0060]** The sulfurized fat and oil may be obtained by reacting fat and oil (e.g. lard oil, whale oil, vegetable oil and fish oil) with sulphur or a sulphur-containing compound. A content of the sulphur is not particularly limited, but 5 to 30 mass% is generally preferable. Concrete examples of the sulfurized fat and oil may include a sulfurized lard, a sulfurized rape seed oil, a sulfurized castor oil, a sulfurized soybean oil and a sulfurized rice bran oil.

**[0061]** The sulfurized fatty acid may be exemplified by a sulfurized oleic acid, while the ester sulphide may be exemplified by a sulfurized methyl oleate, a sulfurized rice bran fatty acid octyl and a ditridecyl thiodipropionate.

**[0062]** Examples of the olefin sulphide preferred for use herein include a compound represented by the following formula (1)



where  $R^1$  represents an alkenyl group having 2 to 15 carbon atoms, and  $R^2$  represents an alkyl group or an alkenyl group having 2 to 15 carbon atoms.

**[0063]** The compound can be obtained by reacting an olefin having 2 to 15 carbon atoms or a dimer to a tetramer thereof with a sulfurizing agent such as sulphur, sulphur chloride and the like. The olefin may preferably be propylene, isobutene and diisobutene.

**[0064]** Examples of the dihydrocarbyl monosulfide include a compound represented by the following formula (2):






wherein  $R^3$  and  $R^4$  each represent an alkyl group or a cyclic alkyl group having 1 to 20 carbon atoms, an aryl group having 6 to 20 carbon atoms, or an alkyl aryl group having 7 to 20 carbon atoms or an arylalkyl group having 7 to 20 carbon atoms, which may be mutually the same or different.

**[0065]** When  $R^3$  and  $R^4$  are alkyl groups, the compound is also referred to as an alkyl sulphide. Examples of  $R^3$  and  $R^4$  in the formula (2) may include methyl group, ethyl group, n-propyl group, isopropyl group, n-butyl group, isobutyl group, sec-butyl group, tert-butyl group, various pentyl groups, various hexyl groups, various heptyl groups, various octyl groups, various nonyl groups, various decyl groups, various dodecyl groups, cyclohexyl group, cyclooctyl group, phenyl group, naphthyl group, tolyl group, xyllyl group, benzyl group and phenethyl group.

**[0066]** Examples of the dihydrocarbyl monosulfide may include dibenzyl monosulfide, various dinonyl monosulfides, various didodecyl monosulfides, various dibutyl monosulfides, various dioctyl monosulfides, diphenyl monosulfide and dicyclohexyl monosulfide.

**[0067]** Examples of the thiadiazole compound include 1,3,4-thiadiazole, 1,2,4-thiadiazole compound and 1,4,5-thia-



diazole represented by the following formulae (3) to (5):

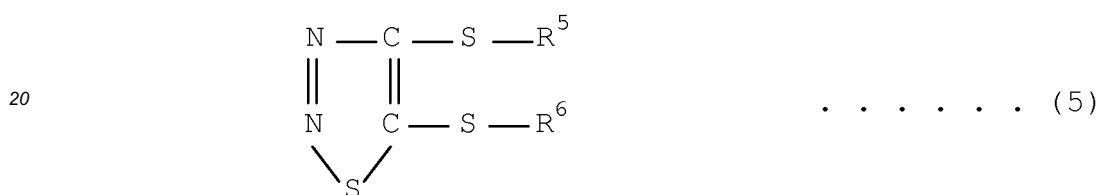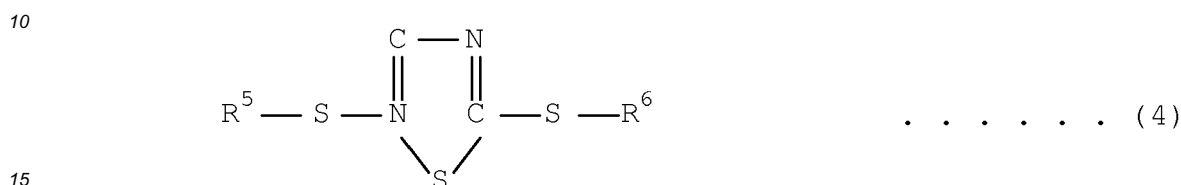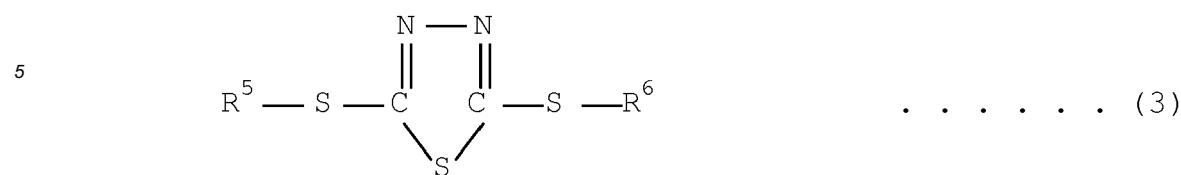

25 **[0068]** In formulae (3) to (5), R<sup>5</sup> and R<sup>6</sup> each represent a hydrocarbon group having 1 to 20 carbon atoms. Examples of the thiadiazole compound include 2,5-bis(n-hexyldithio)-1,3,4-thiadiazole, 2,5-bis(n-octyldithio)-1,3,4-thiadiazole, 2,5-bis(n-nonyldithio)-1,3,4-thiadiazole, 2,5-bis-(1,1,3,3-tetramethylbutyldithio)-1,3,4-thiadiazole, 3,5-bis(n-hexyldithio)-1,2,4-thiadiazole, 3,5-bis(n-octyldithio)-1,2,4-thiadiazole, 3,5-bis(n-nonyldithio)-1,2,4-thiadiazole, 3,5-bis(1,1,3,3-tetramethylbutyldithio)-1,2,4-thiadiazole, 4,5-bis(n-hexyldithio)-1,2,3-thiadiazole, 4,5-bis(n-octyldithio)-1,2,3-thiadiazole, 4,5-bis(n-nonyldithio)-1,2,3-thiadiazole and 4,5-bis(1,1,3,3-tetramethylbutyldithio)-1,2,3-thiadiazole.

30 **[0069]** Examples of the thiophosphate ester may include an alkyl thiophosphite, an aryl or alkyl aryl thiophosphate, and a zinc dialkylthiophosphate. Specific examples include lauryl trithiophosphite and a triphenyl thiophosphate.

**[0070]** The alkylthiocarbamoyl compound may be exemplified by a compound represented by the following formulae (6) and (7):

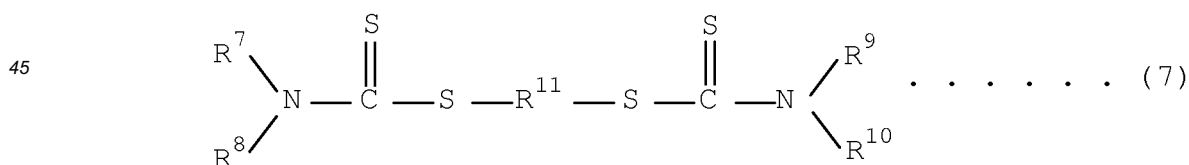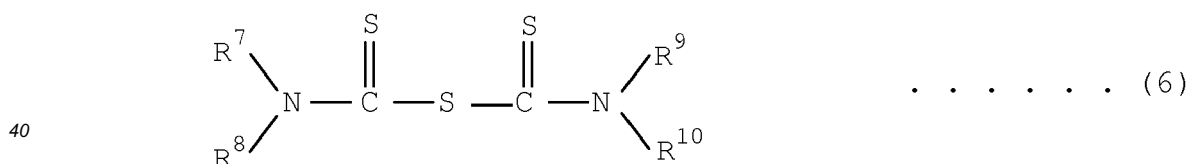

wherein R<sup>7</sup> to R<sup>10</sup> each represent an alkyl group having 1 to 20 carbon atoms. R<sup>11</sup> represents an alkylene group having 1 to 20 carbon atoms.

**[0071]** Examples of the alkylthiocarbamoyl compound may preferably include a bis(dimethylthiocarbamoyl)monosulfide, a bis(dibutylthiocarbamoyl)monosulfide, a bis(dimethylthiocarbamoyl)monosulfide, a bis(dibutylthiocarbamoyl)monosulfide, a bis(diamylthiocarbamoyl)monosulfide, a bis(dioctylthiocarbamoyl)monosulfide, and a methylene bis(dibutyldithiocarbamate).

**[0072]** The thiocarbamate compound may include a metal-containing thiocarbamate or an ashless (non-metal-containing) thiocarbamate. Suitable examples include a zinc dialkyldithiocarbamate and 4,4'-methylene-bis-dibutyldithiocarbamate.

**[0073]** The thioterpene compound may be exemplified by, for instance, a reaction product of a phosphorus pentasulfide or pinene.

**[0074]** The dialkyl thiodipropionate may be exemplified by, for instance, dilauryl thiodipropionate or distearyl thiodipropionate.

**[0075]** The content of sulphur in the -C-S-C- bond is preferably in the range of from 0.05 to 0.3 mass% by weight of the total amount of lubricating oil composition.

**[0076]** In a preferred embodiment herein, the sulphur compound having at least one -C-S-C- compound is a thiocarbamate compound. A particularly preferred thiocarbamate compound for use herein is 4,4'-methylene-bis-dibutyldithiocarbamate. This compound is commercially available from Vanderbilt under the trade name Vanlube 7723.

**[0077]** The lubricating oil composition herein further comprises one or more performance additives in addition to the sulphur compound containing at least one -C-S-C-bond, such as anti-oxidants, anti-wear additives, dispersants, detergents, overbased detergents, extreme pressure additives, friction modifiers, viscosity index improvers, pour point depressants, metal passivators, corrosion inhibitors, demulsifiers, anti-foam agents, seal compatibility agents and additive diluent base oils, etc.

**[0078]** As the person skilled in the art is familiar with the above and other additives, these are not further discussed here in detail. Specific examples of such additives are described in for example Kirk-Othmer Encyclopedia of Chemical Technology, third edition, volume 14, pages 477-526.

**[0079]** Conventional anti-oxidants that may be conveniently used in the lubricating oil compositions of the present invention, diphenylamines (such as "IRGANOX L-57" available from Ciba Specialty Chemicals) as e.g. disclosed in WO 2007/045629 and EP 1 058 720 B1, phenolic anti-oxidants, etc. The teaching of WO 2007/045629 and EP 1 058 720 B1 is hereby incorporated by reference.

**[0080]** Anti-wear additives that may be conveniently used include zinc-containing compounds such as zinc dithiophosphate compounds selected from zinc dialkyl-, diaryl- and/or alkylaryl- dithiophosphates, molybdenum-containing compounds, boron-containing compounds and ashless anti-wear additives such as substituted or unsubstituted thiophosphoric acids, and salts thereof.

**[0081]** Examples of such molybdenum-containing compounds may conveniently include molybdenum dithiocarbamates, trinuclear molybdenum compounds, for example as described in WO 98/26030, sulphides of molybdenum and molybdenum dithiophosphate.

**[0082]** Boron-containing compounds that may be conveniently used include borate esters, borated fatty amines, borated epoxides, alkali metal (or mixed alkali metal or alkaline earth metal) borates and borated overbased metal salts.

**[0083]** The dispersant used is preferably an ashless dispersant. Suitable examples of ashless dispersants are polybutylene succinimide polyamines and Mannich base type dispersants.

**[0084]** The detergent used is preferably an overbased detergent or detergent mixture containing e.g. salicylate, sulfonate and/or phenate-type detergents.

**[0085]** Examples of viscosity index improvers, which may conveniently be used in the lubricating oil composition of the present invention include the styrene-butadiene stellate copolymers, styrene-isoprene stellate copolymers and the polymethacrylate copolymer and ethylene-propylene copolymers (also known as olefin copolymers) of the crystalline and non-crystalline type. Dispersant-viscosity index improvers may be used in the lubricating oil composition of the present invention. However, preferably the composition according to the present invention contains less than 1.0 wt.%, preferably less than 0.5 wt.%, of a Viscosity Index improver concentrate (i.e. VI improver plus "carrier oil" or "diluent"), based on the total weight of the composition. Most preferably, the composition is free of Viscosity Index improver concentrate. The term "Viscosity Modifier" as used hereafter (such as in Table 2) is meant to be the same as the above-mentioned term "Viscosity Index improver concentrate".

**[0086]** Preferably, the composition contains at least 0.1 wt.% of a pour point depressant. As an example, alkylated naphthalene and phenolic polymers, polymethacrylates, maleate/fumarate copolymer esters may be conveniently used as effective pour point depressants. Preferably not more than 0.3 wt.% of the pour point depressant is used.

**[0087]** Furthermore, compounds such as alkenyl succinic acid or ester moieties thereof, benzotriazole-based compounds and thiodiazole-based compounds may be conveniently used in the lubricating composition herein as corrosion inhibitors.

**[0088]** Compounds such as polysiloxanes, dimethyl polycyclohexane and polyacrylates may be conveniently used in the lubricating oil composition herein as defoaming agents.

**[0089]** Compounds which may be conveniently used in the lubricating oil composition herein as seal fix or seal compatibility agents include, for example, commercially available aromatic esters.

**[0090]** The lubricating oil compositions herein may be conveniently prepared by admixing the sulphur compound with at least one -C-S-C- compound with the base oil(s), and one or more additional performance additives.

**[0091]** The above-mentioned performance additives are typically present in an amount in the range of from 0.01 to 35.0 wt.%, based on the total weight of the lubricating oil composition, preferably in an amount in the range of from 0.05 to 25.0 wt.%, more preferably from 1.0 to 20.0 wt.%, based on the total weight of the lubricating oil composition.



**[0092]** Preferably, the composition contains at least 8.0 wt.%, preferably at least 10.0 wt.%, more preferably at least 11.0 wt% of an additive package comprising an anti-wear additive, a metal detergent, an ashless dispersant, an anti-oxidant, a friction modifier and an anti-foaming agent.

**[0093]** The lubricating compositions herein may be so-called "low SAPS" (SAPS = sulphated ash, phosphorus and sulphur), "mid SAPS" or "regular SAPS" formulations.

**[0094]** For Passenger Car Motor Oil (PCMO) engine oils the above ranges mean:

- a sulphated ash content (according to ASTM D 874) of up to 0.5 wt.%, up to 0.8 wt.% and up to 1.5 wt.%, respectively;
- a phosphorus content (according to ASTM D 5185) of up to 0.05 wt.%, up to 0.08 wt.% and typically up to 0.1 wt.%, respectively; and
- a sulphur content (according to ASTM D 5185) of up to 0.2 wt.%, up to 0.3 wt.% and typically up to 0.5 wt.%, respectively.

**[0095]** For Heavy Duty Diesel Engine Oils the above ranges mean:

- a sulphated ash content (according to ASTM D 874) of up to 1 wt.%, up to 1 wt.% and up to 2 wt.%, respectively;
- a phosphorus content (according to ASTM D 5185) of up to 0.08 wt.% (low SAPS) and up to 0.12 wt.% (mid SAPS), respectively; and
- a sulphur content (according to ASTM D 5185) of up to 0.3 wt.% (low SAPS) and up to 0.4 wt.% (mid SAPS), respectively.

**[0096]** The present invention is described below with reference to the following Examples, which are not intended to limit the scope of the present invention in any way.

## Examples

### Lubricating Oil Compositions

**[0097]** Various lubricating oil compositions were prepared as follows.

**[0098]** Comparative Example 1 (Oil A) was a commercially available 5W-30 heavy duty diesel engine oil having a HTHS (High Temperature High Shear) at 150°C (as measured by ASTM D5481) of 3.5 and containing 16 wt% of additives (which includes salicylate detergent, dispersant, zinc-based anti-wear agent, a mixture of aminic and phenolic antioxidants and a corrosion inhibitor), up to 10 wt% of a polymeric viscosity modifier and the remainder a blend of Group III base oils.

**[0099]** Comparative Example 2 (Oil B) was a blend of 90 wt% Oil A and 10 wt% FAME.

**[0100]** Examples 1, 2 and 3 were blends of Oil B with, respectively, 0.5 wt%, 1 wt% and 2 wt%, of Vanlube 7723, commercially available from Vanderbilt.

**[0101]** The compositions of the Examples and the Comparative Examples were obtained by mixing the oils (Oil A/Oil B) with Vanlube 7723 using conventional lubricant blending procedures.

**[0102]** In order to measure the oxidative stability of the Examples and Comparative Examples, each of the lubricating oil compositions were subjected to ASTM D6186 which is a standard test method for measuring oxidation induction time of a lubricating oil composition by Pressure Differential Scanning Calorimetry (pDSC). The pressure and temperature conditions which were used are as set out in Table 1. The longer the onset time to oxidation, the higher the oxidative stability of the lubricating composition. The results of these measurements are set out in Table 1.

Table 1

Example:	Blend:	Psi O <sub>2</sub>	Temperature °C	Onset time to oxidation (mins)
Comparative Example 1	Finished lubricant (Oil A)	500	190	80.84
Comparative Example 2	90 wt% Oil A + 10wt% FAME (Oil B)	500	190	50.49
Example 1	99.5wt% Oil B + 0.5wt% Vanlube 7723	500	190	56.41
Example 2	99 wt% Oil B + 1 wt% Vanlube 7723	500	190	111.48

(continued)

<u>Example:</u>	<u>Blend:</u>	<u>Psi O<sub>2</sub></u>	<u>Temperature °C</u>	<u>Onset time to oxidation (mins)</u>
Example 3	98 wt% Oil B + 2wt% Vanlube 7723	500	195	216.85

Discussion

**[0103]** It can be seen from the results in Table 1 that by diluting the lubricating composition of Comparative Example 1 with 10 wt% FAME, a significant reduction in oxidative stability occurs. It can be also seen from the results in Table 1 that the addition of Vanlube 7723 at a treat rate of 0.5 wt%, 1 wt% and 2 wt% to a lubricating composition which has been diluted with 10 wt% FAME results in a reduction in this loss in oxidative stability. At a treat rate of 1 wt% and 2 wt% Vanlube 7723, the oxidative stability of the lubricating composition is improved beyond that of the original non-FAME diluted lubricating composition (Oil A).

**Claims**

1. Use of a sulphur compound having at least one -C-S-C-bond for reducing the loss in oxidative stability of a lubricating oil composition for the crankcase of an internal combustion engine when the internal combustion engine is fuelled with a biofuel.
2. Use according to Claim 1 wherein the biofuel is a biodiesel fuel which comprises a fatty acid alkyl ester.
3. Use according to Claim 2 wherein the fatty acid alkyl ester is a fatty acid methyl ester.
4. Use according to Claim 1 wherein the lubricating oil composition is contaminated with at least 0.3 wt%, based on the total weight of the lubricating oil composition, of a biofuel or a decomposition product thereof, or a mixture thereof.
5. Use according to any of Claims 1 to 4 wherein the sulfur compound having at least one -C-S-C- bond is selected from thiocarbamate compound is selected from sulfurized fat and oil, a sulfurized fatty acid, an ester sulphide, an olefin sulphide, a dihydrocarbyl monosulfide, a thiadiazole compound, a thiophosphate ester (thiophospite, thiophosphate), an alkylthiocarbamoyl compound, a thiocarbamate compound, a thioterpene compound, a dialkyl thiopropionate compound, and mixtures thereof.
6. Use according to any of Claims 1 to 5 wherein the sulphur compound having at least one -C-S-C- bond is a thiocarbamate compound.
7. Use according to Claim 6 wherein the thiocarbamate is 4,4'-methylene-bis-dibutyldithiocarbamate.
8. Use according to any of Claims 1 to 7 wherein the lubricating oil composition comprises from 0.01 wt% to 10 wt% by weight of the sulphur compound having at least one -C-S-C bond.
9. Use according to any of Claims 1 to 8 wherein the lubricating oil composition additionally comprises base oil and an additional performance additive.
10. Use of a sulphur compound having at least one -C-S-C-bond for improving the oxidative stability of a lubricating oil composition for the crankcase of an internal combustion engine when the internal combustion engine is fuelled with a biofuel, preferably a biodiesel fuel which comprises a fatty acid alkyl ester.
11. Method for improving the resistance to oxidation of lubricating oil compositions used to lubricate engines fuelled with biofuels comprising adding to the lubricating oil composition an additive amount of one or more sulphur compounds having at least one -C-S-C- bond.



## EUROPEAN SEARCH REPORT

 Application Number  
EP 13 17 2544

## DOCUMENTS CONSIDERED TO BE RELEVANT

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	EP 2 334 770 B1 (EXXONMOBIL RES & ENG CO [US]) 29 May 2013 (2013-05-29)	1-6,8-11	INV. C10M135/00 C10M135/18
Y	* paragraphs [0023], [0031], [0033]; claim 1; example 1; table 1 * -----	7	
Y	Vanderbilt Chemicals: "Lubricant Additives",  , 31 January 2013 (2013-01-31), pages 1-36, XP055080763, Retrieved from the Internet: URL:http://www.rtvanderbilt.com/petro/p981.pdf [retrieved on 2013-09-24]	7	
A	* page 20 * -----	1-6,8-11	
A	US 2011/245122 A1 (STRICKLAND KEITH [GB] ET AL) 6 October 2011 (2011-10-06) * abstract; claim 1 * -----	1-11	
			TECHNICAL FIELDS SEARCHED (IPC)
			C10M C10N
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 24 September 2013	Examiner Pöllmann, Klaus
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ..... & : member of the same patent family, corresponding document	

EPO FORM 1503 03/82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 13 17 2544

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

24-09-2013

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 2334770 B1	29-05-2013	EP 2334770 A1	22-06-2011
		US 2010016193 A1	21-01-2010
		WO 2010008532 A1	21-01-2010
-----			
US 2011245122 A1	06-10-2011	BR PI1100837 A2	07-08-2012
		CA 2735524 A1	01-10-2011
		CN 102212408 A	12-10-2011
		EP 2371932 A1	05-10-2011
		JP 2011214005 A	27-10-2011
		US 2011245122 A1	06-10-2011
-----			

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

## REFERENCES CITED IN THE DESCRIPTION

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

### Patent documents cited in the description

- EP 2248876 A [0007]
- EP 0776959 A [0042]
- EP 0668342 A [0042]
- WO 9721788 A [0042]
- WO 0015736 A [0042]
- WO 0014188 A [0042]
- WO 0014187 A [0042]
- WO 0014183 A [0042]
- WO 0014179 A [0042]
- WO 0008115 A [0042]
- WO 9941332 A [0042]
- EP 1029029 A [0042]
- WO 0118156 A [0042]
- WO 0157166 A [0042]
- WO 2007045629 A [0079]
- EP 1058720 B1 [0079]
- WO 9826030 A [0081]

### Non-patent literature cited in the description

- Kirk-Othmer Encyclopedia of Chemical Technology.  
vol. 14, 477-526 [0078]