

(19)



(11)

**EP 2 816 307 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:

**07.11.2018 Bulletin 2018/45**

(51) Int Cl.:

**F28F 3/02** (2006.01)

**F28F 9/02** (2006.01)

**F28D 21/00** (2006.01)

**F25B 39/02** (2006.01)

**F28D 9/00** (2006.01)

(21) Application number: **14166550.5**

(22) Date of filing: **30.04.2014**

(54) **Integral heat exchanger distributor**

Integrierter Verteiler eines Wärmetauschers

Distributeur d'échangeur de chaleur intégré

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB  
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO  
PL PT RO RS SE SI SK SM TR**

(30) Priority: **30.04.2013 US 201313873412**

(43) Date of publication of application:

**24.12.2014 Bulletin 2014/52**

(73) Proprietor: **Hamilton Sundstrand Corporation**

**Windsor Locks, CT 06096-1010 (US)**

(72) Inventor: **Zager, Michael**

**Windsor, CT Connecticut 06096 (US)**

(74) Representative: **Dehns**

**St. Brides House**

**10 Salisbury Square**

**London EC4Y 8JD (GB)**

(56) References cited:

**WO-A2-2013/015944**

**US-A1- 2009 100 854**

**EP 2 816 307 B1**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

### BACKGROUND

**[0001]** The described subject matter relates generally to heat exchangers, and more specifically to heat exchangers for use with in various refrigerant systems.

**[0002]** The current method of distributing a liquid/vapor mixture to the inlet face of an evaporator-type heat exchanger is through a distributor tube. An attempt is made to position holes of the distributor tube at optimum locations and to line them up with each fin passage of a plate fin heat exchanger. Due to tolerance accumulation and manufacturing variation, however, these holes feeding the liquid/vapor mixture do not readily line up with their respective passages. Thus there is often uneven distribution of the liquid/vapor mixture which reduces efficiency of thermal transfer.

**[0003]** A prior art heat exchanger, having the features of the preamble of claim 1, is disclosed in US-2009/0100854 A1.

### SUMMARY

**[0004]** The present invention provides a heat exchanger as claimed in claim 1.

### BRIEF DESCRIPTION OF THE DRAWINGS

#### **[0005]**

FIG. 1 shows an example evaporator-type heat exchanger.

FIG. 2 is a sectional view of the heat exchanger taken through line 2-2 of FIG. 1.

FIG. 3 depicts a heat exchanger subassembly suitable for use in the example evaporator-type heat exchanger of FIG. 1.

FIG. 4 shows an alternative embodiment of a counterflow heat exchanger.

FIG. 5 depicts an alternative heat exchanger subassembly suitable for use in the example counterflow heat exchanger of FIG. 4.

### DETAILED DESCRIPTION

**[0006]** FIG. 1 depicts crossflow heat exchanger 10 with various portions cut away to illustrate the general location of certain internal features. FIG. 1 also shows first fluid 12, inlet port 14, housing 16, inlet chamber 18, refrigerant passages 20, first/longitudinal axis 22, second incoming fluid 24, air passages 26, second/transverse axis 28, third/no-flow axis 29, outlet chamber 30, and first outlet port 32.

**[0007]** Heat exchanger 10 is described with reference to an example evaporator-type heat exchanger for an aircraft. The evaporator can be configured as part of a vapor-cycle air management system (not shown). How-

ever, it will be appreciated that the configuration of crossflow heat exchanger 10 shown here is provided for illustrative purposes, and the described subject matter can be readily adapted to other uses. For example, though shown as a crossflow evaporator-type heat exchanger, the described subject matter can be adapted to many other heat exchanger configurations in which flow rates of each fluid can be suitably managed. A second non-limiting example embodiment of a counterflow heat exchanger is shown in FIG. 4.

**[0008]** First incoming fluid 12 is received into inlet port 14 formed in housing 16. First incoming fluid 12 can be, for example, a refrigerant having previously been passed through an expansion valve (not shown). Inlet chamber 18 is disposed adjacent to an upstream side of one or more refrigerant passages 20 extending along first or longitudinal axis 22. In the crossflow heat exchange relationship of FIG. 1, second incoming fluid 24 (e.g., air) flows transversely through a plurality of air passages 26 in heat exchange relationship with the one or more refrigerant passages 20. Air passages 26 can be substantially perpendicular to refrigerant passages 20 and can extend along second or transverse axis 28.

**[0009]** In certain embodiments, parting plates can be stacked along third or no-flow axis 29 to define first and second flow spaces (best shown in FIGS. 2 and 3). First flow spaces can provide communication between inlet port 14 and outlet port 32 via refrigerant passages 20, while second flow spaces can provide communication along air passages 26. In certain of these embodiments, multiple layers of refrigerant passages 20 and air passages 26 are stacked in alternating first and second flow spaces along third/no-flow axis 29.

**[0010]** In a heat exchange relationship for an evaporator, the mixed liquid/vapor phase of first incoming fluid 12 is heated and vaporized as it passes through inlet chamber 18, refrigerant passages 20, and outlet chamber 30. First outgoing fluid 36, which in this example is vaporized refrigerant, is then discharged from outlet port 32 spaced longitudinally apart from inlet chamber 14. As first incoming fluid 12 passes through refrigerant passages 20, the heat of vaporization chills adjacent/alternating air passages 26 so that second outgoing fluid 34 has a lower temperature than second incoming fluid 24.

**[0011]** To optimize heat transfer and fluid flow rates, the flow of first incoming fluid 12 (e.g., liquid/vapor phase refrigerant) can be metered before entering refrigerant passages 20 in the first flow space(s). Thus a plurality of metering plates can be disposed across an upstream end of at least one of these first flow spaces. As will be seen in subsequent figures, each of the plurality of metering plates can include at least one metering aperture providing fluid communication between the first inlet port and the at least one first flow space. In certain embodiments, the metering plate(s) can take the form of one or more closure bars or other equivalent structure metallurgically bonded to the internal features of the heat exchanger.

**[0012]** FIG. 2 shows a portion of example crossflow

heat exchanger 10 taken across line 2-2 of FIG. 1. FIG. 2 also includes inlet chamber 18, refrigerant passages 20, first/longitudinal axis 22, air passages 26, second/transverse axis 28, third/no-flow axis 29, parting plates 44, first flow spaces 46, second flow spaces 48, first fins 50, upstream refrigerant passage ends 52, first closure bar 54, metering apertures 56, metering plates 60, and second fins 62.

**[0013]** A plurality of parting plates 44 are stacked along third/no-flow axis 29 of heat exchanger such that pairs of adjacent parting plates 44 define alternating first flow spaces 46 and second flow spaces 48, therebetween. Portions of first closure bars 56 are cut away to show first flow spaces 46 between parting plates 44, as well as a first plurality of fins 50 disposed in each first flow space 46. First fins 50 form first fluid passages extending along first/longitudinal axis 22. In the evaporator example, the first fluid passages correspond to refrigerant passages 20.

**[0014]** Inlet chamber 18 is disposed adjacent to respective upstream ends 52 of each refrigerant passage 20. In the view of FIG. 2, inlet chamber 18 extends outward from the page. A plurality of first closure bars 54 are disposed along a first edge of first flow space 46 between inlet chamber 18 and upstream refrigerant passage ends 52. One or more metering apertures 56 can be formed (e.g., by machining) through each first closure bar 54, effectively creating a plurality of metering plates 60 disposed in or over an upstream portion of upstream refrigerant passage ends 52. Metering plates 60, either individually or in the form of first closure bar(s) 54, provide fluid communication between inlet chamber 18 and each refrigerant passage 20. First closure bars 54, and/or individual metering plates 60 can be brazed or otherwise metallurgically bonded to adjacent parting plates 44 defining each first flow space 46. First closure bars 54 and/or individual metering plates 60 can be assembled directly to a heat exchanger plate-and-fin subassembly such as the subassembly shown in FIG. 3. Metering apertures 56 can thus be more closely aligned with each fluid passage (e.g., refrigerant passages 20). It also allows inlet chamber 18 to be an open inlet chamber or header common to multiple refrigerant passages 20.

**[0015]** This and other related heat exchanger configurations eliminate the need for a separate distributor tube. In certain embodiments, this reduces the required number of individual fluid headers for each refrigerant passage, potentially reducing weight and manufacturing complexity. Manufacturing variation, tolerance stackup, and assembly errors all increase the occurrence of the misalignment of feedholes formed in the distributor tube relative to individual headers for each refrigerant passage.

**[0016]** Metering apertures 56 can be individually configured to control the pressure and resulting flow rate of first incoming fluid 12 (shown in FIG. 1) through each refrigerant passage 20. In certain embodiments, one or more metering apertures 56 are cylindrical or frustocon-

ical. A cross-section of each metering aperture 56 can also be tailored to local or global flow and pressure parameters.

**[0017]** The cross-sectional area of each metering aperture 56 can also vary according to its location. In certain embodiments, the size, shape, and/or cross-sectional area of each aperture can be configured so as to provide a substantially equivalent pressure drop through each of the refrigerant passages 20 between inlet chamber 18 and outlet chamber 30 (shown in FIG. 1). In certain embodiments, the size, shape and/or cross-sectional area of each metering aperture 56 can be made to vary according to its position along at least one of second/transverse axis 28 and third/no-flow axis 29.

**[0018]** To further enhance heat transfer relationships, a plurality of second fluid passages can extend through one or more of the second flow spaces 48. In the evaporator example, the second fluid passages correspond to air passages 26, extending along second/transverse axis 28 substantially perpendicular to first/longitudinal axis 22 and refrigerant passages 20. A second plurality of fins 62 can be disposed in each second flow space 48 to form first fluid passages extending along first/longitudinal axis 22. In the crossflow heat exchange relationship, the second plurality of fins 62 can be disposed transversely to the first plurality of fins 50.

**[0019]** FIG. 3 shows plate-and-fin subassembly 110 for a heat exchanger such as an evaporator. FIG. 3 also includes first fluid passages 120, first/longitudinal axis 122, second fluid passages 126, second/transverse axis 128, third/no-flow axis 129, parting plates 144A, 144B, 144C, first flow space 146, second flow space 148, first fins 150, first closure bar 154, metering apertures 156, metering plates 160, second fins 162, first edges 166A, 166B, second closure bar 168, and second edges 170A, 170B.

**[0020]** First parting plate 144A, second parting plate 144B, and third parting plate 144C are generally parallel to one another and spaced apart along third/no-flow axis 129. First plurality of fins 150 are disposed in first flow space 146 between first and second parting plates 144A, 144B, defining a plurality of first fluid passages 120 extending along first/longitudinal axis 122. Second plurality of fins 162 can be disposed in second flow space 148 between second and third parting plates 144B, 144C. In the crossflow configuration, fins 162 can be arranged transversely to fins 150 to define a plurality of second fluid passages 126 extending along second/transverse axis 128.

**[0021]** Similar to FIG. 2, first closure bar 154 is disposed along first edges 166A, 166B of first flow space 146 between first and second parting plates 144A, 144B. First closure bar 154 can include a plurality of metering apertures 156 in communication with first flow space 146 between adjacent ones of fins 150. This forms effective metering plates 160 disposed at one end of each first fluid passage 120. In certain embodiments, first closure bar 154 and/or individual metering plates 160 are metal-

lurgically bonded to first and second parting plates 144A, 144B.

**[0022]** In certain embodiments, second closure bar 168 can be arranged transversely to first closure bar 154 along second edges 170A, 170B of first flow space 146. Second closure bar 168 can be free of any metering apertures to prevent leakage or intermingling of fluids passing separately through first and second flow spaces 146, 148. A longitudinal axis of second closure bar 168 can thus be arranged parallel to the first plurality of fins 150.

**[0023]** FIG. 4 shows an alternative embodiment which includes counterflow heat exchanger 210. Various portions of counterflow heat exchanger 210 are cut away in FIG. 4 to illustrate the general location of certain internal features. Similar to FIG. 1, which shows an example crossflow heat exchanger 10, counterflow heat exchanger 210 can also be configured as an evaporator-type heat exchanger. However, counterflow heat exchanger 210 is provided for illustrative purposes, and the described subject matter can be readily adapted to other uses.

**[0024]** First incoming fluid 212, for example, a liquid/vapor phase refrigerant mixture, can be received into first inlet port 214A formed in housing 216. Inlet chamber 218A is disposed adjacent to an upstream side of one or more first fluid passages 220, with each passage extending along first/longitudinal axis 222. First fluid 212 then enters outlet chamber 230, where it is discharged (as first outgoing fluid 236) from first outlet port 232A longitudinally spaced apart from first inlet port 214A.

**[0025]** Second incoming fluid 224, for example, air, enters via second inlet port 214B, then flows through housing 216 before exiting from second outlet chamber 230B. Second inlet port 214B is also longitudinally spaced apart from second outlet port 232B. In a counterflow design, second inlet port 214B can be disposed at the same longitudinal end of heat exchanger 210 as first outlet port 232A, while first inlet port 214A can be disposed at the same longitudinal end of heat exchanger 210 as second outlet port 232B. It will be appreciated that heat exchanger 210 can be further adapted to a coflow relationship in which fluid inlets 214A, 214B are disposed at the same longitudinal end, and are longitudinally spaced apart from outlet ports 232A, 232B.

**[0026]** Second fluid 224 flows through heat exchanger 210 via a plurality of longitudinal second fluid passages 226 in heat transfer relationship with the one or more first fluid passages 220. Multiple layers of first fluid passages 220 and second fluid passages 226 can be stacked in an alternating manner between adjacent parting plates along third/no-flow axis 229. In certain embodiments, passages 226 can be arranged in a serpentine manner through each layer so that second fluid 224 flows back and forth along first axis 222 before exiting via second outlet port 232B. This is best seen in FIG. 5.

**[0027]** FIG. 5 shows plate-and-fin subassembly 310 for a heat exchanger such as counterflow heat exchanger 210 shown in FIG. 4. First parting plate 344A, second parting plate 344B, and third parting plate 344C are gen-

erally parallel to one another and spaced apart along third/no-flow axis 329. First plurality of fins 350 are disposed in first flow space 346 between first and second parting plates 344A, 344B, defining a plurality of first passages 320 extending along first/longitudinal flow axis 322. Second plurality of fins 362 can be disposed in second flow space 348 between second and third parting plates 344B, 344C, defining a plurality of second passages 326 also extending along first/longitudinal flow axis 322. Second fins 362 can thus be arranged parallel to first fins 350.

**[0028]** Similar to FIGS. 2 and 3, first closure bar 354 is disposed along first edges 366A, 366B of first flow space 346 between first and second parting plates 344A, 344B. First closure bar 354 can include a plurality of metering apertures 356 in communication with first flow space 346 between adjacent ones of first fins 350. This forms effective metering plates 360 disposed at one end of each first fluid passage 320. In certain embodiments, first closure bar 354 and/or individual metering plates 360 are metallurgically bonded to first and second parting plates 344A, 344B. In certain embodiments, second closure bar 368 can be arranged transversely to first closure bar 354 along second edges 370A, 370B of first flow space 346. Second closure bar 368 can be free of metering apertures to prevent leakage or intermingling of fluids passing through first and second flow spaces 346, 348.

**[0029]** In certain embodiments of a counterflow heat exchanger, fluid can flow in the same direction along second passages 326. However, to allow for serpentine flow in second flow space 348, some fins 362 can optionally be recessed from first edges 366B, 366C to allow the fluid in second flow space 348 to change direction. It will be appreciated that, in these embodiments, additional closure bars or plates (not shown for clarity) can be disposed along first edges 366B, 366C to enclose the serpentine passages and retain the second fluid within second flow space 348.

**[0030]** While described with reference to an exemplary embodiment(s), it will be understood by those skilled in the art that various changes may be made and equivalents may be substituted for elements thereof without departing from the scope of the invention. In addition, many modifications may be made to adapt a particular situation or material to the teachings of the invention without departing from the essential scope thereof. Therefore, it is intended that the invention not be limited to the particular embodiment(s) disclosed, but that the invention will include all embodiments falling within the scope of the appended claims.

**[0031]** A further embodiment of any of the foregoing heat exchangers, wherein a cross-sectional area of each metering aperture varies along at least one of: the no-flow axis, and a transverse axis.

**[0032]** A further embodiment of any of the foregoing heat exchangers, wherein a cross-sectional area of each metering aperture is configured so as to provide a sub-

stantially equivalent pressure drop through each of the plurality of first flow spaces between the first inlet port and the first outlet port.

**[0033]** A further embodiment of any of the foregoing heat exchangers, further comprising a plurality of first fluid passages extending along a longitudinal axis of the at least one first flow space.

**[0034]** A further embodiment of any of the foregoing heat exchangers, wherein the plurality of first fluid passages comprises a first plurality of fins disposed in the at least one first flow space.

**[0035]** A further embodiment of any of the foregoing heat exchangers, wherein each of the plurality of metering apertures includes at least one metering aperture in communication with each of the first fluid passages.

**[0036]** A further embodiment of any of the foregoing heat exchangers, further comprising an inlet chamber disposed in fluid communication between the inlet port and the plurality of metering apertures.

**[0037]** A further embodiment of any of the foregoing heat exchangers, further comprising a second inlet port; a second outlet port; and a plurality of second flow spaces providing communication between the second inlet port and the second outlet port; the plurality of second flow spaces defined between adjacent ones of at least some of the parting plates.

**[0038]** A further embodiment of any of the foregoing heat exchangers, wherein the plurality of parting plates define alternating ones of the first plurality of flow spaces and the second plurality of second flow spaces.

**[0039]** A further embodiment of any of the foregoing heat exchangers, further comprising a second plurality of fins disposed in the at least one second flow space, the second plurality of fins defining a plurality of second fluid passages extending through the at least one second flow space.

**[0040]** A further embodiment of any of the foregoing heat exchangers, wherein the plurality of second fluid passages extend along a transverse axis.

**[0041]** A further embodiment of any of the foregoing heat exchangers, wherein the plurality of second fluid passages extend along a longitudinal axis.

**[0042]** A heat exchanger subassembly comprises a first parting plate, a second parting plate spaced apart from, and substantially parallel to, the first parting plate, a third parting plate spaced apart from, and substantially parallel to, the first and second parting plates. A first flow space is disposed between the first and second parting plates, and a second flow space is disposed between the second and third parting plates. A first closure bar is disposed along a first edge of the first flow space between the first and second parting plates. The first closure bar has a plurality of metering apertures in communication with the first flow space.

**[0043]** The heat exchanger subassembly of the preceding paragraph can optionally include, additionally and/or alternatively, any one or more of the following features, configurations and/or additional components:

A further embodiment of the foregoing heat exchanger subassembly, wherein the first closure bar is metallurgically bonded to the first and second parting plates.

**[0044]** A further embodiment of any of the foregoing heat exchanger subassemblies, further comprising a first plurality of fins disposed in the first flow space; and a second plurality of fins disposed in the second flow space.

**[0045]** A further embodiment of any of the foregoing heat exchanger subassemblies, wherein the second plurality of fins define a plurality of second flow passages arranged transversely to a plurality of first flow passages defined by the first plurality of fins.

**[0046]** A further embodiment of any of the foregoing heat exchanger subassemblies, wherein the second plurality of fins define a plurality of second flow passages arranged parallel to a plurality of first flow passages defined by the first plurality of fins.

**[0047]** A further embodiment of any of the foregoing heat exchanger subassemblies, wherein a cross-sectional area of each metering aperture varies along a length of the first closure bar.

**[0048]** A further embodiment of any of the foregoing heat exchanger subassemblies, further comprising a second closure bar arranged transversely to the first closure bar along a second edge of the first flow space, the second closure bar free of metering apertures.

**[0049]** An evaporator comprises a plurality of refrigerant passages in heat exchange relationship with a plurality of air passages. A refrigerant inlet header is disposed adjacent to an upstream end of at least one of the plurality of refrigerant passages. A first closure bar is disposed between the refrigerant inlet header and the upstream end of the at least one refrigerant passage. A metering aperture is formed through the first closure bar and is aligned with the at least one refrigerant passage. The metering aperture provides fluid communication between the refrigerant inlet header and the at least one refrigerant passage.

**[0050]** The evaporator of the preceding paragraph can optionally include, additionally and/or alternatively, any one or more of the following features, configurations and/or additional components:

A further embodiment of the foregoing evaporator, wherein the at least one refrigerant passage extends along a longitudinal axis of the evaporator.

**[0051]** A further embodiment of any of the foregoing evaporators, further comprising a plurality of parting plates spaced apart along a no-flow axis of the heat exchanger; wherein the plurality of refrigerant passages and the plurality of air passages are stacked in an alternating manner between adjacent ones of the parting plates.

**[0052]** A further embodiment of any of the foregoing evaporators, wherein a cross-sectional area of each metering aperture varies along a length of the first closure bar.

**[0053]** A further embodiment of any of the foregoing evaporators, wherein the heat exchange relationship in-

cludes a crossflow heat exchange relationship.

**[0054]** A further embodiment of any of the foregoing evaporators, wherein the heat exchange relationship includes a counterflow heat exchange relationship.

**[0055]** While described with reference to an exemplary embodiment(s), it will be understood by those skilled in the art that various changes may be made and equivalents may be substituted for elements thereof without departing from the scope of the invention. In addition, many modifications may be made to adapt a particular situation or material to the teachings of the invention without departing from the essential scope thereof. Therefore, it is intended that the invention not be limited to the particular embodiment(s) disclosed, but that the invention will include all embodiments falling within the scope of the appended claims.

## Claims

### 1. A heat exchanger (10; 210) comprising:

a first inlet port (14; 214A);  
a first outlet port (32; 232A) longitudinally spaced apart from the first inlet port (14; 214A);  
a plurality of substantially parallel parting plates (144; 344); and  
a plurality of first flow spaces (146; 346) providing communication between the first inlet port (14; 214A) and the first outlet port (32; 232A);  
the plurality of first flow spaces (146; 346) defined between adjacent ones of at least some of the parting plates (144; 344);

#### characterised in that:

the heat exchanger (10; 210) further comprises a plurality of metering plates (154; 354) disposed across an upstream end of at least one of the first flow spaces (146; 346), each of the plurality of metering plates (154; 354) including at least one metering aperture (156; 356) providing fluid communication between the first inlet port (14; 214A) and the at least one first flow space (146; 346); and  
the parting plates (144; 344) are stacked along a no-flow axis (129; 239).

2. The heat exchanger (10; 210) of claim 1, wherein the plurality of metering plates comprises a first closure bar (154; 354) arranged along a first edge (166; 366) of the at least one first flow space (146; 346) proximate to the first inlet port (14; 214A).

3. The heat exchanger (10; 210) of claim 2, wherein the first closure bar (154; 354) is metallurgically bonded to adjacent ones of the parting plates (144; 344) defining the one of the first flow spaces (146;

346).

4. The heat exchanger (10; 210) of claim 2 or 3, further comprising a second closure bar (168; 368) arranged transversely to the first closure bar (154; 354) along a second edge (170; 370) of the first flow space (146; 346), the second closure bar (168; 368) being free of any metering apertures.

5. The heat exchanger (10; 210) of any preceding claim, wherein a cross-sectional area of each metering aperture (156; 356) varies along the no-flow axis (129; 329) and/or a transverse axis (128; 328).

6. The heat exchanger (10; 210) of any preceding claim, wherein a cross-sectional area of each metering aperture (156; 356) is configured so as to provide a substantially equivalent pressure drop through each of the plurality of first flow spaces (146; 346) between the first inlet port (14; 214A) and the first outlet port (32; 232A).

7. The heat exchanger (10; 210) of any preceding claim, further comprising a plurality of first fluid passages (120; 320) extending along a longitudinal axis (122; 232) of the at least one first flow space (146; 346).

8. The heat exchanger (10; 210) of claim 7, wherein the plurality of first fluid passages (146; 346) comprises a first plurality of fins (150; 350) disposed in the at least one first flow space (146; 346).

9. The heat exchanger (10; 210) of claim 7 or 8, wherein each of the plurality of metering apertures (156; 356) includes at least one metering aperture (156; 356) in communication with each of the first fluid passages (120; 320).

10. The heat exchanger (10; 210) of any of claims 7 to 9, further comprising an inlet chamber (18; 218) disposed in fluid communication between the first inlet port (14; 214A) and the plurality of metering apertures (156; 356).

11. The heat exchanger (10; 210) of any of claims 7 to 10, further comprising:

a second inlet port (214B);  
a second outlet port (232B); and  
a plurality of second flow spaces (148; 348) providing communication between the second inlet port (214B) and the second outlet port (232B), the plurality of second flow spaces (148; 348) being defined between adjacent ones of at least some of the parting plates (144; 344).

12. The heat exchanger (10; 210) of claim 11, wherein

the plurality of parting plates (144; 344) define alternating ones of the first plurality of flow spaces (146; 346) and the second plurality of second flow spaces (148; 348).

13. The heat exchanger (10; 210) of claim 11 or 12, further comprising a second plurality of fins (162; 362) disposed in the at least one second flow space (148; 348), the second plurality of fins (162; 362) defining a plurality of second fluid passages (126; 326) extending through the at least one second flow space (148; 348).

14. The heat exchanger (10; 210) of claim 13, wherein the plurality of second fluid passages (126; 326) extend:

along a transverse axis (128); or  
along a longitudinal axis.

#### Patentansprüche

1. Wärmetauscher (10; 210), umfassend:

eine erste Einlassöffnung (14; 214A);  
eine erste Auslassöffnung (32; 232A), die in Längsrichtung von der ersten Einlassöffnung (14; 214A) beabstandet ist;  
eine Vielzahl von im Wesentlichen parallelen Trennplatten (144; 344); und  
eine Vielzahl von ersten Strömungsräumen (146; 346), die eine Verbindung zwischen der ersten Einlassöffnung (14; 214A) und der ersten Auslassöffnung (32; 232A) bereitstellt; wobei die Vielzahl von ersten Strömungsräumen (146; 346) zwischen angrenzenden der mindestens einigen der Trennplatten (144; 344) definiert ist;

**dadurch gekennzeichnet, dass:**

der Wärmetauscher (10; 210) ferner eine Vielzahl von Dosierplatten (154; 354) umfasst, die über ein stromaufwärts gelegenes Ende von mindestens einem der ersten Strömungsräume (146; 346) angeordnet ist, wobei jede der Vielzahl von Dosierplatten (154; 354) mindestens eine Dosieröffnung (156; 356) beinhaltet, die eine Fluidverbindung zwischen der ersten Einlassöffnung (14; 214A) und dem mindestens einen ersten Strömungsraum (146; 346) bereitstellt; und  
die Trennplatten (144; 344) entlang einer Nichtströmungsachse (129; 239) aufeinandergeschichtet sind.

2. Wärmetauscher (10; 210) nach Anspruch 1, wobei die Vielzahl von Dosierplatten eine erste Schließleiste

(154; 354) umfasst, die entlang einer ersten Kante (166; 366) des mindestens einen ersten Strömungsraums (146; 346) in der Nähe der ersten Einlassöffnung (14; 214A) angebracht ist.

3. Wärmetauscher (10; 210) nach Anspruch 2, wobei die erste Schließleiste (154; 354) metallurgisch mit den angrenzenden der Trennplatten (144; 344) verbunden ist, die den einen der ersten Strömungsräume (146; 346) begrenzen.

4. Wärmetauscher (10; 210) nach Anspruch 2 oder 3, ferner umfassend eine zweite Schließleiste (168; 368), die quer zu der ersten Schließleiste (154; 354) entlang einer zweiten Kante (170; 370) des ersten Strömungsraums (146; 346) angebracht ist, wobei die zweite Schließleiste (168; 368) frei von jeglichen Dosieröffnungen ist.

5. Wärmetauscher (10; 210) nach einem der vorhergehenden Ansprüche, wobei eine Querschnittsfläche jeder Dosieröffnung (156; 356) entlang der Nichtströmungsachse (129; 329) und/oder einer Querachse (128; 328) variiert.

6. Wärmetauscher (10; 210) nach einem der vorhergehenden Ansprüche, wobei eine Querschnittsfläche jeder Dosieröffnung (156; 356) derart konfiguriert ist, einen im Wesentlichen äquivalenten Druckabfall durch jeden der Vielzahl der ersten Strömungsräume (146; 346) zwischen der ersten Einlassöffnung (14; 214A) und der ersten Auslassöffnung (32; 232A) bereitzustellen.

7. Wärmetauscher (10; 210) nach einem der vorhergehenden Ansprüche, ferner umfassend eine Vielzahl von Fluiddurchlässen (120; 320), die sich entlang einer Längsachse (122; 232) des mindestens einen ersten Strömungsraums (146; 346) erstreckt.

8. Wärmetauscher (10; 210) nach Anspruch 7, wobei die Vielzahl von ersten Fluiddurchlässen (146; 346) eine erste Vielzahl von Rippen (150; 350) umfasst, die in dem mindestens einen ersten Strömungsraum (146; 346) angeordnet ist.

9. Wärmetauscher (10; 210) nach Anspruch 7 oder 8, wobei jede der Vielzahl von Dosieröffnungen (156; 356) mindestens eine Dosieröffnung (156; 356) beinhaltet, die in Verbindung mit jeder der ersten Fluiddurchlässe (120; 320) steht.

10. Wärmetauscher (10; 210) nach einem der Ansprüche 7 bis 9, ferner umfassend eine Einlasskammer (18; 218), die in Fluidverbindung zwischen der ersten Einlassöffnung (14; 214A) und der Vielzahl von Dosieröffnungen (156; 356) angeordnet ist.

11. Wärmetauscher (10; 210) nach einem der Ansprüche 7 bis 10, ferner umfassend:

eine zweite Einlassöffnung (214B);  
eine zweite Auslassöffnung (232B); und  
eine Vielzahl von zweiten Strömungsräumen (148; 348), die eine Verbindung zwischen der zweiten Einlassöffnung (214B) und der zweiten Auslassöffnung (232B) bereitstellen, wobei die Vielzahl von zweiten Strömungsräumen (148; 348) zwischen angrenzenden der mindestens einigen der Trennplatten (144; 344) definiert wird.

5

10

12. Wärmetauscher (10; 210) nach Anspruch 11, wobei die Vielzahl von Trennplatten (144; 344) sich abwechselnde der ersten Vielzahl von Strömungsräumen (146; 346) und der zweiten Vielzahl von zweiten Strömungsräumen (148; 348) definiert.

15

20

13. Wärmetauscher (10; 210) nach Anspruch 11 oder 12, ferner umfassend eine zweite Vielzahl von Rippen (162; 362), die in dem mindestens einen zweiten Strömungsraum (148; 348) angeordnet ist, wobei die zweite Vielzahl von Rippen (162; 362) eine Vielzahl von zweiten Fluiddurchlässen (126; 326) definiert, die sich durch den mindestens einen zweiten Strömungsraum (148; 348) erstreckt.

25

14. Wärmetauscher (10; 210) nach Anspruch 13, wobei sich die Vielzahl von zweiten Fluiddurchlässen (126; 326):

30

entlang einer Querachse (128); oder  
entlang einer Längsachse erstreckt.

35

## Revendications

1. Echangeur de chaleur (10 ; 210) comprenant :

40

un premier orifice d'entrée (14 ; 214A) ;  
un premier orifice de sortie (32 ; 232A) espacé longitudinalement du premier orifice d'entrée (14 ; 214A) ;  
une pluralité de plaques de séparation sensiblement parallèles (144 ; 344) ; et  
une pluralité de premiers espaces d'écoulement (146 ; 346) fournissant une communication entre le premier orifice d'entrée (14 ; 214A) et le premier orifice de sortie (32 ; 232A) ; la pluralité de premiers espaces d'écoulement (146 ; 346) étant définis entre des plaques de séparation adjacentes d'au moins une partie des plaques de séparation (144 ; 344) ;

45

50

55

caractérisé en ce que :

l'échangeur de chaleur (10 ; 210) comprend en outre une pluralité de plaques de mesure (154 ; 354) disposées à travers une extrémité amont d'au moins un des premiers espaces d'écoulement (146 ; 346), chacune de la pluralité de plaques de mesure (154 ; 354) incluant au moins une ouverture de mesure (156 ; 356) fournissant une communication fluide entre le premier orifice d'entrée (14 ; 214A) et l'au moins un premier espace d'écoulement (146 ; 346) ; et les plaques de séparation (144 ; 344) sont empilées le long d'un axe sans écoulement (129 ; 239).

2. Echangeur de chaleur (10 ; 210) selon la revendication 1, dans lequel la pluralité de plaques de mesure comprend une première barre de clôture (154 ; 354) agencée le long d'un premier bord (166 ; 366) de l'au moins un premier espace d'écoulement (146 ; 346) à proximité du premier orifice d'entrée (14 ; 214A).

3. Echangeur de chaleur (10 ; 210) selon la revendication 2, dans lequel la première barre de clôture (154 ; 354) est liée métallurgiquement à des plaques de séparation adjacentes des plaques de séparation (144 ; 344) définissant l'un des premiers espaces d'écoulement (146 ; 346).

4. Echangeur de chaleur (10 ; 210) selon la revendication 2 ou 3, comprenant en outre une seconde barre de clôture (168 ; 368) agencée transversalement à la première barre de clôture (154 ; 354) le long d'un second bord (170 ; 370) du premier espace d'écoulement (146 ; 346), la seconde barre de clôture (168 ; 368) étant dépourvue de toute ouverture de mesure.

5. Echangeur de chaleur (10 ; 210) selon une quelconque revendication précédente, dans lequel une section transversale de chaque ouverture de mesure (156 ; 356) varie le long de l'axe sans écoulement (129 ; 329) et/ou d'un axe transversal (128 ; 328).

6. Echangeur de chaleur (10 ; 210) selon une quelconque revendication précédente, dans lequel une section transversale de chaque ouverture de mesure (156 ; 356) est configurée pour fournir une chute de pression sensiblement équivalente à travers chacun de la pluralité de premiers espaces d'écoulement (146 ; 346) entre le premier orifice d'entrée (14 ; 214A) et le premier orifice de sortie (32 ; 232A).

7. Echangeur de chaleur (10 ; 210) selon une quelconque revendication précédente, comprenant en outre une pluralité de premiers passages de fluide (120 ; 320) s'étendant le long d'un axe longitudinal (122 ; 232) de l'au moins un premier espace d'écoulement (146 ; 346).



8. Echangeur de chaleur (10 ; 210) selon la revendication 7, dans lequel la pluralité de premiers passages de fluide (146 ; 346) comprend une première pluralité d'ailettes (150 ; 350) disposées dans l'au moins un premier espace d'écoulement (146 ; 346) . 5
9. Echangeur de chaleur (10 ; 210) selon la revendication 7 ou 8, dans lequel chacune de la pluralité d'ouvertures de mesure (156 ; 356) inclut au moins une ouverture de mesure (156 ; 356) en communication avec chacun des premiers passages de fluide (120 ; 320). 10
10. Echangeur de chaleur (10 ; 210) selon l'une quelconque des revendications 7 à 9, comprenant en outre une chambre d'entrée (18 ; 218) disposée en communication fluidique entre le premier orifice d'entrée (14 ; 214A) et la pluralité d'ouvertures de mesure (156 ; 356). 15  
20
11. Echangeur de chaleur (10 ; 210) selon l'une quelconque des revendications 7 à 10, comprenant en outre :  
un second orifice d'entrée (214B) ; 25  
un second orifice de sortie (232B) ; et  
une pluralité de seconds espaces d'écoulement (148 ; 348) fournissant une communication entre le second orifice d'entrée (214B) et le second orifice de sortie (232B), la pluralité de seconds espaces d'écoulement (148 ; 348) étant définis entre des plaques de séparation adjacentes d'au moins une partie des plaques de séparation (144 ; 344). 30  
35
12. Echangeur de chaleur (10 ; 210) selon la revendication 11, dans lequel la pluralité de plaques de séparation (144 ; 344) définissent des espaces d'écoulement alternatifs parmi la première pluralité d'espaces d'écoulement (146 ; 346) et la seconde pluralité de seconds espaces d'écoulement (148 ; 348). 40
13. Echangeur de chaleur (10 ; 210) selon la revendication 11 ou 12, comprenant en outre une seconde pluralité d'ailettes (162 ; 362) disposées dans l'au moins un second espace d'écoulement (148 ; 348), la seconde pluralité d'ailettes (162 ; 362) définissant une pluralité de seconds passages de fluide (126 ; 326) s'étendant à travers l'au moins un second espace d'écoulement (148 ; 348). 45  
50
14. Echangeur de chaleur (10 ; 210) selon la revendication 13, dans lequel la pluralité de seconds passages de fluide (126 ; 326) s'étend : 55  
le long d'un axe transversal (128) ; ou  
le long d'un axe longitudinal.

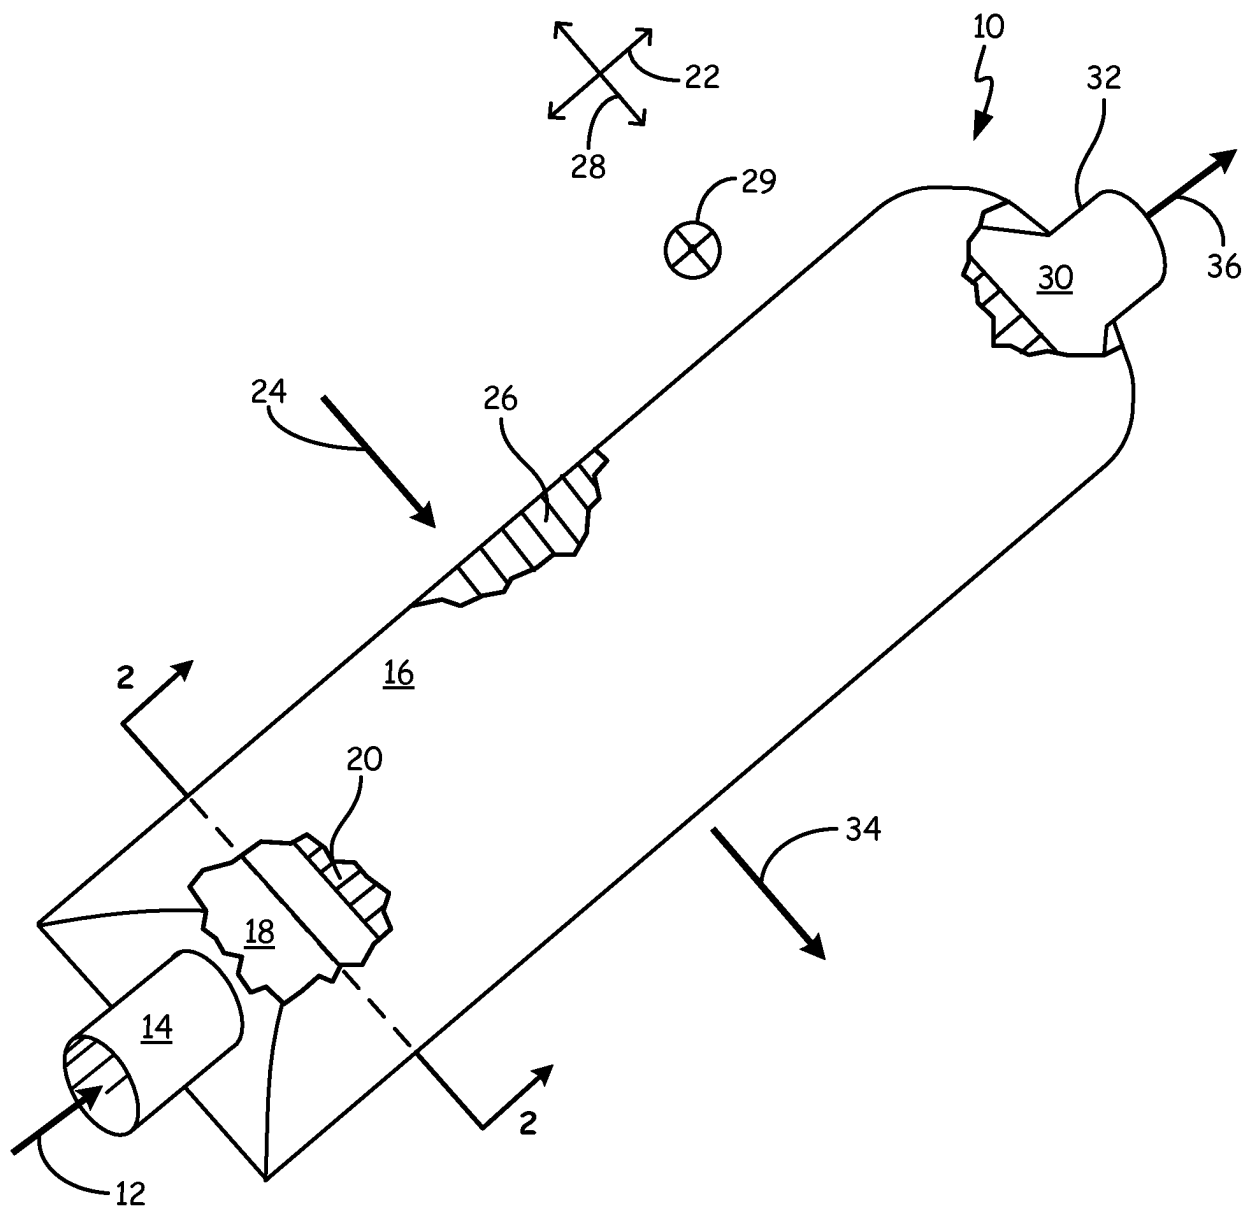


FIG. 1

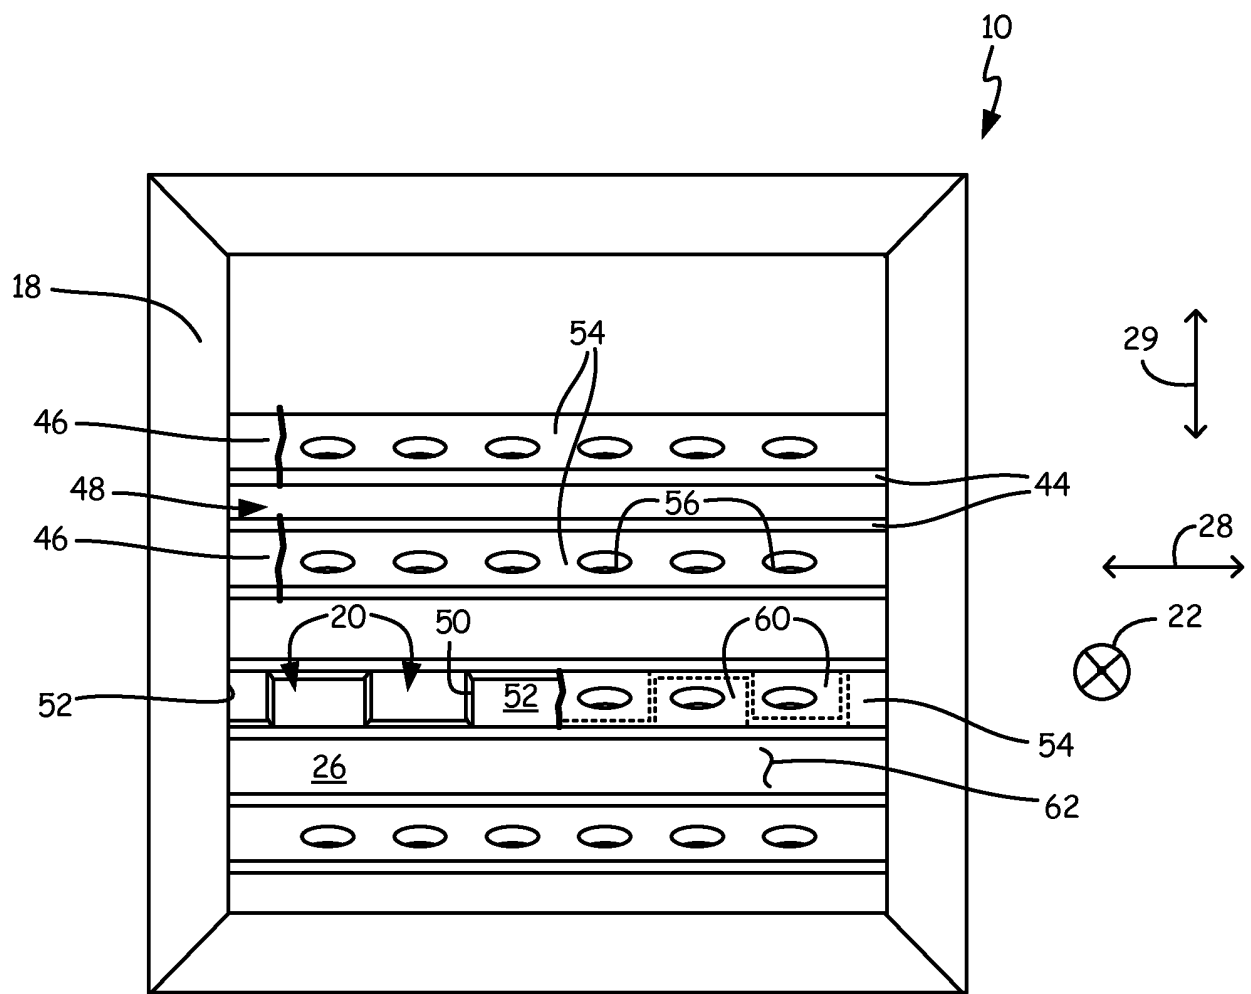


FIG. 2

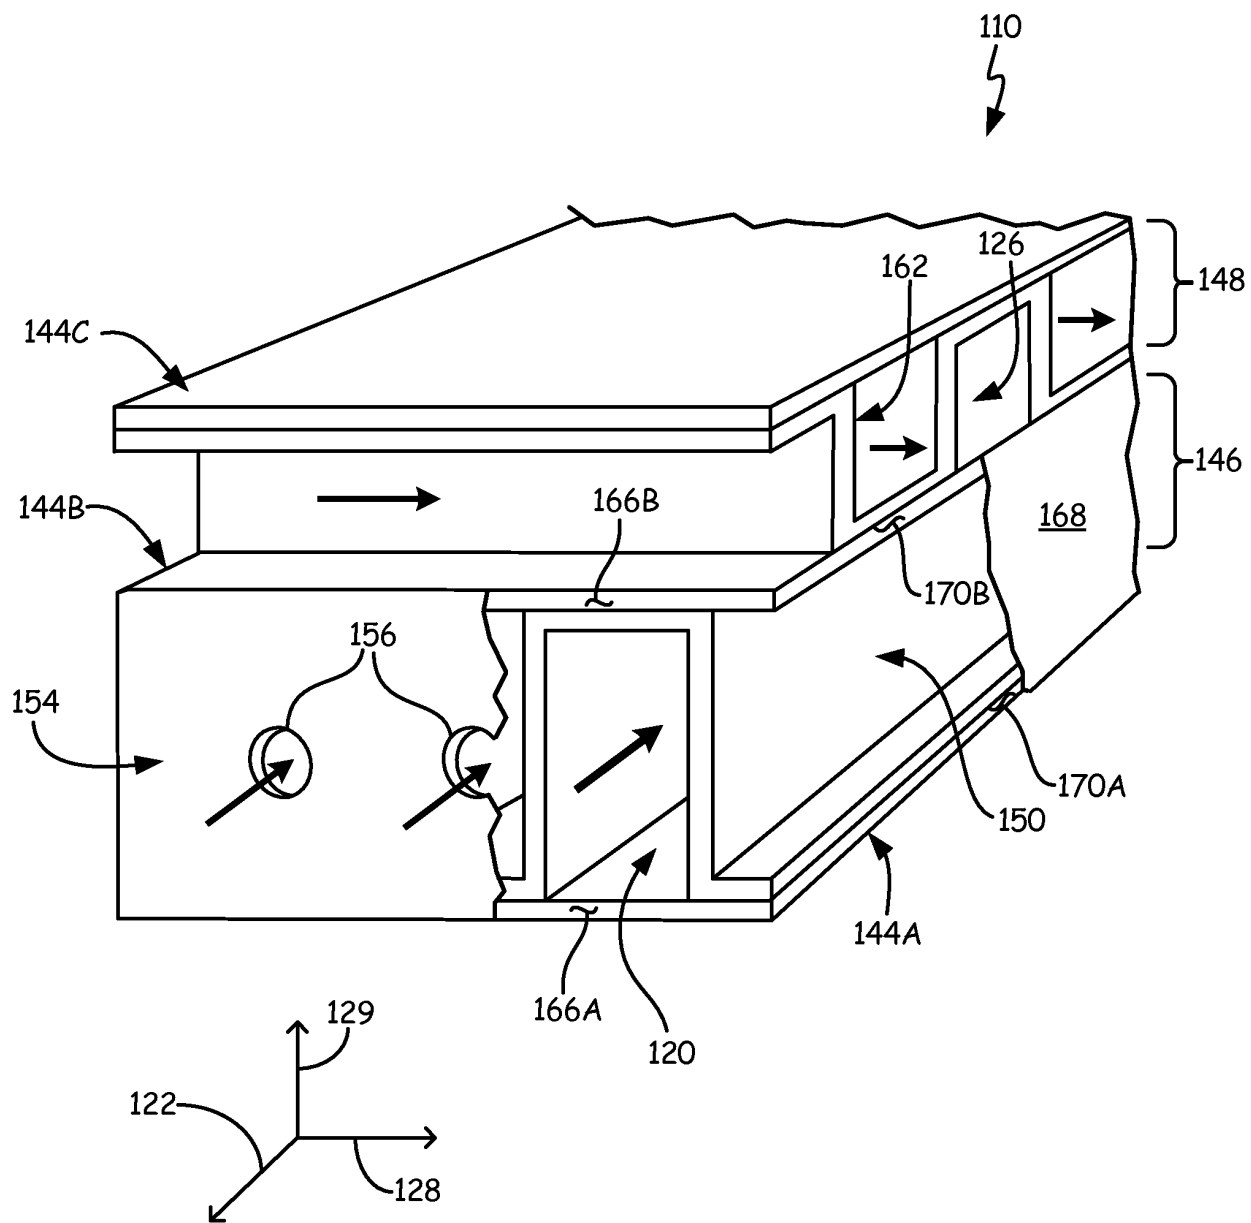


FIG. 3

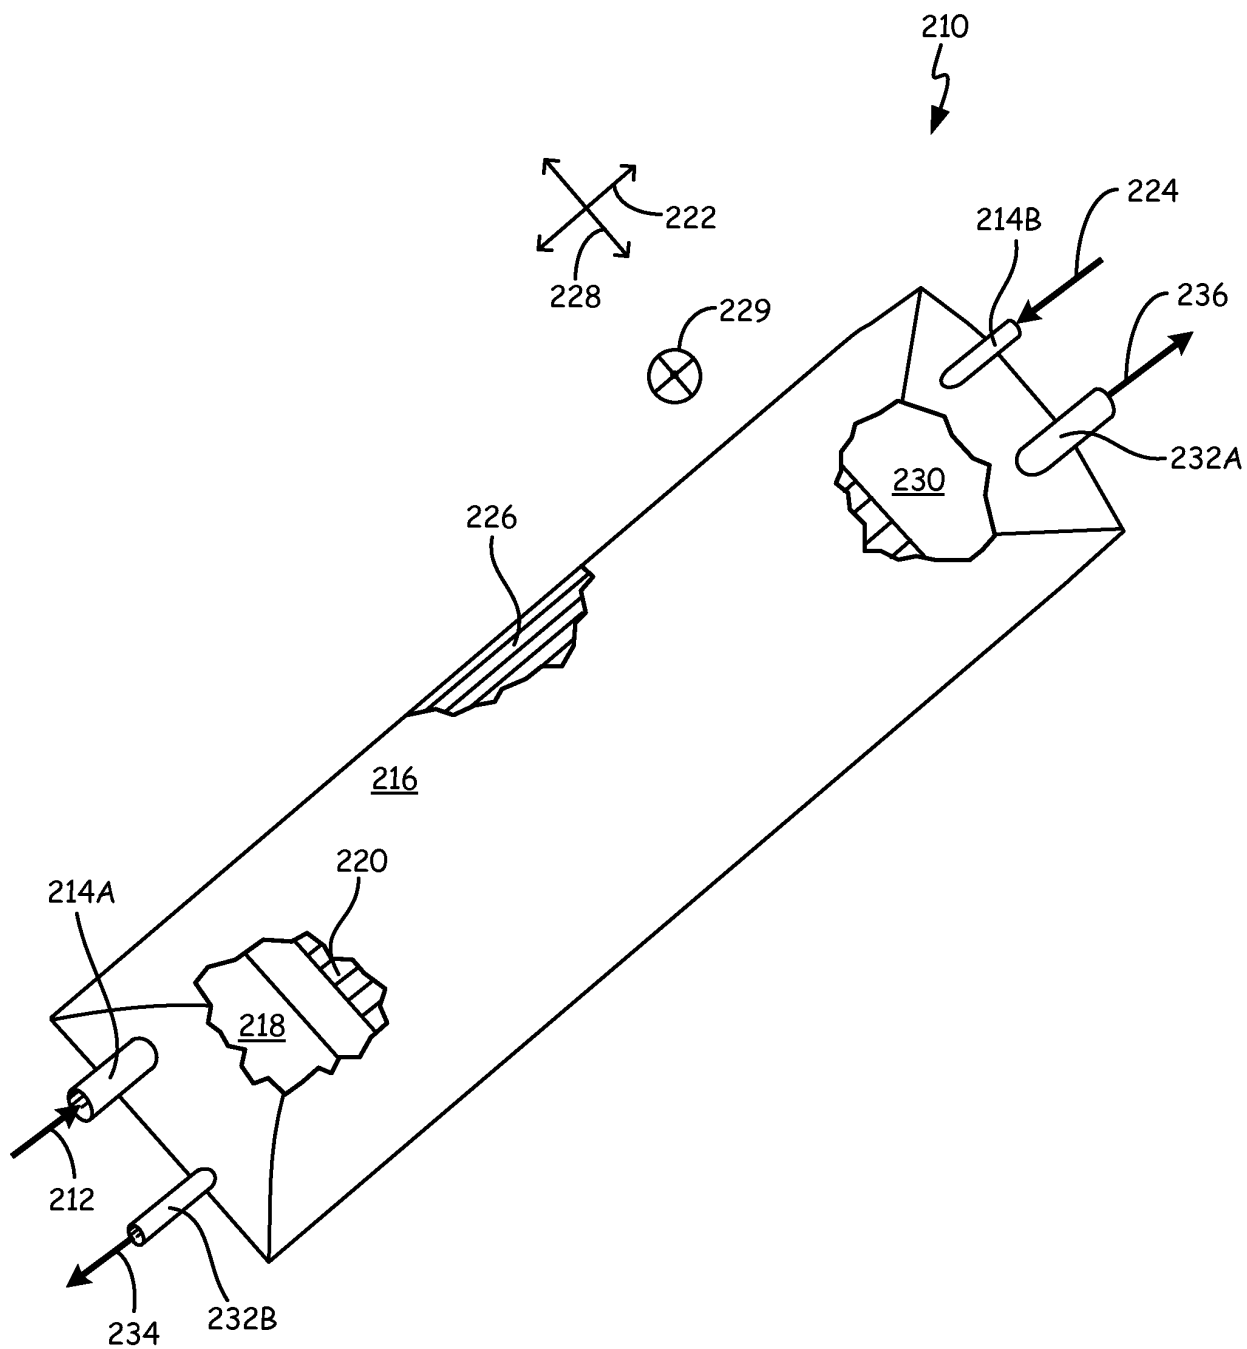


FIG. 4

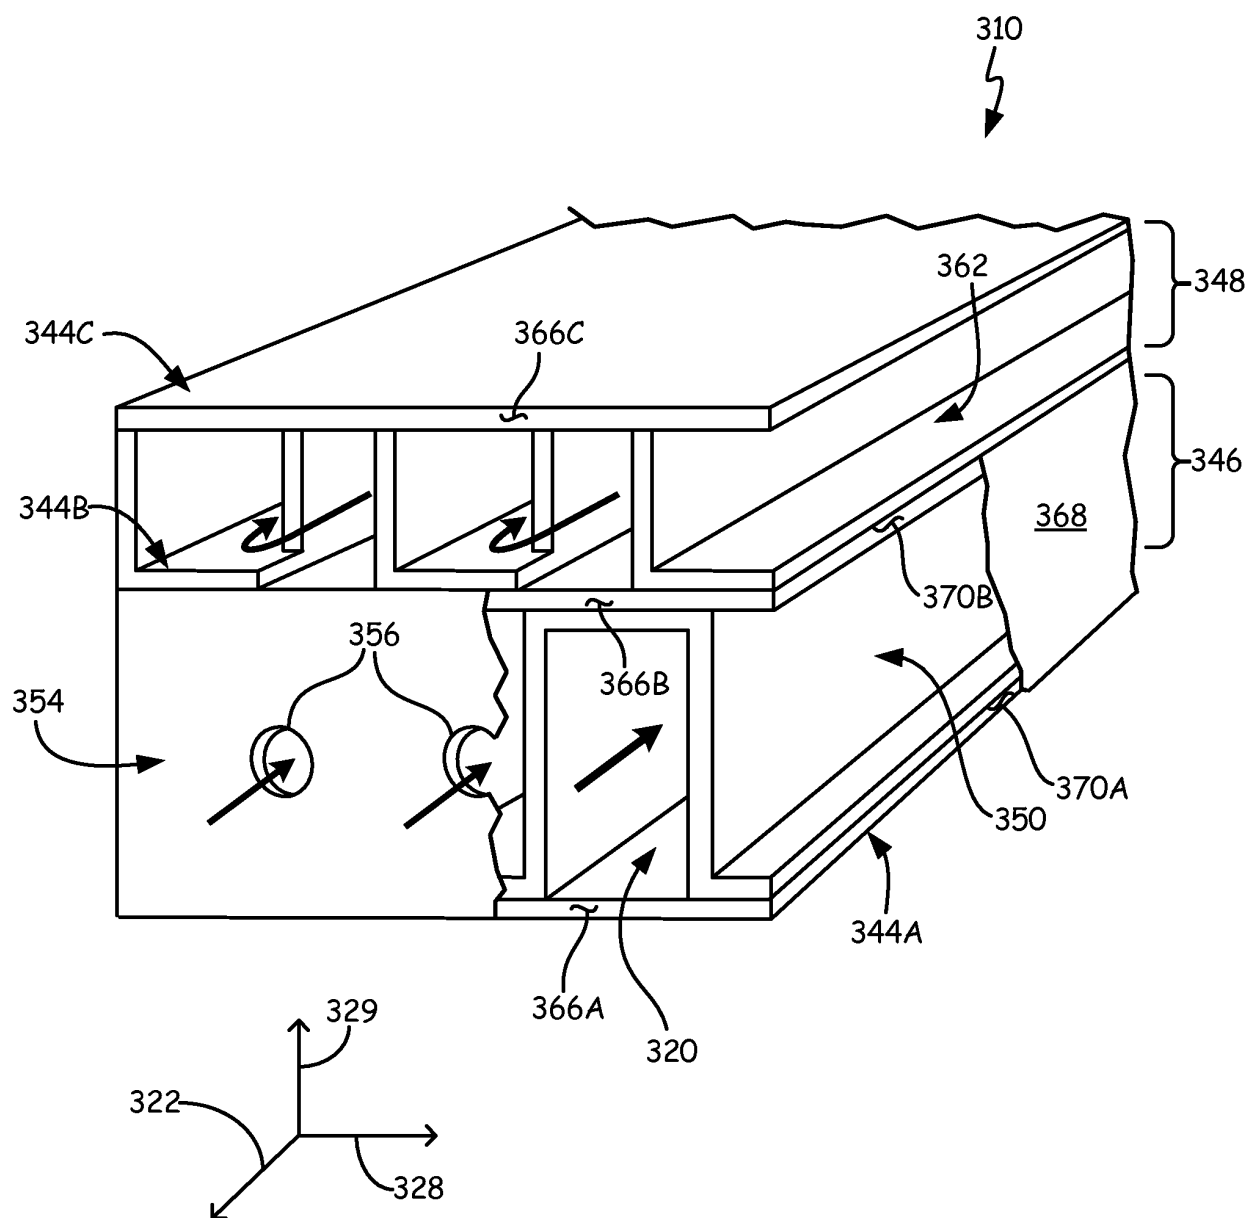


FIG. 5

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- US 20090100854 A1 [0003]