



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**21.01.2015 Bulletin 2015/04**

(51) Int Cl.:  
**H04N 5/232 (2006.01)**

(21) Application number: **14177556.9**

(22) Date of filing: **17.07.2014**

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**  
 Designated Extension States:  
**BA ME**

(71) Applicant: **SPO Systems Inc. Limited Hong Kong (CN)**

(72) Inventor: **Shafir, Michael (Micha) 54037 Givat Shmuel (IL)**

(30) Priority: **18.07.2013 US 201361847585 P**

(74) Representative: **Gallo, Luca Gallo & Partners S.r.l. Via Rezzonico, 6 35131 Padova (IT)**

(54) **Virtual video patrol system and components therefor**

(57) A system and corresponding components for providing a virtual video patrol functionality comprised of a plurality of sensor units and a monitoring station. The sensor units are preferably deployed in a configuration such that physically adjacent sensor units have overlapping fields of view. Each sensor unit is preferably configured to generate and transmit an alert to the monitoring station upon the detection of an event. The monitoring station may request video data from a specifically ad-

ressed sensor unit as well as additional sensor units with fields of view overlapping with the specifically addressed sensor unit. Requested video data from sensor units may be processed and combined using stitching algorithms. A user input device and display in the monitoring station allows virtual panning of the combined video image. The sensor units are preferably implemented as street light sensor units combined with a street light illumination source.

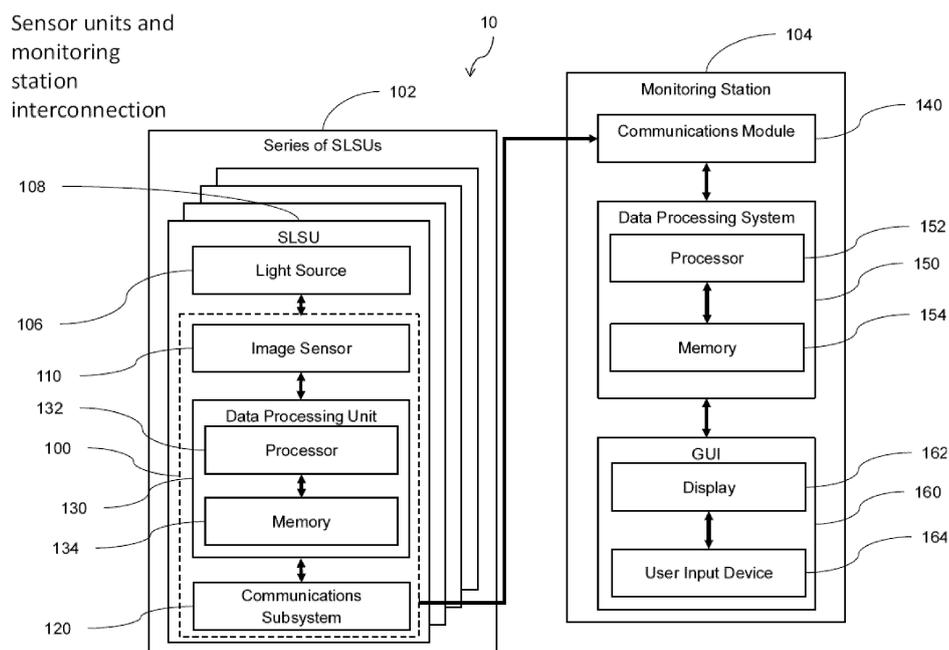


Fig. 1

## Description

### FIELD AND BACKGROUND OF THE INVENTION

**[0001]** The present invention relates to information technology and processing and, in particular, it concerns a system and corresponding sensor units capturing video data in order to facilitate a real-time virtual video patrol.

**[0002]** It is known that virtual image panning from one angle to another is possible as exemplified by Google Maps Street View. However, the images in this technology are static and can be quite outdated. Additionally, according to current technology, no attempt is made to achieve any level of fidelity of images during a transition from one sampled image viewpoint to the next, often resulting in a loss of spatial awareness of the user during the transition.

**[0003]** In the context of a localized event venue, such as in a sports stadium, it has been proposed to provide a virtual video panning effect from one viewing region to another based on data from multiple video cameras (US 2012/0098925, Dasher et al). However, this virtual video panning is based upon simultaneous and continuous upload of streaming video from all of the video cameras, which renders the approach impractical for implementing in a large area system.

**[0004]** There is therefore a need for a system and corresponding components for providing a virtual video patrol functionality.

### SUMMARY OF THE INVENTION

**[0005]** The present invention is a system and corresponding components for providing a virtual video patrol functionality.

**[0006]** According to the teachings of an embodiment of the present invention there is provided, a street light and sensor unit comprising: (a) a light source deployed for illuminating an first region; (b) an image sensor for capturing video data from a field of view having at least partial overlap with the first region; (c) a data processing unit associated with the image sensor comprising at least one processor and a data storage medium; (d) a communications subsystem associated with the data processing unit and configured for transmitting and receiving data over a wired or wireless network, the communications subsystem having an associated identifier, wherein the data processing unit is configured to actuate the communications subsystem to: (i) maintain indefinitely a low-bandwidth mode in which no video data is transmitted and the communications subsystem monitors for video data requests; and (ii) selectively on receipt of a video data request relating to the associated identifier, transmit video data derived from the image sensor.

**[0007]** According to a further feature of an embodiment of the present invention, the data processing unit is further configured to: (a) process the video data from the image sensor to monitor for events occurring within the

field of view; and (b) on identifying an event occurring within the field of view that satisfies at least one alert criterion, actuate the communications subsystem to transmit an alert notification over the wired or wireless network while maintaining the low-bandwidth mode.

**[0008]** According to a further feature of an embodiment of the present invention, the street light and sensor unit is associated with an electric power line, and wherein the communications subsystem is configured for transmitting and receiving data via the electric power line.

**[0009]** There is also provided according to an embodiment of the present invention, a system comprising: (a) a plurality of the aforementioned street light and sensor units, wherein the plurality of street light and sensor units are deployed in spaced relation such that the fields of view provide continuous coverage of a scene; and (b) a monitoring station comprising: (i) a communications module in networked communication with the communications subsystems; (ii) a data processing system comprising at least one processor and a data storage medium, the data processing system being associated with the communications module; and (iii) a graphical user interface associated with the data processing system, the graphical user interface including a display and at least one user input device, wherein the monitoring station is responsive to an input via the at least one user input device to transmit a video request addressed to a first of the street light and sensor units and a second of the street light and sensor units having an overlapping field of view with the first of the street light and sensor units, and wherein the communications module is configured to receive video data associated with the video request to the first street light and sensor unit and to the second street light and sensor unit over the wired or wireless network, and wherein the data processing system is configured to generate from the video data a stitched video image for display via the graphical user interface.

**[0010]** According to a further feature of an embodiment of the present invention, the street light and sensor units are deployed in an elongated array.

**[0011]** According to a further feature of an embodiment of the present invention, the graphical user interface is responsive to an input via the at least one user input device to change from the selected street light and sensor unit to one of the street light and sensor units located physically adjacent to the selected street light and sensor unit.

**[0012]** According to a further feature of an embodiment of the present invention, the data processing unit is further configured to: (a) process the video data from the image sensor to monitor for events occurring within the field of view; and (b) on identifying an event occurring within the field of view that satisfies at least one alert criterion, actuate the communications subsystem to transmit an alert notification over the wired or wireless network while maintaining the low-bandwidth mode.

**[0013]** According to a further feature of an embodiment of the present invention, the communications module is

further configured to receive alert notifications from physical locations over the wired or wireless network, and wherein the graphical user interface is configured to generate a display indicative of the physical locations from which the alert notifications have been received.

**[0014]** According to a further feature of an embodiment of the present invention, the street light and sensor unit is further configured to perform processing to track moving objects; and wherein the at least one alert criterion includes the movement of objects which violates at least one predefined rule.

**[0015]** According to a further feature of an embodiment of the present invention, the street light and sensor units are associated with an electric power line, and wherein the communications subsystems are configured for transmitting and receiving data via the electric power line.

**[0016]** According to a further feature of an embodiment of the present invention, the electric power line is connected to a multi-phase electric power supply; and wherein each of the street light and sensor units are independently linked to at least one phase of the multi-phase electric power supply.

**[0017]** According to a further feature of an embodiment of the present invention, the image sensor is configured to capture video data from the field of view via infrared imaging.

**[0018]** According to a further feature of an embodiment of the present invention, the image sensor is configured to capture video data from the field of view via microwave imaging.

**[0019]** According to a further feature of an embodiment of the present invention, the street light and sensor unit further comprises an audio sensor for capturing audio data.

**[0020]** According to a further feature of an embodiment of the present invention, the monitoring station is responsive to an input via the at least one user input device to transmit an audio request addressed to a selected one of the street light and sensor units, and wherein each of the street light and sensor units is responsive to a correspondingly addressed audio request to transmit audio data to the monitoring station.

**[0021]** According to a further feature of an embodiment of the present invention, the street light and sensor unit further comprises a speaker system configured to play audio data.

**[0022]** According to a further feature of an embodiment of the present invention, the monitoring station further comprises: (a) an audio sensor for capturing audio data; and (b) a speaker system configured to play audio data.

**[0023]** According to a further feature of an embodiment of the present invention, the street light and sensor units and the monitoring station have audio intercommunications.

**[0024]** There is also provided according to an embodiment of the present invention, a monitoring station comprising: (a) a communications module configured for transmitting and receiving data over a wired or wireless

network; (b) a data processing system comprising at least one processor and a data storage medium, the data processing system being associated with the communications module; (c) a graphical user interface associated with the processing system, the graphical user interface including a display and at least one user input device, wherein the monitoring station is responsive to an input via the at least one user input device to transmit a video request to a plurality of addresses over the wired or wireless network, and wherein the communications module is further configured to receive video data associated with the video request to the addresses over the wired or wireless network, and wherein the data processing system is configured to generate from the video data a stitched video image for display via the graphical user interface.

**[0025]** According to a further feature of an embodiment of the present invention, the communications module is further configured to receive alert notifications from physical locations over the wired or wireless network, and wherein the graphical user interface is configured to generate a display indicative of the physical locations from which the alert notifications have been received.

**[0026]** According to a further feature of an embodiment of the present invention, the monitoring station is associated with an electric power line, and wherein the communications module is configured for transmitting and receiving data via the electric power line.

**[0027]** There is also provided according to an embodiment of the present invention, a street light and sensor unit comprising: (a) a light source deployed for illuminating a first region; and (b) a sensor unit comprising: (i) an image sensor for capturing video data from a field of view having at least partial overlap with the first region; (ii) a data processing unit associated with the image sensor comprising at least one processor and a data storage medium, wherein the data processing unit is configured to adjust the brightness level of the light source, and wherein the sensor unit is configured to record video data to the data storage medium, and wherein the light source and the sensor unit are within a common housing.

#### TERMINOLOGY

**[0028]** The following terms are used in this application in accordance with their plain meanings, which are understood to be known to those of skill in the pertinent art(s). However, for the sake of further clarification in view of the subject matter of this application, the following explanations, elaborations and exemplifications are given as to how these terms may be used or applied herein. It is to be understood that the below explanations, elaborations and exemplifications are to be taken as exemplary or representative and are not to be taken as exclusive or limiting. Rather, the terms discussed below are to be construed as broadly as possible, consistent with their ordinary meanings and the below discussion.

◦ Video stitching - The term "video stitching" refers

to the process of combining two or more video images with overlapping fields of view to produce a single video image having an effective field of view overlapping the fields of view of more than one of the source video images. This process preferably includes applying geometrical transformations (image warping) to at least partially correct for mismatches between the image data at or near the region of overlap due to camera optics and differences in viewing direction. The process may include storing and updating baseline image pixels for each video image, performing coordinate transforms on the pixels of each of individual video images based on baseline image pixels, determining the overlapping sections of the video images, performing warp correction to overlapping sections of video images, and filtering video images to enhance the final video image quality. Video stitching may be accomplished by algorithms in dedicated hardware, software, or a combination of both hardware and software. It should be noted that the term "stitching" as used herein refers to the implementation of the process that combines the images, and not necessarily to any process for determining what transformations are required. In cases where the video image sensors are in fixed positions, it is typically sufficient to determine once, or intermittently during a calibration process, what transformations are required to achieve effective video stitching. The calibration process may employ initial estimations based upon a priori data regarding camera positions and/or optical properties. Final determination of the required transformations and regions of overlap are typically achieved by image processing techniques, for example, employing feature-matching, as are well known in the art.

- Stitched video image - The term "stitched video image" refers to a video image that results from a "video stitching" process as defined above.
- The terms "image sensor", "video sensor" and "camera" are used herein interchangeably to refer to any and all image sensors which can sample a sequence of images to generate video output. The sensor may be a monochrome or color sensor, may be sensitive to visible and/or non-visible wavelengths of light, and may be multispectral. Furthermore, non-optical imaging sensor technology may be used such as, for example, microwave or other three-dimensional surface mapping technology, with the resulting data rendered into a sequence of images for display. A sensor according to any such technology is referred to herein generically as a "video sensor" generating "video data".

#### BRIEF DESCRIPTION OF THE DRAWINGS

**[0029]** The invention is herein described, by way of example only, with reference to the accompanying drawings, wherein:

FIG. 1 illustrates a block diagram of a series of street light sensor units in communication with a monitoring station according to an embodiment of the invention; FIGS. 2A-2B illustrate a process for capturing and transmitting video data according to an embodiment of the invention; FIG. 3 illustrates a process for requesting, receiving, and stitching together video data streams according to an embodiment of the invention; FIG. 4 illustrates a deployment of street light sensor units in an elongated array; FIGS. 5A-5B and FIG. 6A-6C illustrate a process for a user to virtually pan through video data; FIG. 5C illustrates street light sensor units configured to operate via power line communication with a three phase power supply; FIG. 7 illustrates a process for generating and sending alert notifications, followed by requesting, receiving, and stitching together video data streams according to an embodiment of the invention; FIG. 8 illustrates a block diagram of a monitoring station according to an embodiment of the invention; FIGS. 9A-9B illustrate an example of device physical locations and network addresses; and FIG. 10 illustrates a block diagram of a street light sensor unit with multiple accessory features.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

**[0030]** The present invention is a system and corresponding components for providing a virtual video patrol functionality.

**[0031]** The principles and operation of a system and corresponding components according to the present invention may be better understood with reference to the drawings and the accompanying description.

**[0032]** Referring now to the drawings, FIG. 1 is an overall system block diagram of a system 10 and corresponding components for providing a virtual patrol functionality. With reference to FIG. 1, major elements of system 10 preferably include a plurality of street light sensor units (SLSUs) 102 and a monitoring station 104. Each individual SLSU 108 preferably includes a light source 106 for illuminating a region connected to a sensor unit 100. Each individual sensor unit 100 preferably includes an image sensor 110 for capturing video data from a field of view that overlaps at least partially with the region illuminated by the light source 106, a communications subsystem 120 for transmitting and receiving data, and a data processing unit 130 for processing video data as well as actuating the communications subsystem 120. Although preferably the light source 106 is physically connected to the sensor unit 100, the herein described embodiments, unless otherwise stated, are functional without a physically connected light source 106. Types of light sources include, but are not limited to, LED lights, incandescent light bulbs, halogen light bulbs, or other suitable sources that are capable of producing illumination. The

data processing unit 130 preferably contains a processor 132 coupled to a storage medium such as a memory 134. The processor 132 can be any number of computer processors including, but not limited to a microprocessor, an ASIC, a DSP, a state machine, and a microcontroller. Such processors include, or may be in communication with computer readable media, which stores program code or instruction sets that, when executed by the processor, cause the processor to perform actions. Types of computer readable media include, but are not limited to, electronic, optical, magnetic, or other storage or transmission device capable of providing a processor with computer readable instructions. The communications subsystem 120 is configured to maintain a low bandwidth communication mode as actuated by the data processing unit 130. The low bandwidth communication mode configures the communications subsystem 120 to remain silent and not transmit video data until explicitly and individually requested to do so.

**[0033]** The SLSUs may be deployed in any suitable location, including, but not limited to, roads, highways, parking lots, public parks, and airports. Preferably, the SLSUs 102 are deployed such that physically adjacent sensor units have overlapping fields of view. The overlapping fields of view of physically adjacent sensor units provide continuous video coverage of a scene. Preferably, each individual SLSU 108 is in networked communication with the monitoring station 104, as depicted in FIG. 1. Major elements of the monitoring station 104 preferably include a communications module 140, a data processing system 150, and a graphical user interface 160. The communications module 140 is preferably configured such that it is in networked communication with the communications subsystems 120 of each SLSU 108. The data processing system 150 may contain a processor 152 coupled to a storage medium such as memory 154. Preferably, the graphical user interface 160 is connected to a user input device 164 as well as a display 162 for displaying data received from a SLSU. The types of data displayed on the display 162 may include, but is not limited to, video data, geographic information, SLSU information, and satellite maps or other maps with sensor geographic positions. A specific example may be a satellite map on the display 162 combined with the geographic location of a particular SLSU from the series of SLSUs 102. The geographic location of the particular SLSU may be represented by colored dot overlaid on the satellite map. The user input device 164 may be any suitable device for providing input, including, but not limited to, a keyboard, mouse, joystick, or a voice recognition system. The processor 152 can be any number of computer processors including, but not limited to a microprocessor, an ASIC, a DSP, a state machine, and a microcontroller. Such processors include, or may be in communication with computer readable media, which stores program code or instruction sets that, when executed by the processor, cause the processor to perform actions. Types of computer readable media include, but are not

limited to, electronic, optical, magnetic, or other storage or transmission device capable of providing a processor with computer readable instructions. The communication may include, but is not limited to direct networked communication, communication via an intermediate cloud server, or other suitable paradigms.

**[0034]** Referring to FIG. 2A-B, examples of the processing flow of the low bandwidth communication mode are depicted by way of illustration purposes. In FIG. 2A, the communications subsystem 120 of FIG. 1 listens for incoming video data requests 210 from the monitoring station 104 or other systems in networked communication with the communications subsystem 120. Subsequent to a video data request 210, the real-time video data stream captured 220 by the image sensor is transmitted to the destination address of the device which sent the video data request 210, preferably to the monitoring station 104. In FIG. 2B, the data processing unit 130 of FIG. 1 may additionally process 240 the video data captured 220 from the image sensor 110 of FIG. 1 prior to transmission 230. The processing may include, but is not limited to, compression, sampling, trimming, filtering, warping, and/or any other suitable processing request. Although not depicted in the figures, indirect communication between the communications module 140 and the communications subsystems 120 of each SLSU 108 is also possible. For example, high bandwidth data from a SLSU 108 may be transmitted to the monitoring station 104 via a cloud server. In this example, high bandwidth data from a SLSU 108 may be first uploaded to a cloud server and subsequently downloaded by the monitoring station 104 for processing. Other suitable communication paradigms are also possible.

**[0035]** Referring to FIG. 1 and FIG. 3, a specific example of the processing flow of two SLSUs with overlapping fields of view is depicted for illustration purposes. Preferably, the user input device 164 is configured to receive input 310 from a user to generate 320 and send a video request 330 to a specifically selected SLSU. The video request 330 is sent to the communications module 140 via the data processing system 150. The communications subsystem 120 of the selected SLSU receives the video request 340 from the communications module 140. Preferably, the monitoring station 104 will also send a video request 340' to an additional SLSU that has an overlapping field of view with the selected sensor. In practice, a single SLSU may have overlapping fields of view with multiple distinct SLSUs; however FIG. 3 represents a specific example of two SLSUs with overlapping fields of view. Subsequent to receiving the video transmission request, the selected SLSU and the additional SLSU, may transmit 350, 350' recorded full quality video data 360, 360' to the monitoring station for processing. Upon receiving the video data 370 from each of the requested SLSUs, the data processing system 150 performs a video stitching algorithm 380 which may provide a single stitched video image. At least part of the stitched video image corresponding to the currently desired field of view

is displayed 390 via the display 162 of the graphical user interface 160. The data processing system 150 may automatically send an END-TRANSMIT instruction 392 to a SLSU upon the condition that video data from that unit is no longer necessary for providing a single stitched video image. Upon receiving an END-TRANSMIT instruction 392, a SLSU will end video transmission. The user input device 164 may also be further configured to initiate sending of an END-TRANSMIT instruction 392 to a SLSU.

**[0036]** The data processing system of each SLSU may also perform processing on the video data prior to transmission. Processing may include, but is not limited to, compression, sampling, trimming, filtering, warping, and/or any other suitable processing requested by the monitoring station 104. Upon receipt of the processed video data by the monitoring station 104, the data processing system 150 may perform processing techniques which restore the received video data to full content, and subsequently may perform a video stitching algorithm which may provide a single stitched video image.

**[0037]** According to certain preferred embodiments, a plurality of SLSUs 102 in combination with a monitoring station 104 are deployed as described in FIG. 1. The SLSUs 102 are preferably deployed in spaced relation such that physically adjacent SLSUs have overlapping fields of view. This overlap enables the particular "virtual patrol" functionality, as will be described in more detail below. Many spatial arrangements are possible, including, but not limited to, SLSUs deployed in an elongated array, SLSUs deployed in a circular or oblong arrangement, SLSUs deployed in a triangular arrangement, SLSUs deployed in a polygonal arrangement, and SLSUs deployed at different heights. Referring to FIG. 4, an example of a series of four SLSUs deployed in an elongated array is presented for illustration purposes. As mentioned, the SLSUs are arranged such that the field of view of each SLSU overlaps with the field of view of physically adjacent SLSUs. The first SLSU 410 has a field of view that is contained within the space between a first set of field of view boundary edges 412, 412'. The second SLSU 420 has a field of view that is contained within the space between a second set of field of view boundary edges 422, 422'. The third SLSU 430 has a field of view that is contained within the space between a third set of field of view boundary edges 432, 432'. The fourth SLSU 440 has a field of view that is contained within the space between a fourth set of field of view boundary edges 442, 442'. The field of view of the first SLSU 410 overlaps with the field of view of the second SLSU 420. The field of view of the second SLSU 420 additionally overlaps with the field of view of the third SLSU 430. The field of view of the third SLSU 430 additionally overlaps with the field of view of the fourth SLSU 440. An object 450 is contained within the fields of view of the second SLSU 420 as well as the third SLSU 430.

**[0038]** It is a particularly preferred feature of certain embodiments of the present invention that the system

and corresponding method provide a "virtual patrol" functionality. The term "virtual patrol" is used herein to describe a process of visually monitoring an extended area, as if progressing along a route, without the operator actually traveling. Practically, this is achieved by allowing virtual panning within stitched video images derived from image sensors with overlapping fields of view, and dynamically switching the group of image sensors transmitting video data in order to allow dynamically changing coverage of the stitched video image as the instantaneous field of view progresses along an array of image sensors. It should be noted that an operator of the "virtual patrol" is not limited to smooth progressive movement along a route, and can typically jump to any particular location selected, for example, on a map. However, the ability to perform virtual panning in video images over an extended area provides an intuitive interface and greatly improves situational awareness compared to abrupt switching between difference camera views from differing viewpoints. An exemplary implementation of this feature will now be described.

**[0039]** The transmit and receive processing flow may follow a similar flow to that illustrated in FIG. 3. The user input device 164 of FIG. 1 may be used to virtually pan through the stitched video image. Referring now to FIGS. 5-6C, the virtual pan capability is described by example. In this specific example, the elongated array configuration of FIG. 4 is used for illustration. The four image sensors illustrated here are typically at some arbitrary location along an extended array of image sensors, which may number many tens, or hundreds of sensors, or possibly thousands of image sensors in a case of city-wide coverage. Prior to any user request for video from a specific location, all of these many image sensors are preferably maintaining their low bandwidth mode. Upon receipt of a video request from an operator seeking to receive video images from a location corresponding to the second sensor 420, the monitoring station 104 of FIG. 4 transmits a video request to second sensor 420 and additional video requests to the first and third SLSUs 410, 430. FIG. 5A depicts the resulting transmit and receive configurations of the four SLSUs. The first three SLSUs 410, 420, 430 transmit video data 510, 520, 530 and are also configured to receive 512, 522, 532 command and control messages from the monitoring station. Referring to FIG. 6A, the current video image 600 is derived from a stitched video image 602 and displayed via the graphical user interface 160. Stitched video image 602 is stitched from video images 610, 620, 630 derived, respectively, from the first three SLSUs 410, 420, 430 that are transmitting video data 510, 520, 530 (FIG. 5A). The region 640, corresponding to the field of view of SLSU 440 is not available, since SLSU 440 remains in low-bandwidth mode (like other SLSUs in the system that are not shown), monitor for video data transmission requests 542. Referring to FIG. 6B, as the user operates input device 164 of FIG. 1 to request panning to the right, the portion of stitched image 602 provided as the current

video image 600 pans across the stitched image. At the stage illustrated in FIG. 6B, data from image 610 is no longer required for generating the current image 600, and the system identifies that the requested field of view is moving towards the region covered by SLSU 440. Accordingly, the monitoring station transmits an END-TRANSMIT instruction to SLSU 410 and a transmit request to SLSU 440. After this switch-over, a new stitched video image 604 including regions 620, 630, 640 is generated, thus allowing continued virtual panning into the region corresponding to the field of view of SLSU 440, as illustrated in FIG. 6C. The updated transmit and receive configurations for the four SLSUs is depicted in FIG. 5B. This hand-over process can be performed repeatedly, allowing the operator to perform a continuous virtual panning motion along a region covered by an array of image sensors.

**[0040]** The same, or similar, techniques may be used to virtually pan in a multitude of directions. For example, where arrays of SLSUs cover multiple intersecting paths, such as in a system giving coverage of a system of roads, a suitable user input can be used to select which of a plurality of available paths should be selected for continued virtual panning through a junction.

**[0041]** It should be appreciated that the example of SLSUs transmitting in groups of three is a non-limiting example. In certain cases, particularly where the current video image corresponds to a smaller field of view than an individual camera, or where panning in steps is acceptable, it may be sufficient to have two SLSUs transmitting at a time. Similarly, where allowed for by the network bandwidth, it may be preferable to have more than three units transmitting at a time, for example, four units, which allows the upcoming unit to be actuated before another unit is stopped, or five units including two on either side of the current viewing location.

**[0042]** In one particularly preferred implementation in which power-line communications are used, the use of three SLSUs transmitting at one time may offer a particular synergy with power line communications where a three-phase electrical power supply is available. Specifically, by linking successive SLSUs cyclically to the three phases, the system can ensure that only one video data transmission needs to be transferred on each phase at any given time, thereby simplifying encoding requirements and/or avoiding bandwidth limitations which might otherwise be encountered. More generally, however, the PLC protocol used has sufficient bandwidth to carry more than one video transmission in parallel, and connections to the different phases of the electrical supply occurs in an arbitrary manner according to the existing power supply architecture of the streetlight grid. A line control unit 500, in direct or indirect data communication with the monitoring station 104, is connected to all three phases and relays data to and from each of the phases, rendering the entire system phase-independent. An example of the above described implementation is shown in FIG. 5C. Although the SLSUs preferably maintain the low-band-

width mode indefinitely until video data is requested, the SLSUs preferably perform continuous recording and processing of video data from their respective fields of view. The recorded data serves as an archive which can be called up from the monitoring station for viewing later, and provides a basis for monitoring for a range of different conditions under which an alarm signal or other prompt may be sent to the monitoring station. Various examples of this functionality will now be described.

**[0043]** According to certain preferred embodiments, the data processing unit 130 of each SLSU 108 is configured to perform video processing algorithms or techniques on video data captured by the SLSU image sensor 110 in order to generate and transmit an alert to the monitoring station 104 or other systems in networked communication with the communications subsystem 120. Types of video processing algorithms and supplementary processing techniques may include, but are not limited to, pattern/object recognition algorithms, object tracking algorithms, anomaly detection algorithms, machine learning algorithms (supervised or unsupervised), and hypothesis tests, as well as combinations of the above. Preferably, upon installation of a SLSU 108, there is an initial calibration or learning period, during which the SLSU may capture and processes video data in the field of view in order to define a nominal baseline. An example of a nominal baseline may be a time-averaged or modal value of each pixel, corresponding to a static background image. The baseline definition preferably also includes information, either preset during installation or derived during the learning period, defining the type of activities considered "normal" within the field of view of the unit and/or what criteria are to be used to identify abnormal situations which should generate an alarm or other notification. Preferably, the alarm signal conditions are predicated on predefined rules or rules established during a learning period, characterized by the movement of objects in a monitoring region. The movement of objects which violates any or all of the rules may generate an alarm. The rules may depend on the specific scene which the field of view is monitoring. Preferably, the nominal baseline is stored in a suitable format in the memory 134 associated with the data processing unit 130. Preferably, subsequent to the learning period, video data captured by the image sensor 110 is sent to the data processing unit 130 for analytical comparison with the nominal baseline stored in the memory 134 using any suitable technique. The analytical comparison will preferably generate a score for the video data streams according to a metric relating to each of the potential alarm criteria defined in force for the given SLSU. Preferably, video data streams which score above a given statistically significant threshold defined for each alarm condition metric will generate a corresponding event alert signal.

**[0044]** Events may be defined depending on the specific scene which the field of view is monitoring. For example, if the field of view is observing a highway, the nominal baseline activity constitutes motor vehicles

traveling at a predetermined minimum speed. The categorization of expected content included within the SLSU field of view may be defined by an operator, or may be automatically derived during a learning period or recalibration period. In the example of a SLSU monitoring a region of a highway, types of events which may satisfy an alert criterion may include, but are not limited to, a motor vehicle stopped on the highway, a collision of motor vehicles, a pedestrian moving on the highway, a pedestrian motionless on the highway, or an object obstructing one or more lanes of the highway.

**[0045]** The above example of monitoring a region of a highway is only one of a wide range of categories which may be assigned to SLSUs across a system. Other examples include, but are not limited to:

- SLSUs monitoring road junctions and other no-parking zones, where motion interruption for a period of time may be normal, but where an obstruction in the road for more than a certain period of time may generate an alarm signal;
- SLSUs monitoring pedestrian-only regions, where the presence of an object classified as a motor vehicle may generate an alarm signal;
- restricted areas where access is denied for security or safety reasons, where the presence of any people or vehicles may generate an alarm signal.

**[0046]** It will be appreciated that the above are a limited set of examples, and the system of the invention can readily be adapted to evaluate and identify a wide range of additional or alternative alarm signal criteria appropriate to various situations and applications of the technology.

**[0047]** The capability of individual SLSUs to identify alarm conditions and generate an alarm signal, while remaining in low bandwidth mode, facilitates additional layers of functionality beyond what was described above with reference to FIG. 3. Referring to FIG. 1 and FIG. 7, a specific example of a first SLSU 108a and an additional SLSU 108b with overlapping fields of view is depicted for illustration purposes. Two SLSUs 108a, 108b record 702, 704 video data captured from respective image sensors. The first SLSU 108a processes 706 video data captured 702 from its image sensor. The data processing unit of the first sensor 108a generates an alert 708 and actuates the communications subsystem to transmit 710 the generated alert to the monitoring station 104. Subsequent to the alert transmission, the communications subsystem of the first sensor waits for a video request 712 from the monitoring station 104, maintaining the low bandwidth mode of communication. The remaining processing steps are parallel to those described above with reference to FIG. 3. Specifically, upon receiving 718 the alert, the monitoring station 104 may display 720 a map with the geographic location of the SLSU 108a that issued the alert. A user input device 164, including, but not limited to a mouse, keyboard, joystick, touch-screen input

or voice recognition system, is used to interactively select 722 the SLSU 108a that issued the alert. Upon selection of the SLSU 108a, the data processing system 150 may generate a video request 724 addressed to the selected SLSU 108a and to additional SLSUs 108b which have fields of view that overlap the field of view associated with the selected SLSU 108a. The video requests 724 are transmitted 726 to the specified SLSUs 108a, 108b. Upon receiving the video requests 714, 716 each specified SLSU 108a, 108b transmits video data 728, 730 to the monitoring station 104. The monitoring station 104 receives 732 and processes 734 the different video data feeds in order to produce the stitched video image discussed in previous embodiments. The stitched video image is displayed 736 via the graphical user interface 160. The user input device 164 may subsequently be used to perform the virtual panning action as described in previous embodiments. Additionally, the data processing system of each SLSU may also perform processing on the video data prior to transmission. Processing may include, but is not limited to, compression, sampling, trimming, filtering, or any other suitable processing requested by the monitoring station 104. Upon receipt of the processed video data by the monitoring station 104, the data processing system 150 may perform processing techniques which restore the received video data to full content, and subsequently may perform a video stitching algorithm which may provide a single stitched video image.

**[0048]** While the present invention can clearly be implemented using a dedicated infrastructure where feasible, it is a particularly preferred feature of certain implementations of the invention that it lends itself easily to installation based primarily, if not exclusively, on commonplace existing infrastructure. By way of one particularly preferred example, the SLSUs of the present invention can advantageously be implemented for installation in conventional streetlight poles, which typically provide vantage points spaced at roughly regular intervals along roads in combination with an electrical power supply provided along power lines which can also be used for power-line communication. In this particularly preferred embodiment, the light source 106 and sensor unit 100 of FIG. 1 are preferably contained within a common housing and are preferably fed by a single connection to the electrical power supply, to facilitate faster and easier installation on existing infrastructure. When combined with energy efficient high-output LED street lighting as a replacement street light fitting, installation of SLSUs according to the present invention becomes a particularly cost-effective proposition for upgrading conventional street lights over an extended region.

**[0049]** An example of such an implementation is illustrated in FIG. 10, which is an overall system block diagram showing an embodiment of a representative SLSU 1000 with multiple sensors 1006, 1008, 1010, an LED lighting unit 1002, a PLC adapter 1004, an infrared (IR) imaging device 1012 for capturing video data in environments lacking in visible light, and a microwave (MW) im-

aging device 1014 for capturing the movement of objects in environments where the visibility of the objects in obstructed by edifices or the like.

**[0050]** It should be noted that the SLSU 1000 can be used as a "smart street light" platform for providing a wide range of other functions, including various data collection, data output and communications functions. For example, additional sensors that may be integrated with a SLSU 1000, include, but not limited to, temperature sensors 1006 for collecting temperature data, luminance sensors 1008 for detecting ambient light, and wind sensors 1010 for detecting wind velocity. SLSU 1000 may also include communication components for implementing daisy-chained WIFI access points and/or include cellular repeater stations and/or other hardware solutions for providing communications access to nearby or passing users. Local image processing may also automatically derive traffic congestion information, which may be shared via the communications network while remaining in low bandwidth mode. The multiple sensors 1006, 1008, 1010 in combination with the monitoring station 104 of FIG. 4 are preferably used to intelligently control the illumination level of each SLSU LED lighting unit 1002. For example, in the event that the luminance sensor 1008 detects sufficient natural lighting, the LED lighting unit 1002 is preferably turned off or dimmed. Another example is a SLSU which has been deployed in an isolated area. At night, when the luminance sensor 1008 detects no sunlight or other sources of visible light, it may seem logical that the LED lighting unit 1002 operate at a high illumination level to provide visibility for vehicles and other passersby. However, traffic information coupled with data collected from other sensors in the SLSU as well as other SLSUs, may be indicative of conditions for which minimal or no lighting is necessary. Such conditions may include, but are not limited to, no passing vehicle traffic and no passing pedestrian traffic within a defined distance, or travel time, from the SLSU. In such conditions, the LED lighting unit 1002 is preferably dimmed to a reduced illumination level.

**[0051]** According to certain preferred embodiments, communication between the monitoring station 104 and SLSUs 102 is via a wireless network, including, but not limited to, GSM, CDMA, 4G, LTE, Wi-Fi, or WiMax. Different communications protocols may be used for the transmission and reception of different types of data. For example, alerts or video requests are preferably transmitted and received by using Power Line Communication technology, while video data is preferably transmitted and received by using a cellular broadband protocol such as LTE.

**[0052]** According to certain preferred embodiments, both the monitoring station 104 and SLSUs 102 are equipped with audio sensors and speaker systems. Types of audio sensors may include, but are not limited to, microphones, Doppler sensors, or any other suitable device for capturing and/or measuring audio. Voice communications is established via any of the wired or wireless

network protocols discussed in previous embodiments. Voice communication modes may be any suitable mode of communication, including, but not limited to, point-to-point, point-to-multipoint, half-duplex, and full-duplex.

5 The monitoring station 104 is preferably configured to request audio data from a selectively specified SLSU 108. The process of the monitoring station requesting and receiving audio data, and a SLSU receiving an audio request and transmitting audio data, is logically similar to the video data request process described in FIG. 2A and FIG. 3. Additionally, or alternatively, emergency responder intercom contact may be initiated by a passerby at the SLSU by actuating an emergency call button or the like associated with the SLSU. This would preferably also generate a prioritized alarm signal to the operator of the monitoring system to prompt the operator to view the corresponding region and initiate appropriate action to address any emergency that may have occurred.

**[0053]** According to a preferred embodiment, the monitoring station of FIG. 1 is deployed remotely from the SLSUs 102. FIG. 8 depicts the monitoring station of FIG. 1 and additional database component 840. The user input device 834 is preferably configured to receive input from a user to generate and send a video request to a specifically addressed device that is in communication with the communications module 810. Additional video requests are preferably sent to the address of a device, or devices, that are physically adjacent to the specifically addressed device. A mapping which relates the physical location of devices to the network address of devices is preferably stored in any suitable location, including, but not limited to, the memory 824 of the monitoring station 800, the cloud, or as illustrated in FIG. 8, a database or table 840 which is preferably associated with the data processing system 820.

**[0054]** Referring now to FIGS. 9A-9B, an example of five devices in physical space and the database 840 which associates the physical location of each device with a network address is illustrated. In this example, if a video request is addressed to Device 4 940 in Location E, a video request may also be sent to the device, or devices, closest in physical proximity, which in this case is Device 2 920, in location D. The example database entry in FIG. 9B shows the mapping of device location and network address. In this case, the devices to be addressed have addresses a 942 and e 922. Any change to the number of devices is preferably reflected in an update to the mapping.

**[0055]** Although the operation of the system as described thus far has related primarily to viewing and "patrolling" real-time video data, certain particularly preferred implementations of the invention allow the operator to view data previously stored in one or more of the SLSUs, and most preferably, to perform virtual panning ("patrolling") within that historical data as if viewing it in real-time. For this purpose, the video requests preferably include a timestamp flag which will either correspond to the date and time of the video being requested or will flag

the video request as a real-time video request for the video currently being sampled. In the case of historical video, any subsequent instructions for a new given SLSU to start transmitting will also include a corresponding timestamp in order for the newly added video data for stitching to be synchronized with the currently transmitted data from the actively transmitting SLSUs.

**[0056]** One common application of this historical video retrieval occurs in the case of an alarm signal generated at a certain SLSU, where the operator wishes to evaluate the events directly. The operator is preferably given an option to trigger viewing of the video starting immediately before the video sequence which caused generation of an alarm signal, thereby providing the exact information needed for rapid and reliable assessment of the validity and seriousness of the alarm.

**[0057]** Although the system as described thus far has pertained to a SLSU 108 comprised of a street light 106 connected to a sensor unit 100 as described in FIG. 1, other embodiments are possible in which a plurality of sensor units 100 are deployed in spaced relation without any lighting sources. These sensor units 100 may be deployed in conjunction with a monitoring station 104 as described above, with the operation of the system primarily for viewing and "patrolling" real-time video data, as well as "patrolling" historical video.

**[0058]** It will be appreciated that the above descriptions are intended only to serve as examples, and that many other embodiments are possible within the scope of the present invention as defined in the appended claims.

**Claims**

1. A street light and sensor unit comprising:

- (a) a light source deployed for illuminating an first region;
- (b) an image sensor for capturing video data from a field of view having at least partial overlap with said first region;
- (c) a data processing unit associated with said image sensor comprising at least one processor and a data storage medium;
- (d) a communications subsystem associated with said data processing unit and configured for transmitting and receiving data over a wired or wireless network, said communications subsystem having an associated identifier, wherein said data processing unit is configured to actuate said communications subsystem to:
  - (i) maintain indefinitely a low-bandwidth mode in which no video data is transmitted and said communications subsystem monitors for video data requests; and
  - (ii) selectively on receipt of a video data request relating to said associated identifier,

transmit video data derived from said image sensor.

2. The street light and sensor unit of claim 1, wherein said data processing unit is further configured to:

- (i) process said video data from said image sensor to monitor for events occurring within said field of view; and
- (ii) on identifying an event occurring within said field of view that satisfies at least one alert criterion, actuate said communications subsystem to transmit an alert notification over said wired or wireless network while maintaining said low-bandwidth mode.

3. The street light and sensor unit of claim 2, wherein the street light and sensor unit is associated with an electric power line, and wherein said communications subsystem is configured for transmitting and receiving data via the electric power line.

4. A system comprising:

- (a) a plurality of street light and sensor units, each of said street light and sensor units being according to claim 1, wherein said plurality of street light and sensor units are deployed in spaced relation such that said fields of view provide continuous coverage of a scene; and
- (b) a monitoring station comprising:

- (i) a communications module in networked communication with said communications subsystems;
- (ii) a data processing system comprising at least one processor and a data storage medium, said data processing system being associated with said communications module; and
- (iii) a graphical user interface associated with said data processing system, said graphical user interface including a display and at least one user input device, wherein said monitoring station is responsive to an input via said at least one user input device to transmit a video request addressed to a first of said street light and sensor units and a second of said street light and sensor units having an overlapping field of view with said first of said street light and sensor units, and wherein said communications module is configured to receive video data associated with said video request to said first street light and sensor unit and to said second street light and sensor unit over said

- wired or wireless network,  
and wherein said data processing system  
is configured to generate from said video  
data a stitched video image for display via  
said graphical user interface. 5
5. The system of claim 4, wherein said street light and  
sensor units are deployed in an elongated array.
6. The system of claim 4, wherein said graphical user  
interface is responsive to an input via said at least  
one user input device to change from said selected  
street light and sensor unit to one of said street light  
and sensor units located physically adjacent to said  
selected street light and sensor unit. 10 15
7. The system of claim 4, wherein said data processing  
unit is further configured to:
- (i) process said video data from said image sensor  
to monitor for events occurring within said  
field of view; and 20
- (ii) on identifying an event occurring within said  
field of view that satisfies at least one alert criterion,  
actuate said communications subsystem to transmit an alert  
notification over said wired or wireless network while  
maintaining said low-bandwidth mode. 25
8. The system of claim 7, wherein said communications  
module is further configured to receive alert notifications  
from physical locations over said wired or wireless  
network, and wherein said graphical user interface  
is configured to generate a display indicative of  
said physical locations from which said alert notifications  
have been received. 30 35
9. The system of claim 7, wherein said street light and  
sensor unit is further configured to perform processing  
to track moving objects;  
and wherein said at least one alert criterion includes  
the movement of objects which violates at least one  
predefined rule. 40
10. The system of claim 4, wherein said street light and  
sensor units are associated with an electric power  
line, and wherein said communications subsystems  
are configured for transmitting and receiving data via  
the electric power line. 45 50
11. The system of claim 10, wherein said electric power  
line is connected to a multi-phase electric power supply;  
and wherein each of said street light and sensor units  
are independently linked to at least one phase of  
said multi-phase electric power supply. 55
12. A monitoring station comprising:
- (a) a communications module configured for  
transmitting and receiving data over a wired or  
wireless network;  
(b) a data processing system comprising at least  
one processor and a data storage medium, said  
data processing system being associated with  
said communications module;  
(c) a graphical user interface associated with  
said processing system, said  
graphical user interface including a display and  
at least one user input device, wherein said monitoring  
station is responsive to an input via said  
at least one user input device to transmit a video  
request to a plurality of addresses over said  
wired or wireless network,  
and wherein said communications module is further  
configured to receive video data associated  
with said video request to said addresses over  
said wired or wireless network,  
and wherein said data processing system is configured  
to generate from said video data a  
stitched video image for display via said graphical  
user interface.
13. The monitoring station of claim 12, wherein said  
communications module is further configured to receive  
alert notifications from physical locations over  
said wired or wireless network, and wherein said  
graphical user interface is configured to generate a  
display indicative of said physical locations from  
which said alert notifications have been received.
14. The monitoring station of claim 12, wherein the  
monitoring station is associated with an electric power  
line, and wherein said communications module is  
configured for transmitting and receiving data via the  
electric power line.
15. A street light and sensor unit comprising:
- (a) a light source deployed for illuminating a first  
region; and  
(b) a sensor unit comprising:
- (i) an image sensor for capturing video data  
from a field of view having at least partial  
overlap with said first region;  
(ii) a data processing unit associated with  
said image sensor comprising at  
least one processor and a data storage medium,  
wherein said data processing unit is configured  
to adjust the brightness level of said  
light source,  
and wherein said sensor unit is configured  
to record video data to said data storage  
medium,  
and wherein said light source and said sensor

sor unit are within a common housing.

5

10

15

20

25

30

35

40

45

50

55

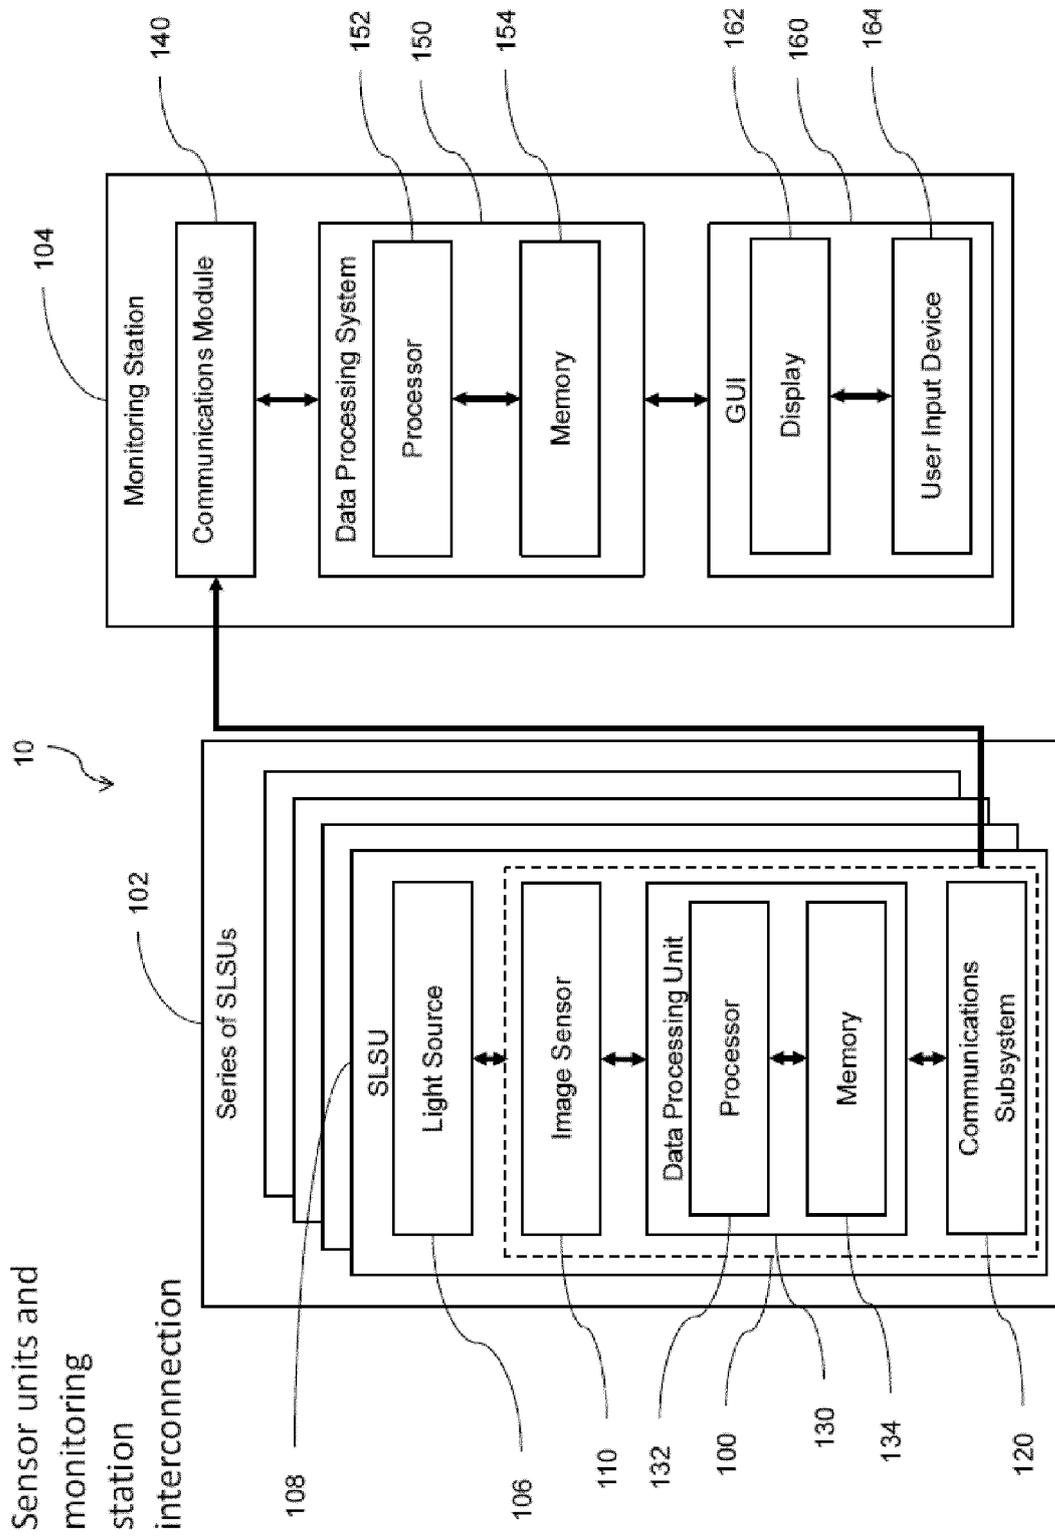


Fig. 1

New claim 1 –  
Low BW mode

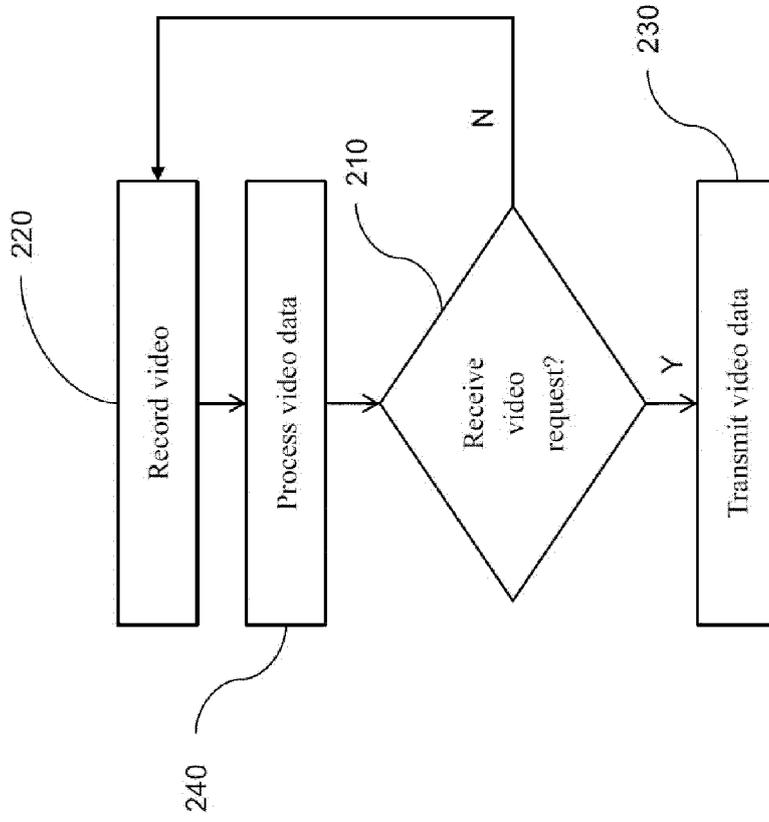


Fig. 2A

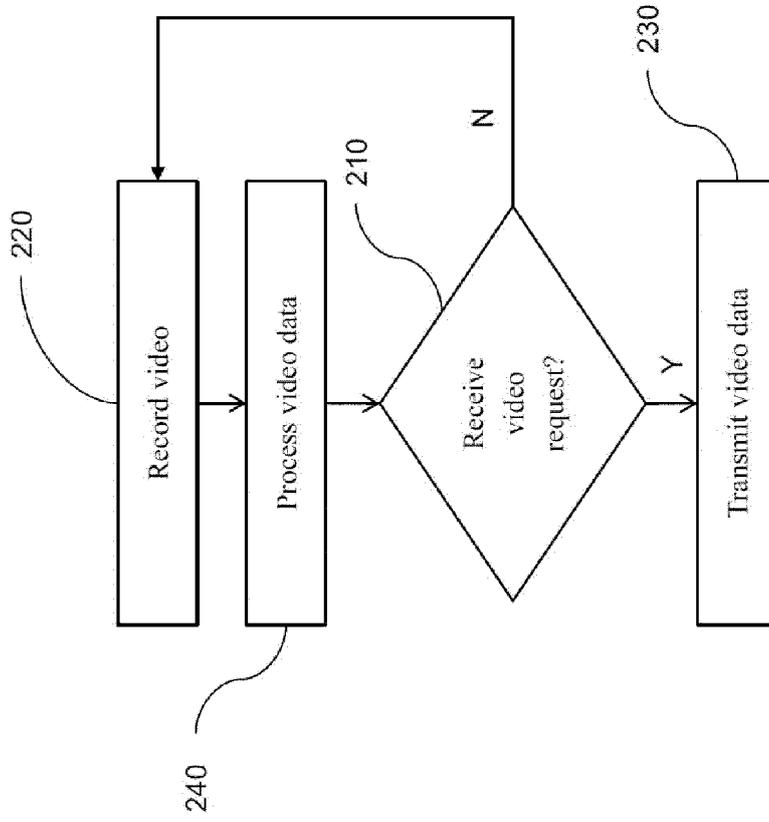


Fig. 2B

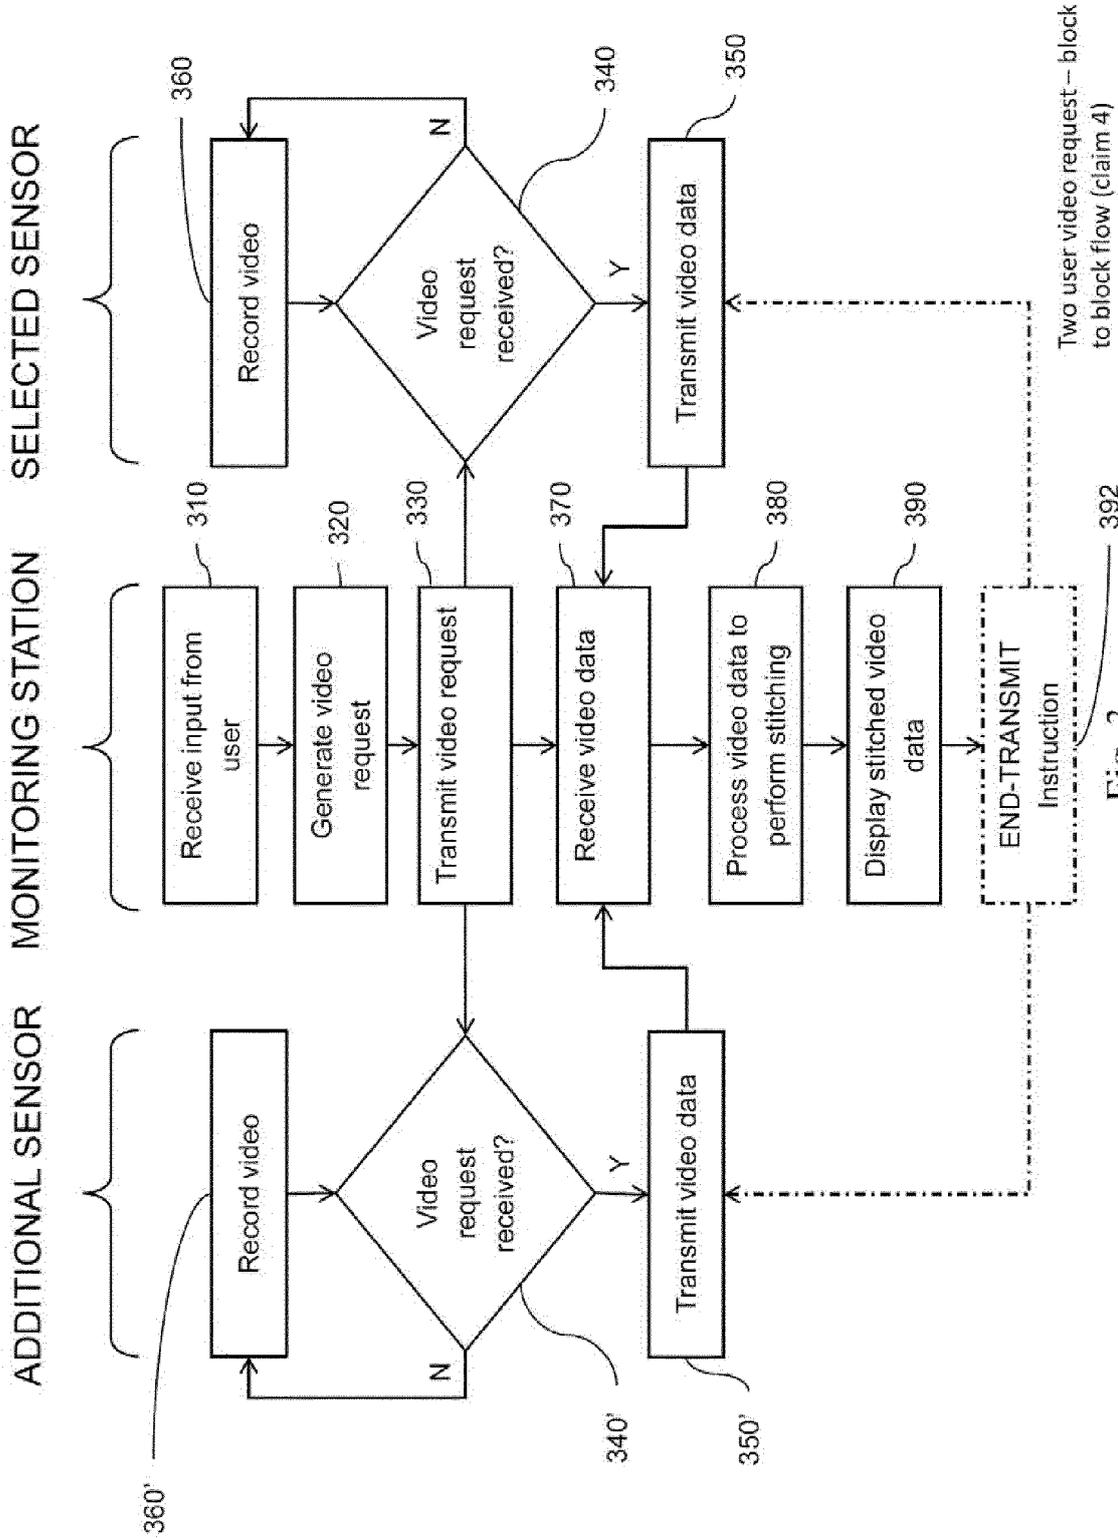


Fig. 3

Two user video request -- block to block flow (claim 4)

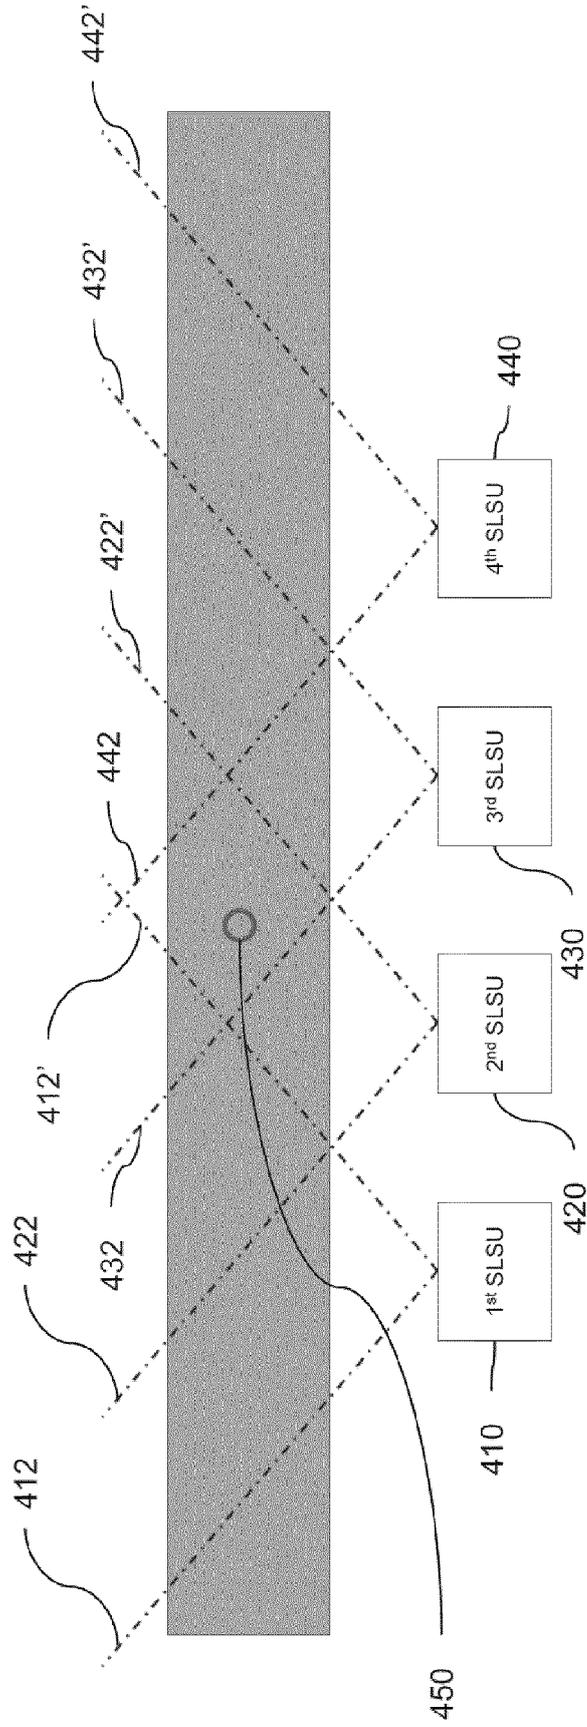


Fig. 4

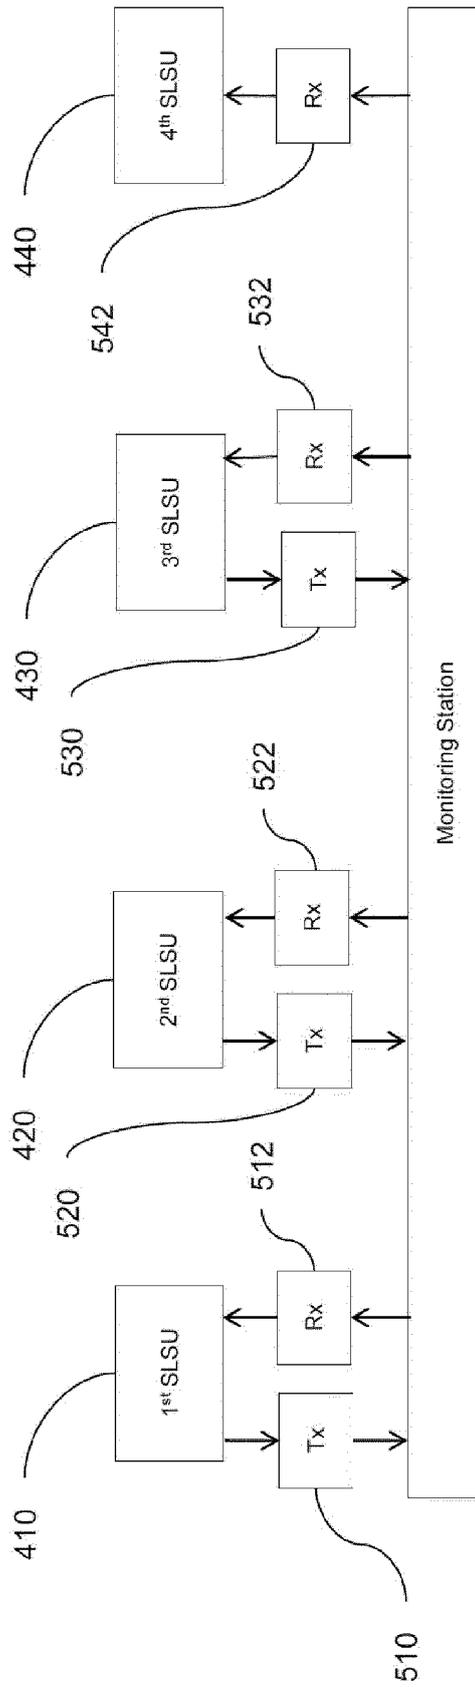


Fig. 5A

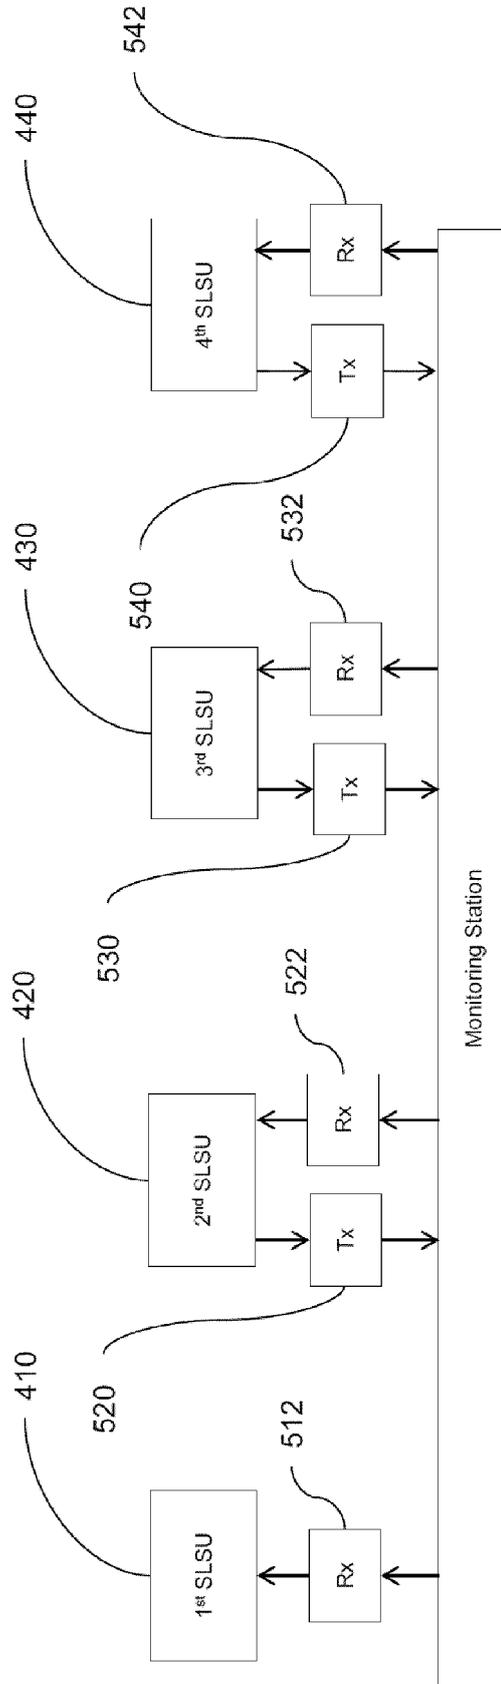


Fig. 5B

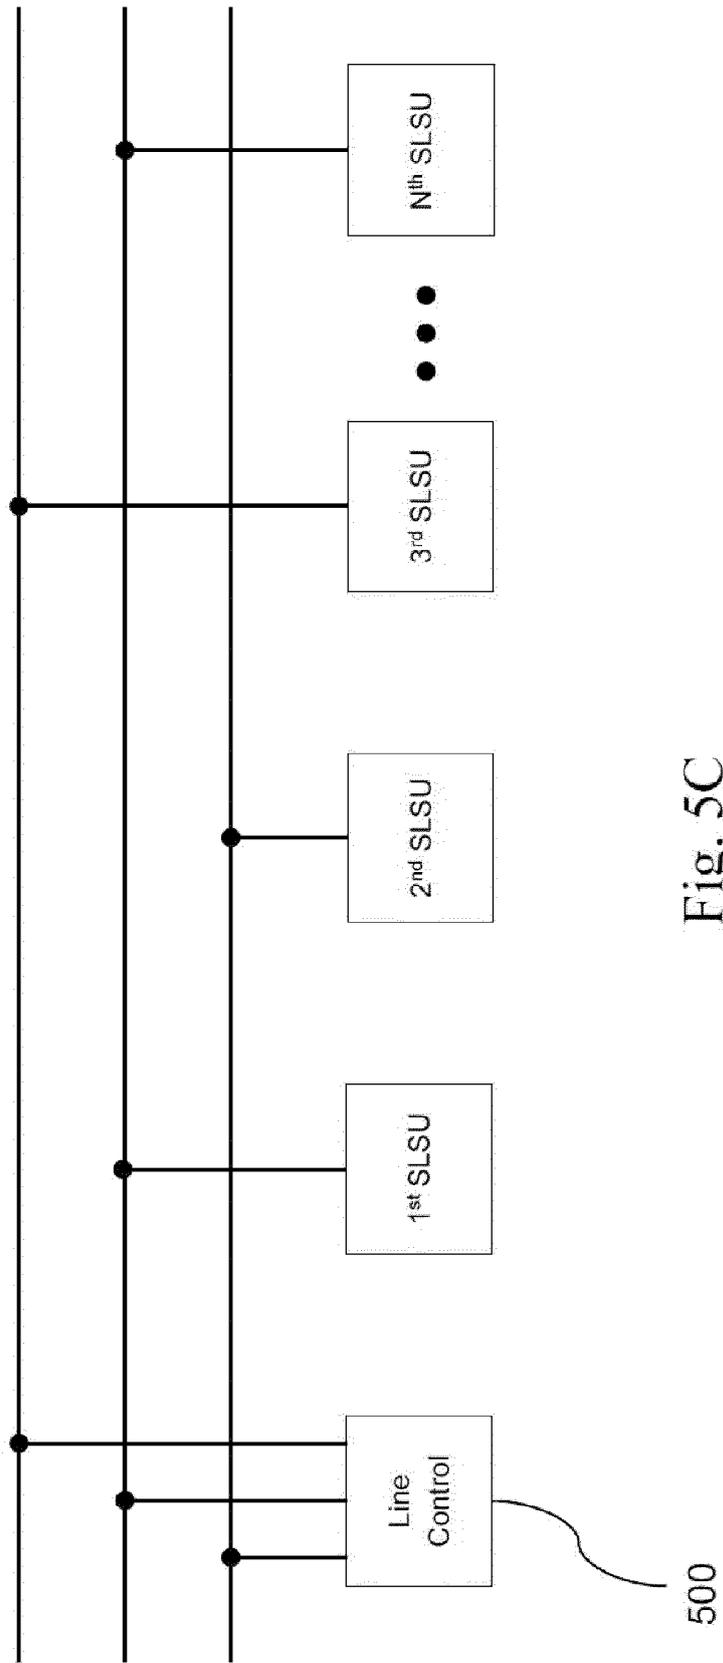


Fig. 5C

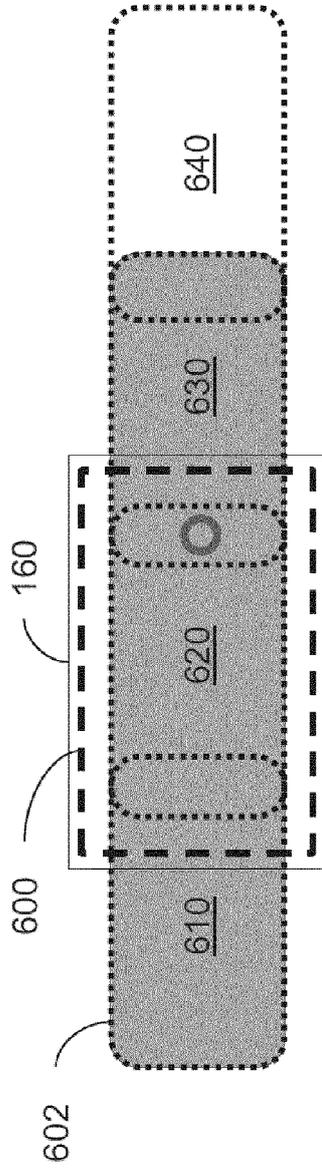


Fig. 6A

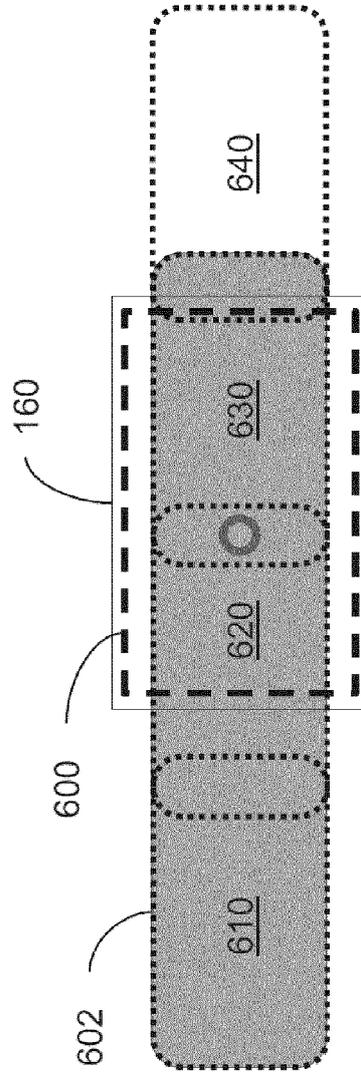


Fig. 6B

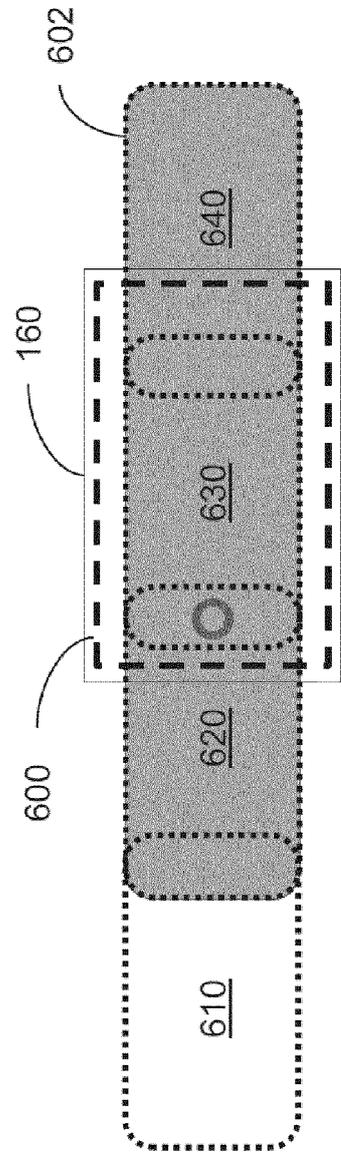


Fig. 6C

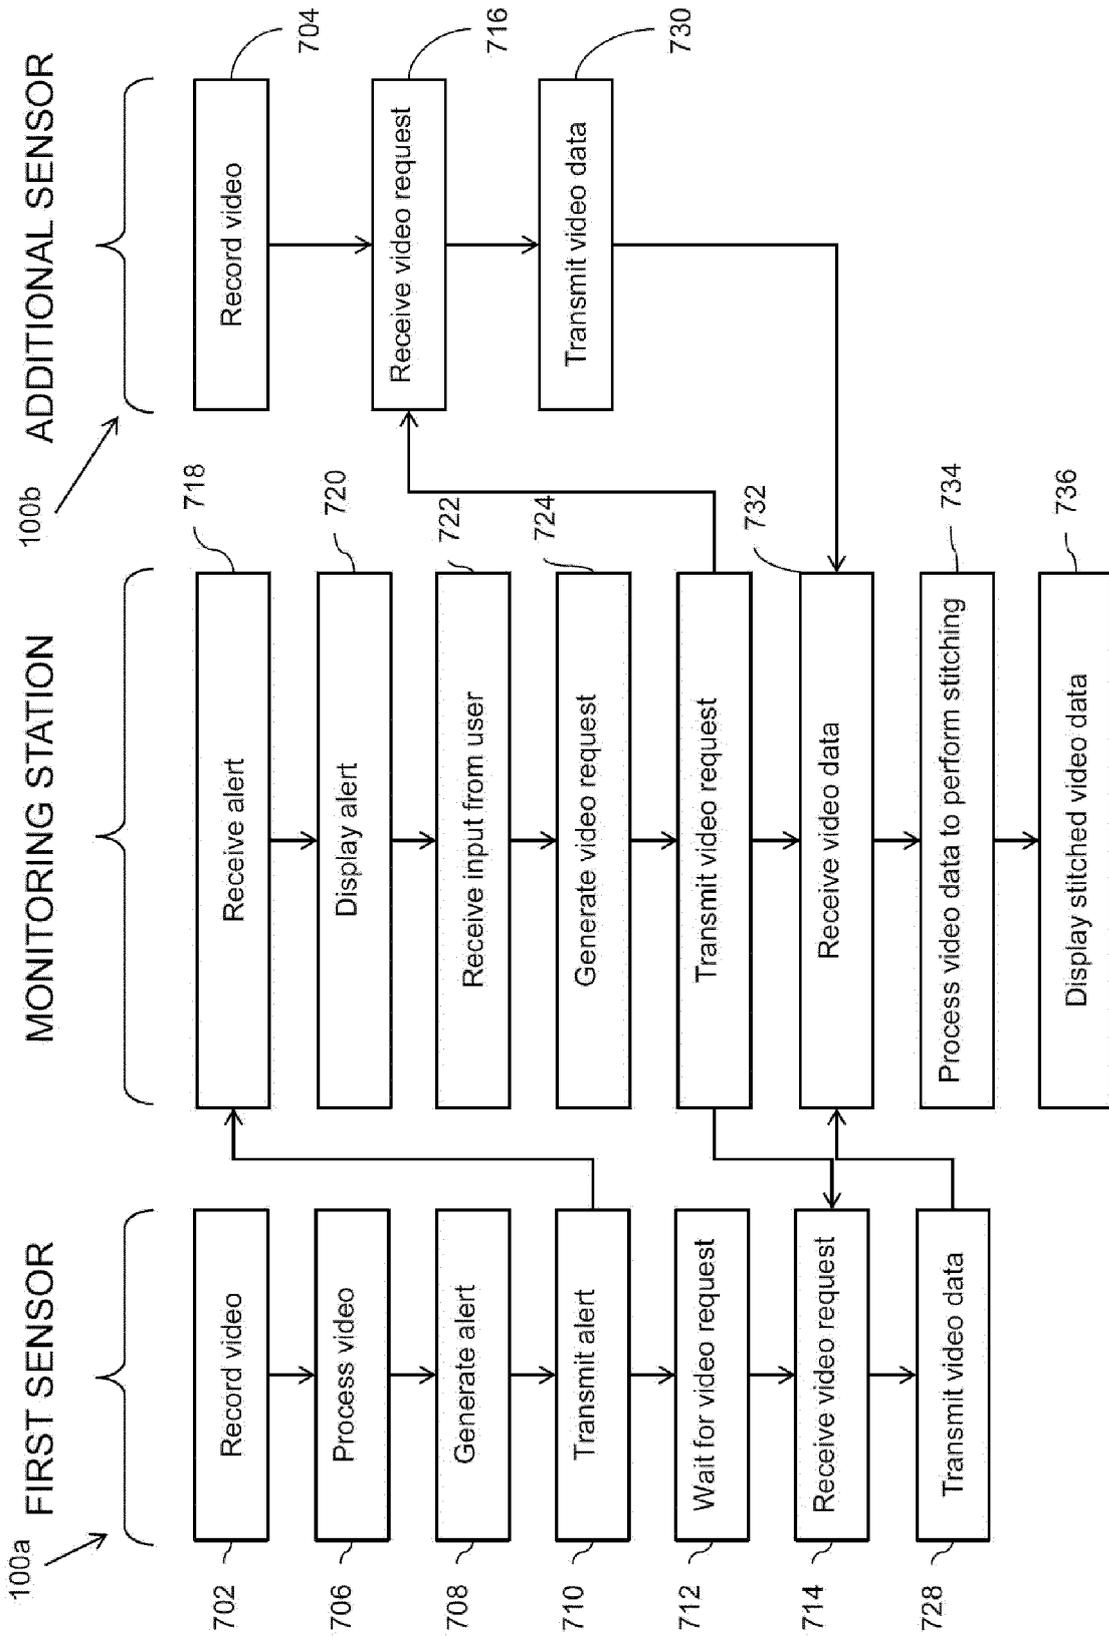


Fig. 7

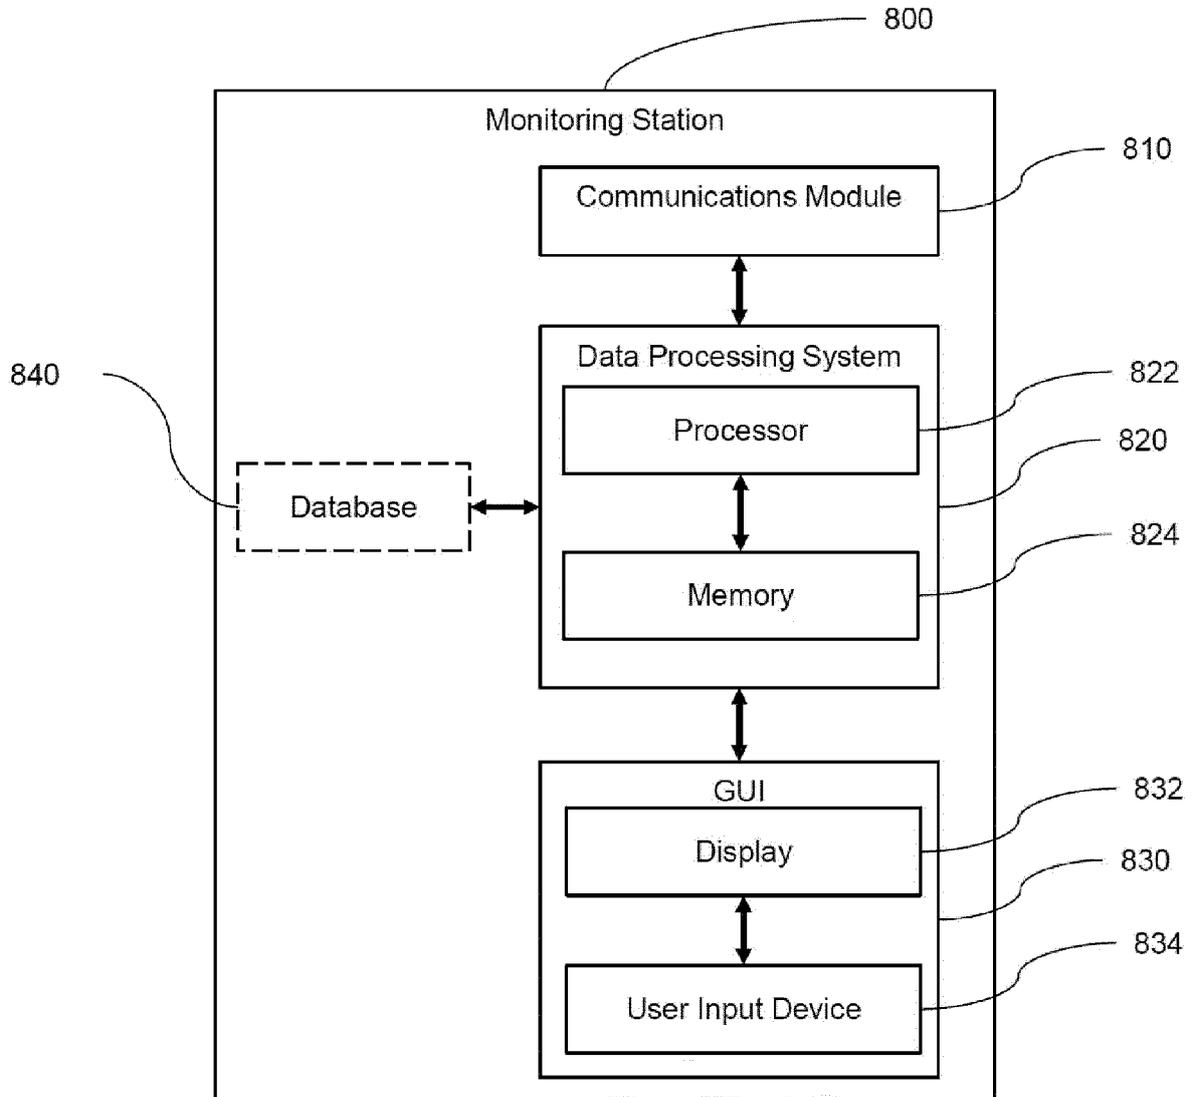


Fig. 8

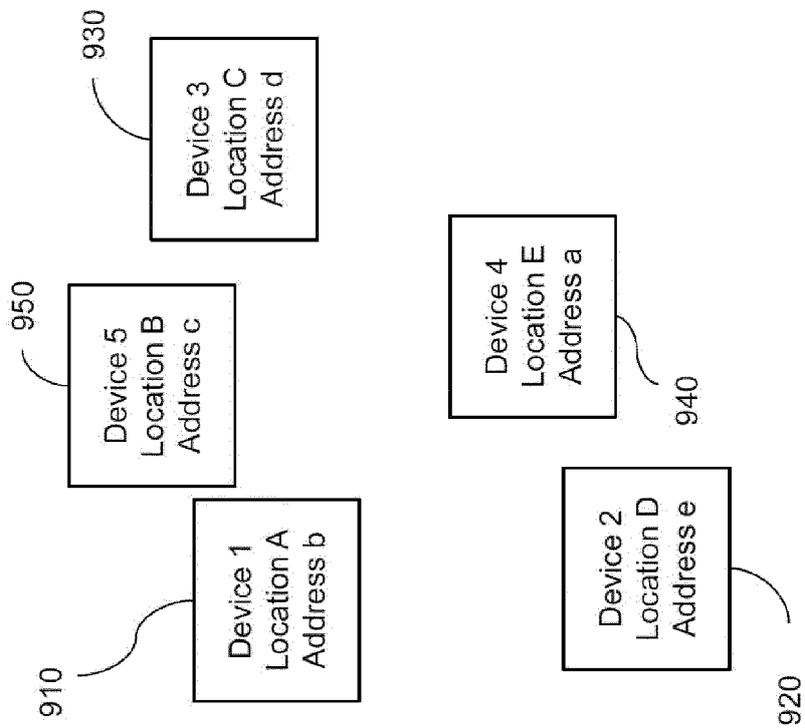


Fig. 9A

Device	Location	Address
1	A	b
2	D	e
3	C	d
4	E	a
5	B	c

922

942

Fig. 9B

Single sensor unit  
and plurality of  
sensor units

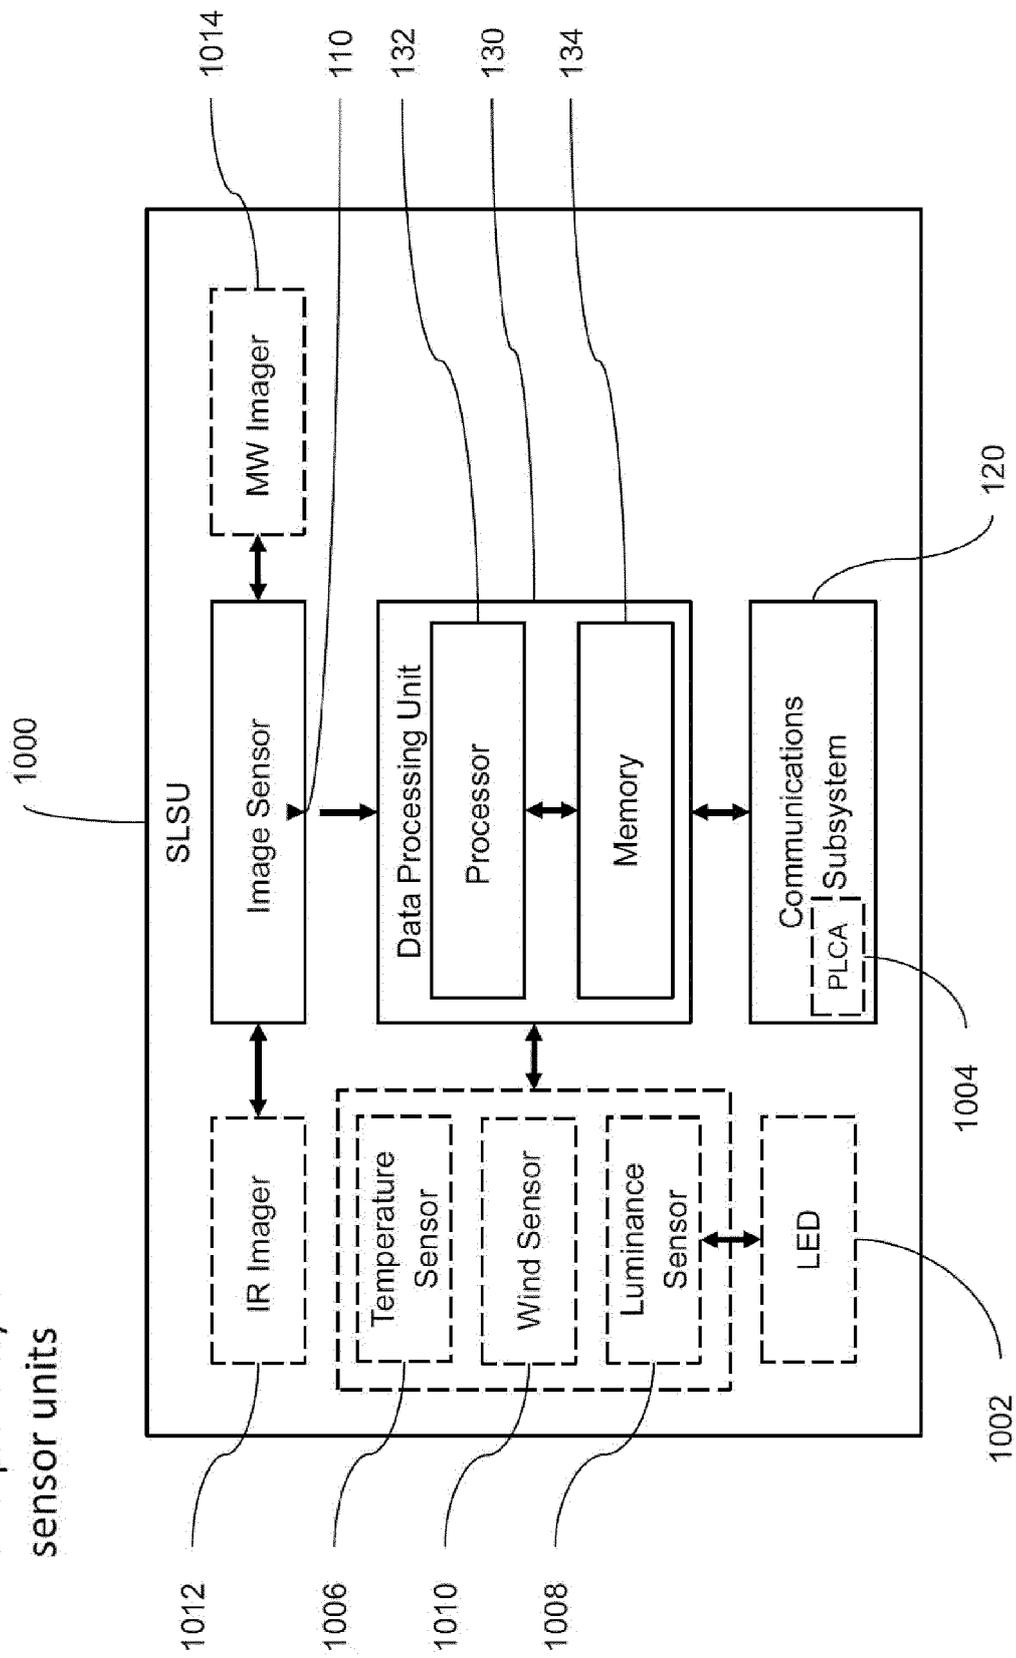


Fig. 10



EUROPEAN SEARCH REPORT

Application Number  
EP 14 17 7556

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT				
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)	
X	US 2012/169842 A1 (CHUANG DANIEL B [US] ET AL) 5 July 2012 (2012-07-05) * paragraph [0011] * * paragraph [0046] - paragraph [0053] * * paragraph [0059] * * paragraph [0078] - paragraph [0093] * * paragraph [0102] - paragraph [0103] * * paragraph [0123] - paragraph [0125] * * paragraph [0167] - paragraph [0170] * * paragraph [0182] - paragraph [0193] *	1-15	INV. H04N5/232	
A	US 2006/056855 A1 (NAKAGAWA MASAO [JP] ET AL) 16 March 2006 (2006-03-16) * paragraph [0334] - paragraph [0335] * * paragraph [0405] * * paragraph [0435] - paragraph [0442] * * figures 44,55,59 *	1-15		
A	WO 93/19441 A1 (COMMW SCIENT IND RES ORG [AU]; TELSTRA CORP LTD [AU]) 30 September 1993 (1993-09-30) * page 25, line 27 - page 31, line 11 *	1-15		TECHNICAL FIELDS SEARCHED (IPC)
A	US 2005/185047 A1 (HII DESMOND TOH O [SG]) 25 August 2005 (2005-08-25) * paragraph [0047] - paragraph [0058] *	1-15		H04N
A	EP 2 242 252 A2 (SONY CORP [JP]; SONY ELECTRONICS INC [US]) 20 October 2010 (2010-10-20) * paragraph [0036] - paragraph [0044] *	1-15		
A	US 2013/129304 A1 (FEINSON ROY [US]) 23 May 2013 (2013-05-23) * paragraph [0052] - paragraph [0070] *	1-15		
The present search report has been drawn up for all claims				
Place of search Berlin		Date of completion of the search 16 December 2014	Examiner Le Gleut, Ronan	
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document		

EPC FORM 1503 03.82 (P04C01)

ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.

EP 14 17 7556

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

16-12-2014

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2012169842 A1	05-07-2012	NONE	
-----			
US 2006056855 A1	16-03-2006	AT 372614 T	15-09-2007
		AU 2003275606 A1	13-05-2004
		CN 101714898 A	26-05-2010
		DE 60316178 T2	05-06-2008
		EP 1564914 A1	17-08-2005
		EP 1855398 A1	14-11-2007
		EP 1858179 A1	21-11-2007
		EP 1860799 A1	28-11-2007
		EP 1860800 A1	28-11-2007
		EP 1860801 A1	28-11-2007
		EP 1863203 A1	05-12-2007
		EP 1865631 A1	12-12-2007
		HK 1087848 A1	13-08-2010
		HK 1129164 A1	16-11-2012
		KR 20050071617 A	07-07-2005
		US 2006056855 A1	16-03-2006
		US 2009297156 A1	03-12-2009
		US 2009297157 A1	03-12-2009
		US 2009297166 A1	03-12-2009
		US 2009297167 A1	03-12-2009
		US 2009310976 A1	17-12-2009
		WO 2004038962 A1	06-05-2004
-----			
WO 9319441 A1	30-09-1993	AT 203844 T	15-08-2001
		AU 671106 B2	15-08-1996
		AU 3740293 A	21-10-1993
		CA 2132515 A1	21-09-1993
		DE 69330513 D1	06-09-2001
		EP 0631683 A1	04-01-1995
		JP H07505966 A	29-06-1995
		NZ 249799 A	26-11-1996
		US 5809161 A	15-09-1998
		WO 9319441 A1	30-09-1993
-----			
US 2005185047 A1	25-08-2005	AU 2005215585 A1	01-09-2005
		CN 1922544 A	28-02-2007
		GB 2430104 A	14-03-2007
		US 2005185047 A1	25-08-2005
		WO 2005081057 A1	01-09-2005
-----			
EP 2242252 A2	20-10-2010	CN 101867720 A	20-10-2010
		EP 2242252 A2	20-10-2010
		JP 5389697 B2	15-01-2014
		JP 2010252312 A	04-11-2010

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 14 17 7556

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

16-12-2014

10

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		US 2010265313 A1	21-10-2010
US 2013129304 A1	23-05-2013	NONE	

15

20

25

30

35

40

45

50

55

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- US 20120098925 A, Dasher [0003]