

(19)



(11)

**EP 2 829 647 A1**

(12)

**EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**28.01.2015 Bulletin 2015/05**

(51) Int Cl.:  
**D03D 47/34** (2006.01) **B65H 59/30** (2006.01)  
**D03D 47/36** (2006.01) **D04B 15/44** (2006.01)  
**D04B 15/48** (2006.01)

(21) Application number: **14001766.6**

(22) Date of filing: **20.05.2014**

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB**  
**GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO**  
**PL PT RO RS SE SI SK SM TR**  
 Designated Extension States:  
**BA ME**

(72) Inventors:  
 • **Bertocchi, Giorgio**  
**I-24026 Leffe (BG) (IT)**  
 • **Pedrini, Giovanni**  
**I-24026 Leffe (BG) (IT)**

(30) Priority: **22.07.2013 IT TO20130616**

(74) Representative: **Spandonari, Carlo**  
**Spandonari & Modiano s.r.l.**  
**Corso Duca degli Abruzzi 16**  
**10129 Torino (IT)**

(71) Applicant: **L.G.L. Electronics S.p.A.**  
**24024 Gandino (Bergamo) (IT)**

(54) **Yarn feeder provided with a weft-winding drum and with a feedback-controlled, weft-braking device**

(57) A drum (12) has a yarn (Y) wound thereon which is adapted to be unwound upon request of a downstream textile machine. A passive weft-braking device (22) exerts a predetermined, uncontrolled braking action upon the yarn (Y). A controlled weft-braking device (24) arranged downstream of the passive weft-braking device (22) is provided with a first series of comb-like arranged prongs (36) and with a second series of comb-like arranged prongs (40) inserted in an alternated configuration between the prongs (36) of the first series. The yarn (Y) runs in a zig-zag manner between the two series of

prongs (36, 40) and receives a braking action by friction from them, which changes in strength depending on their relative position. A motor (46) drives the second series of prongs (40) with respect to the first one for adjusting the strength of the braking action. A tension sensor (50) measures the tension of the yarn (Y) unwinding from the drum (12) and generates a corresponding tension signal (T). A control unit (CU) controls the motor (46) by feedback based on the tension signal (T), in such a way as to stabilize the tension of the yarn (Y) on a desired level.

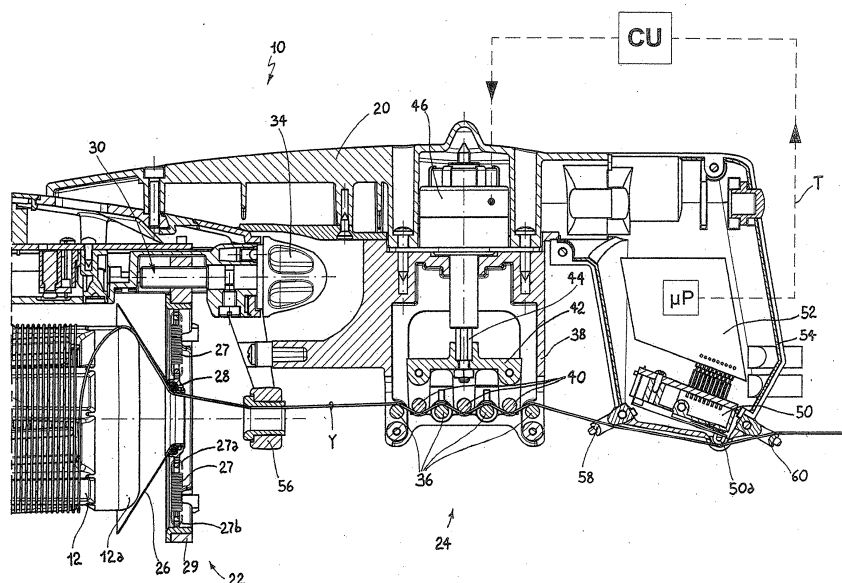


Fig. 1

## Description

**[0001]** "Yarn feeder provided with a weft-winding drum and with a feedback-controlled, weft-braking device"

**[0002]** The present invention relates to a yarn feeder provided with a weft-winding drum and with a feedback-controlled, weft-braking device.

**[0003]** As known, a generic yarn feeder may comprise a drum having a yarn wound thereon, which is adapted to be unwound upon request of a generic textile machine, such as a knitting machine or a loom. Before entering the textile machine, the yarn unwinding from the drum passes through a weft-braking device which controls the yarn tension.

**[0004]** In EP 0 707 102, the weft-braking device comprises a frustoconical, hollow member which is elastically biased against the delivery end of the drum by a spider assembly of springs, which have their inner ends anchored to the small end of the frustoconical member and their outer ends anchored to an annular support which is axially movable upon control of a screw mechanism driven by a motor. The yarn unwinding from the feeder is pressed between the drum and the frustoconical, hollow member, thereby receiving a braking action by friction. The motor which drives the screw mechanism is controlled by a feedback loop which modulates the braking action applied by the weft-braking device to the yarn on the basis of a signal received from a tension sensor arranged downstream of the weft-braking device, in order to maintain the tension of the yarn unwinding from the drum substantially constant on a predetermined level.

**[0005]** A drawback of known feedback-controlled, weft-braking devices, such as the one disclosed in EP 0 707 102, is that they can only generate relatively weak braking forces, e.g., about 20 cN in knitting processes. However, as well known to the person skilled in the art, higher yarn-feeding tensions (up to 100-200 cN) are required for certain applications, such as for the insertion of "lay-in yarn" in circular knitting machines. Nowadays, so called "positive" yarn feeders are used for such applications, in which the yarn is wound on a drum which rotates at a speed synchronized with the downstream machine; however, it is well known in the art that such systems are not suitable for some applications, e.g., jacquard processes.

**[0006]** Therefore, it is a main object of the present invention to provide a yarn feeder having a drum and a weft-braking device controlled by feedback, which is capable of applying considerably stronger braking forces to the yarn with respect to known systems of the above-mentioned type.

**[0007]** The above object and other advantages, which will better appear from the following description, are achieved by a yarn feeder having the features recited in claim 1, while the dependent claims state other advantageous, though secondary features of the invention.

**[0008]** The invention will be now described in more detail with reference to a few preferred, non-exclusive em-

bodiments, shown by way of non-limiting example in the attached drawings, wherein:

Fig. 1 is a view in axial cross-section, with respect to the axis of the drum, of a delivery end portion of the yarn feeder according to the invention;

Fig. 2 is a diagrammatical view in side elevation of a component of a weft-braking device incorporated in the yarn feeder of Fig. 1;

Fig. 3 is a perspective view showing a weft-braking device incorporated in the yarn feeder according to a first alternative embodiment of the invention;

Fig. 4 is a perspective view isolately showing a component of the weft-braking device of Fig. 3 to an enlarged scale;

Fig. 5 is a perspective view showing a detail of the weft-braking device of Fig. 3 from a different standpoint and to an enlarged scale;

Fig. 6 is a view in side elevation of the weft-braking device of Fig. 3 in a first operative configuration;

Fig. 7 is a view in side elevation of the weft-braking device of Fig. 3 in a second operative configuration;

Fig. 8 is a perspective view showing a weft-braking device incorporated in the yarn feeder according to a second alternative embodiment of the invention;

Fig. 9 is a perspective view separately showing a few interconnected components of the weft-braking device of Fig. 8;

Fig. 10 is a view in axial cross-section, with respect to the axis of the motor, of the weft-braking device of Fig. 8 in a first operative configuration;

Fig. 11 is a view in axial cross-section of the weft-braking device of Fig. 8 in a second operative configuration;

Fig. 12 is a diagrammatical view in axial cross section of a further component of the weft-braking device incorporated in the yarn feeder of Fig. 1;

Fig. 13 is a block diagram showing the operation of the yarn feeder according to a preferred embodiment of the invention;

Fig. 14 is a broken-away, perspective view showing a weft-braking device incorporated in the yarn feeder according to a third alternative embodiment of the invention, which is improved with respect to the embodiment of Figs. 1 and 2 in relation to the operation

shown in Fig. 13;

Fig. 15 is a broken-away view in side elevation of the weft-braking device of Fig. 14.

**[0009]** With reference to the above Figures, a yarn feeder 10 comprises a drum 12 having a yarn Y wound thereon. Upon request from a generic textile machine, such as a circular knitting machine (not shown), the yarn is unwound from drum 12, then passes through a yarn-braking assembly supported on an arm 20 connected to drum 12, and finally is fed to the textile machine.

**[0010]** The braking assembly comprises a passive weft-braking device 22 of a conventional type, which is adapted to apply an uncontrolled, predetermined braking action to the yarn unwinding from drum 12 at its delivery end 12a, and a weft-braking device 24 controlled by feedback, which is adapted to apply a modulated braking action to the yarn incoming from passive weft-braking device 22, in order to stabilize the yarn tension on a desired level.

**[0011]** In a way known per se, passive weft-braking device 22 comprises a frustoconical, hollow member 26 which is elastically biased with its inner surface against delivery end 12a of drum 12. Frustoconical, hollow member 26 is supported coaxial to drum 12 by a spider assembly of springs, such as 27, which have their inner ends 27a anchored to a ring 28 fixed to the small end of frustoconical member 26, and their outer ends 27b anchored to an annular support 29 which is axially movable upon control of a screw mechanism 30 incorporated in arm 20. Screw mechanism 30 may be manually operated by a knob 34, in order to adjust the pressure exerted by frustoconical hollow member 26 against drum 12 and, consequently, the braking force applied to the unwinding yarn Y, which is pressed between drum 12 and frustoconical, hollow member 26.

**[0012]** Controlled weft-braking device 24 according to the invention comprises a first series of four comb-arranged prongs 36 projecting horizontally, at right angles to the running direction of the yarn, from a support 38 screwed to arm 20, and a second series of three comb-arranged prongs 40, which are inserted in an alternated configuration between prongs 36 of the first series and are attached to a slide 42 which is anchored to the operative rod 44 of a stepper linear actuator 46 having its axis lying at right angles to the plane defined by prongs 36 of the first series. Yarn Y unwinding from drum 12 is slidably inserted in a zig-zag arrangement between prongs 36 of the first series and prongs 40 of the second series and, while running, it is subject to a braking action by friction which varies as a function of the angular extent of the portions of prongs engaged by the yarn, according to an exponential relation defined by the formula:

$$F_{out} = F_{in} e^{\mu(N-1)\alpha},$$

where  $F_{out}$  is the tension of the outcoming yarn,  $F_{in}$  is the tension of the incoming yarn which may be manually adjusted by passive, weft-braking device 22,  $\mu$  is the friction coefficient between the yarn and prongs 36, 40,  $N$  is the overall number of prongs, and  $\alpha$  is the angular extent of the portions of prong engaged by the yarn (Fig. 2), which depends on the position of the second series of prongs 40 with respect to the first series of prongs 36 which, in turn, depends on the position  $x$  (Fig. 2) of operative rod 44 of stepper linear actuator 46.

**[0013]** A control unit CU (which is only diagrammatically shown in Fig. 1) is programmed for controlling stepper linear actuator 46 by feedback, on the basis of a tension signal  $T$  received from a tension sensor 50 arranged downstream of controlled weft-braking device 24, in order to maintain the tension of the yarn unwinding from drum 12 substantially constant on a desired level. Tension sensor 50 is provided with a circuit interface 52 including a micro-processor  $\mu P$ , via which it communicates with control unit CU, both parts being received in a housing 54 mounted to the free end of arm 20.

**[0014]** Advantageously, control unit CU is normally programmed to enable the feedback control of the tension only when there is yarn unwinding from the drum (which circumstance is indicative of the fact that the downstream textile machine is in motion) and to disable it when the yarn is at rest.

**[0015]** However, as mentioned above, the present invention is particularly suitable for applications in which the yarn-feeding tension is relatively high, such as the insertion of "lay-in yarn" (a type of yarn used, e.g., for covering mattresses, which is not mashed by the needles but simply inserted into the fabric as a filler). In this case, as well known to the person skilled in the art, if the machine is stopped for a long time, e.g., for maintenance, the yarn is liable to slowly unwind from the drum, to slacken and, due to the very nature of the yarn, to swell. A so-swollen yarn may easily get stuck with the needles of the knitting machine, resulting in jamming or even breaking of the needles at the next start of the knitting machine, with consequent damages in the machine and in the fabric. This risk increases as the yarn count is increased, as the yarn-feeding tension is reduced, as the gauge of the machine is increased, etc.

**[0016]** In order to solve this problem, control unit CU is advantageously provided with an ALWAYS\_LOOP operating mode, which may be enabled upon request, in which the feedback control loop is always enabled, even when the yarn is not unwinding, i.e., when the downstream knitting machine at rest. As a result, with the knitting machine at rest and the yarn consequently liable to slacken, the control loop will strengthen the braking action exerted by controlled weft-braking device up to re-

store the predetermined yarn-feeding tension. A so-tensioned yarn, even if at rest, will be less liable to unwind from the drum and to slacken.

**[0017]** Fig. 13 is a block diagram showing the operation of control unit CU in relation to the above ALWAYS\_LOOP operating mode.

**[0018]** At block 70, control unit CU checks whether the operating mode ALWAYS\_LOOP is enabled. If so (ALWAYS\_LOOP == 1), the tension is controlled by feedback at block 74, typically by a Proportional-Integral-Derivative control TENS\_PID adapted to compensate for the difference between a reference tension TENS\_REF and a measured tension TENS. If not, at block 72 control unit CU checks whether the yarn-unwinding speed UNW\_SP is higher than a minimum speed MIN. If so, the tension is controlled by feedback at block 74. If not, the routine is stopped at block 76.

**[0019]** The programming of control unit CU to perform the feedback control of stepper linear actuator 46 falls within the knowledge of the person skilled in the art and, therefore, will not be discussed in detail herein.

**[0020]** As shown in Fig. 12, in a way known per se, stepper linear actuator 46 generally comprises a hollow cylindrical body 46a which houses a plurality of stator windings 46b facing a rotor 46c which is coaxially supported within body 46a. Rotor 46c is keyed to a nut 46d, which is rotatably supported on bearings 46e and engages a threaded rod (corresponding to operative rod 44 of Figs. 1 and 2) which is guided to slide axially with respect to body 46a by guiding means (not shown). In other words, stepper linear actuator 46 is comprised of a stepper rotary motor and of transmission means which change the rotary motion of rotor 46c into a traslatory motion of the threaded, operative rod.

**[0021]** As shown in the Figures, all prongs 36, 38 preferably have a cylindrical profile and are equal to each other in diameter. Moreover, all prongs 36, 38 are advantageously made of a ceramic material, whereby the friction coefficient is typically in the range 0,2 to 0,3, depending on the type of yarn.

**[0022]** Between passive weft-braking device 22 and controlled weft-braking device 24, yarn Y passes through a first yarn-guide eyelet 56 attached to arm 20. Moreover, yarn Y also passes through a second yarn-guide eyelet 58 and a third yarn-guide eyelet 60, which are respectively attached to housing 54 of tension sensor 50 upstream and downstream of its sensitive end 50a.

**[0023]** In operation, a minimum level for the yarn-feeding tension is firstly set, by manually adjusting passive weft-braking device 22. Controlled weft-braking device 24 amplifies the braking action applied by passive weft-braking device 22, in such a way as to substantially stabilize the yarn-feeding tension on a desired level, which, as the person skilled in the art will appreciate, may be much higher than the highest level of tension which may be achieved by known controlled weft-braking devices. In particular, it has been found that the exponential relation which links the tension  $F_{out}$  of the outcoming yarn Y

to the angle  $\alpha$ , allows the braking action applied by the yarn-braking assembly to be adjusted in the range 0 to 200 cN and over, as required for certain applications, such as those cited in the background part of this description.

**[0024]** Figs. 3-7 show a controlled weft-braking device according to a first alternative embodiment of the invention. Controlled weft-braking device 124 comprises a first series of six comb-arranged arched prongs, which are attached to a support plate 138. The first series of prongs is formed of two combs, each of which is provided with three prongs 136a, 136b projecting monolithically from abase 136a', 136b', via which they are attached side-by-side to a shoulder 138a of support plate 138. Support plate 138 supports a swinging bracket 142 which is hinged about a first axis A1 between two arms 138b, 138c. Swinging bracket 142 supports a second series of six comb-arranged prongs, which are arched in the opposite direction with respect to prongs 136a, 136b of the first series, and are inserted in an alternated configuration between them. The second series of prongs is also formed of two side-by-side combs 140a, 140b which are identical to combs 136a, 136b attached to support plate 138. Swinging bracket 142 may swing, upon control of a stepper motor 146 via torque multiplying-means which will be described in more detail below, in order to vary the position of prongs 140a, 140b of the second series with respect to prongs 136a, 136b of the first series, between the two end-stop positions respectively shown in Figs. 6 and 7.

**[0025]** Stepper motor 146 is fixed to support plate 138 with its axis A2 lying at right angles to hinging axis A1 of braket 142. With this embodiment, the torque multiplying means comprise a cam consisting of a cylindrical member 152 which is coaxially keyed to driving shaft 144 of motor 146. Cylindrical member 152 has a contoured groove 154 formed on its outer surface, which is slidably engaged by a pin 156 supported by a lever 158 projecting radially from braket 142 at a misaligned position with respect to axis A1.

**[0026]** With the embodiment shown herein, groove 154 has a helical profile with a constant pitch about the axis of cylindrical member 152. However, this profile may be changed in order to vary the opening/closing action of the weft-braking device. For instance, the pitch may be reduced along a longitudinal portion of cylindrical member 152, in order to enhance the accuracy in adjusting the braking force in the corresponding stroke portion of the weft-braking device.

**[0027]** Figs. 8-11 illustrate a controlled weft-braking device 224 according to a second alternative embodiment of the invention, which only differs from the previous embodiment in the torque-multiplying means. Accordingly, the description of the parts in common with the previous embodiment will not be repeated.

**[0028]** With this embodiment, the torque-multiplying means comprise a crank 252 keyed to driving shaft 244 of motor 246. Crank 252 has a cylindrical seat 251 having

an axis A3 which is inclined at an angle  $\theta$  with respect to axis A4 of motor 246 and which intersects it at a point P lying on hinging axis A5 of bracket 242. Bracket 242 is provided with a first pin 253, whose axis A6 is arranged at right angles to hinging axis A5 of bracket 242 and intersects it at point P. First pin 253 is pivotally engaged by a bush 255 provided with a second pin 257, which radially projects at right angles outwards and pivotally engages cylindrical seat 251. In practice, the above-described system of pins provides a cross joint having one branch obliquely hinged to the crank and the other branch hinged to the bracket. Accordingly, also in this case, the rotation of the motor causes bracket 242 and prongs 240a, 240b of the second series to swing between the two end-stop positions shown in Figs. 10 and 11 respectively, such oscillation being  $2\theta$  in amplitude.

**[0029]** Figs. 14 and 15 show a further embodiment of controlled weft-braking device 324, which is modified with respect to the first embodiment of Figs. 1 and 2 in view of the possible use of the above-described ALWAYS\_LOOP operative mode.

**[0030]** With this embodiment, controlled weft-braking device 324 comprises a first series of four, comb-arranged stationary prongs 336, and a second series of three comb-arranged prongs 340 which are inserted in an alternated configuration between prongs 336 of the first series and are attached to a slide 342. Slide 342 is anchored to an operative rod 344 of a stepper linear actuator 346 having its axis arranged at right angles to the plane defined by prongs 336 of the first series. With this embodiment, slide 342 has a yarn-locking member 347 attached thereto in the shape of an undulated plate having two recesses 347', 347" suitably shaped to partially engage, or embrace, the two inner prongs of the first series in the area engaged by the yarn, with the weft-braking device in its position of maximum braking. Accordingly, with the knitting machine at rest, once reached the position of maximum braking the yarn remains clamped, or locked, between yarn-locking member 347 and the two inner stationary prongs, thereby preventing the yarn from slackening (and consequent swelling) in the area between the weft feeder and the downstream machine, with even more certainty.

**[0031]** Of course, the same solution with yarn-locking member may be applied to other embodiments of the controlled weft-braking device such as those described herein, with mere changes which will be obvious to the person skilled in the art.

**[0032]** A few preferred embodiments of the invention have been described herein, but of course many changes may be made by a person skilled in the art within the scope of the claims. For example, although reference has always been made to stepper motors in this description, different types of motors in a linear/rotary configuration may be used, in particular, brushless motors. Moreover, in the first and last embodiments, the operative rod of the linear actuator may also be arranged obliquely, e.g., in the lateral direction, with respect to the running

direction of the yarn, provided that the operative rod shifts in a direction capable of progressively varying the angular amplitude  $\alpha$  of the portions of prongs engaged by the yarn. Furthermore, the number of stationary prongs and movable prongs may be increased or reduced depending on the requirements, in order to respectively increase or reduce the average braking action applied to the yarn. The material of the prongs may also be changed, e.g., hardened steel may be used, although ceramics should be construed as a preferred material due to its high resistance to wear. Of course, the above-mentioned formula, which links angle  $\alpha$  to the tension of the yarn upstream and downstream of the brake, can be applied to the embodiment described herein by way of example, in which all the prongs have a cylindrical profile, are equal in diameter at least in the area engaged by the yarn, and are equally spaced from each other, so that angle  $\alpha$  is the same for all the prongs. However, in view of the informations found herein, the person skilled in the art will easily find formulas which can be applied to other geometries, in which, e.g., the prongs have are different in diameter and/or are not equally spaced from each other. In addition, the transmission means and/or torque-multiplying means, via which the movable prongs are connected to the electric motor in the various embodiments, may be replaced by other conventional systems, e.g., gear-based systems or lever systems of different types which can be devised by a person skilled in the art.

## Claims

### 1. A yarn feeder (10), comprising

- a drum (12) having a yarn (Y) wound thereon which is adapted to be unwound upon request from a downstream textile machine, and
- a passive weft-braking device (22), which is arranged to exert a predetermined, uncontrolled braking action upon the yarn (Y) unwinding from the drum (12), **characterized in that** it also comprises
- a controlled weft-braking device (24), which is arranged downstream of said passive weft-braking device (22) and is provided with
  - a first series of comb-like arranged prongs (36),
  - a second series of comb-like arranged prongs (40), which are inserted in an alternated configuration between the prongs (36) of the first series, said yarn (Y) being slidably inserted in a zig-zag arrangement between the two series of prongs (36, 40) for receiving a braking action by friction from them which changes in strength depending on the position of said second series of prongs (40) with respect to said first series

- of prongs (36), and  
 - a motor (46), which is operatively connected to move said second series of prongs (40) with respect to said first series of prongs (36) in such a way as to adjust the strength of said braking action by friction,
- a tension sensor (50), which is arranged downstream of said controlled, weft-braking device (24) for measuring the tension of the yarn (Y) unwinding from the drum (12) and generating a corresponding tension signal (T), and  
 - a control unit (CU), which is connected to feedback control said motor (46) based on said tension signal (T), in such a way as to substantially stabilize the tension of the yarn (Y) on a desired level.
2. The yarn feeder of claim 1, **characterized in that** said second series of prongs (40) is attached to a rod (44) which is guided to slide axially upon control of said motor (46a, 46b, 46c) via rotation-to-translation conversion means (44, 46d).
  3. The yarn feeder of claim 1, **characterized in that** said second series of prongs (140, 240) is attached to a bracket (142, 242) swinging about an hinging axis (A1, A5), upon control of said motor (146, 246,) via torque multiplying means.
  4. The yarn feeder of claim 3, **characterized in that** said torque multiplying means comprise a cam (152, 154) which is attached to the driving shaft (144) of said motor (146) and is operatively engaged by an engaging member (156) which is attached to said bracket (142) at a misaligned position with respect to its hinging axis (A1, A5).
  5. The yarn feeder of claim 4, **characterized in that** said cam consists of a cylindrical member (152) which is coaxially keyed to the driving shaft (144) of the motor (146) and has a contoured groove (154) on its outer surface, and said engaging member consists of a pin (156) which slidably engages said contoured groove (154).
  6. The yarn feeder of claim 5, **characterized in that** said groove (154) has a substantially helical contour about the axis of the cylindrical member (152).
  7. The yarn feeder of claim 3, **characterized in that** said torque multiplying means comprise a cross joint having one branch hinged to a crank (252) keyed to the driving shaft (244) of the motor (246) about an oblique axis (A3) intersecting the axis (A4) of the motor (246), and the other branch hinged to said support (242) about an axis (A6) lying at right angles to the hinging axis (A5) of the support (242).
  8. The yarn feeder of any of claims 3 to 7, **characterized in that** the prongs of said first series and the prongs of said second series have opposed arched profiles.
  9. The yarn feeder of any of claims 1 to 8, wherein all the prongs (36, 40) are equally spaced from each other and, at least in the area contacting the yarn, have cylindrical profiles with the same diameter, **characterized in that** said control unit (CU) is programmed to control said motor (46) based on the formula:
 
$$F_{out} = F_{in} e^{\mu(N-1)\alpha},$$
 where  $F_{out}$  is the tension of the outcoming yarn,  $F_{in}$  is the tension of the incoming yarn,  $\mu$  is the friction coefficient between the yarn and said prongs (36, 40),  $N$  is the overall number of prongs, and  $\alpha$  is the angular extent of the portion of prongs engaged by the yarn.
  10. The yarn feeder of any of claims 1 to 9, **characterized in that** said passive weft-braking device (22) comprises a substantially frustoconical hollow member (26), which is biased with its inner surface against the delivery edge (12a) of the drum (12) by a support (29), which is connected to said substantially frustoconical hollow member (26) via elastic means (27) and is axially movable, upon control of manual adjusting means (30, 34), for adjusting the pressure exerted by the substantially frustoconical hollow member (26) against the drum (12).
  11. The yarn feeder of any of claims 1 to 10, **characterized in that** said motor is a stepper motor.
  12. The yarn feeder of any of claims 1 to 11, **characterized in that** said control unit (CU) is normally programmed to enable said feedback control with the yarn unwinding from the drum and to disable it with the yarn at rest, and is further provided with an operating mode (ALWAYS\_LOOP), which may be enabled upon request, in which said feedback control is always enabled, even with the yarn at rest.
  13. The yarn feeder of claim 12, **characterized in that** it comprises a yarn-locking member (347) which is attached to said second series of prongs (340) and is arranged in such a way as to engage at least one of the prongs of said first series (336) in the area engaged by the yarn, with the controlled, weft-braking device in a configuration of maximum braking, whereby the yarn is clamped between said yarn-locking member (347) and said at least one prong

of said first series (336).

- 14.** The yarn feeder of claim 13, **characterized in that** said yarn-locking member (347) has at least one recess (347', 347'') which is suitably shaped to partially embrace said at least one prong of said first series (336) with the controlled, weft-braking device in said configuration of maximum braking.

5

10

15

20

25

30

35

40

45

50

55

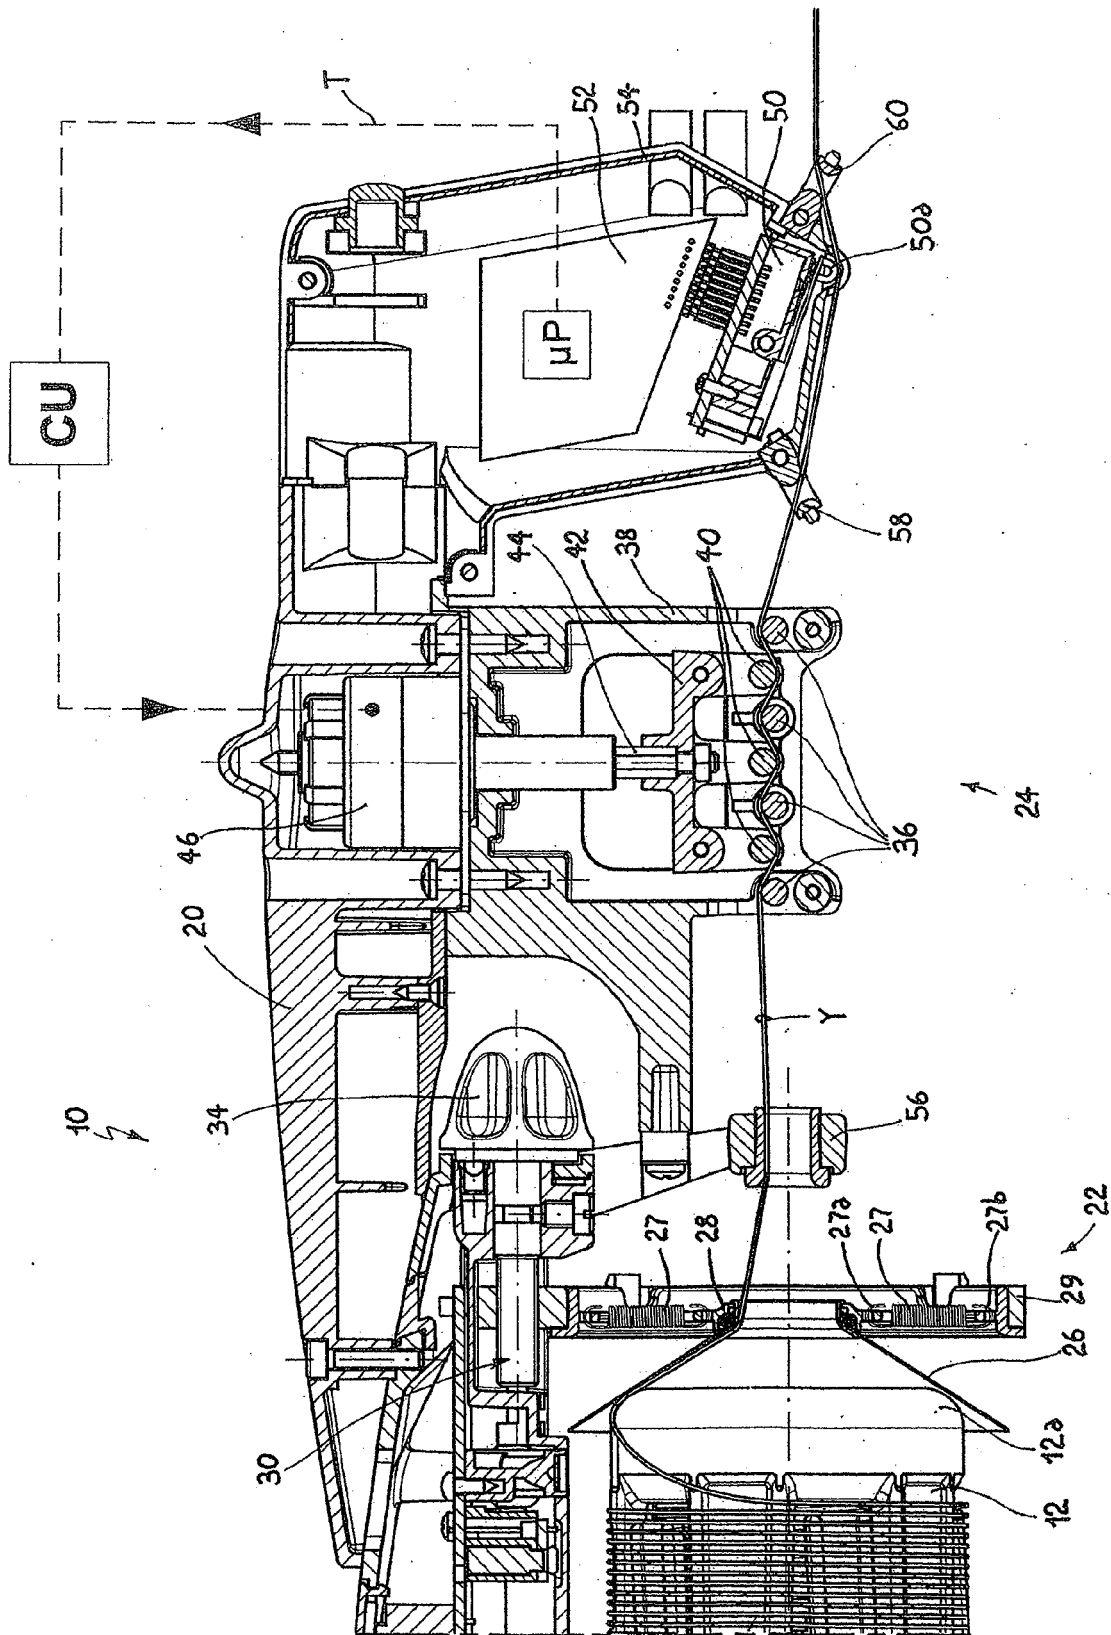


Fig. 1

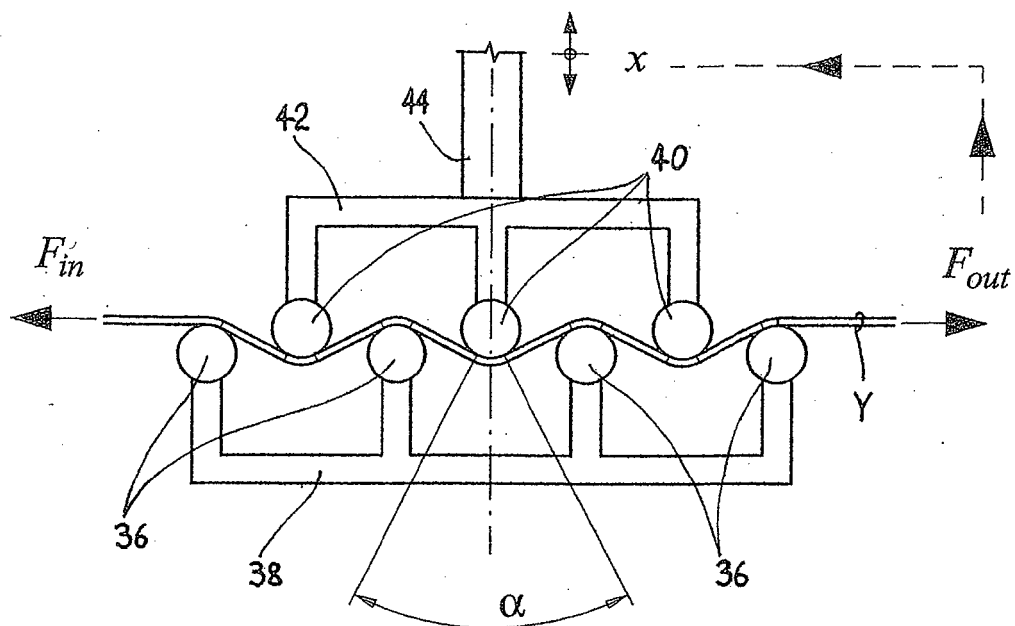


Fig. 2

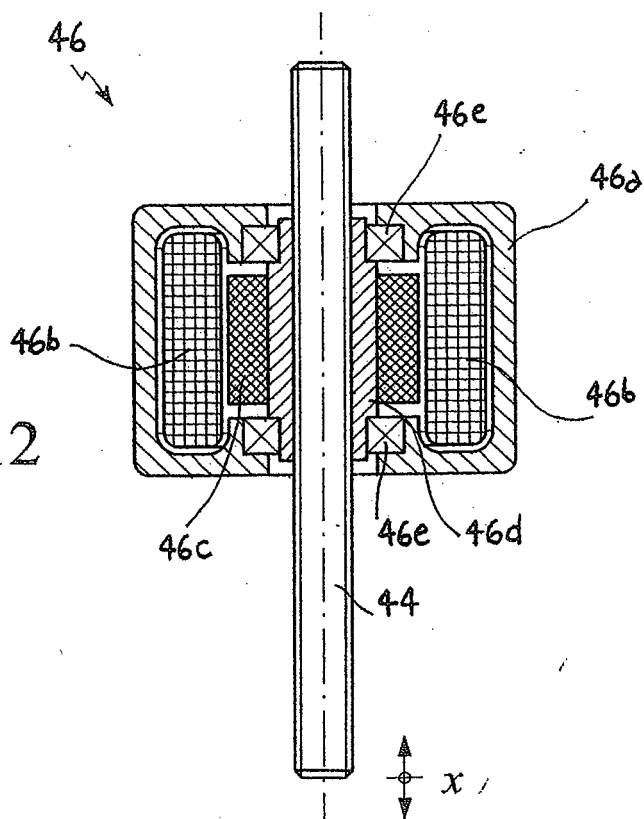
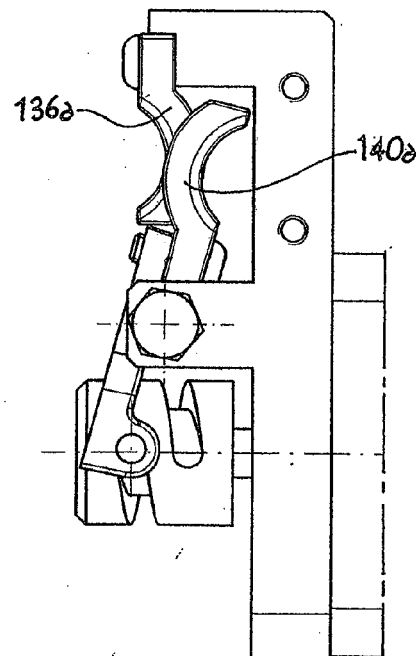
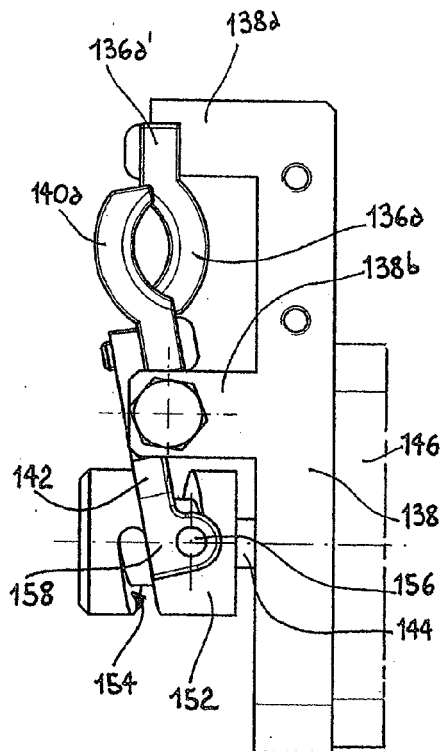
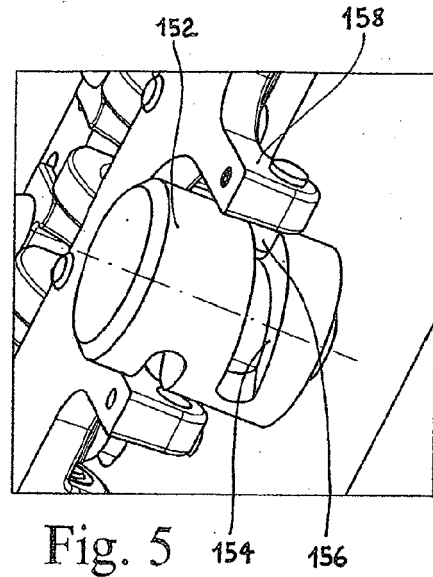
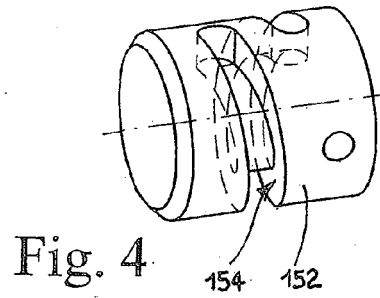
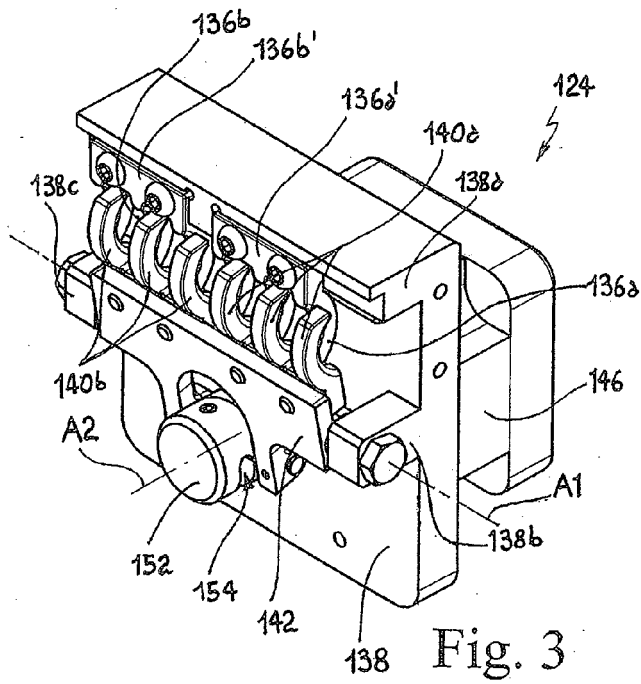


Fig. 12



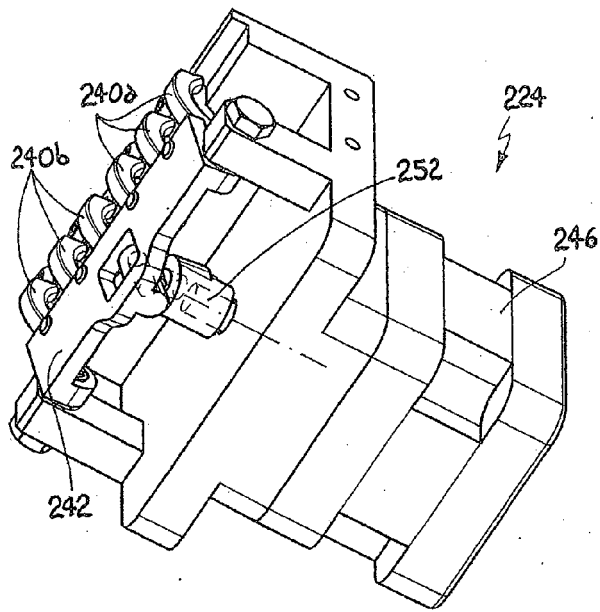


Fig. 8

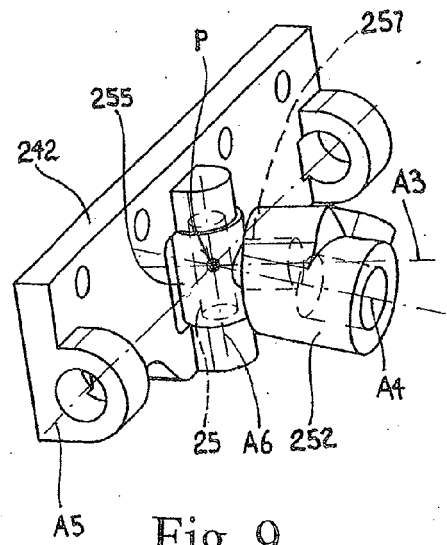


Fig. 9

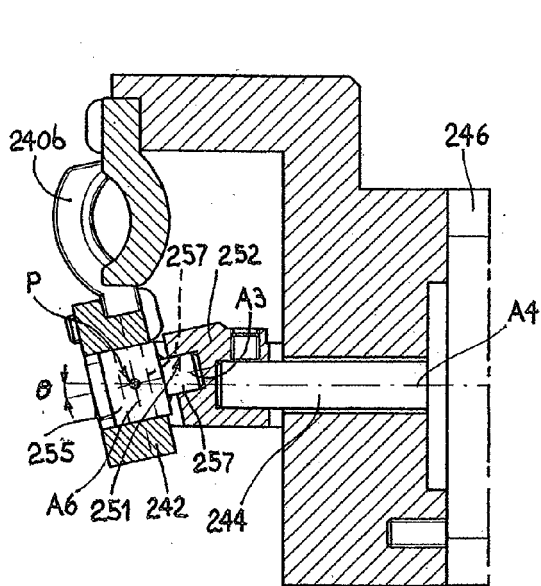


Fig. 10

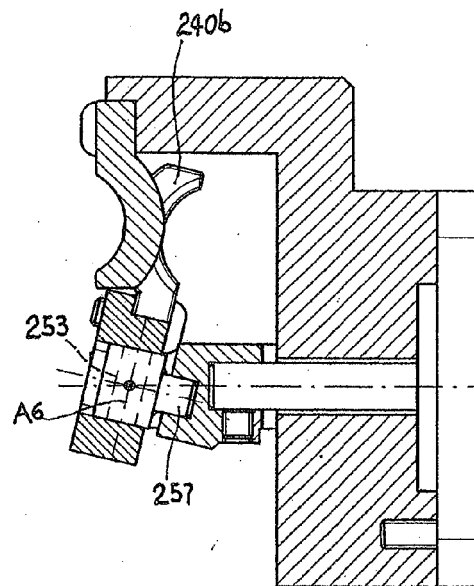


Fig. 11

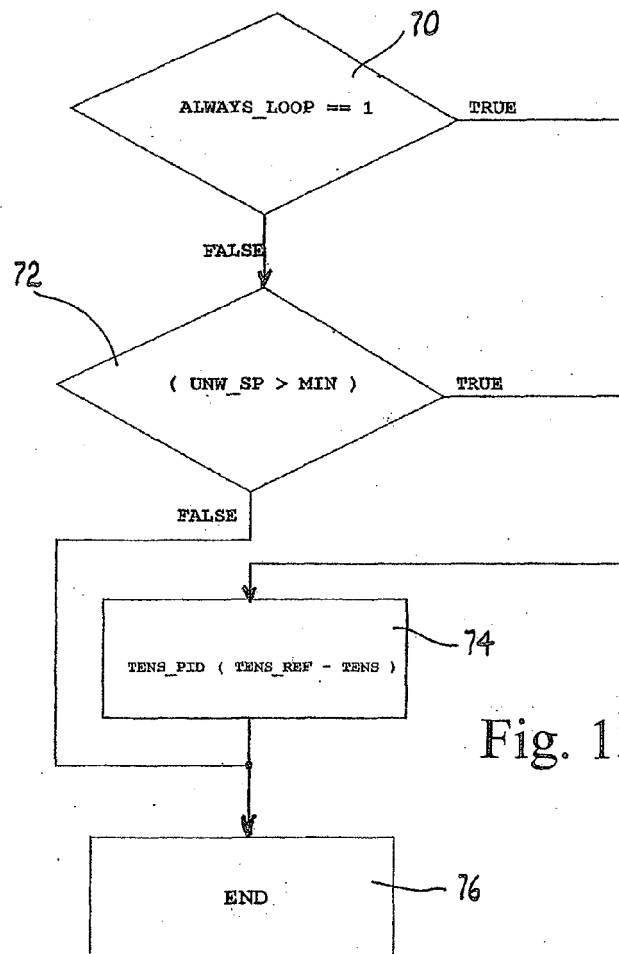


Fig. 13

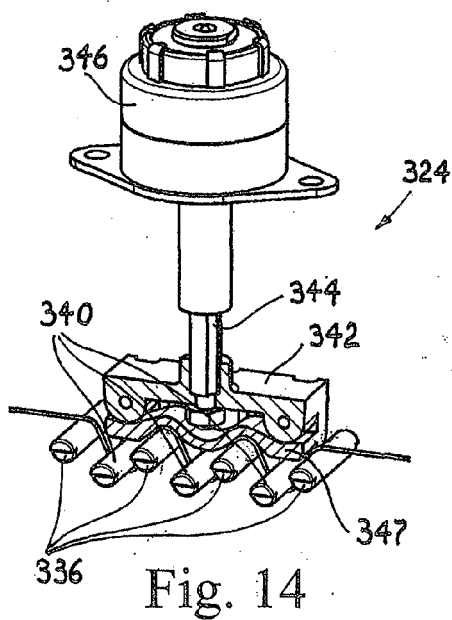


Fig. 14

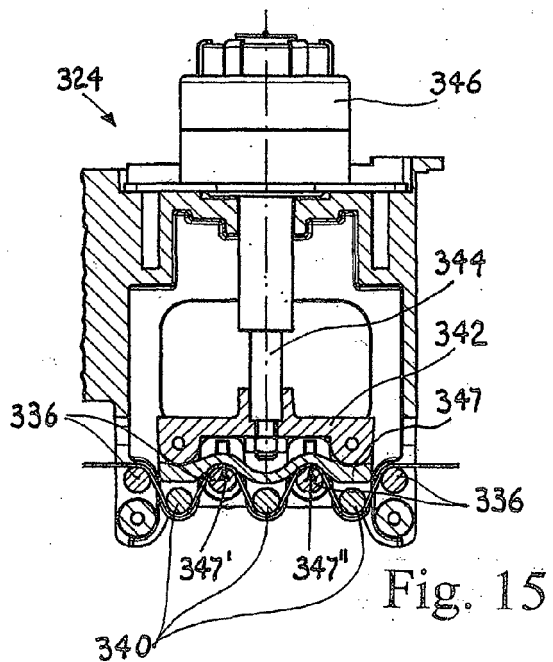


Fig. 15



## EUROPEAN SEARCH REPORT

Application Number  
EP 14 00 1766

## DOCUMENTS CONSIDERED TO BE RELEVANT

| Category                                                                                                                                                                                                                                               | Citation of document with indication, where appropriate, of relevant passages                      | Relevant to claim                                                                                                                                                                                                                                                            | CLASSIFICATION OF THE APPLICATION (IPC)                               |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------|
| Y                                                                                                                                                                                                                                                      | US 5 487 415 A (MAINA BRUNO [IT])<br>30 January 1996 (1996-01-30)                                  | 1-3,8-11                                                                                                                                                                                                                                                                     | INV.<br>D03D47/34<br>B65H59/30<br>D03D47/36<br>D04B15/44<br>D04B15/48 |
| A                                                                                                                                                                                                                                                      | * figures 4, 5 *<br>* column 4, line 17 - line 27 *<br>* column 4, line 64 - column 5, line 10 *   | 4-7,<br>12-14                                                                                                                                                                                                                                                                |                                                                       |
| Y                                                                                                                                                                                                                                                      | EP 1 072 707 A1 (LGL ELECTRONICS SPA [IT])<br>31 January 2001 (2001-01-31)                         | 1-3,8-11                                                                                                                                                                                                                                                                     |                                                                       |
| A                                                                                                                                                                                                                                                      | * paragraph [0032] - paragraph [0038] *<br>* figure 3 *                                            | 4-7,<br>12-14                                                                                                                                                                                                                                                                |                                                                       |
| Y                                                                                                                                                                                                                                                      | US 2 774 551 A (PIEPER ALPHONSE F)<br>18 December 1956 (1956-12-18)                                | 3,8                                                                                                                                                                                                                                                                          |                                                                       |
| A                                                                                                                                                                                                                                                      | * the whole document *                                                                             | 4-7,<br>12-14                                                                                                                                                                                                                                                                |                                                                       |
| Y                                                                                                                                                                                                                                                      | DE 195 44 202 A1 (SCHLAFHORST & CO W [DE]<br>SAURER GMBH & CO KG [DE])<br>5 June 1997 (1997-06-05) | 9                                                                                                                                                                                                                                                                            | TECHNICAL FIELDS<br>SEARCHED (IPC)<br><br>D03D<br>B65H<br>D04B        |
| A                                                                                                                                                                                                                                                      | * column 3, line 32 - column 5, line 4 *<br>* figures 1-3 *                                        | 1                                                                                                                                                                                                                                                                            |                                                                       |
| Y                                                                                                                                                                                                                                                      | EP 2 610 380 A1 (LGL ELECTRONICS SPA [IT])<br>3 July 2013 (2013-07-03)                             | 10                                                                                                                                                                                                                                                                           |                                                                       |
| A                                                                                                                                                                                                                                                      | * figure 7 *<br>* paragraph [0013] - paragraph [0020] *                                            | 1                                                                                                                                                                                                                                                                            |                                                                       |
| A                                                                                                                                                                                                                                                      | EP 0 622 485 A1 (LGL ELECTRONICS SPA [IT])<br>2 November 1994 (1994-11-02)<br>* figure 1 *         | 1-10                                                                                                                                                                                                                                                                         |                                                                       |
| The present search report has been drawn up for all claims                                                                                                                                                                                             |                                                                                                    |                                                                                                                                                                                                                                                                              |                                                                       |
| Place of search<br><b>Munich</b>                                                                                                                                                                                                                       |                                                                                                    | Date of completion of the search<br><b>29 October 2014</b>                                                                                                                                                                                                                   | Examiner<br><b>Hausding, Jan</b>                                      |
| CATEGORY OF CITED DOCUMENTS<br>X : particularly relevant if taken alone<br>Y : particularly relevant if combined with another document of the same category<br>A : technological background<br>O : non-written disclosure<br>P : intermediate document |                                                                                                    | T : theory or principle underlying the invention<br>E : earlier patent document, but published on, or after the filing date<br>D : document cited in the application<br>L : document cited for other reasons<br>& : member of the same patent family, corresponding document |                                                                       |

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 14 00 1766

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

29-10-2014

| Patent document<br>cited in search report | Publication<br>date | Patent family<br>member(s) | Publication<br>date |
|-------------------------------------------|---------------------|----------------------------|---------------------|
| US 5487415 A                              | 30-01-1996          | AT 132212 T                | 15-01-1996          |
|                                           |                     | CZ 9400583 A3              | 15-06-1994          |
|                                           |                     | DE 69207202 D1             | 08-02-1996          |
|                                           |                     | DE 69207202 T2             | 15-05-1996          |
|                                           |                     | EP 0607147 A1              | 27-07-1994          |
|                                           |                     | ES 2083740 T3              | 16-04-1996          |
|                                           |                     | IT VC910010 U1             | 19-03-1993          |
|                                           |                     | JP 3058914 B2              | 04-07-2000          |
|                                           |                     | JP H06510823 A             | 01-12-1994          |
|                                           |                     | KR 100248532 B1            | 01-04-2000          |
|                                           |                     | US 5487415 A               | 30-01-1996          |
|                                           |                     | WO 9306277 A1              | 01-04-1993          |
| EP 1072707 A1                             | 31-01-2001          | DE 60012434 D1             | 02-09-2004          |
|                                           |                     | DE 60012434 T2             | 02-12-2004          |
|                                           |                     | EP 1072707 A1              | 31-01-2001          |
|                                           |                     | IT T0990458 A1             | 01-12-2000          |
| US 2774551 A                              | 18-12-1956          | NONE                       |                     |
| DE 19544202 A1                            | 05-06-1997          | CN 1152536 A               | 25-06-1997          |
|                                           |                     | DE 19544202 A1             | 05-06-1997          |
|                                           |                     | JP H09175736 A             | 08-07-1997          |
|                                           |                     | US 5738295 A               | 14-04-1998          |
| EP 2610380 A1                             | 03-07-2013          | CN 103184650 A             | 03-07-2013          |
|                                           |                     | EP 2610380 A1              | 03-07-2013          |
|                                           |                     | US 2013168480 A1           | 04-07-2013          |
| EP 0622485 A1                             | 02-11-1994          | DE 69407210 D1             | 22-01-1998          |
|                                           |                     | DE 69407210 T2             | 02-04-1998          |
|                                           |                     | EP 0622485 A1              | 02-11-1994          |
|                                           |                     | IT 1260645 B               | 22-04-1996          |
|                                           |                     | US 5398732 A               | 21-03-1995          |

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- EP 0707102 A [0004] [0005]