



(11)

EP 2 832 865 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

14.11.2018 Bulletin 2018/46

(51) Int Cl.:

C21D 8/12 (2006.01) **B23K 15/00** (2006.01)
B23K 26/00 (2014.01) **C22C 38/00** (2006.01)
C22C 38/60 (2006.01) **H01F 1/16** (2006.01)

(21) Application number: **13768554.1**

(86) International application number:

PCT/JP2013/002192

(22) Date of filing: **29.03.2013**

(87) International publication number:

WO 2013/145784 (03.10.2013 Gazette 2013/40)

(54) METHOD FOR MANUFACTURING GRAIN ORIENTED ELECTRICAL STEEL SHEET

VERFAHREN ZUR HERSTELLUNG EINES KORNIORIENTIERTEN ELEKTRISCHEN
STAHLBLECHS

PROCÉDÉ DE FABRICATION D'UNE FEUILLE D'ACIER MAGNÉTIQUE ORIENTÉE

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

- **TAKAMIYA, Toshito**
Tokyo 100-0011 (JP)
- **MATSUDA, Hiroshi**
Tokyo 100-0011 (JP)

(30) Priority: **29.03.2012 JP 2012077744**

(43) Date of publication of application:

04.02.2015 Bulletin 2015/06

(73) Proprietor: **JFE Steel Corporation**

Tokyo, 100-0011 (JP)

(74) Representative: **Grünecker Patent- und
Rechtsanwälte
PartG mbB
Leopoldstraße 4
80802 München (DE)**

(72) Inventors:

- **TAKENAKA, Masanori**
Tokyo 100-0011 (JP)

(56) References cited:

WO-A1-90/13673 WO-A1-2011/158519
JP-A- S5 993 828 JP-A- H05 306 410
JP-A- H08 215 710 JP-A- S54 120 214
JP-A- S55 119 126

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 832 865 B1

Description

TECHNICAL FIELD

[0001] The present invention relates to a method for manufacturing a so-called grain oriented electrical steel sheet having crystal grains with {110} plane in accord with the sheet plane and <001> orientation in accord with the rolling direction, in Miller indices.

BACKGROUND ART

[0002] It is known that grain oriented electrical steel sheets having crystal grains in accord with {110}<001> orientation (hereinafter, "Goss orientation") through secondary recrystallization annealing exhibit superior magnetic properties (e.g. see JPS40-15644B (PTL 1)). As indices of magnetic properties of the grain oriented electrical steel sheets, magnetic flux density B_8 at a magnetic field strength of 800 A/m and iron loss (per kg) $W_{17/50}$ of the steel sheet when it is magnetized to 1.7 T in an alternating magnetic field with an excitation frequency of 50 Hz, are mainly used.

[0003] Further, it has been a common practice in manufacturing grain oriented electrical steel sheets to use precipitates called inhibitors to induce differences of grain boundary mobility during final annealing so that the crystal grains preferentially grow only in the Goss orientation.

[0004] For example, PTL 1 discloses a method of using AlN and MnS, while JPS51-13469B (PTL 2) discloses a method of using MnS and MnSe. Both of them have been put into practical use industrially.

[0005] Since these methods using inhibitors require a uniform and fine precipitate distribution of inhibitors as an ideal state, it is necessary to heat a slab before hot rolling to 1300 °C or higher. As such high temperature slab heating is performed, excessive coarsening occurs in the crystal structure of the slab. With this coarsening, the orientation of the slab structure tends to grow in {100}<011> orientation which is a stable orientation of hot rolling, which greatly impedes grain growth during secondary recrystallization, thereby leading to serious deterioration of magnetic properties.

[0006] For the purpose of reducing the above coarse slab structure, JPH03-10020A (PTL 3) discloses a technique for obtaining uniformly recrystallized microstructures by performing high reduction rolling at a temperature range of 1280 °C or higher in the first pass of rough rolling, thereby facilitating generation of recrystallization nuclei from grain boundaries of α grains.

[0007] For the purpose of recrystallization of the surface layer of the hot rolled sheet, JPH02-101121A (PTL 4) discloses a technique for performing hot rolling with a rolling reduction of 40 % to 60 % in a temperature range of 1050 °C to 1150 °C using the rolls having surface roughness of 4 μmRa to 8 μmRa , to increase the amount of shear strain in the surface layer of the hot rolled sheet.

[0008] Further, JPS61-34117A (PTL 5) discloses a technique for growing only highly oriented secondary recrystallized grains, by subjecting a silicon steel slab containing 0.01 wt% to 0.06 wt% of C to high reduction rolling of 40 % or more in the first pass of finish hot rolling, and afterward to light reduction rolling of 30 % or less per 1 pass so that Goss orientation grains existing in the surface layer of the hot rolled sheet increase. These Goss orientation grains lead to the increased amount of Goss orientation grains in the surface layer after primary recrystallization annealing through a so called "structure memory mechanism".

Further, WO2011/158519 A1 discloses a method for manufacturing a grain oriented electrical steel sheet, comprising the steps of: subjecting a steel slab having a composition containing, by mass %, 0.02% to 0.015% C, 2.5% to 7.0% Si, 0.005% to 0.3% Mn, 0.01% to 0.05% acid-soluble aluminum, 0.002% to 0.012% N, at least one of S and Se by the total content thereof being 0.05% or less, and the balance being Fe and incidental impurities, to heating and subsequent hot rolling to obtain a hot rolled steel sheet; subjecting the hot rolled steel sheet optionally to hot-band annealing and essentially to at least two cold-rolling operations with intermediate annealing therebetween to obtain a cold-rolled steel sheet; and subjecting the cold-rolled steel sheet to primary recrystallization annealing and an secondary recrystallization annealing, wherein a thermal treatment is carried out prior to any one of the cold-rolling operations other than final cold rolling at a temperature in the range of 500 to 750°C for a period of 10 min. to 480 hours. The specified thermal treatment prior to any one of the cold-rolling operations leads to superior magnetic properties.

CITATION LIST

Patent Literature

[0009]

PTL 1: JPS40-15644B

PTL 2: JPS51-13469B

PTL 3: JPH03-10020A
 PTL 4: JPH02-101121A
 PTL 5: JPS61-34117A

5 SUMMARY OF INVENTION

(Technical Problem)

10 **[0010]** PTL 3 discloses high reduction rolling at a temperature of 1280 °C or higher in rough hot rolling. However, as a technical concept, this is originally high reduction rolling in an α single phase region, and there existed a problem that an (α + γ) dual phase is formed even at a temperature of 1280 °C or higher depending on compositions, so that sufficiently uniform recrystallized microstructures cannot be obtained.

15 **[0011]** Further, according to PTL 4, shear strain in the surface layer of the hot rolled sheet increases by controlling finish hot rolling condition. However, recrystallization is hard to occur in the center layer in sheet thickness direction of a steel sheet where shear strain is difficult to be introduced, and there still remained a problem in facilitating recrystallization in the center layer.

20 **[0012]** Further, it is assumed that PTL 4 and PTL 5 mainly focus on high reduction rolling in a temperature range of high γ phase volume fraction. However, since the temperature range of the maximum γ phase volume fraction greatly varies depending on the material compositions, there was a problem that, when using certain compositions, high reduction rolling is performed in a temperature range out of the temperature range of maximum γ phase volume fraction, which results in an insufficient improving effect of magnetic properties.

(Solution to Problem)

25 **[0013]** The inventors of the present invention intensely investigated how to resolve the above problems. As a result, the inventors discovered the relation between the addition amount of Si, C, and Ni which are known compositions in grain oriented electrical steel sheets, and the α single phase transition temperature (T_{α}) as well as the maximum γ phase volume fraction temperature ($T_{\gamma\max}$). Further, the inventors also discovered that it is important to perform high reduction rolling at a temperature equal to or higher than ($T_{\alpha}-100$) °C which was obtained from the α single phase transition temperature in the first pass of the rough rolling process of hot rolling, and to perform high reduction rolling at a temperature range of ($T_{\gamma\max}\pm 50$) °C obtained from the maximum γ phase volume fraction temperature in any one pass of the finish hot rolling process of hot rolling.

30 **[0014]** The inventors of the present invention discovered that by performing the above hot rolling, ferrite grains in the hot rolled sheet are refined, and that fine and uniform generation of the γ phase provides refinement of the structure of the hot rolled steel sheet, and also that as the refinement of the structure of the hot rolled steel sheet proceeds, it becomes possible to better control the texture of the primary recrystallized sheet.

35 **[0015]** The present invention is based on the above discoveries, and an object thereof is to provide a method for manufacturing a grain oriented electrical steel sheet using austenite (γ) - ferrite (α) transformation which develops excellent magnetic properties after secondary recrystallization by performing high reduction rolling, at a predetermined temperature range based on the material compositions, in the first pass of a rough rolling process and at least one pass of a finish rolling process during hot rolling.

40 **[0016]** Further, in addition to the above technique, the present invention achieves further improvement in the magnetic properties of the grain oriented electrical steel sheet by controlling the heating rate of the predetermined temperature range in the heating process of primary recrystallization annealing, performing magnetic domain refining treatment, and so on.

45 **[0017]** Specifically, the primary features of the present invention are specified in claims 1 to 6.

(Advantageous Effect of Invention)

50 **[0018]** Since the method for manufacturing a grain oriented electrical steel sheet according to the present invention can control the texture of the primary recrystallized sheet so that the orientation of the product steel sheet is highly in accord with the Goss orientation, it becomes possible to manufacture the grain oriented electrical steel sheet having excellent magnetic properties compared to before, after secondary recrystallization annealing. In particular, the grain oriented electrical steel sheet according to the present invention can achieve excellent iron loss properties with iron loss $W_{17/50}$ after secondary recrystallization annealing of 0.85 W/kg or less, even with a thin steel sheet with a sheet thickness of 0.23 mm which is generally difficult to manufacture.

BRIEF DESCRIPTION OF DRAWINGS

[0019] The present invention will be further described below with reference to the accompanying drawings, wherein:

FIG. 1 is a graph showing the influence of the temperature and rolling reduction in the first pass of rough hot rolling and in the first pass of finish hot rolling on the magnetic properties of a final annealed steel sheet (Material No. 3); FIG. 2 is a graph showing the influence of the temperature and rolling reduction in the first pass of rough hot rolling and in the first pass of finish hot rolling on the magnetic properties of another final annealed steel sheet (Material No. 15); and FIG. 3 is a graph showing the influence of the temperature and rolling reduction in the first pass of rough rolling and in the first pass of finish rolling on the magnetic properties of another final annealed steel sheet (Material No. 20).

DESCRIPTION OF EMBODIMENTS

[0020] The following describes the present invention in detail. Here, unless otherwise specified, the indication of "%" regarding compositions of the steel sheet shall stand for "mass%".

Si: 3.0 % or more to 4.0 % or less

[0021] Si is an element that is extremely effective for enhancing electrical resistance of steel and reducing eddy current loss which constitutes a part of iron loss. By adding Si to the steel sheet, electrical resistance monotonically increases until the content reaches 11 %. However, when the content exceeds 4.0 %, workability significantly decreases. On the other hand, if the content is less than 3.0 %, electrical resistance becomes too small and good iron loss properties cannot be obtained. Therefore, the amount of Si is in the range of 3.0 % or more to 4.0 % or less.

C: 0.020 % or more to 0.10 % or less

[0022] C is a necessary element for improving the hot rolled texture by using austenite-ferrite transformation during hot rolling and the soaking time of hot band annealing. However, when C content exceeds 0.10 %, not only does the burden of decarburization treatment increase but the decarburization itself becomes incomplete, and becomes the cause of magnetic aging in the product steel sheet. On the other hand, if C content is less than 0.020 %, the improving effect of the hot rolled texture is small, and it becomes difficult to obtain a desirable primary recrystallized texture. Therefore, the amount of C is in the range of 0.020 % or more to 0.10 % or less.

Ni: 0.005 % or more to 1.50 % or less

[0023] Ni is an austenite forming element and therefore it is an element useful for improving the texture of a hot-rolled sheet and improving magnetic properties using austenite transformation. However, if Ni content is less than 0.005 %, it is less effective for improving magnetic properties. On the other hand, if the content is over 1.50 %, workability decreases and leads to deterioration of sheet threading performance, and also causes unstable secondary recrystallization and leads to deterioration of magnetic properties. Therefore, the amount of Ni is in the range of 0.005 % to 1.50 %.

Mn: 0.005 % or more to 0.3 % or less

[0024] Mn is an important element in a grain oriented electrical steel sheet since it serves as an inhibitor in suppressing normal grain growth by MnS and MnSe in the heating process of secondary recrystallization annealing. Here, if Mn content is less than 0.005 %, the absolute content of the inhibitor will be insufficient, and therefore the inhibition effect on normal grain growth will be insufficient. On the other hand, if Mn content exceeds 0.3 %, not only will it be necessary to perform slab heating at a high temperature to completely dissolve Mn in the process of heating the slab before hot rolling, but the inhibitor will be formed as a coarse precipitate, and therefore the inhibition effect on normal grain growth will be insufficient. Therefore, the amount of Mn is in the range of 0.005 % or more to 0.3 % or less.

Acid-Soluble Al: 0.01 % or more to 0.05 % or less

[0025] Acid-Soluble Al is an important element in a grain oriented electrical steel sheet since AlN serves as an inhibitor in suppressing normal grain growth in the heating process of secondary recrystallization annealing. Here, if Acid-Soluble Al content is less than 0.01 %, the absolute content of the inhibitor is insufficient, and therefore the inhibition effect on normal grain growth will be insufficient. On the other hand, if Acid-Soluble Al content exceeds 0.05 %, AlN is formed as

a coarse precipitate, and therefore inhibition effect on normal grain growth will be insufficient. Therefore, the amount of Acid-Soluble Al is in the range of 0.01 % or more to 0.05 % or less.

N: 0.002 % or more to 0.012 % or less

[0026] N bonds with Al to form an inhibitor. However, if N content is less than 0.002 %, the absolute content of the inhibitor will be insufficient, and therefore inhibition effect on normal grain growth will be insufficient. On the other hand, if the content exceeds 0.012 %, holes called blisters will be generated during cold rolling, and the appearance of the steel sheet will be deteriorated. Therefore, the amount of N is in the range of 0.002 % or more to 0.012 % or less.

[0027] Total of at least one element selected from S and Se: 0.05 % or less S and Se bond with Mn to form an inhibitor. However, if the content exceeds 0.05 %, desulfurization and deselenization become incomplete in secondary recrystallization annealing which causes deterioration of iron loss properties. Therefore, the total amount of at least one element selected from S and Se is 0.05 % or less. Further, although there is no particular lower limit for these elements, it is preferable to include them in an amount of about 0.01 % or more in order to obtain their addition effect.

[0028] Although the basic components of the present invention are as explained above, the following elements may also be added as necessary, according to the present invention.

Sn: 0.005 % or more to 0.50 % or less, Sb: 0.005 % or more to 0.50 % or less, Cu: 0.005 % or more to 1.5 % or less, and P: 0.005 % or more to 0.50 % or less

[0029] Sn, Sb, Cu and P are useful elements for improving magnetic properties. However, if the content of each element is less than the lower limit value of each of the above ranges, improving effect of magnetic properties is poor, while if the content of each element exceeds the upper limit value of each of the above ranges, secondary recrystallization becomes unstable and magnetic properties deteriorate. Therefore, each element may be contained in the following ranges.

Sn: 0.005 % or more to 0.50 % or less, Sb: 0.005 % or more to 0.50 % or less, Cu: 0.005 % or more to 1.5 % or less, and P: 0.005 % or more to 0.50 % or less

[0030] A steel slab having the above composition is heated and subjected to hot rolling.

[0031] Here, a major feature of the present invention is that in the rough rolling process of the above hot rolling (also simply referred to as rough hot rolling in the present invention) and the finish rolling process (also referred to as finish hot rolling in the present invention), when defining the α single phase transition temperature and the maximum γ phase volume fraction temperature obtained from the addition amount of Si, C, and Ni as T_{α} and $T_{\gamma\max}$ respectively, high reduction rolling is performed with the surface temperature set to $(T_{\alpha}-100)$ °C or higher in the first pass of rough hot rolling, and high reduction rolling is performed with the surface temperature set to $(T_{\gamma\max}\pm 50)$ °C in at least one pass of the process of finish hot rolling.

[0032] Hereinbelow, reference will be made to the experiments by which the present invention has been completed. Regarding each of the slabs of steel compositions shown in table 1, thermal expansion coefficient in the heating process was measured using Formastor dilatometer, and T_{α} was obtained from the change in its slope. That is, since the atomic packing factor is lower in α phase (bcc structure) compared to γ phase (fcc structure), it is possible to confirm transition of α single phase from the sharp change in thermal expansion coefficient.

[Table 1]

[0033]

Table 1

No.	Si [mass. %]	C [mass. %]	Ni [mass. %]	Mn [mass. %]	sol.Al [mass. %]	N [mass. %]	S [mass. %]	Se [mass. %]	T _α [°C] (Measured Value)	T _{γmax} [°C] (Measured Value)
1	3.0	0.02	0.005	0.08	0.02	0.01	0.01	0.02	1159	1099
2	3.0	0.02	0.2	0.08	0.03	0.01	0.01	0.02	1278	1158
3	3.0	0.02	0.4	0.09	0.02	0.01	0.01	0.02	1343	1181
4	3.0	0.05	0.005	0.08	0.03	0.01	0.01	0.02	1316	1162
5	3.0	0.05	0.2	0.08	0.03	0.01	0.01	0.02	1359	1181
6	3.0	0.05	0.4	0.08	0.03	0.01	0.01	0.02	1396	1195
7	3.0	0.08	0.005	0.09	0.02	0.01	0.01	0.02	1372	1181
8	3.0	0.08	0.2	0.09	0.03	0.01	0.01	0.02	1402	1195
9	3.0	0.08	0.4	0.08	0.03	0.01	0.01	0.02	1429	1205
10	3.5	0.02	0.2	0.08	0.02	0.01	0.01	0.02	1193	1106
11	3.5	0.02	0.4	0.08	0.03	0.01	0.01	0.02	1302	1159
12	3.5	0.05	0.005	0.09	0.03	0.01	0.01	0.02	1263	1121
13	3.5	0.05	0.2	0.09	0.03	0.01	0.01	0.02	1322	1157
14	3.5	0.05	0.4	0.08	0.02	0.01	0.01	0.02	1371	1180
15	3.5	0.08	0.005	0.09	0.03	0.01	0.01	0.02	1336	1157
16	3.5	0.08	0.2	0.08	0.03	0.01	0.01	0.02	1374	1178
17	3.5	0.08	0.4	0.08	0.02	0.01	0.01	0.02	1410	1195
18	4.0	0.02	0.4	0.08	0.03	0.01	0.01	0.02	1242	1118
19	4.0	0.05	0.005	0.08	0.03	0.01	0.01	0.02	1192	1048
20	4.0	0.05	0.2	0.09	0.03	0.01	0.01	0.02	1273	1115
21	4.0	0.05	0.4	0.09	0.03	0.01	0.01	0.02	1337	1155
22	4.0	0.08	0.005	0.08	0.02	0.01	0.01	0.02	1292	1117
23	4.0	0.08	0.2	0.08	0.02	0.01	0.01	0.02	1340	1150

(continued)

No.	Si [mass.%]	C [mass.%]	Ni [mass.%]	Mn [mass.%]	sol.Al [mass.%]	N [mass.%]	S [mass.%]	Se [mass.%]	T _α [°C] (Measured Value)	T _{γmax} [°C] (Measured Value)
24	4.0	0.08	0.4	0.08	0.03	0.01	0.01	0.02	1384	1175

[0034] Further, regarding $T_{\gamma\max}$, a thermodynamic calculation software (Thermo-Calc) was used to estimate the temperature where the component reaches the maximum γ phase volume fraction. Then, a simulated thermal cycle tester was used to perform soaking treatment for 30 minutes in the range of ± 30 °C of the estimated temperature with an increment of 5 °C, and then rapid cooling was performed to freeze the microstructure. Regarding the steel sheet microstructure for each temperature, microstructure observation was performed using an optical microscope, to measure the pearlite fraction in the range of approximately $130 \mu\text{m} \times 100 \mu\text{m}$, and a mean value of 5 views was defined as γ phase volume fraction.

[0035] Then, the relations between test temperatures and measurement results of γ phase volume fraction were plotted, and the maximum value of the γ phase volume fraction was obtained by a curved approximation of the plots, and the temperature of the maximum value was defined as $T_{\gamma\max}$.

[0036] The results of $T_{\gamma\max}$ obtained by the above procedures are shown in Table 1. Based on the results of the same table, the relations of the addition amount of Si, C and Ni, and T_{α} and $T_{\gamma\max}$ are obtained from multiple regression calculation, and they are expressed by the following two equations (1) and (2).

$$T_{\alpha} [\text{°C}] = 1383.98 - 73.29 [\text{\%Si}] + 2426.33 [\text{\%C}] + 271.68 [\text{\%Ni}] \dots (1)$$

$$T_{\gamma\max} [\text{°C}] = 1276.47 - 59.24 [\text{\%Si}] + 919.22 [\text{\%C}] + 149.03 [\text{\%Ni}] \dots (2)$$

where, [%A] represents content of element "A" in steel (mass%).

[0037] Next, experiments of changing hot rolling conditions regarding slabs of the steel compositions shown in Nos. 3, 15 and 20 of table 1 were conducted. Here, the values obtained by the above equations (1) and (2) were used as T_{α} and $T_{\gamma\max}$. Regarding material No. 3, $T_{\alpha} = 1321$ °C and $T_{\gamma\max} = 1177$ °C. Regarding material No. 15, $T_{\alpha} = 1323$ °C and $T_{\gamma\max} = 1144$ °C. Regarding material No. 20, $T_{\alpha} = 1266$ °C and $T_{\gamma\max} = 1116$ °C.

[0038] Each slab shown in table 1 was heated to a temperature of 1400 °C, subjected to rough hot rolling and finish hot rolling with various conditions regarding temperature and rolling reduction of the first pass, and then the steel sheet was subjected to hot rolling until reaching sheet thickness of 2.6 mm thick, and then subjected to hot band annealing at 1050 °C for 40 seconds. Then, the steel sheet was subjected to the first cold rolling until reaching a sheet thickness of 1.7 mm thick and then subjected to intermediate annealing at 1100 °C for 60 seconds. Further, the steel sheet was subjected to cold rolling until reaching a sheet thickness of 0.23 mm thick, and then the steel sheet was subjected to primary recrystallization annealing combined with decarburization annealing at 800 °C for 120 seconds. Then, an annealing separator mainly composed of MgO was applied to the surface of the steel sheet, and the steel sheet was subjected to secondary recrystallization annealing combined with purification annealing at 1150 °C for 50 hours to obtain a test piece under each condition.

[0039] Figs. 1 to 3 show the magnetic properties of material Nos. 3, 15 and 20 in table 1. Figs. 1 to 3 show that good magnetic properties can be obtained by performing the first pass of rough rolling at a temperature of $(T_{\alpha}-100)$ °C or higher with a rolling reduction of 30 % or more, and the first pass of finish hot rolling at a temperature of $(T_{\gamma\max} \pm 50)$ °C with a rolling reduction of 40 % or more.

[0040] In the present invention, although the upper limit of the temperature of the first pass of rough hot rolling is not specified, considering air cooling after high temperature slab heating, a temperature of around 1350 °C is preferable. Further, the upper limit of rolling reduction is preferably around 60 % in terms of the bite angle. Further, rough hot rolling is performed with the total pass of around 2 to 7 passes. Here, the temperature and the rolling reduction from the second pass and after are not particularly limited and the temperature may be around $(T_{\alpha}-150)$ °C or higher, and the rolling reduction may be around 20 % or more.

[0041] On the other hand, the upper limit of the rolling reduction of finish hot rolling is preferably around 80 % in terms of the bite angle. Further, finish rolling is performed with the total pass of around 4 to 7 passes. Here, as a result of further investigation by the inventors, it has been found that performing finish hot rolling with a rolling reduction of 40 % or more in a temperature range of $(T_{\gamma\max} \pm 50)$ °C even at any pass of the second pass and after would lead to the effect of the present invention. Therefore, in the finish hot rolling process of the present invention, it is sufficient to perform at least one pass of finish rolling in the temperature range of $(T_{\gamma\max} \pm 50)$ °C with a rolling reduction of 40 % or more.

[0042] By performing rough hot rolling and finish hot rolling satisfying the above conditions, an improving effect on texture such as mentioned above is obtained, and good magnetic properties can be obtained in the product steel sheet. Further, by performing one pass of finish hot rolling in a temperature range of $(T_{\gamma\max} \pm 50)$ °C at a strain rate of 6.0s^{-1} or more, refinement of the γ phase during finish hot rolling which is a feature of the present invention becomes prominent, and improving effect of the texture of the primary recrystallized sheet and improving effect of magnetic properties of the secondary recrystallized sheet becomes prominent.

[0043] Further, in the present invention, the microstructure of the hot rolled sheet can be improved by performing hot band annealing, if necessary. Hot band annealing at this time is preferably performed under the conditions of soaking temperature of 800 °C or higher and 1200 °C or lower and soaking duration of 2 seconds or more and 300 seconds or less.

[0044] With a soaking temperature of hot band annealing of lower than 800 °C, the microstructure of the hot rolled sheet is not completely improved and non-recrystallized parts remain. Therefore, a desirable microstructure may not be obtained. On the other hand, if the soaking temperature is over 1200 °C, dissolution of AlN, MnSe and MnS proceeds, the inhibition effect of inhibitor in the secondary recrystallization process becomes insufficient, and secondary recrystallization is suspended accordingly, resulting in deterioration of magnetic properties. Therefore, soaking temperature of hot band annealing is preferably 800 °C or higher and 1200 °C or lower.

[0045] Further, if the soaking duration is less than 2 seconds, non-recrystallized parts remain because of the short high-temperature holding time, and a desirable microstructure may not be obtained. On the other hand, if the soaking duration is over 300 seconds, dissolution of AlN, MnSe and MnS proceeds, the inhibition effect of inhibitor in the secondary recrystallization process becomes insufficient, so that secondary recrystallization is suspended, resulting in deterioration of magnetic properties.

[0046] Therefore, soaking duration of hot band annealing is preferably 2 seconds or more and 300 seconds or less.

[0047] After hot band annealing or without hot band annealing by subjecting the steel sheet to cold rolling once, or twice or more with intermediate annealing performed therebetween until reaching the final sheet thickness, it is possible to obtain a grain oriented electrical steel sheet according to the present invention.

[0048] In the present invention, the conditions for intermediate annealing may be in accordance with conventionally known conditions. Preferably, soaking temperature is 800 °C or higher and 1200 °C or lower and soaking duration is 2 seconds or more and 300 seconds or less. In the cooling process after intermediate annealing, it is preferable to perform rapid cooling with a cooling rate from 800 °C to 400 °C of 10 °C/s or more and 200 °C/s or less.

[0049] Here, if the above soaking temperature is lower than 800 °C, non-recrystallized microstructures remain, and therefore it becomes difficult to obtain a microstructure of uniformly-sized grains in the microstructure of the primary recrystallized sheet and a desirable growth of secondary recrystallized grains cannot be achieved, thereby leading to deterioration of magnetic properties. On the other hand, if the soaking temperature is over 1200 °C, dissolution of AlN, MnSe and MnS proceeds, the inhibition effect of inhibitor in the secondary recrystallization process becomes insufficient, and secondary recrystallization is suspended, which may result in deterioration of magnetic properties.

[0050] Therefore, soaking temperature of intermediate annealing before final cold rolling is preferably 800 °C or higher and 1200 °C or lower.

[0051] Further, if the soaking duration is less than 2 seconds, non-recrystallized parts remain because of the short high-temperature holding time, and it becomes difficult to obtain a desirable microstructure. On the other hand, if the soaking duration is over 300 seconds, dissolution of AlN, MnSe and MnS proceeds, the inhibition effect of inhibitor in the secondary recrystallization process becomes insufficient, so that secondary recrystallization is suspended, resulting in deterioration of magnetic properties.

[0052] Therefore, soaking duration of intermediate annealing before final cold rolling is preferably 2 seconds or more and 300 seconds or less.

[0053] Further, in the cooling process after intermediate annealing before final cold rolling, if the cooling rate from 800 °C to 400 °C is less than 10 °C/s, coarsening of carbides becomes more likely to proceed, and the texture improving effect from the subsequent cold rolling to primary recrystallization annealing decreases, and magnetic properties are more likely to deteriorate. On the other hand, if the cooling rate from 800 °C to 400 °C is over 200 °C/s, hard martensite phase is more easily generated, and a desirable microstructure cannot be obtained in the microstructure of the primary recrystallized sheet, thereby leading to deterioration of magnetic properties.

[0054] Therefore, the cooling rate from 800 °C to 400 °C in the cooling process after intermediate annealing before final cold rolling is preferably 10 °C/s or more and 200 °C/s or less.

[0055] In the present invention, by setting the rolling reduction in final cold rolling to 80 % or more and 92 % or less, it is possible to obtain an even better texture of the primary recrystallized sheet.

[0056] Steel sheets rolled until reaching final sheet thickness by final cold rolling are preferably subjected to primary recrystallization annealing at a soaking temperature of 700 °C or higher and 1000 °C or lower. In this case, the primary recrystallization annealing may be performed in, for example, wet hydrogen atmosphere to obtain the effect of decarburization of the steel sheet.

[0057] Here, if the soaking temperature in primary recrystallization annealing is lower than 700 °C, non-recrystallized parts remain, and a desirable microstructure may not be obtained. On the other hand, if the soaking temperature is over 1000 °C, secondary recrystallization of Goss orientation grains may occur.

[0058] Therefore, primary recrystallization annealing is preferably performed at a temperature of 700 °C or higher and 1000 °C or lower.

[0059] By performing common primary recrystallization annealing satisfying the above conditions, texture improving effect such as mentioned above is achieved. Here, by performing primary recrystallization annealing where the heating

rate from 500 °C to 700 °C until reaching soaking temperature of primary recrystallization annealing is 50°C/s or more, it is possible to obtain an even higher S orientation ($\{12\ 4\ 1\} <014>$) intensity or Goss orientation intensity of textures of primary recrystallized sheets and hence it becomes possible to increase the magnetic flux density of the steel sheet after secondary recrystallization and decrease the recrystallized grain size to improve iron loss properties.

[0060] Regarding the temperature range of primary recrystallization annealing, since an object of primary recrystallization annealing is to cause recrystallization by performing rapid heating in the temperature range corresponding to recovery of microstructure after cold rolling, the heating rate from 500 °C to 700 °C corresponding to the recovery of microstructure is important and it is preferable that the heating rate of this range is defined. Specifically, if the heating rate in the aforementioned temperature range is less than 50 °C/s, recovery of the microstructure in said temperature cannot be sufficiently suppressed, and therefore the heating rate is preferably 50 °C/s or more. Although there is no upper limit for the above heating rate, it is preferably 300 °C/s from the limitation of facilities.

[0061] Further, primary recrystallization annealing is normally combined with decarburization annealing and should be performed in an appropriate oxidizing atmosphere (e.g. $P_{H_2O}/P_{H_2} > 0.1$). Regarding the above range between 500 °C and 700 °C where a high heating rate is required, there may be situations where due to limitations of facilities and the like it is difficult to introduce oxidizing atmosphere. However, in the light of decarburization, the oxidizing atmosphere in the vicinity of 800 °C is important. Therefore, there would be no problem even if the temperature range between 500 °C and 700 °C is a range of $P_{H_2O}/P_{H_2} \leq 0.1$.

[0062] If it is difficult to perform these annealing procedures, a separate decarburizing annealing process may be provided.

[0063] In the present invention, it is also possible to perform nitriding treatment in the range of 150 ppm to 250 ppm of N in steel after completion of primary recrystallization annealing and before beginning of secondary recrystallization annealing. In order to do so, known techniques of performing heat treatment in NH_3 atmosphere, adding nitride in annealing separators, changing the atmosphere of secondary recrystallization annealing to nitriding atmosphere may be applied after primary recrystallization annealing.

[0064] Then, if necessary, an annealing separator mainly composed of MgO can be applied on the steel sheet surface, and then secondary recrystallization annealing can be performed. Annealing conditions of the secondary recrystallization annealing are not particularly limited, and conventionally known annealing conditions may be applied. Further, by making the annealing atmosphere a hydrogen atmosphere, it is also possible to obtain the effect of purification annealing. Then, after an insulating coating applying process and a flattening annealing process, a desired grain oriented electrical steel sheet is obtained. There is no particular provision regarding the manufacturing conditions of the insulating coating applying process and the flattening annealing process, and they may be performed in accordance with conventional manners.

[0065] A grain oriented electrical steel sheet manufactured by satisfying the above conditions have an extremely high magnetic flux density as well as low iron loss properties after secondary recrystallization.

[0066] However, achieving the high magnetic flux density, means that the crystal grains were allowed to preferentially grow only in orientations in the vicinity of the Goss orientation during the secondary recrystallization process. Since it is known that the closer to the Goss orientation the secondary recrystallized grains are, the more the growth rate of secondary recrystallized grains increases, an increase in magnetic flux density indicates that secondary recrystallized grain size is potentially coarse. This is advantageous in terms of reducing hysteresis loss, yet may be disadvantageous in terms of reducing eddy current loss. In order to advantageously solve such an offsetting problem for the ultimate goal of reducing iron loss, it is possible to perform magnetic domain refining treatment in the present invention.

[0067] By performing magnetic domain refining treatment, the increase in eddy current loss caused by coarsening of secondary recrystallized grain size is improved, and together with reduction in hysteresis loss, it is possible to obtain extremely good iron loss properties, even better than those of the aforementioned examples of the grain oriented electrical steel sheets. In the present invention, both of conventionally known heat resistant and non-heat resistant magnetic domain refining treatment methods may be applied. In particular, by performing magnetic domain refining treatment using an electron beam or a continuous laser to the steel sheet surface after secondary recrystallization, it is possible to allow the magnetic domain refining effect to spread to the inner part in the sheet thickness direction of the steel sheet, leading to even lower iron loss properties compared to other magnetic domain refining treatment such as etching.

EXAMPLES

(Example 1)

[0068] Slabs of steel compositions shown in table 2 were heated at a temperature of 1420 °C, then subjected to the first pass of rough hot rolling with a rolling reduction of 40 % at 1280 °C, then the steel sheet was subjected to the first pass of finish hot rolling with a rolling reduction of 50% at 1180 °C, and then subjected to hot rolling until reaching a sheet thickness of 2.6 mm. Then, the steel sheet was subjected to hot band annealing for 40 seconds at 1050 °C. Then,

the steel sheet was subjected to cold rolling until reaching a sheet thickness of 1.6 mm, intermediate annealing for 80 seconds at 1080 °C, cold rolling until reaching a sheet thickness of 0.23 mm, and then to primary recrystallization annealing combined with decarburization for 120 seconds at 820 °C. Then, an annealing separator mainly composed of MgO was applied on the steel sheet surface, and then secondary recrystallization annealing combined with purification was performed for 50 hours at 1150 °C.

[0069] T_{α} and $T_{\gamma\max}$ calculated from the following equations (1) and (2) and the results of magnetic measurement of the final annealed sheets are shown in table 2.

$$T_{\alpha} [^{\circ}\text{C}] = 1383.98 - 73.29 [\% \text{Si}] + 2426.33 [\% \text{C}] + 271.68 [\% \text{Ni}] \dots (1)$$

$$T_{\gamma\max} [^{\circ}\text{C}] = 1276.47 - 59.24 [\% \text{Si}] + 919.22 [\% \text{C}] + 149.03 [\% \text{Ni}] \dots (2)$$

where, [%A] represents content of element "A" in steel (mass%).

[Table 2]

[0070]

Table 2

No.	Si [mass. %]	C [mass. %]	Ni [mass. %]	Mn [mass. %]	sol.Al [mass. %]	N [mass. %]	S [mass. %]	Se [mass. %]	T _α [°C]	T _{γmax} [°C]	Product Sheet-Magnetic Properties		Remarks
											W ₁₇₅₀ [W/kg]	B ₈ [T]	
1	3.2	0.04	0.01	0.08	0.02	0.01	0.01	0.02	1249	1125	0.87	1.92	Comparative Example
2	3.4	0.07	0.2	0.08	0.03	0.01	0.01	0.02	1359	1169	0.83	1.94	Inventive Example
3	3.3	0.08	0.18	0.09	0.02	0.01	0.01	0.02	1385	1181	0.84	1.94	Inventive Example
4	3.6	0.05	0.005	0.08	0.03	0.01	0.01	0.02	1243	1110	0.88	1.91	Comparative Example
5	3.1	0.06	0.31	0.08	0.03	0.01	0.01	0.02	1387	1194	0.82	1.95	Inventive Example
6	3.7	0.05	0.4	0.08	0.03	0.01	0.01	0.02	1343	1163	0.79	1.95	Inventive Example
7	3.4	0.03	0.42	0.09	0.02	0.01	0.01	0.02	1322	1165	0.81	1.94	Inventive Example
8	3.6	0.06	0.2	0.09	0.03	0.01	0.01	0.02	1320	1148	0.80	1.94	Inventive Example

[0071] Table 2 shows that a material subjected to high reduction rolling in a temperature range of $(T_{\alpha}-100)^{\circ}\text{C}$ or higher in the first pass of rough hot rolling, and high reduction rolling in a temperature range of $(T_{\gamma\text{max}}\pm 50)^{\circ}\text{C}$ in the first pass of finish hot rolling, was provided with excellent magnetic properties. On the other hand, regarding materials of Nos. 1 and 4, it is assumed that the reason why excellent magnetic properties were not obtained is that, due to the fact that the temperature of the first pass of finish hot rolling is higher than the temperature range of maximum γ phase volume fraction which is calculated from the compositions, recrystallized grain refinement of ferrite grains as well as uniform generation of the γ phase was insufficient.

[0072] From the above results, it is understood that a grain oriented electrical steel sheet with excellent magnetic properties can be obtained by calculating T_{α} and $T_{\gamma\text{max}}$ using the above equations (1) and (2) based on the steel slab compositions, and performing high reduction rolling of 30 % or more in a temperature range of $(T_{\alpha}-100)^{\circ}\text{C}$ or higher in the first pass of rough hot rolling, and performing high reduction rolling of 40 % or more in a temperature range of $(T_{\gamma\text{max}}\pm 50)^{\circ}\text{C}$ in the first pass of finish hot rolling.

(Example 2)

[0073] Slabs of steel compositions shown in table 3 were heated at a temperature of 1420°C , then subjected to the first pass of rough hot rolling with a rolling reduction of 40 % at 1280°C , then the steel sheet was subjected to the first pass of finish hot rolling with a rolling reduction of 50 % at 1180°C , and then subjected to hot rolling until reaching a sheet thickness of 2.6 mm. Then, the steel sheet was subjected to hot band annealing for 40 seconds at 1050°C . Then, the steel sheet was subjected to cold rolling until reaching a sheet thickness of 1.8 mm, intermediate annealing for 80 seconds at 1080°C , cold rolling until reaching a sheet thickness of 0.27 mm, and then to primary recrystallization annealing combined with decarburization for 120 seconds at 820°C . Then, an annealing separator mainly composed of MgO was applied on the steel sheet surface, and then secondary recrystallization annealing combined with purification was performed for 50 hours at 1150°C .

[0074] T_{α} and $T_{\gamma\text{max}}$ calculated from the above equations (1) and (2) and the results of magnetic measurement of the final annealed sheets are shown in table 3.

[Table 3]

[0075]

Table 3

No.	Si [mass. %]	C [mass. %]	Ni [mass. %]	Mn [mass. %]	sol.Al [mass. %]	N [mass. %]	S [mass. %]	Se [mass. %]	Sn [mass. %]	Sb [mass. %]	Cu [mass. %]	P [mass. %]	T _α [°C]	T _{γmax} [°C]	Product Sheet-Magnetic Properties		Remarks
															W _{17/50} [W/kg]	B ₈ [T]	
1	3.4	0.06	0.15	0.08	0.03	0.01	0.01	0.02	tr	tr	tr	tr	1321	1153	0.86	1.96	Inventive Example
2	3.5	0.07	0.20	0.09	0.02	0.01	0.01	0.02	0.15	tr	tr	tr	1352	1163	0.85	1.95	Inventive Example
3	3.3	0.08	0.10	0.08	0.02	0.01	0.01	0.02	tr	0.031	tr	tr	1363	1169	0.85	1.96	Inventive Example
4	3.4	0.06	0.17	0.08	0.02	0.01	0.01	0.02	tr	tr	0.1	tr	1327	1156	0.84	1.95	Inventive Example
5	3.5	0.06	0.31	0.08	0.03	0.01	0.01	0.02	tr	tr	tr	0.012	1357	1170	0.85	1.95	Inventive Example

[0076] Table 3 shows that a material subjected to high reduction rolling in a temperature range of $(T_{\alpha}-100)$ °C or higher in the first pass of rough hot rolling, and high reduction rolling in a temperature range of $(T_{\gamma\max}\pm 50)$ °C in the first pass of finish hot rolling, was provided with excellent magnetic properties.

[0077] From the above results, it is understood that a grain oriented electrical steel sheet with excellent magnetic properties can be obtained by calculating T_{α} and $T_{\gamma\max}$ from the above equations(1) and (2) based on the steel slab compositions, and performing high reduction rolling of 30 % or more in a temperature range of $(T_{\alpha}-100)$ °C or higher in the first pass of rough hot rolling, and performing high reduction rolling of 40 % or more in a temperature range of $(T_{\gamma\max}\pm 50)$ °C in the first pass of finish hot rolling.

(Example 3)

[0078] The above mentioned Examples 1 and 2 are results of performing primary recrystallization annealing with a heating rate from 500 °C to 700 °C of 20 °C/s. Samples prepared by performing cold rolling under conditions of No. 2 (inventive example) of Example 1 until reaching a sheet thickness of 0.23 mm were used with the heating rate from 500 °C to 700 °C in primary recrystallization annealing being the values shown in table 4, to further conduct a test of changing the method of magnetic domain refining treatment.

[0079] Here, etching grooves having a width of 150 μm , depth of 15 μm , rolling direction interval of 5 mm were formed in transverse direction (direction orthogonal to the rolling direction) on one side of the steel sheet subjected to cold rolling until reaching a sheet thickness of 0.23 mm. The steel sheet was continuously irradiated on one side with an electron beam in the transverse direction after final annealing under the conditions of an acceleration voltage of 100 kV, irradiation interval of 5 mm, beam current of 3 mA. A laser was continuously irradiated in the transverse direction on one side of the steel sheet after final annealing under the conditions of beam diameter of 0.3 mm, output of 200 W, scanning rate of 100 m/s, irradiation interval of 5 mm.

[0080] The measurement results of magnetic properties are shown in Table 4.

[Table 4]

No.	Primary Recrystallization Annealing	Magnetic Domain Refining	Magnetic Properties (After Magnetic Domain Refining)		Remarks
	Heating Rate (500-700 °C) [°C/s]		$W_{17/50}$ [W/kg]	B_8 [T]	
2-a-0	20	-	0.83	1.94	Inventive Example
2-a-1	20	Etching	0.72	1.90	Inventive Example
2-a-2	20	Electron Beam	0.69	1.94	Inventive Example
2-a-3	20	Continuous Laser	0.70	1.94	Inventive Example
2-b-0	40	-	0.81	1.95	Inventive Example
2-b-1	40	Etching	0.70	1.91	Inventive Example
2-b-2	40	Electron Beam	0.67	1.94	Inventive Example
2-b-3	40	Continuous Laser	0.67	1.94	Inventive Example
2-c-0	100	-	0.76	1.95	Inventive Example
2-c-1	100	Etching	0.66	1.91	Inventive Example
2-c-2	100	Electron Beam	0.60	1.95	Inventive Example

(continued)

No.	Primary Recrystallization Annealing	Magnetic Domain Refining	Magnetic Properties (After Magnetic Domain Refining)		Remarks
	Heating Rate (500-700 °C) [°C/s]		$W_{17/50}$ [W/kg]	B_8 [T]	
2-c-3	100	Continuous Laser	0.60	1.95	Inventive Example

[0081] Table 4 shows that as the heating rate from 500 °C to 700 °C during primary recrystallization annealing increases, good iron loss properties are obtained. Further, it is also shown that, regarding all of the heating rates, extremely good iron loss properties are obtained by performing magnetic domain refining treatment.

(Example 4)

[0082] Examples 1, 2, and 3 are results of conducting experiments in a temperature range of $(T_{y\max} \pm 50)$ °C with a strain rate of $8.0s^{-1}$ in the first pass of finish hot rolling. Here, regarding a material of No. 3 (inventive example) of Example 1, an experiment of changing the strain rate of only one pass of finish hot rolling was performed.

[0083] Using a rolling reduction and a rolling speed such as shown in table 5, the material was subjected to at least one pass of finish hot rolling at 1150 °C which corresponds to $(T_{y\max} \pm 50)$ °C under the controlled strain rate, and then the steel sheet was subjected to hot rolling until reaching a sheet thickness of 2.0 mm thick. Then, the steel sheet was subjected to hot band annealing for 60 seconds at 1100 °C. Further, the steel sheet was subjected to cold rolling until reaching a sheet thickness of 0.23 mm thick, and then subjected to primary recrystallization annealing combined with decarburization for 120 seconds at 820 °C. Then, an annealing separator mainly composed of MgO was applied on the steel sheet surface, and then secondary recrystallization annealing combined with purification was performed for 50 hours at 1150 °C. The results of magnetic measurement of the final annealed sheets are shown in Table 5.

[Table 5]

[0084]

Table 5

No.	Pass which is the Subject of the Invention	Conditions for Finish Hot Rolling										Magnetic Properties		Remarks		
		First Pass			Second Pass			Third Pass				W _{17/50} [W/kg]	B ₈ [T]			
		Temp. [°C]	Rolling Re-duction [%]	Rolling Rate [mpm]	Strain Rate [s ⁻¹]	Temp. [°C]	Rolling Re-duction [%]	Rolling Rate [mpm]	Strain Rate [s ⁻¹]	Temp. [°C]	Rolling Re-duction [%]				Rolling Rate [mpm]	Strain Rate [s ⁻¹]
3-a-1	First Pass	1150	40	70	6.0	1100	35	150	12.0	1070	30	250	18.5	0.84	1.93	Inventive Example
3-a-2	First Pass	1150	50	70	6.8	1095	35	150	12.0	1060	30	250	185	0.83	1.94	Inventive Example
3-a-3	First Pass	1150	50	150	14.3	1095	35	180	14.4	1060	30	290	21.4	080	1.95	Inventive Example
3-a-4	First Pass	1150	70	70	7.9	1085	35	150	12.0	1040	30	250	18.5	0.82	1.94	Inventive Example
3-a-5	First Pass	1150	70	150	16.9	1085	35	180	14.4	1040	30	290	21.4	0.79	1.95	Inventive Example
3-b-1	Second Pass	1200	40	70	6.0	1150	40	150	12.8	1100	30	250	18.5	0.81	1.94	Inventive Example
3-b-2	Second Pass	1200	40	70	6.0	1150	50	150	14.3	1090	30	250	18.5	0.81	1.94	Inventive Example
3-b-3	Second Pass	1200	40	70	6.0	1150	50	220	21.0	1090	30	320	23.7	0.79	1.95	Inventive Example
3-b-4	Second Pass	1200	40	70	6.0	1150	70	150	16.9	1075	30	250	18.5	0.80	1.94	Inventive Example
3-b-5	Second Pass	1200	40	70	6.0	1150	70	220	24.8	1075	30	320	23.7	0.78	1.95	Inventive Example
3-c-1	Third Pass	1250	50	70	6.7	1190	45	150	13.6	1150	40	250	21.3	0.81	1.94	Inventive Example
3-c-2	Third Pass	1250	50	70	6.7	1190	45	150	13.6	1150	50	250	23.8	0.80	1.93	Inventive Example

(continued)

No.	Pass which is the Subject of the Invention	Conditions for Finish Hot Rolling												Magnetic Properties		Remarks
		First Pass				Second Pass				Third Pass				$W_{17/50}$ [W/kg]	B_8 [T]	
		Temp. [°C]	Rolling Re-duction [%]	Rolling Rate [mpm]	Strain Rate [s ⁻¹]	Temp. [°C]	Rolling Re-duction [%]	Rolling Rate [mpm]	Strain Rate [s ⁻¹]	Temp. [°C]	Rolling Re-duction [%]	Rolling Rate [mpm]	Strain Rate [s ⁻¹]			
3-c-3	Third Pass	1250	50	70	6.7	1190	45	150	13.6	1150	50	360	34.3	0.78	1.95	Inventive Example
3-c-4	Third Pass	1250	50	70	6.7	1190	45	150	13.6	1150	70	250	28.2	0.79	1.95	Inventive Example
3-c-5	Third Pass	1250	50	70	6.7	1190	45	150	13.6	1150	70	360	40.6	0.79	1.96	Inventive Example

[0085] Table 5 shows that, good iron loss properties are obtained by performing at least one pass of finish hot rolling at the strain rate of 6.0s^{-1} or more in a temperature range of $(T_{\gamma\text{max}} \pm 50)^\circ\text{C}$.

Claims

1. A method for manufacturing a grain oriented electrical steel sheet, the method comprising:

heating a steel slab consisting of by mass%

Si: 3.0 % or more and 4.0 % or less,

C: 0.020 % or more and 0.10 % or less,

Ni: 0.005 % or more and 1.50 % or less,

Mn: 0.005 % or more and 0.3 % or less,

Acid-Soluble Al: 0.01 % or more and 0.05 % or less,

N: 0.002 % or more and 0.012 % or less,

at least one element selected from S and Se in a total of 0.05 % or less, and optionally one or more of Sn: 0.005 % or more and 0.50 % or less, Sb: 0.005 % or more and 0.50 % or less, Cu: 0.005 % or more and 1.5 % or less, and P: 0.005 % or more and 0.50 % or less,

the balance being Fe and incidental impurities;

then subjecting the slab to hot rolling to obtain a hot rolled steel sheet;

subjecting or not subjecting the steel sheet to subsequent hot band annealing;

then subjecting the steel sheet to cold rolling once, or twice or more with intermediate annealing performed therebetween to have a final sheet thickness;

then subjecting the steel sheet to primary recrystallization annealing and further secondary recrystallization annealing to manufacture a grain oriented electrical steel sheet,

wherein in a rough rolling process of the hot rolling, when the α single phase transition temperature calculated by the following equation (1) is defined as T_{α} , a first pass of the rough rolling is performed at a temperature of $(T_{\alpha} - 100)^\circ\text{C}$ or higher with a rolling reduction of 30 % or more, and

wherein in a finish rolling process of the hot rolling, when the maximum γ phase volume fraction temperature calculated by the following equation (2) is defined as $T_{\gamma\text{max}}$, at least one pass of the finish rolling is performed in a temperature range of $(T_{\gamma\text{max}} \pm 50)^\circ\text{C}$ with a rolling reduction of 40 % or more.

$$T_{\alpha} [^\circ\text{C}] = 1383.98 - 73.29 [\%\text{Si}] + 2426.33 [\%\text{C}] + 271.68 [\%\text{Ni}] \dots (1)$$

$$T_{\gamma\text{max}} [^\circ\text{C}] = 1276.47 - 59.24 [\%\text{Si}] + 919.22 [\%\text{C}] + 149.03 [\%\text{Ni}] \dots (2)$$

where [%A] represents content of element "A" in steel (mass%).

2. The method for manufacturing a grain oriented electrical steel sheet according to Claim 1, wherein a heating rate from 500°C to 700°C in the primary recrystallization annealing is 50°C/s or more.

3. The method for manufacturing a grain oriented electrical steel sheet according to Claim 1 or 2, wherein the steel sheet is subjected to magnetic domain refining treatment at any stage after the cold rolling.

4. The method for manufacturing a grain oriented electrical steel sheet according to Claim 1 or 2, wherein the steel sheet after the secondary recrystallization is subjected to magnetic domain refining treatment by electron beam irradiation.

5. The method for manufacturing a grain oriented electrical steel sheet according to Claim 1 or 2, wherein the steel sheet after the secondary recrystallization is subjected to magnetic domain refining treatment by continuous laser irradiation.

6. The method for manufacturing a grain oriented electrical steel sheet according to any, one of Claims 1 to 5, wherein

at least one pass of the finish rolling is performed in a temperature range of $(T_{\gamma\max} \pm 50)$ °C at a strain rate of 6.0 s^{-1} or more.

Patentansprüche

1. Verfahren zur Herstellung eines kornorientierten Elektrostahlblechs, wobei das Verfahren umfasst:

Erwärmen einer Stahlbramme, die in Masse % besteht aus

Si: 3,0 % oder mehr und 4,0 % oder weniger,

C: 0,020 % oder mehr und 0,10 % oder weniger,

Ni: 0,005 % oder mehr und 1,50 % oder weniger,

Mn: 0,005 % oder mehr und 0,3 % oder weniger,

säurelösliches Al: 0,01 % oder mehr und 0,05 % oder weniger,

N: 0,002 % oder mehr und 0,012 % oder weniger,

wenigstens einem Element, das aus S und Se von insgesamt 0,05 % oder weniger ausgewählt wird, und optional

ein oder mehr von Sn: 0,005 % oder mehr und 0,50 % oder weniger, Sb: 0,005 % oder mehr und 0,50 % oder

weniger, Cu: 0,005 % oder mehr und 1,5 % oder weniger und P: 0,005 % oder mehr und 0,50 % oder weniger,

wobei der Rest Fe und nebensächliche Verunreinigungen sind;

dann Unterziehen der Bramme einem Warmwalzen, um ein warmgewalztes Stahlblech zu erhalten;

Unterziehen oder nicht Unterziehen des Stahlblechs einem nachfolgenden Warmbandglühen;

dann Unterziehen des Stahlblechs dem Kaltwalzen einmal oder zweimal oder mehr, wobei dazwischen ein

Zwischenglühen durchgeführt wird, um eine endgültige Blechdicke zu erhalten;

dann Unterziehen des Stahlblechs einem primären Rekristallisationsglühen und einem weiteren sekundären

Rekristallisationsglühen, um ein kornorientiertes Elektrostahlblech herzustellen,

wobei in einem Vorwalzprozess des Warmwalzens, wenn die durch die folgende Gleichung (1) berechnete α

Einphasenübergangstemperatur als T_{α} definiert ist, ein erster Durchlauf des Vorwalzens bei einer Temperatur

von $(T_{\alpha} - 100)$ °C oder höher mit einer Walzreduktion von 30 % oder mehr durchgeführt wird, und

wobei in einem Fertigwalzprozess des Warmwalzens, wenn die durch die folgende Gleichung (2) berechnete

maximale γ Phasenvolumenfraktionstemperatur als $T_{\gamma\max}$ definiert ist, wenigstens ein Durchlauf des Fertigwal-

zens in einem Temperaturbereich von $(T_{\gamma\max} \pm 50)$ °C mit einer Walzreduktion von 40 % oder mehr durchgeführt

wird.

$$T_{\alpha}[\text{°C}] = 1383,98 - 73,29 [\% \text{Si}] + 2426,33 [\% \text{C}] + 271,68 [\% \text{Ni}] \dots (1)$$

$$T_{\gamma\max}[\text{°C}] = 1276,47 - 59,24 [\% \text{Si}] + 919,22 [\% \text{C}] + 149,03 [\% \text{Ni}] \dots (2)$$

wobei [% A] den Gehalt des Elements "A" im Stahl (Masse %) darstellt.

2. Verfahren zur Herstellung eines kornorientierten Elektrostahlblechs nach Anspruch 1, wobei eine Erwärmungsrate von 500°C bis 700°C beim primären Rekristallisationsglühen 50°C/s oder mehr beträgt.

3. Verfahren zur Herstellung eines kornorientierten Elektrostahlblechs nach Anspruch 1 oder 2, wobei das Stahlblech einer Feinmagnetisierungsbehandlung in jedem Stadium nach dem Kaltwalzen unterzogen wird.

4. Verfahren zur Herstellung eines kornorientierten Elektrostahlblechs nach Anspruch 1 oder 2, wobei das Stahlblech nach der sekundären Rekristallisation einer Feinmagnetisierungsbehandlung durch Elektronenbestrahlung unterzogen wird.

5. Verfahren zur Herstellung eines kornorientierten Elektrostahlblechs nach Anspruch 1 oder 2, wobei das Stahlblech nach der sekundären Rekristallisation einer Feinmagnetisierungsbehandlung durch kontinuierliche Laserbestrahlung unterzogen wird.

6. Verfahren zur Herstellung eines kornorientierten Elektrostahlblechs nach einem der Ansprüche 1 bis 5, wobei wenigstens ein Durchlauf des Fertigwalzens in einem Temperaturbereich von $(T_{\gamma\max} \pm 50)$ °C bei einer Umformungsrate

von 6,0 s⁻¹ oder mehr durchgeführt wird.

Revendications

1. Procédé de fabrication d'une tôle d'acier magnétique orientée, le procédé comprenant :

le chauffage d'une brame d'acier constituée, en % en masse, de

Si : 3,0 % ou plus et 4,0 % ou moins,

C : 0,020 % ou plus et 0,10 % ou moins,

Ni : 0,005 % ou plus et 1,50 % ou moins,

Mn : 0,005 % ou plus et 0,3 % ou moins,

Al soluble en milieu acide : 0,01 % ou plus et 0,05 % ou moins,

N : 0,002 % ou plus et 0,012 % ou moins,

au moins un élément choisi parmi S et Se pour un total de 0,05 % ou moins, et éventuellement l'un ou

plusieurs parmi Sn : 0,005 % ou plus et 0,50 % ou moins, Sb : 0,005 % ou plus et 0,50 % ou moins, Cu :

0,005 % ou plus et 1,5 % ou moins et P : 0,005 % ou plus et 0,50 % ou moins,

le reste étant du Fe et des impuretés inévitables ;

puis la soumission de la brame à un laminage à chaud pour obtenir une tôle d'acier laminée à chaud ;

la soumission, ou non, de la tôle d'acier à un recuit de bande à chaud ultérieur ;

puis la soumission de la tôle d'acier à un laminage à froid une fois, ou deux fois ou plus en effectuant un recuit intermédiaire entre ceux-ci pour obtenir une épaisseur de tôle finale ;

puis la soumission de la tôle d'acier à un recuit de recristallisation primaire et en outre à un recuit de recristallisation secondaire pour fabriquer une tôle d'acier magnétique orientée,

où lors d'une opération de laminage de dégrossissage du laminage à chaud, si on définit en tant que T_{α} la température de transition de phase unique α calculée par l'équation (1) suivante, une première passe du laminage de dégrossissage est effectuée à une température de $(T_{\alpha} - 100)$ °C ou supérieure avec un taux de réduction par laminage de 30 % ou plus, et

où lors d'une opération de laminage de finissage du laminage à chaud, si on définit en tant que $T_{\gamma\max}$ la température maximale de la fraction volumique de phase γ calculée par l'équation (2) suivante, au moins une passe du laminage de finissage est effectuée dans une plage de température de $(T_{\gamma\max} \pm 50)$ °C avec un taux de réduction par laminage de 40 % ou plus.

$$T_{\alpha} [^{\circ}\text{C}] = 1383,98 - 73,29 [\% \text{ Si}] + 2426,33 [\% \text{ C}] + 271,68 [\% \text{ Ni}] \quad (1)$$

$$T_{\gamma\max} [^{\circ}\text{C}] = 1276,47 - 59,24 [\% \text{ Si}] + 919,22 [\% \text{ C}] + 149,03 [\% \text{ Ni}] \quad (2)$$

où [% A] représente la teneur de l'élément « A » dans l'acier (% en masse).

2. Procédé de fabrication d'une tôle d'acier magnétique orientée selon la revendication 1, dans lequel une vitesse de chauffage de 500 °C à 700 °C lors du recuit de recristallisation primaire est de 50 °C/s ou plus.

3. Procédé de fabrication d'une tôle d'acier magnétique orientée selon la revendication 1 ou 2, dans lequel la tôle d'acier est soumise à un traitement d'affinage des domaines magnétiques à n'importe quel stade après le laminage à froid.

4. Procédé de fabrication d'une tôle d'acier magnétique orientée selon la revendication 1 ou 2, dans lequel la tôle d'acier après la recristallisation secondaire est soumise à un traitement d'affinage des domaines magnétiques par irradiation par faisceau d'électrons.

5. Procédé de fabrication d'une tôle d'acier magnétique orientée selon la revendication 1 ou 2, dans lequel la tôle d'acier après la recristallisation secondaire est soumise à un traitement d'affinage des domaines magnétiques par irradiation laser continue.

EP 2 832 865 B1

6. Procédé de fabrication d'une tôle d'acier magnétique orientée selon l'une quelconque des revendications 1 à 5, dans lequel au moins une passe du laminage de finissage est effectuée dans une plage de température de ($T_{\gamma\max} \pm 50$) °C à une vitesse de déformation de 6,0 s⁻¹ ou plus.

5

10

15

20

25

30

35

40

45

50

55

FIG. 1

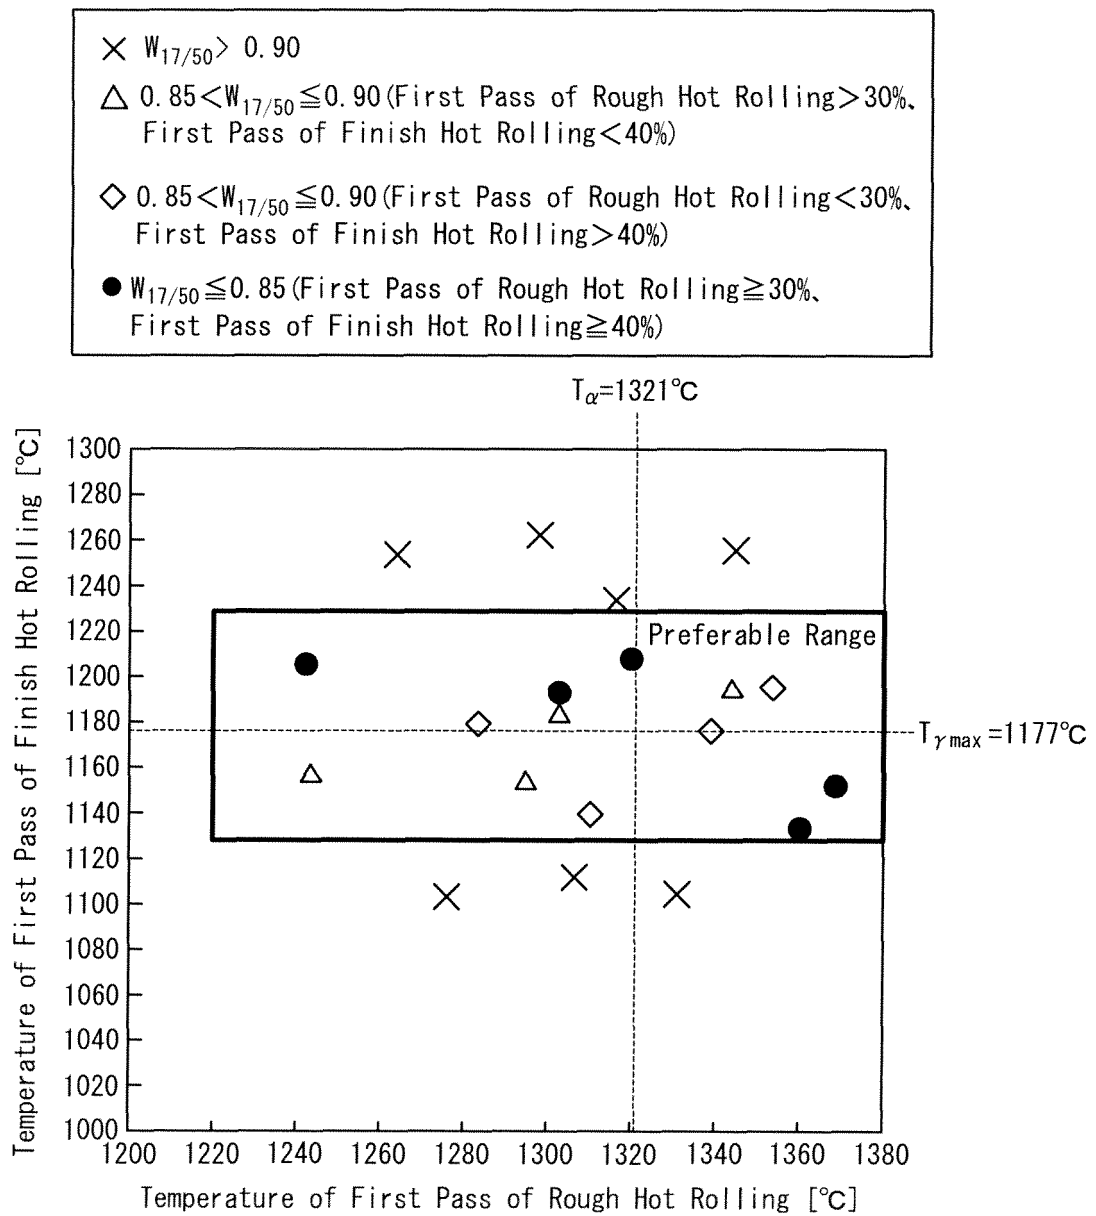


FIG. 2


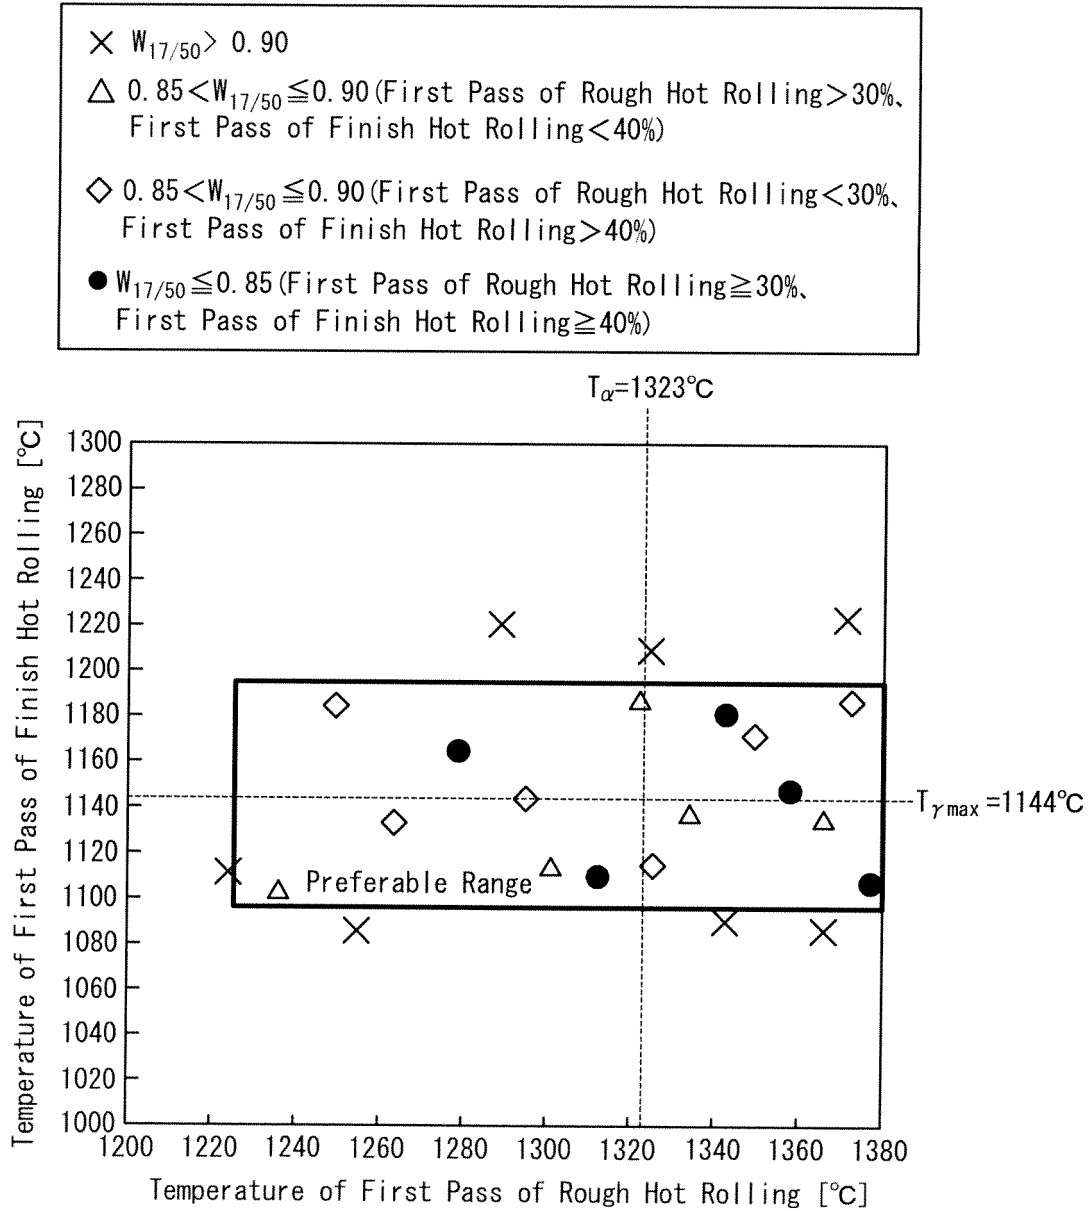


FIG. 3

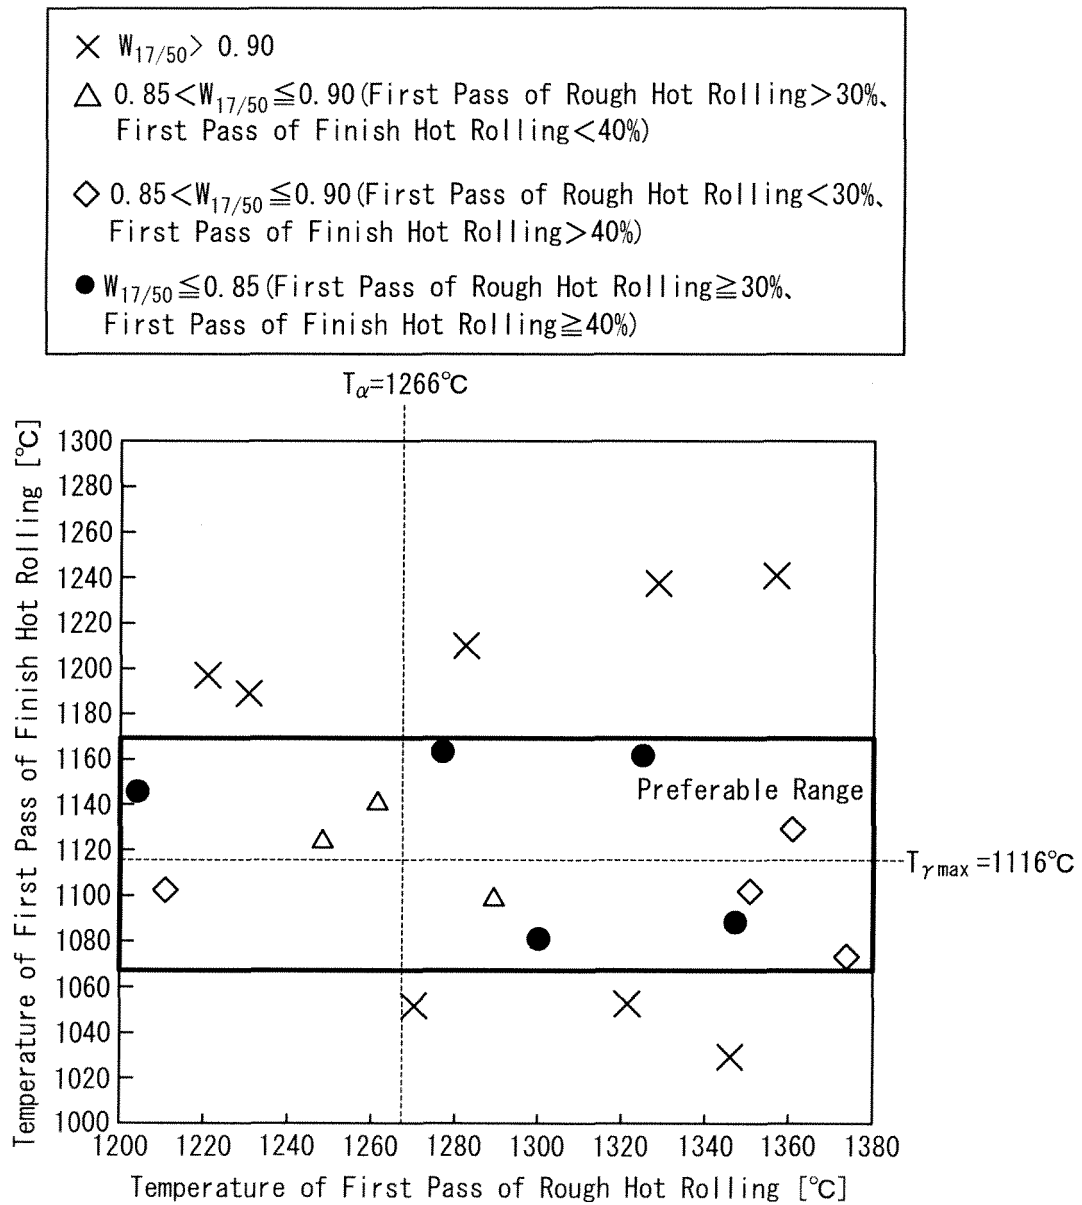

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP S4015644 B [0002] [0009]
- JP S5113469 B [0004] [0009]
- JP H0310020 A [0006] [0009]
- JP H02101121 A [0007] [0009]
- JP S6134117 A [0008] [0009]
- WO 2011158519 A1 [0008]