



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
04.03.2015 Bulletin 2015/10

(51) Int Cl.:
A61H 9/00 (2006.01)

(21) Application number: **14182175.1**

(22) Date of filing: **25.08.2014**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**
Designated Extension States:
BA ME

(30) Priority: **30.08.2013 JP 2013179054**

(71) Applicants:
• **NITTO KOHKI CO., LTD.**
Ohta-ku
Tokyo 146 (JP)
• **PUBLIC UNIVERSITY CORPORATION**
YOKOHAMA CITY
UNIVERSITY
Yokohama-shi
Kanagawa 236-0027 (JP)


(72) Inventors:
• **Takagi, Norikazu**
Tokyo, 146-8555 (JP)
• **Nakao, Haruki**
Tokyo, 146-8555 (JP)
• **Maegawa, Jiro**
Kanagawa, 236-0004 (JP)

(74) Representative: **Schmidbauer, Andreas Konrad**
Wagner & Geyer
Patent- und Rechtsanwälte
Gewürzmühlstrasse 5
80538 München (DE)

(54) **Pneumatic massage apparatus for treatment of edema**

(57) A pneumatic massage apparatus making it possible to perform even more efficient drainage is provided. The pneumatic massage apparatus 1 includes a massage device 2 to be fitted to wrap around an arm or leg of a patient and having a plurality of air chambers disposed in series in a proximal direction from a distal position of the arm or leg toward the center of the patient's body when the massage device is fitted around the arm or leg, and a compressed air control unit 4 supplying and discharging compressed air into and from the plurality of air chambers of the massage device 2. The compressed air control unit 4 has a means for pressurizing each air chamber by supplying compressed air therein, and a means for depressurizing each pressurized air chamber by discharging compressed air therefrom. The means for depressurizing is configured to depressurize the pressurized air chambers in such a manner that, of any pair of mutually adjacent air chambers, a proximal air chamber of the pair first starts to be depressurized, and then a distal air chamber of the pair starts to be depressurized.

[Fig. 1]

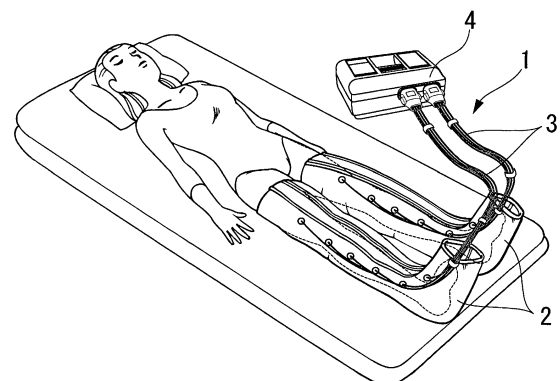

Description

Technical Field

5 **[0001]** The present invention relates to a pneumatic massage apparatus. More particularly, the present invention relates to a pneumatic massage apparatus suitable for use in treatment of various types of edema (swelling), including lymphedema in the legs and arms.

Background Art

10 **[0002]** If lymphatic vessels are depressed in function or occluded by cancer treatment or the like, the lymph fluid does not flow smoothly. Consequently, the lymph fluid, which should normally be absorbed into the lymphatic vessels, may accumulate in spaces in the cellular tissues, resulting in swelling mainly in the arms and legs. Such swelling resulting from obstruction of the circulation of lymph fluid is known as lymphedema. Edema may also occur in the arms and legs
15 owing to some disease in the blood vessels.

[0003] Manual lymphatic drainage is known as a method of treating such edema. The manual lymphatic drainage is effective in treating not only lymphedema but also vascular edema. With the manual lymphatic drainage, a body fluid such as lymph fluid accumulated in spaces in the cellular tissues is urged toward normally-functioning lymphatic vessels and blood vessels by massage performed with the human hands, thereby resolving the swelling. The manual lymphatic
20 drainage needs to be performed almost daily, which is a heavy burden whether the patient oneself performs the massage or a nurse or the like massages the patient.

[0004] To lighten the load of carrying out manual lymphatic drainage, it is becoming common practice to perform lymphatic drainage using a pneumatic massage apparatus as an auxiliary of manual lymphatic drainage. A pneumatic massage apparatus used for this purpose has a plurality of air chambers disposed in series in a proximal direction from
25 a distal position of an arm or a leg of a patient's body toward the center of the patient's body. Each air chamber is inflated with compressed air supplied thereinto to compress the patient's arm or leg by pneumatic pressure, thereby performing massage. Basically, a body fluid such as lymph fluid needs to be urged from the distal part of a patient's arm or leg toward the center of the patient's body. Therefore, usually, the air chambers are pressurized sequentially from a distal
30 end air chamber located at the periphery side toward successively proximal air chambers to promote the flow of body fluid by the action of compressing the patient's arm or leg during pressurization (see Non-Patent Document 1).

Citation List:

Non-Patent Document

35 **[0005]** Catalog "Physical Medomer PM-8000", Nitto Kohki Co., Ltd. (Tokyo, JP)

Summary of Invention:

40 Technical Problem:

[0006] The above-described conventional pneumatic massage apparatus offers certain advantageous effects as an auxiliary of manual lymphatic drainage. It is, however, desirable to be able to promote the flow of body fluid even more efficiently. The present invention has been made in view of these circumstances, and provides a pneumatic massage
45 apparatus making it possible to perform even more efficient drainage.

Solution to Problem

[0007] That is, the present invention provides a pneumatic massage apparatus including a massage device to be fitted
50 to wrap around an arm or leg of a patient and having a plurality of air chambers disposed in series in a proximal direction from a distal position of the arm or leg toward the center of the patient's body when the massage device is fitted around the arm or leg, and a compressed air control unit supplying and discharging compressed air into and from the plurality of air chambers of the massage device. The compressed air control unit has a means for pressurizing each air chamber by supplying compressed air thereinto, and a means for depressurizing each pressurized air chamber by discharging
55 compressed air therefrom. The depressurizing device is configured to depressurize the pressurized air chambers in such a manner that, of any pair of mutually adjacent air chambers, a proximal air chamber of the pair first starts to be depressurized, and then a distal air chamber of the pair starts to be depressurized.

[0008] In the pneumatic massage apparatus of the present invention, when the pressurized air chambers are to be

depressurized, a proximal (closer to the center of the patient's body) air chamber of any pair of mutually adjacent air chambers first starts to be depressurized. Therefore, at the time when the depressurization of the proximal air chamber is started, the distal (closer to the periphery of the patient's body) air chamber is still in a pressurized state. Consequently, a pressure difference is produced between a patient's body part having been compressed by the proximal air chamber until depressurization thereof and another patient's body part being compressed by the distal air chamber still being pressurized. As a result, the body fluid flows in the proximal direction from the distal body part toward the proximal body part. In this way, it is possible to urge the body fluid to flow in the proximal direction not only during pressurization but also during depressurization and hence possible to perform even more efficient drainage. As has been stated above, with the conventional pneumatic massage apparatus, the air chambers are pressurized sequentially from a distal end air chamber located at the periphery side toward successively proximal air chambers to promote the flow of body fluid mainly by the action of compressing the patient's arm or leg during pressurization. Further, in the conventional pneumatic massage apparatus, the air chambers are sequentially depressurized from the distal air chamber pressurized first, or alternatively, all the air chambers are simultaneously depressurized. Thus, the depressurization of the massage chambers is performed solely to repeatedly promote the flow of body fluid by pressurization. The pneumatic massage apparatus according to the present invention is, as has been stated above, configured to urge the body fluid to flow toward the center of the patient's body also by the depressurization of the air chambers.

[0009] Preferably, the means for depressurizing may be configured to start depressurizing at least one of the pressurized air chambers except a distal end air chamber disposed at the distal-most position of the pressurized air chambers before depressurization of the distal end air chamber.

[0010] Specifically, the means for depressurizing may be configured such that, when the pressurized air chambers are numbered sequentially in the proximal direction so that the distal end air chamber is given number one, the even-numbered air chambers first start to be depressurized in descending order of the given numbers, and then the odd-numbered air chambers start to be depressurized in descending order of the given numbers.

[0011] Alternatively, the means for depressurizing may be configured such that, when the pressurized air chambers are numbered sequentially in the proximal direction so that the distal end air chamber is given number one, the odd-numbered air chambers first start to be depressurized in descending order of the given numbers, and then the even-numbered air chambers start to be depressurized in descending order of the given numbers.

[0012] Alternatively, the means for depressurizing may be configured such that, when the pressurized air chambers are numbered sequentially in the proximal direction so that the distal end air chamber is given number one, the air chambers start to be depressurized in descending order of the given numbers.

[0013] The results of exhaustive studies conducted by the present inventors have proved that particularly efficient drainage can be performed by the above-described depressurization patterns.

[0014] Specifically, the means for pressurizing may be configured such that, when the air chambers are numbered sequentially in the proximal direction so that the distal end air chamber is given number one, the air chambers start to be pressurized in ascending order of the given numbers.

[0015] The means for pressurizing may be configured to start pressurizing the plurality of air chambers simultaneously.

[0016] Preferably, the plurality of air chambers may be disposed so that the mutually adjacent air chambers overlap each other.

[0017] Because the mutually adjacent air chambers are disposed to overlap each other, the area of the patient's body that is not to be pressurized by the air chambers reduces, and pressure can be applied all over the arm or leg. It is therefore possible to perform even more efficient drainage.

[0018] Preferably, the compressed air control unit may further have a means for maintaining a pressurized state of each air chamber for a predetermined period of time after completion of pressurization of the air chamber by the means for pressurizing.

[0019] An embodiment of a pneumatic massage apparatus according to the present invention will be explained below with reference to the accompanying drawings.

Brief Description of Drawings:

[0020]

Fig. 1 is a general view showing a pneumatic massage apparatus according to the present invention.

Fig. 2 is an illustration of a massage device of the pneumatic massage apparatus shown in Fig. 1.

Fig. 3 is a schematic view showing an outline of an experiment.

Fig. 4 is a diagram showing a driving sequence of electromagnetic valves of a conventional pneumatic massage apparatus.

Fig. 5 is a diagram showing a driving sequence of electromagnetic valves of the pneumatic massage apparatus according to the present invention.

Fig. 6 is a graph showing the results of a first experiment.

Fig. 7 is a graph showing the results of a second experiment.

Description of Embodiments:

[0021] As shown in Fig. 1, a pneumatic massage apparatus 1 according to an embodiment of the present invention has tubular massage devices 2 to be fitted to wrap around the legs of a patient, and a compressed air control unit 4 connected to the massage devices 2 through air tubes 3. Each massage device 2 has, as shown in Fig. 2, first to sixth air chambers 5a-5f arranged in series from a periphery-side portion of the massage device 2 covering a patient's foot from the tow to the heel to a center-side portion of the massage device 2 covering the patient's thigh. The six air chambers 5a-5f are disposed so that the mutually adjacent air chambers overlap each other. The air tubes 3 respectively connect between the air chambers 5a-5f of each massage device 2 and the compressed air control unit 4. The compressed air control unit 4 is provided therein with an air pump (not shown) delivering compressed air, six electromagnetic valves (not shown) disposed between the air pump and the air tubes 3, respectively, six pressure sensors (not shown) for measuring the pressure in the air chambers 5a-5f, and a control circuit (not shown) controlling the drive of the six electromagnetic valves. Each of the electromagnetic valves is a three-way valve having a first opening communicating with the air pump, a second opening communicating with the associated air chamber through the associated air tube 3, and a third opening communicating with the atmosphere. When the electromagnetic valve is in an OFF state, the first opening is closed, and the second and third openings are communicated with each other. Thus, the electromagnetic valve is in a compressed air discharge state. When the electromagnetic valve is in an ON state, the third opening is closed, and the first and second openings are communicated with each other. Thus, the electromagnetic valve is in a compressed air supply state. That is, when the electromagnetic valve is turned ON by the control circuit while the air pump is operating, the electromagnetic valve is brought into a compressed air supply state, so that compressed air from the air pump is supplied into the associated air chamber. Consequently, the air chamber is pressurized and thus inflated. When turned OFF, the electromagnetic valve is brought into a compressed air discharge state, so that the compressed air in the associated air chamber is discharged into the atmosphere. Consequently, the air chamber is depressurized and thus deflated.

[0022] The operating sequence of the electromagnetic valves, i.e. the order in which the air chambers 5a-5f are pressurized and depressurized, can be set as desired with the control circuit. In the pneumatic massage apparatus 1, the electromagnetic valves are turned ON in a sequence set by a pressurization program (means for pressurizing) of the control circuit, and after completion of pressurization of all the air chambers, each air chamber is allowed to maintain the pressurized state for a predetermined period of time (5 seconds) by a pressurized state maintaining program (means for maintaining a pressurized state). Thereafter, the electromagnetic valves are turned OFF in a sequence set by a depressurization program (means for depressurizing), and thus all the air chambers 5a-5f are depressurized. After completion of depressurization of all the air chambers 5a-5f, the pressurization program starts again. In this way, pressurization and depressurization are performed in sequences similar to the above. This cycle is repeated thereafter.

[0023] Typical pressurization patterns used in the pneumatic massage apparatus 1 include a first pressurization pattern in which all the electromagnetic valves are simultaneously turned ON to pressurize all the air chambers 5a-5f simultaneously, and a second pressurization pattern in which the first to sixth electromagnetic valves are sequentially turned ON to start pressurizing the air chambers sequentially in the proximal direction from the first air chamber, which is the distal-most air chamber, to the sixth air chamber, which is the proximal-most air chamber. However, pressurization patterns usable in the present invention are not limited to those described above. The first to sixth electromagnetic valves may be driven to pressurize the air chambers 5a-5f in any sequence.

[0024] Depressurization patterns used in the pneumatic massage apparatus 1 are, basically, such that, of any pair of mutually adjacent air chambers, a proximal air chamber of the pair first starts to be depressurized, and then a distal air chamber of the pair starts to be depressurized. By performing depressurization in this way, a pressure gradient is produced between a patient's body part having been compressed by the proximal air chamber until depressurization thereof and another patient's body part being compressed by the distal air chamber. Consequently, it is possible to urge the body fluid to flow from the body part being compressed by the distal air chamber toward the body part having been compressed by the proximal air chamber until depressurization thereof. Typical depressurization patterns used in the pneumatic massage apparatus 1 include first, second and third depressurization patterns. In the first depressurization pattern, the sixth air chamber 5f first starts to be depressurized, and thereafter, the fourth air chamber 5d, the second air chamber 5b, the fifth air chamber 5e, the third air chamber 5c, and the first air chamber 5a start to be depressurized in the order mentioned. In the second depressurization pattern, the fifth air chamber 5e first starts to be depressurized, and thereafter, the third air chamber 5c, the first air chamber 5a, the sixth air chamber 5f, the fourth air chamber 5d, and the second air chamber 5b start to be depressurized in the order mentioned. In the third depressurization pattern, the air chambers start to be depressurized sequentially in the order in which the air chambers are arranged in the distal direction, i.e. from the sixth air chamber 5f to the first air chamber 5a. It should, however, be noted that depressurization

patterns usable in the present invention are not limited to the above-described three depressurization patterns, and that the present invention may use any depressurization pattern in which depressurization of each of the air chambers 5a-5f is performed so that the pressure applied to the patient's body decreases from the distal side toward the proximal side.

[0025] To verify the effects of the pneumatic massage apparatus 1 as used for lymphatic drainage, we observed the flow of lymph fluid during massage performed using the pneumatic massage apparatus 1 by ICG (Indo-Cyanine Green) fluorescence imaging. The ICG fluorescence imaging is a technique in which ICG that emits infrared fluorescence having a wavelength of 830 nm when excited with infrared light of 760 nm in wavelength is intracutaneously injected into a patient's body, and fluorescence that the ICG emits when irradiated with infrared excitation light from the outside of the patient's body is observed with an infrared observation camera, thereby observing the ICG flowing with the lymph fluid to inspect the flow of lymph fluid and to identify the position of lymphatic vessels. Infrared light, which has a long wavelength, can penetrate biological tissues relatively easily. Therefore, the ICG fluorescence technique can observe the flow of lymph fluid deep under the skin. In this experiment, a transparent massage device 2 having six air chambers 5a-5f was fitted around a subject's leg as shown in Fig. 3, and ICG was intracutaneously injected between each pair of subject's toes. Thereafter, massage using the pneumatic massage apparatus 1 was started, and the flow of ICG was observed during the massage with an infrared observation camera while irradiating an area around the subject's calf with infrared excitation light. Specifically, the observation area observed with the infrared observation camera was provided with five measurement regions R1-R5 as shown in Fig. 3. An average value of fluorescence intensity in each of the measurement regions R1-R5 was calculated every 0.2 seconds, and the magnitude of the flow of ICG, i.e. the flow of lymph fluid, was evaluated from the change of the average fluorescence intensity.

[0026] The first experiment was carried out to verify the effects of the conventional pneumatic massage apparatus. In the first experiment, as shown in Fig. 4, the first to sixth electromagnetic valves corresponding to the first to sixth air chambers, respectively, were sequentially turned ON from the first electromagnetic valve to the sixth electromagnetic valve, and while doing so, the first to sixth electromagnetic valves were sequentially turned OFF in such a manner that the first electromagnetic valve was first turned OFF at a timing after the third electromagnetic valve was turned ON, and so forth. Consequently, the air chambers were pressurized sequentially in the order in which the first to sixth air chambers were arranged in the proximal direction. When the third air chamber started to be pressurized, the first air chamber, which was the distal-most air chamber, first started to be depressurized, and then the second to sixth air chambers were depressurized sequentially. The pressure in each air chamber during pressurization was 8 kPa.

[0027] The second experiment was carried out to verify the effects of the pneumatic massage apparatus 1 according to the present invention. In the second experiment, the above-described first pressurization pattern and first depressurization pattern were combined, as shown in Fig. 5, to present a typical example of pressurization-depressurization patterns usable in the present invention. That is, the first to sixth electromagnetic valves were controlled as follows. The six air chambers 5a-5f were simultaneously pressurized, and after the pressurized state was maintained for 5 seconds, the sixth air chamber 5f started to be depressurized, and thereafter, the fourth air chamber 5d, the second air chamber 5b, the fifth air chamber 5e, the third air chamber 5c, and the first air chamber 5a started to be depressurized sequentially in the order mentioned. The pressure in each of the air chambers 5a-5f during pressurization was 8 kPa, as in the case of the first experiment.

[0028] Figs. 6 and 7 show the results of the first and second experiments, respectively. Figs. 6 and 7 show the changes of the average fluorescence intensity in the first to fifth measurement regions R1-R5 in a period of time corresponding to about 2 cycles of each pressurization-depressurization pattern. In the graphs of Figs. 6 and 7, at points where there is an increase in fluorescence intensity, the air chambers 5a-5f were pressurized, and at points where there is a decrease in fluorescence intensity, the air chambers 5a-5f were depressurized. It will be understood that the amount of change in fluorescence intensity of ICG during massage using the pneumatic massage apparatus 1 of the present invention, which is shown in Fig. 7, is larger than the amount of change in fluorescence intensity of ICG during massage using the conventional pneumatic massage apparatus, which is shown in Fig. 6. The amount of change in fluorescence intensity is correlated with the change in amount of ICG. Therefore, it is considered from the above-described results that a larger amount of ICG passed through the measurement regions R1-R5 in the second experiment than in the first experiment. In other words, it is considered that a larger amount of lymph fluid passed through the measurement regions R1-R5 in the second experiment using the present invention. In addition, the fluorescence intensity decreases more sharply, particularly, during depressurization in the second experiment, which is shown in Fig. 7, and it is inferred from the results of the second experiment that the lymph fluid flowed more rapidly in the second experiment. These experimental results suggest that the massage using the pneumatic massage apparatus 1 according to the present invention allows a larger amount of lymph fluid to flow more rapidly than the massage using the conventional pneumatic massage apparatus.

[0029] According to the present invention, the order in which the air chambers 5a-5f are depressurized, in particular, is appropriately set to form inside the patient's body such a pressure gradient that the pressure decreases in the proximal direction from the periphery toward the center of the patient's body, thereby urging the lymph fluid to flow not only during pressurization but also during depressurization. Although the first to third depressurization patterns have been shown above specifically as examples of a depressurization pattern for forming the above-described pressure gradient, other

depressurization patterns may also be used to realize the present invention. Examples of other usable depressurization patterns will be shown below, together with the above-described first to third depressurization patterns. It should, however, be noted that depressurization patterns usable in the present invention are not limited to those shown below.

Table 1:

First Depressurization Pattern	6→4→2→5→3→1
Second Depressurization Pattern	5→3→1→6→4→2
Third Depressurization Pattern	6→5→4→3→2→1
Fourth Depressurization Pattern	6→3→5→2→4→1
Fifth Depressurization Pattern	(6, 4, 2)→(5, 3, 1)
Sixth Depressurization Pattern	(5, 3, 1)→(6, 4, 2)
Seventh Depressurization Pattern	(6, 5)→(4, 3)→(2, 1)
Eighth Depressurization Pattern	(6, 5, 4)→(3, 2, 1)
Ninth Depressurization Pattern	(6, 3)→(5, 2)→(4, 1)

[0030] In Table 1, each arrow means that, after an air chamber designated by the number on the left side of the arrow has started to be depressurized, an air chamber designated by the number on the right side of the arrow starts to be depressurized. Air chambers designated by the numbers in each set of parentheses simultaneously start to be depressurized. It should be noted that the timing of starting depressurization may be either of the following: a next air chamber may start to be depressurized after completion of depressurization of the preceding air chamber; a next air chamber may start to be depressurized in the middle of depressurization of the preceding air chamber.

[0031] Although all the air chambers 5a-5f of the massage device 2 are used in the above-described pressurization-depressurization patterns, only necessary air chambers may be used according to each particular situation. For example, when the patient has edema only in the calf portion and drainage of his or her thigh is unnecessary, only the first to fourth air chambers 5a-5d may be used. Further, the pressurizing force may be changed appropriately in accordance with the severity of edema. It is also possible to set a different pressure value for each of the air chambers 5a-5f. These conditions can be changed appropriately in accordance with the condition of the patient.

[0032] Although in the foregoing embodiment each massage device 2 is provided with six air chambers 5a-5f, the number and size of air chambers may be changed appropriately. Lymph flow in vivo is a stream of lymph fluid flowing in small amounts through thin lymphatic vessels having valve structures; therefore, lymph fluid cannot be allowed to flow over a long distance at a time. Accordingly, it is an effective way to depressurize an air chamber closer to the center of the patient's body by a distance of from several centimeters to 20 centimeters at the most from a patient's body portion from which the lymph fluid is desired to be drained. For this reason, when the pneumatic massage apparatus of the present invention is used for treatment of lymphedema, the number of air chambers may be increased to 8 or 12, with the size of each air chamber being reduced. With this structure, lymphatic drainage may be able to be performed even more efficiently. Alternatively, the massage device 2 may have a reduced number of air chambers, i.e. four air chambers, to form a compact massage device for performing local drainage. Although in the foregoing embodiment the massage device 2 is for massaging a leg, the massage device 2 may also be constructed to massage an arm by modifying the configuration.

Claims

1. A pneumatic massage apparatus comprising:


a massage device to be fitted to wrap around one of an arm and a leg of a patient and having a plurality of air chambers disposed in series in a proximal direction from a distal position of the one of the arm and the leg toward a center of a body of the patient when the massage device is fitted around the one of the arm and the leg; and
a compressed air control unit supplying and discharging compressed air into and from the plurality of air chambers of the massage device;
the compressed air control unit having a means for pressurizing each of the air chambers by supplying compressed air thereinto, and a means for depressurizing each of the pressurized air chambers by discharging

compressed air therefrom;


the means for depressurizing being configured to depressurize the pressurized air chambers in such a manner that, of any pair of mutually adjacent ones of the air chambers, a proximal air chamber of the pair first starts to be depressurized, and then a distal air chamber of the pair starts to be depressurized.

- 5 2. The pneumatic massage apparatus of claim 1, wherein the means for depressurizing is configured to start depressurizing at least one of the pressurized air chambers except a distal end air chamber disposed at a distal-most position of the pressurized air chambers before depressurization of the distal end air chamber.
- 10 3. The pneumatic massage apparatus of claim 2, wherein the means for depressurizing is configured such that, when the pressurized air chambers are numbered sequentially in the proximal direction so that the distal end air chamber is given number one, even-numbered air chambers first start to be depressurized in descending order of numbers given thereto, and then odd-numbered air chambers start to be depressurized in descending order of numbers given thereto.
- 15 4. The pneumatic massage apparatus of claim 2, wherein the means for depressurizing is configured such that, when the pressurized air chambers are numbered sequentially in the proximal direction so that the distal end air chamber is given number one, odd-numbered air chambers first start to be depressurized in descending order of numbers given thereto, and then even-numbered air chambers start to be depressurized in descending order of numbers given thereto.
- 20 5. The pneumatic massage apparatus of claim 2, wherein the means for depressurizing is configured such that, when the pressurized air chambers are numbered sequentially in the proximal direction so that the distal end air chamber is given number one, the air chambers start to be depressurized in descending order of numbers given thereto.
- 25 6. The pneumatic massage apparatus of any one of claims 1 to 5, wherein the means for pressurizing is configured such that, when the air chambers are numbered sequentially in the proximal direction so that the distal end air chamber is given number one, the air chambers start to be pressurized in ascending order of numbers given thereto.
- 30 7. The pneumatic massage apparatus of any one of claims 1 to 5, wherein the means for pressurizing is configured to start pressurizing the plurality of air chambers simultaneously.
- 35 8. The pneumatic massage apparatus of any one of claims 1 to 7, wherein the plurality of air chambers are disposed so that mutually adjacent ones of the air chambers overlap each other.
- 40 9. The pneumatic massage apparatus of any one of claims 1 to 8, wherein the compressed air control unit further has a means for maintaining a pressurized state of each pressurized air chamber for a predetermined period of time after completion of pressurization of the air chamber by the means for pressurizing.
- 45
- 50
- 55


[Fig. 1]

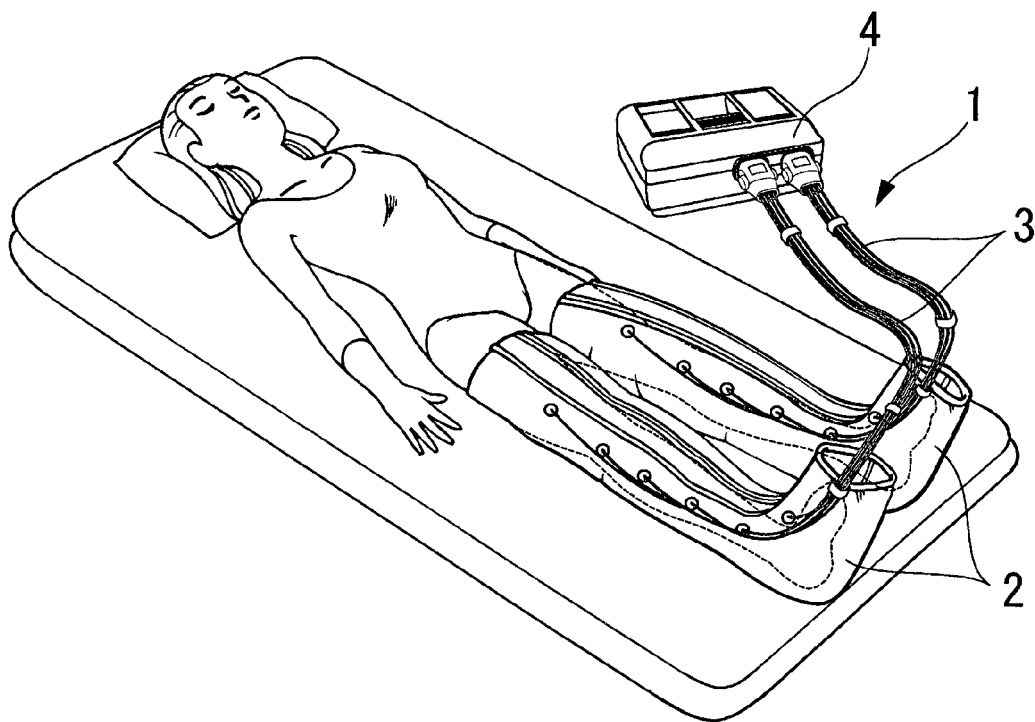


[Fig. 2]

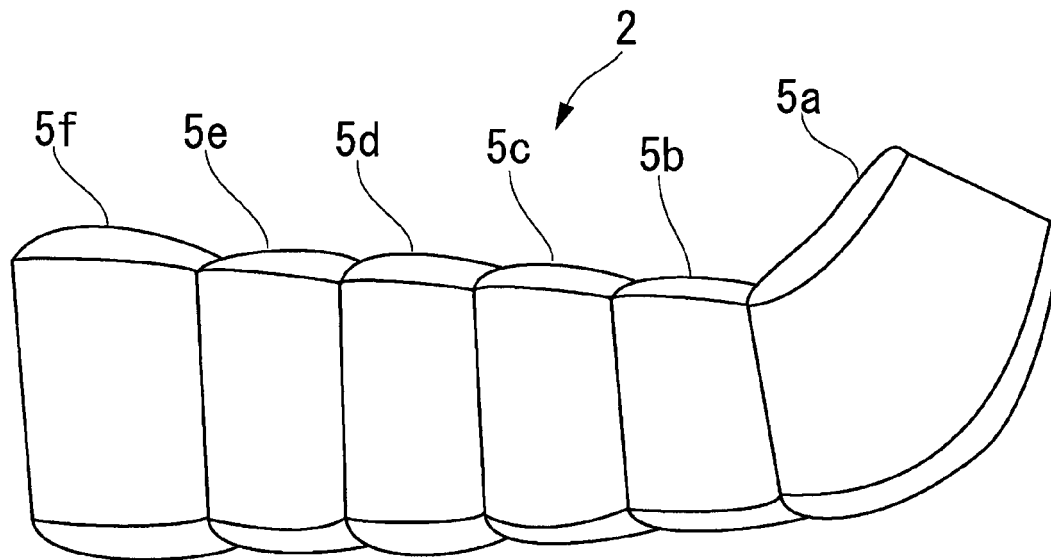


[Fig. 3]

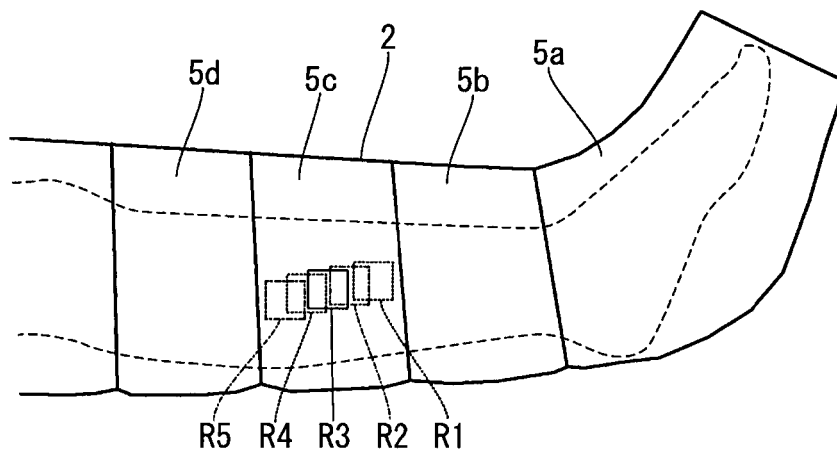


[Fig. 4]

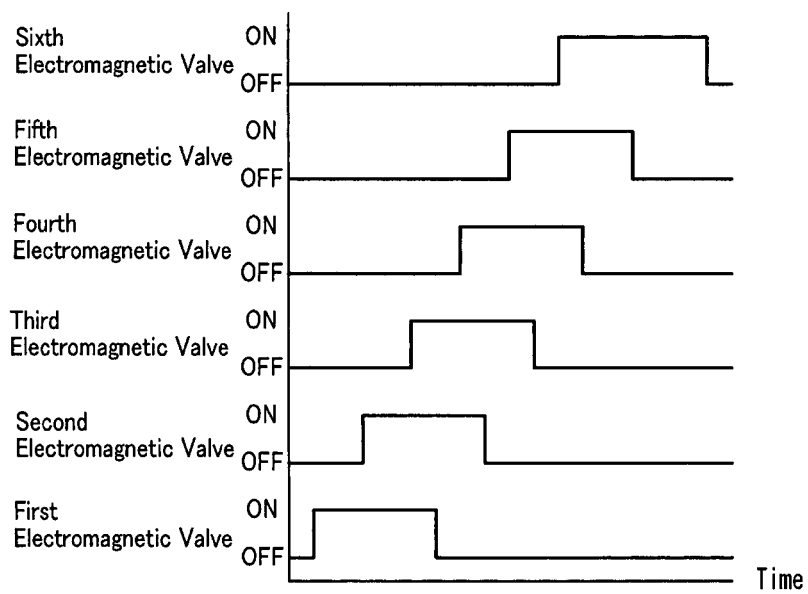

[Fig. 5]

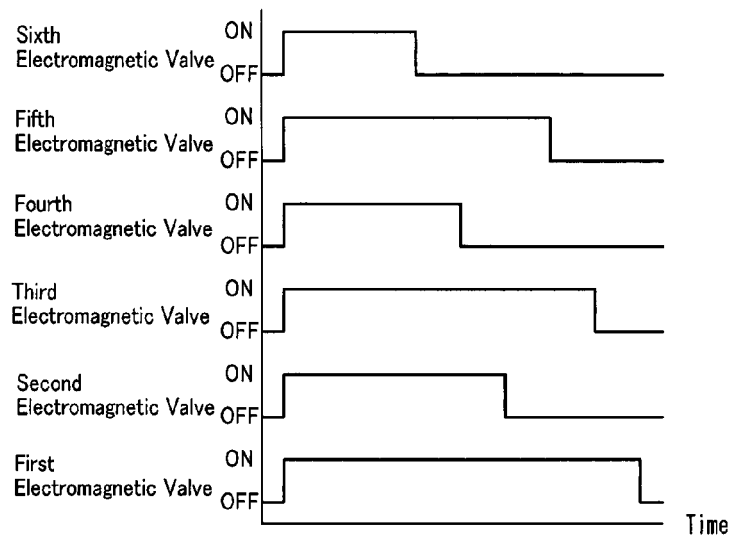


[Fig. 6]

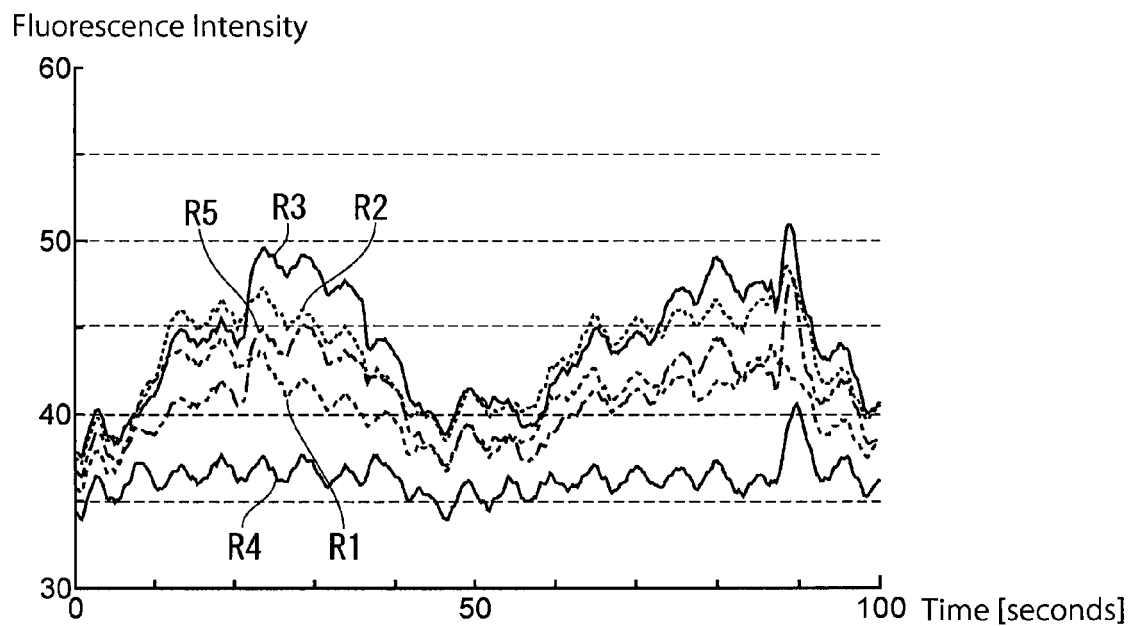

[Fig. 7]

Fluorescence Intensity

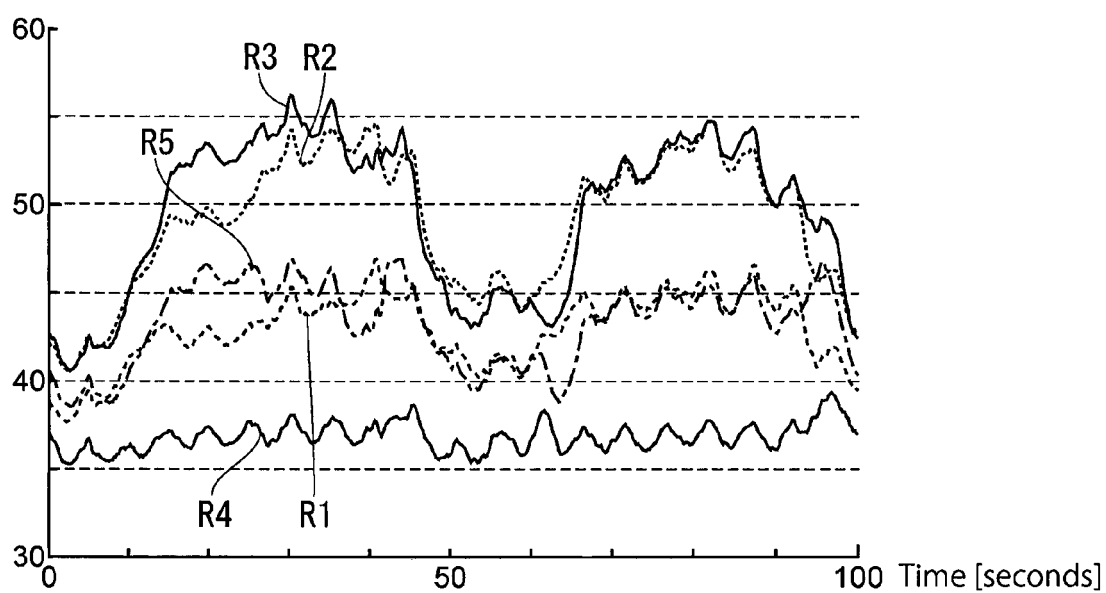



EUROPEAN SEARCH REPORT

Application Number
EP 14 18 2175

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	WO 2009/049103 A2 (SLEEP IMPROVEMENT CT P C [US]; KHAN SITARA R [US]) 16 April 2009 (2009-04-16) * abstract; figures 2,4-6,12,13 *	1-9	INV. A61H9/00
X	GB 2 313 784 A (MEDICAL DYNAMICS LIMITED [IL]) 10 December 1997 (1997-12-10) * page 17, line 15 - page 19, line 11; figures 1,2,4 *	1-9	
X	FR 2 345 992 A1 (BONDIVENNE JEAN [FR]) 28 October 1977 (1977-10-28) * page 3, lines 10-31; figures 1,3,4 *	1-9	
X	US 7 846 114 B2 (WEBSTER NATHAN [GB] ET AL) 7 December 2010 (2010-12-07) * column 1, lines 51-59; figure 2 *	1-9	
			TECHNICAL FIELDS SEARCHED (IPC)
			A61H
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 23 January 2015	Examiner Fischer, Elmar
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

1
EPO FORM 1503 03.92 (P04C01)

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 14 18 2175

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

23-01-2015

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2009049103 A2	16-04-2009	US 2010268130 A1 WO 2009049103 A2	21-10-2010 16-04-2009
GB 2313784 A	10-12-1997	NONE	
FR 2345992 A1	28-10-1977	NONE	
US 7846114 B2	07-12-2010	AT 484270 T AU 2005268584 A1 CA 2575043 A1 CN 101022775 A DK 1776075 T3 EP 1776075 A1 JP 2008508917 A US 2008097264 A1 WO 2006013375 A1	15-10-2010 09-02-2006 09-02-2006 22-08-2007 07-02-2011 25-04-2007 27-03-2008 24-04-2008 09-02-2006

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Non-patent literature cited in the description

- Physical Medomer PM-8000. Nitto Kohki Co., Ltd,
[0005]