



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
01.04.2015 Bulletin 2015/14

(51) Int Cl.:
C21D 6/02 (2006.01)
C21D 6/00 (2006.01)
C21D 6/04 (2006.01)

(21) Application number: **14175600.7**

(22) Date of filing: **03.07.2014**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**
Designated Extension States:
BA ME

(72) Inventor: **Fletcher, Colin**
Fort Worth, TX 76101 (US)

(74) Representative: **Lawrence, John**
Barker Brettell LLP
100 Hagley Road
Edgbaston
Birmingham B16 8QQ (GB)


(30) Priority: **26.09.2013 US 201314038229**

(71) Applicant: **Bell Helicopter Textron Inc.**
Fort Worth, TX 76101 (US)

(54) **Precipitation hardening steel with improved toughness and method**

(57) In some aspects, a heat treatment process (200) is described for precipitation hardening steel. The heat treatment process (200) can include a solution treatment (202) for a precipitation hardening steel part. The solution treatment (202) includes heating the precipitation hardening steel part to an austenitizing temperature. The heat treatment process (200) can also include a quenching or cooling treatment (204, 206), in which the precipitation

hardening steel part is cooled to a martensitizing temperature. The heat treatment process (200) can also include an aging treatment (210), in which the precipitation hardening steel part is heated to a temperature of 1000 °F and held at that temperature for five or more hours until a fracture toughness of the precipitation hardening steel part is greater than 120 ksi√in.

100 

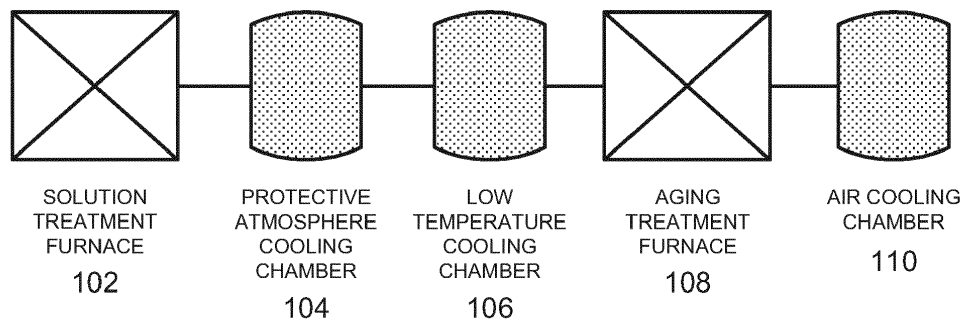


FIG. 1

Description

CLAIM OF PRIORITY

[0001] This application claims priority to U.S. Patent Application Serial No. 14/038,229 filed on September 26, 2013, the entire contents of which are hereby incorporated by reference.

BACKGROUND

[0002] The following description relates to precipitation hardening steel with improved toughness and a heat treatment process for making the same.

[0003] Precipitation hardening (PH) steels are steel alloys which utilize an aging treatment to form additional phases which improve the alloy's mechanical properties. Precipitation hardening steel is widely used in industry for fittings, shafts, pins, aircraft components, and chemical applications. Precipitation hardening steel is typically heat treated using standard processes. To improve toughness of precipitation hardening steel, higher temperature heat treatments can be used. Also, refined chemistry can be used.

DESCRIPTION OF DRAWINGS

[0004]

FIG. 1 is a diagram of an example heat treatment system;

FIG. 2 is a flowchart diagram of an example heat treatment process for precipitation hardening steel; and

FIG. 3 is an example plot based on exemplary data of material characteristics vs. an extended aging time.

[0005] Like reference symbols in the various drawings indicate like elements.

DETAILED DESCRIPTION

[0006] FIG. 1 is a schematic diagram of an example heat treatment system 100. The heat treatment system 100 is a collection of equipment, chambers, and components that can be used to perform a heat treatment process on a precipitation hardening steel part. The heat treatment process can be controlled to alter or enhance the material characteristics of the precipitation hardening steel. For example, the process can be controlled to increase the toughness of a precipitation hardening steel part while maintaining strength. The precipitation hardening steel part could be any suitable part, component, tool or other (item?) used in any applicable industry such as aerospace, aviation, nuclear, or automotive. In avia-

tion, precipitation hardening steel may, for example, be used for fixed-wing aircraft, rotor-winged aircraft such as helicopters, vertical-lift aircraft and tilt-rotor aircraft. The precipitation hardening steel part could be composed of any suitable steel, such as 13Cr-8Ni (PH 13-8, UNS S13800, XM-13).

[0007] Referring to FIG. 1, the heat treatment system 100 includes a solution treatment furnace 102, a protective atmosphere cooling chamber 104, a low temperature cooling chamber 106, an aging treatment furnace 108, and an air cooling chamber 110. Though, the system 100 may not include a separate protective atmosphere cooling chamber 104 or an air cooling chamber 110 without departing from the scope of the disclosure. For example, the solution treatment furnace 102 may be a vacuum furnace where both the solution treatment and the protective atmosphere cooling occur. In instances that do not include a separate air cooling chamber 110, air cooling may be accomplished by removing a part from the aging treatment furnace 108 or opening the furnace doors and cooling in ambient air. The components of the heat treatment system 100 may vary in their configuration or arrangement. For example, the protective atmosphere cooling chamber 104 can be incorporated into the solution treatment furnace 102. As another example, the protective atmosphere cooling chamber 104 and the low temperature cooling chamber 106 could be the same chamber or equipment. One or more components may be connected as part of a workflow or may be separate. For example, conveyors, rollers, or other mechanisms could convey a part from one component to another. In some implementations, one or more of the components can be omitted, or other components can be included.

[0008] The solution treatment furnace 102 is a furnace capable of heating a precipitation hardening steel part to the austenitizing temperature. The austenitization temperature is a temperature at which, given sufficient time, will ensure transformation of the steel to an austenitic structure. The austenitization temperature may vary depending on a steel's particular chemical composition. As an example, the austenitization temperature for PH 13-8 is typically a temperature in the range of 1700 °F. In a typical implementation, the precipitation hardening steel part is held at each of one or more stages at a temperature setting until that temperature is substantially or otherwise uniform throughout the part. For example, the precipitation hardening steel part could be heated in the furnace to a temperature of 1700 °F and held at that temperature for one hour after the part has uniformly reached 1700 °F. A different austenitizing temperature or a different period of time could be used. Any suitable treatment furnace like those found in the industry can be used. For example, the solution treatment furnace 102 can have a gas or electric heat source, or may process the part in air, a vacuum, or protective atmosphere.

[0009] The protective atmosphere cooling chamber 104 is a chamber or apparatus in which the steel part can cool or quench in a protective atmosphere after so-

lution treatment heating. The protective atmosphere can be a gas such as nitrogen or argon, or it can be a gas mixture such as a mixture of nitrogen and hydrogen. The protective atmosphere cooling chamber 104 can cool the precipitation hardening steel part to a given temperature such as 300 °F or room temperature. In some instances, the protective atmosphere cooling chamber 104 is incorporated into the solution treatment furnace 102. For example, the temperature setting of the solution treatment furnace 102 could be lowered without removing the steel part, or a protective atmosphere could be introduced into the solution treatment furnace 102. As previously mentioned, the system 100 may not include a separate protective atmosphere cooling chamber 104.

[0010] The low temperature cooling chamber 106 is a chamber or apparatus in which the precipitation hardening steel part can cool or quench to a relatively low temperature for conversion of the steel structure to martensite. For example, the low temperature cooling chamber 106 could cool a precipitation hardening steel part to a temperature below room temperature, such as below 60 °F or -100 °F. For example, the precipitation hardening steel part may be cooled below 32 °F. In some implementations, the cooling process may improve fatigue performance. In some instances, the part in the low temperature cooling chamber 106 is maintained at a low temperature by a liquid nitrogen bath or a deep freeze chiller. In some instances, the low temperature cooling chamber 106 may be combined with the protective atmosphere cooling chamber 104. For example, the part could be cooled to room temperature and then down to -100 °F in a single chamber.

[0011] The aging treatment furnace 108 is a furnace for applying an aging heat treatment to a precipitation hardening steel part. In some instances, the aging treatment furnace 108 is the same furnace as the solution treatment furnace 102. The aging treatment furnace 108 can be configured to hold a steel part at a set temperature for a period of time. The set temperature can be a temperature that will create reverted austenite in the precipitation hardening steel part, such as a temperature in the range of 950-1150 °F. After the steel part has uniformly reached the set temperature, the aging treatment furnace 108 can maintain the part at that temperature for a period of time. For example, the aging treatment furnace 108 can be configured to maintain the precipitation hardening steel part at a set temperature of 1000 °F for more than four hours, for example, for five or more hours.

[0012] The example air cooling chamber 110 is a chamber within which a precipitation hardening steel part can cool to room temperature after an aging treatment. The example air cooling chamber 110 uses a cool or room temperature environment to allow the part to cool to room temperature. In some cases, other cooling techniques such as a water bath or an oil bath could be implemented instead of or in tandem with air cooling. The example air cooling chamber 110 can be incorporated into the aging treatment furnace 108. For example, the

aging treatment furnace 108 can cool to room temperature after the aging treatment. As previously mentioned, the system 100 may not include a separate air cooling chamber 110.

[0013] FIG. 2 shows an example heat treatment process 200. The heat treatment process 200 is an example process to toughen a precipitation hardening steel part. In one embodiment, the toughness of the precipitation hardening steel part may be improved while maintaining tensile strength, other strength or other properties of the precipitation hardening steel above desired levels. In some cases, sub processes of the heat treatment process 200 may be omitted or combined. For example, the heat treatment process 200 may not include at least one of cooling in a protective atmosphere or warming to ambient temperature. The heat treatment process 200 can use some or all of the system described in FIG. 1.

[0014] At 202, the precipitation hardening steel part is subjected to a solution treatment. This solution treatment is a heat treatment that holds the steel part at an austenitization temperature for a period of time. The steel part to be treated can be heated in a furnace such as the solution treatment furnace 102 in FIG. 1. In some cases, the precipitation hardening steel part is placed in the furnace when the furnace is at room temperature, and the temperature of the furnace is subsequently increased to the austenitization temperature. In this manner, the temperature of the steel part can ramp along with the temperature of the furnace. Once the precipitation hardening steel part has uniformly reached the set austenitization temperature, the part is held at that temperature until the part has formed a substantially or otherwise homogenous austenite structure. The length of time that the precipitation hardening steel part is held at the austenitization temperature can depend on the size and shape of the part. For example, a part can be ramped to 1700 °F and held at 1700 °F for 1 hour.

[0015] At 204, the solution-treated part is cooled or quenched in a protective atmosphere. The precipitation hardening steel part can be allowed to cool in the solution treatment furnace or in a separate environment such as the protective atmosphere chamber 104 of FIG. 1. Cooling the precipitation hardening steel part in a protective atmosphere can reduce oxidation and other undesired chemical reactions. In some cases, the precipitation hardening steel part is allowed to cool to room temperature.

[0016] At 206, the precipitation hardening steel part is cooled to a low temperature to facilitate martensitic conversion. The low quenching temperature can be a temperature below room temperature, such as at or below 60 °F, 32 °F, or -100 °F. A lower temperature (such as -100 °F) can increase the driving force for martensitic conversion and create a substantially or otherwise uniform martensitic microstructure. The precipitation hardening steel part can be cooled with a variety of techniques, including placement in a deep freeze chiller or a liquid nitrogen bath. The temperature of the part can be

ramped down, or the part can be placed directly in a low-temperature environment (such as a liquid nitrogen bath). In some cases, the precipitation hardening steel part is held in the cooling environment long enough for the entire part to reach the desired temperature. At 208, the precipitation hardening steel part is allowed to return to an ambient temperature (such as room temperature).

[0017] At 210, the precipitation hardening steel part is subjected to an aging treatment. An aging treatment is a prolonged heat treatment in a furnace such as the aging treatment furnace 108 of FIG. 1. An aging treatment can increase fracture toughness in a precipitation hardening steel part. In some implementations, the precipitation hardening steel part is placed in a room temperature furnace, and the furnace temperature is increased to the set aging temperature. In some implementations, the precipitation hardening steel part is placed into a furnace that is already at the set aging temperature. After the temperature of the part has reached the set aging temperature such that it is substantially or otherwise uniform at the temperature, the precipitation hardening steel part is maintained at that temperature for a period of time. For example, the set aging temperature can be a temperature in the range of 950-1150 °F. In the illustrated embodiment, the precipitation hardening steel part is held or heated at a temperature of 950-1150 °F for five or more hours. The heat treatment time may, for example, be 5.5 hours, 6 hours, 6.5 hours, 7 hours, 7.5 hours, 8 hours, or some other suitable time. Holding the precipitation hardening steel part at the aging temperature of 1000 °F for five or more hours can additionally increase fracture toughness and additionally enhance resistance to hydrogen embrittlement. An extended age time of five or more hours can, for example, form retained austenite and allow martensite to revert to austenite in an even manner.

[0018] At 212, the precipitation hardening steel part is cooled to room temperature. The precipitation hardening steel part can be cooled in situ by bringing the aging treatment furnace to room temperature. The precipitation hardening steel part can also be cooled by removing the part from the furnace to a cooler environment, such as a chiller or the ambient temperature of the room. In some cases, the precipitation hardening steel part is cooled in a protective atmosphere. These and other cooling techniques can be implemented.

[0019] FIG. 3 shows an example plot 300 based on exemplary data, showing material properties curves 302, 304, and 306 for precipitation-hardened 13-8 stainless steel (PH-13-8) after undergoing extended aging treatments for more than four hours. The PH-13-8 stainless steel characterized in FIG. 3 was treated using the example process described in FIG. 2. The PH-13-8 stainless steel was solution treated at 1700 °F, cooled at -100 °F, and aged at 1000 °F for four to eight hours. In FIG. 3, curve 302 represents the ultimate tensile strength (UTS) of the steel, curve 304 represents the yield strength (YS), and curve 306 represents the fracture toughness (K_q). In FIG. 3, the x-axis is the aging time of the PH-

13-8 stainless steel in hours. The left y-axis is the tensile strength measured in ksi, corresponding to curves 302 and 304. The right y-axis is the fracture toughness measured in ksi√in, corresponding to curve 306. The horizontal line 308 represents an example minimum UTS standard of 205 ksi. The horizontal line 310 represents an example minimum fracture toughness standard of 120 ksi√in at room temperature. Room temperature is typically in the range of 65 °F to 75 °F.

[0020] FIG. 3 shows that aging more than four hours, such as for five or more hours, can have a material effect on material properties of PH 13-8 stainless steel. For example, the fracture toughness curve 306 shows that increasing the aging time more than 4 hours can result in increased fracture toughness of 140 ksi√in. At six or more hours, the example fracture toughness is 125 ksi√in, greater than the minimum standard fracture toughness of line 310. The ultimate tensile strength (curve 302) and yield strength (curve 304) of the 13-8 stainless steel is reduced as the aging time increases. However, for example, in one or more embodiments, the extended heat treatment aging at standard temperature allows improved toughness while limiting reduction in ultimate tensile strength and yield strength and/or maintaining ultimate tensile strength and yield strength above minimum or other desired limits. After 8 hours of aging, the example ultimate tensile strength remains greater than the minimum standard ultimate tensile strength of line 308. In specific embodiments, the extended aging time may yield material properties for the precipitation hardening steel of a fracture toughness greater than 115 ksi√in, 120 ksi√in, or 130 ksi√in at room temperature, a yield strength greater than 195 ksi or 200 ksi, and an ultimate tensile strength greater than 210 ksi or 215 ksi. For example, the properties may include one or more of the following: about 220 ksi strength and 85 ksi√in toughness (H950); about 185 ksi strength and 140 ksi√in toughness (H1025); about 175 ksi strength and 165 ksi√in toughness (H1050); or others.

[0021] While this specification contains many details, these should not be construed as limitations on the scope of what may be claimed, but rather as descriptions of features specific to particular examples. Certain features that are described in this specification in the context of separate implementations can also be combined. Conversely, various features that are described in the context of a single implementation can also be implemented in multiple embodiments separately or in any suitable sub-combination. A number of examples have been described. Nevertheless, it will be understood that various modifications can be made. Accordingly, other implementations are within the scope of the following claims.

Claims

1. A heat treatment process for precipitation hardening steel comprising:

- a solution treatment for a precipitation hardening steel part, wherein the precipitation hardening steel part is heated to an austenitizing temperature;
- a cooling treatment for a precipitation hardening steel part, wherein the precipitation hardening steel part is cooled to a martensitizing temperature; and
- an aging treatment for a precipitation hardening steel part, including heating the precipitation hardening steel part in a furnace at a temperature of at least 950 °F for at least 5 hours until a fracture toughness of the precipitation hardening steel part is greater than 120 ksi√in.
2. The heat treatment process of claim 1, wherein the quenching treatment includes cooling the stainless steel part in a protective atmosphere.
 3. The heat treatment process of claim 1, or of claim 2, wherein the austenitizing temperature is a temperature of 1700 °F.
 4. The heat treatment process of claim 1, or of claim 2 or of claim 3, wherein the martensitizing temperature is a temperature of 32 °F or lower.
 5. The heat treatment process of claim 1, or of any of claim 2 to 4, wherein the temperature for the aging treatment is 1000 °F or greater.
 6. The heat treatment process of claim 1, or of any of claims 2 to 5, wherein the aging treatment is for at least 6 hours.
 7. The heat treatment process of claim 1, or of any of claims 2 to 5, wherein the aging treatment is for at least 7 hours; or is for at least 8 hours.
 8. The heat treatment process of claim 1, or of any of claims 2 to 7, wherein the precipitation hardening steel part is composed of precipitation-hardened 13Cr-8Mo stainless steel (PH 13-8, UNS S13800, XM-13).
 9. A precipitation hardening steel part comprising:
 - a part composed of precipitation hardening steel alloy having:
 - an ultimate tensile strength greater than 170 ksi; and
 - a fracture toughness greater than 120 ksi√in.
 10. The precipitation hardening steel part of claim 9, wherein the fracture toughness is greater than 140 ksi√in.
 11. The precipitation hardening steel part of claim 9 or of claim 10, wherein the fracture toughness is greater than 165 ksi√in and the yield strength is about or greater than 175 ksi.
 12. The precipitation hardening steel part of claim 9 or of claim 10, or of claim 11, wherein the fracture toughness is at or greater than 140 ksi√in and the yield strength is about or greater than 185 ksi.
 13. The precipitation hardening steel part of claim 9, or of any of claims 10 to 12, wherein the yield strength is greater than 195 ksi, or is greater than 200 ksi.
 14. The precipitation hardening steel part of claim 9, or of any of claims 10 to 13, wherein the ultimate tensile strength is greater than 210 ksi, or is greater than 215 ksi.
 15. A vertical lift aircraft component of precipitation hardening steel formed from:
 - a solution treatment for the component, wherein the component is heated to an austenitizing temperature;
 - a cooling treatment for the component, wherein the component is cooled to a martensitizing temperature; and
 - an aging treatment for the component, including heating the component in a furnace at a temperature of 1000 °F plus or minus 15 °F and holding the component at the aging temperature for at least 5 hours until a fracture toughness of the precipitation hardening steel part is greater than 120 ksi√in.

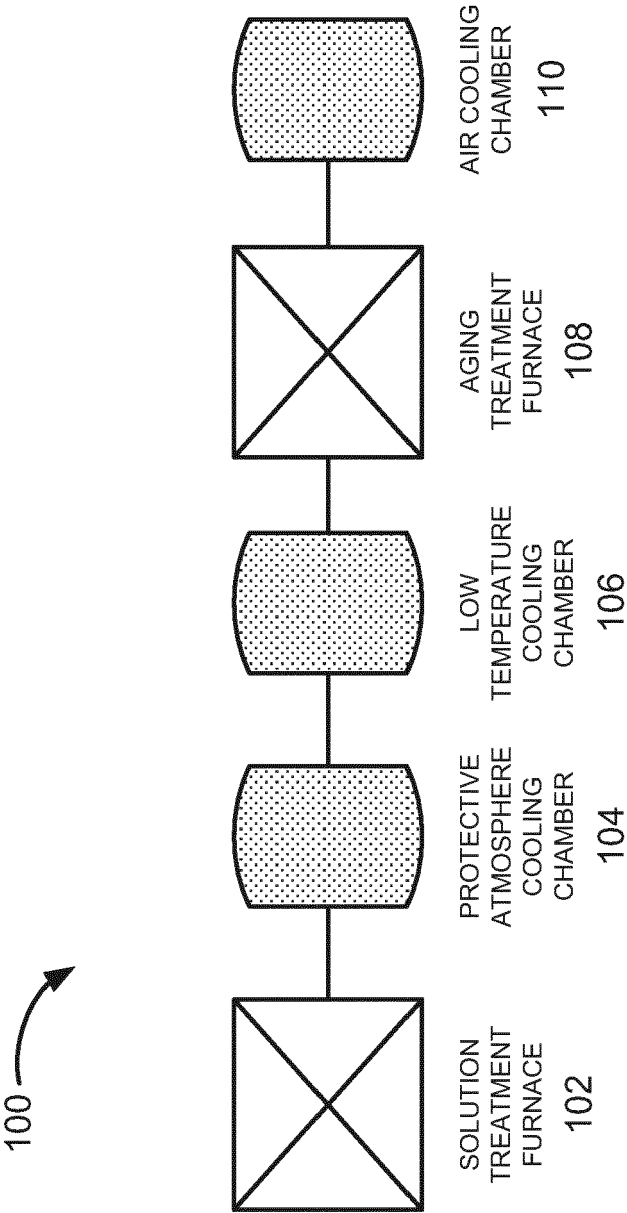


FIG. 1

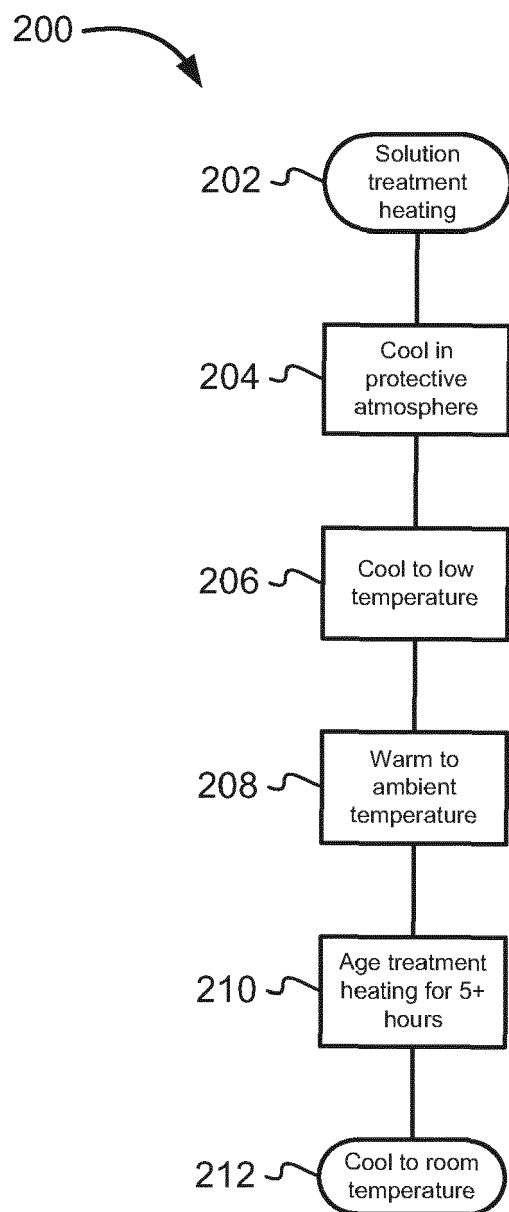


FIG. 2

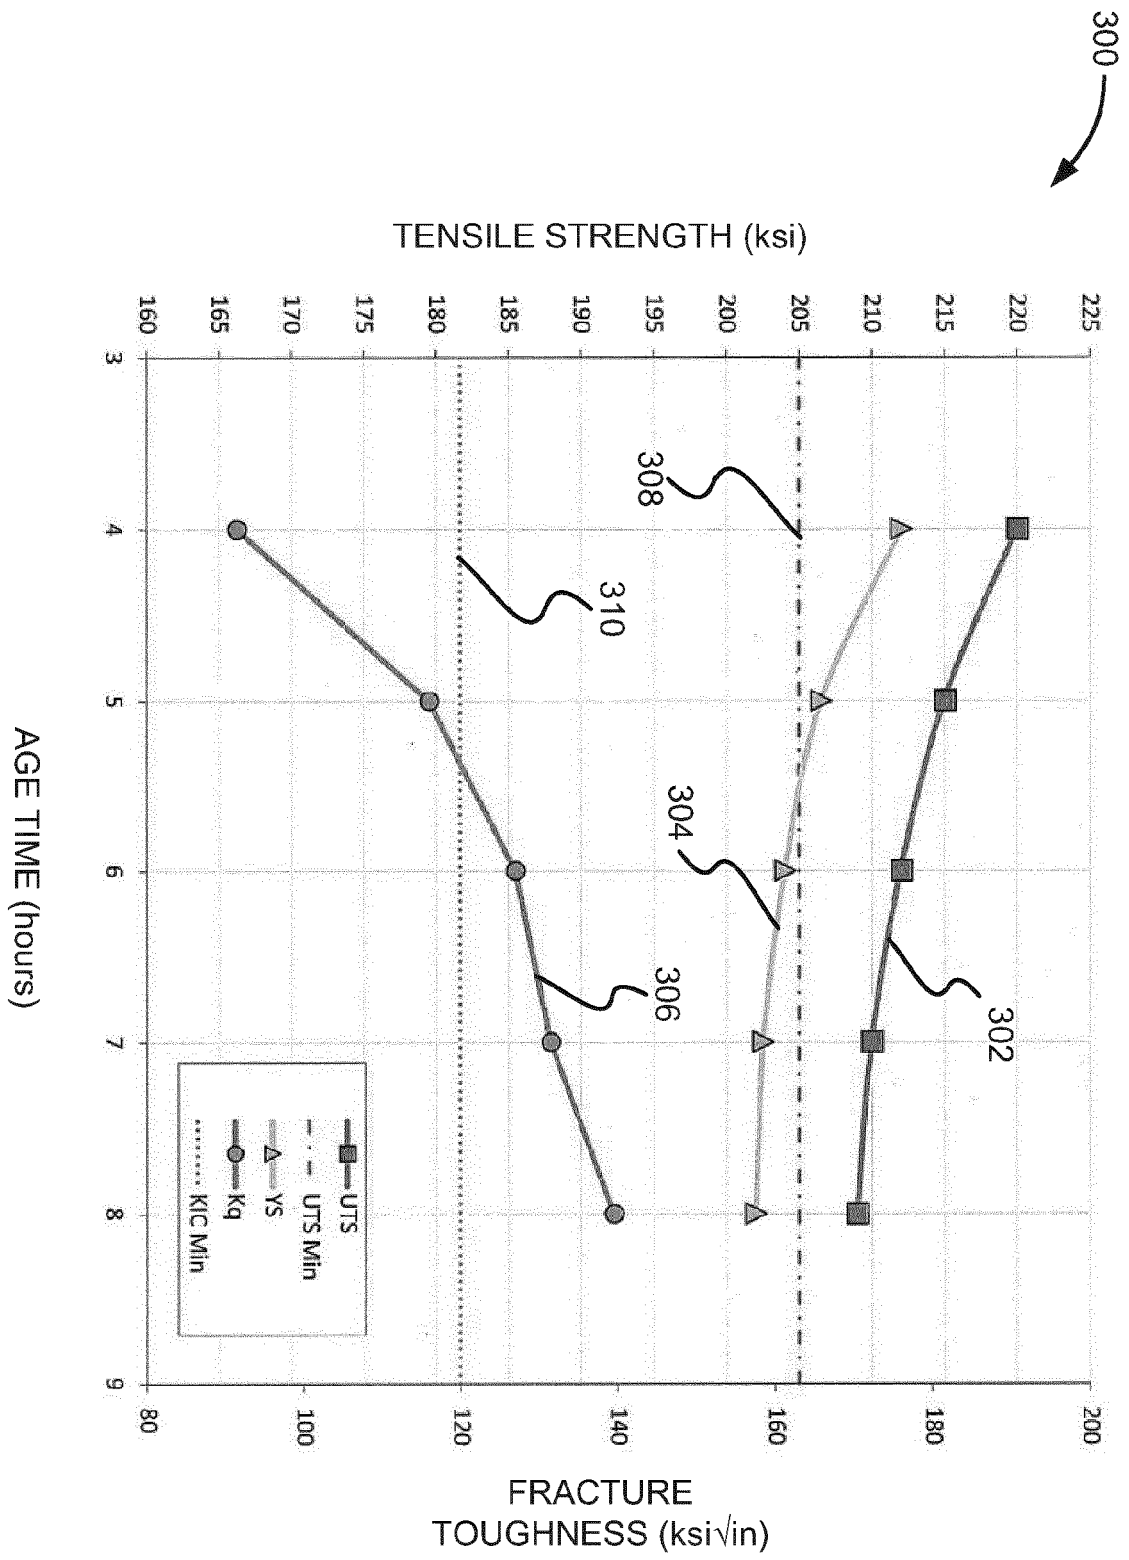


FIG 3.



EUROPEAN SEARCH REPORT

 Application Number
 EP 14 17 5600

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	GB 1 056 561 A (ARMCO STEEL CORP) 25 January 1967 (1967-01-25) * column 4, line 104 - column 5, line 44; claims 1-21; tables I-VI *	1-15	INV. C21D6/02 C21D6/04 C21D6/00
X	US 2011/232809 A1 (CHEN JIANQIANG [US] ET AL) 29 September 2011 (2011-09-29) * paragraphs [0024] - [0036]; claims 1-20; tables 1-4 *	1-15	
A	US 5 888 449 A (KENNEDY RICHARD L [US] ET AL) 30 March 1999 (1999-03-30) * claims 1-12; figures 1-6; tables 1-3 *	1-15	
A	PING D H ET AL: "Microstructural evolution in 13Cr-8Ni-2.5Mo-2Al martensitic precipitation-hardened stainless steel", MATERIALS SCIENCE AND ENGINEERING A: STRUCTURAL MATERIALS: PROPERTIES, MICROSTRUCTURE & PROCESSING, LAUSANNE, CH, vol. 394, no. 1-2, 15 March 2005 (2005-03-15), pages 285-295, XP027791305, ISSN: 0921-5093 [retrieved on 2005-03-15] * paragraphs [0002], [03.1]; figure 2 *	1-15	TECHNICAL FIELDS SEARCHED (IPC) C21D
A	Davis J.R., Ed.: "ASM Specialty Handbook-Stainless Steels", 1996, ASM International, XP002732565, ISBN: 0-87170-503-6 page 34-37, 300-302, * figure 20; tables 18,20 *	1-15	
A	US 3 658 513 A (CLARKE WILLIAM C JR) 25 April 1972 (1972-04-25) * claims 1-13; tables V a-c *	1-15	
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 17 November 2014	Examiner Catana, Cosmin
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 14 17 5600

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

17-11-2014

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB 1056561 A	25-01-1967	DE 1458323 A1	27-03-1969
		GB 1056561 A	25-01-1967
		JP S4822566 B1	06-07-1973
		SE 318115 B	01-12-1969

US 2011232809 A1	29-09-2011	NONE	

US 5888449 A	30-03-1999	AT 408993 B	25-04-2002
		AU 742809 B2	10-01-2002
		AU 6808998 A	03-12-1998
		DE 19823911 A1	03-12-1998
		FR 2763961 A1	04-12-1998
		JP H1150205 A	23-02-1999
		US 5888449 A	30-03-1999

US 3658513 A	25-04-1972	NONE	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 03822913 A [0001]