

(19)



(11)

EP 2 865 940 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
30.11.2016 Bulletin 2016/48

(51) Int Cl.:
F21V 29/15 ^(2015.01) **F21V 23/02** ^(2006.01)
F21Y 115/10 ^(2016.01)

(21) Application number: **14382413.4**

(22) Date of filing: **22.10.2014**

(54) **Luminaire**

Leuchte

Luminaire

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **24.10.2013 ES 201331223 U**

(43) Date of publication of application:
29.04.2015 Bulletin 2015/18

(73) Proprietor: **Simon, S.A.U.**
08013 Barcelona (ES)

(72) Inventors:
• **Plaja Miro, Salvi**
08025 BARCELONA (ES)

• **Riqué Rebull, Adrià**
08917 BADALONA (ES)
• **Jordana Casamitjana, Francesc**
08912 BADALONA (ES)

(74) Representative: **Espiell Volart, Eduardo Maria**
R. Volart Pons y Cia. S.L.
Pau Claris, 77, 2.o, 1.a
08010 Barcelona (ES)

(56) References cited:
WO-A1-2011/079387 JP-A- 2008 159 341
JP-B1- 5 296 251 US-A1- 2011 242 828
US-A1- 2012 155 077

EP 2 865 940 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

OBJECT OF THE INVENTION

[0001] The invention, as expressed in the title of the present description, refers to a luminaire, which presents several advantages and novel features inherent to its improved configuration to be described in detail below and which suppose a noteworthy novelty in the current state of the art.

[0002] The object of the present invention is specifically centred on a luminaire which incorporates as source or light sources LEDs or other lights whose heat is dissipated towards their rear part and is structurally designed to advantageously favour the dissipation of the said heat avoiding any negative effect on the various elements that comprise the lighting fixture.

FIELD OF APPLICATION OF THE INVENTION

[0003] The field of application of the present invention is in the sector of industry engaged in the manufacture of luminaires.

BACKGROUND OF THE INVENTION

[0004] As it is known, some light sources, such as LED lamps, have the advantage that, apart from consuming less, they do not generate heat in the direction of the light radiation, but in the opposite direction.

[0005] This circumstance, in the case of luminaires which, on their rear side, dispose of components such as the power source itself, can end up having problems of reliability and a shortening of the useful lifetime of the luminaire, as said components have to be designed to withstand the high temperatures brought about by the lamps, or else introduce other elements to dissipate effectively said heat.

[0006] Currently, the heat from the lamps is dissipated through a series of radiators which complicate and add to the expense of the products, therefore a new type of luminaire which avoids said inconvenience would be desirable, and the development of such a luminaire with a perfected housing is the essential object of the present invention.

[0007] Document JP2008159341 A (MATSUSHITA ELECTRIC WORKS LTD) discloses a luminaire according to the preamble of claim 1 of the type that has lamps generate heat in the opposite direction to the light radiation, the housing of that luminaire comprising two areas, one lower area and one upper area separated by, at least one point of juncture, that determines the existence of at least one intermediate space between the upper area comprising a housing for several components and the lower area comprising the lamps and the lamp-holding support. The intermediate space between the upper area and the lower area define a regular distance between the two areas and therefore

the heat coming from the lamps is not easily dissipated through the intermediate space.

[0008] As a reference to the current state of the art, it can be pointed out that, although many types and models of luminaires of the type we are concerned with here exist on the market, the applicant, at least, has no knowledge of any with technical, structural or constituent features similar to those presented and claimed herein.

EXPLANATION OF THE INVENTION

[0009] The luminaire that the invention proposes satisfactorily fulfils the aforementioned objective as the ideal solution and is configured as a novelty within its field of application, its distinguishing features being summed up in the claims at the end of this document.

[0010] Specifically, the luminaire of the invention, which as has been explained in previous sections, is a luminaire whose housing is designed so that the source or light sources incorporated are LED lamps or similar that generate heat toward their rear side, with the peculiarity of an improved design of housing structure which incorporates spaces that favour the dissipation of said heat.

[0011] Thus, according to a first characteristic of the invention, the luminaire in question is provided with a housing that comprises two areas, one below the fixture appropriate for the insertion of the lamp holder with its light sources. and another on top of it to hold several components such as the power source.

[0012] These two areas may or may not be on the same part and they are separated by at least one point of junction, determined by a central joining partition wall and corresponding lateral joining partition walls.

[0013] The heat generated by the lamps in the lower area is emitted towards the upper area, where several components that could be damaged by the high temperatures are housed.

[0014] The heat passes through the open intermediate space before arriving at the upper area towards at least one side of the housing, so that part of the heat is extracted to the open side(s) of the luminaire and not to the upper area of the luminaire.

[0015] It is also important to highlight that said intermediate space comprises an open space whose height increases in the direction of the sides of the housing where it is open, so that it forms an approximately wedge shaped configuration, which favours the circulation of the heat coming from the lower area of the housing, where the lamps are housed towards said side so that part of it leaves the housing and does not affect the upper area.

[0016] Similarly, according to another additional characteristic of the invention, the luminaire has an air chamber in the upper area, where several components are housed, that separates said components from the lower base of said upper area of the housing, in such a way that said power source is moved even further away and better isolated from the heat generated by the lamps

housed in the lower area of the housing.

[0017] In one preferred embodiment of the invention, said air chamber is determined by the existence of a support plate on which several components are incorporated.

DESCRIPTION OF THE DRAWINGS

[0018] To complement the description described herein, and with the objective of helping to understand better the features of the invention, a plan accompanying the present description, and forming part of the same, in an illustrative and non-limiting way, shows the following:

Figure 1.- Shows a perspective and sectional view of an example of an embodiment of the luminaire, object of the invention, where the main parts and its comprising elements, as well as its configuration and disposition can be appreciated; and

Figure 2.- Shows a front and sectional view, of the same example of embodiment of the luminaire, according to the invention, shown in the figure 1.

PREFERRED EMBODIMENT OF THE INVENTION

[0019] In the light of the aforementioned figures, and according to the adopted numbering, a non-limiting example of a preferred embodiment of the luminaire of the invention may be appreciated in them, which comprises the parts and elements indicated and described in detail below.

[0020] Thus, as observed in said figures, the luminaire (1) in question which has LED or similar type lamps (2) that generate heat in the opposite direction to the light radiation, that is, in the direction of the lamp-holding support (3) to which they are attached, comprises a housing made up of two areas, one lower area (4a) and another upper area (4b) separated by two intermediate spaces (5) open on the sides and determined by a central joining partition wall (4c) and corresponding lateral joining partition walls (4d) for the improvement of stability in the upper area (4b).

[0021] The lower area (4a) of the housing incorporates the lamp-holding support (3) and the lamps (2), being configured by a perimeter wing (6), while the upper area (4b) is configured in such a way that it acts as a housing (7) for the incorporation of the power source (8) of the lamps (2) and, optionally, other components.

[0022] As can be clearly appreciated in figure 2, each intermediate space (5) is a hollow area with a wedge-shaped section whose dimension increases in the direction of the two sides of the housing where it is open to the exterior, with the objective of favouring the circulation of heat coming from the lamps (2) arranged inside the lower area (4a) towards the exterior through the open sides of the two intermediate spaces (5) of the luminaire

(1).

[0023] Additionally, in the upper area (4b), in the lower area of the housing (7) where the power source (8) is located, the existence of an air chamber (9) is envisaged that separates said power source (8) from the lower base of said upper area (4b) and, therefore, isolates the heat generated by the lamps (2) even more.

[0024] Preferably, said air chamber (9) is determined by a support plate (10) which is laterally supported for this purpose, with the help of a corresponding means of attachment (11) which support the power source (8) in a raised position, always at a certain distance over the lower base of the mentioned upper area (4b).

[0025] It is thus evident that the main function of the invention is produced when, after connecting the power source (8) and the lamps (2) are subsequently turned on, generating heat in the opposite direction to the light radiation, part of the same heat is dissipated through the open sides of the intermediate spaces (5) while another part is mitigated in the air chamber (9) this improving the conditions of the components housed in the housing (7) of the upper area (4b).

[0026] Now that the nature of the present invention, as well as its implementation have been sufficiently described, it is not deemed necessary to extend the explanation for an expert in the field to understand the scope and the benefits derived therefrom, and it is affirmed that, in its essence, it can be put into practice in other embodiments that differ in detail from the example, and which will also be covered by the protection conferred as long as its fundamental principles are not changed or modified

Claims

1. LUMINAIRE of the type that has lamps (2) of the type that generate heat in the opposite direction to the light radiation, the housing comprising two areas, one lower area (4a) and one upper area (4b) separated by, at least one point of juncture (4c, 4d), that determines the existence of at least one intermediate space (5) between the upper area (4b) comprising a housing (7) for several components and the lower area (4a) comprising the lamps (2) and the lamp-holding support (3) **characterized in that** the point of juncture is a central joining partition wall (4c) and corresponding lateral joining partition walls (4d) and the intermediate space (5) is a hollow area of wedge-shaped section whose dimension increases in the direction of the lateral extremes of the housing where it is open to the exterior.
2. LUMINAIRE, according to claim 1, **characterized by** that there exists an air chamber (9) in the upper area (4b), where several components are located, which separates said components from the lower base of said upper area (4b).

3. LUMINAIRE, according to claim 2, **characterized by** that the air chamber (9) is determined by a support plate (10) which maintains the various components in a raised position at a certain distance over the lower base of the upper area (4b).
4. LUMINAIRE, according to claim 3, **characterized by** that the support plate (10) is attached to the upper area (4b) through a means of attachment (11).

Patentansprüche

1. Leuchte der Art, die Lampen (2) der Art, die Wärme in der Gegenrichtung zur Lichtstrahlung erzeugen, aufweist, wobei das Gehäuse zwei Bereiche umfasst, einen unteren Bereich (4a) und einen oberen Bereich (4b), die durch mindestens eine Verbindungsstelle (4c, 4d) getrennt sind, die das Vorhandensein von mindestens einem Zwischenraum (5) zwischen dem oberen Bereich (4b), der ein Gehäuse (7) für mehrere Komponenten umfasst, und dem unteren Bereich (4a), der die Lampen (2) und die Lampenhalterungsstütze (3) umfasst, bestimmt, **dadurch gekennzeichnet, dass** die Verbindungsstelle eine mittlere Verbindungstrennwand (4c) und entsprechende seitliche Verbindungstrennwände (4d) ist und der Zwischenraum (5) ein hohler Bereich mit keilförmigem Querschnitt ist, dessen Abmessungen sich in der Richtung der seitlichen Enden des Gehäuses vergrößern, wo er nach außen offen ist.
2. Leuchte nach Anspruch 1, **dadurch gekennzeichnet, dass** eine Luftkammer (9) in dem oberen Bereich (4b) vorhanden ist, wo mehrere Komponenten liegen, welche die Komponenten von dem unteren Boden des oberen Bereichs (4b) trennt.
3. Leuchte nach Anspruch 2, **dadurch gekennzeichnet, dass** die Luftkammer (9) durch eine Stützplatte (10) bestimmt wird, welche die diversen Komponenten in einer erhöhten Position in einem gewissen Abstand über dem unteren Boden des oberen Bereichs (4b) hält.
4. Leuchte nach Anspruch 3, **dadurch gekennzeichnet, dass** die Stützplatte (10) an dem oberen Bereich (4b) durch ein Befestigungsmittel (11) befestigt ist.

Revendications

1. LUMINAIRE du type qui comporte des lampes (2) du type qui génèrent de la chaleur dans la direction opposée au rayonnement lumineux, le boîtier comprenant deux zones, une zone inférieure (4a) et une zone supérieure (4b) séparées par, au moins un

point de jointure (4c, 4d), qui détermine l'existence d'au moins un espace intermédiaire (5) entre la zone supérieure (4b) comprenant un boîtier (7) pour plusieurs composants et la zone inférieure (4a) comprenant les lampes (2) et le support qui retient les lampes (3). **caractérisé en ce que** le point de jointure est une paroi de séparation et de liaison centrale (4c) et des parois de séparation et de liaison latérales correspondantes (4d) et l'espace intermédiaire (5) est une zone creuse de section en forme de coin dont la dimension augmente dans la direction des extrémités latérales du boîtier où il s'ouvre vers l'extérieur.

2. LUMINAIRE, selon la revendication 1, **caractérisé en ce qu'il** existe une chambre à air (9) dans la zone supérieure (4b), où plusieurs composants sont situés, qui sépare lesdits composants de la base inférieure de ladite zone supérieure (4b).
3. LUMINAIRE, selon la revendication 2, **caractérisé en ce que** la chambre à air (9) est déterminée par une plaque de support (10) qui maintient les divers composants dans une position relevée à une certaine distance au-dessus de la base inférieure de la zone supérieure (4b).
4. LUMINAIRE, selon la revendication 3, **caractérisé en ce que** la plaque de support (10) est fixée à la zone supérieure (4b) par le biais d'un moyen de fixation (11).

FIG. 1


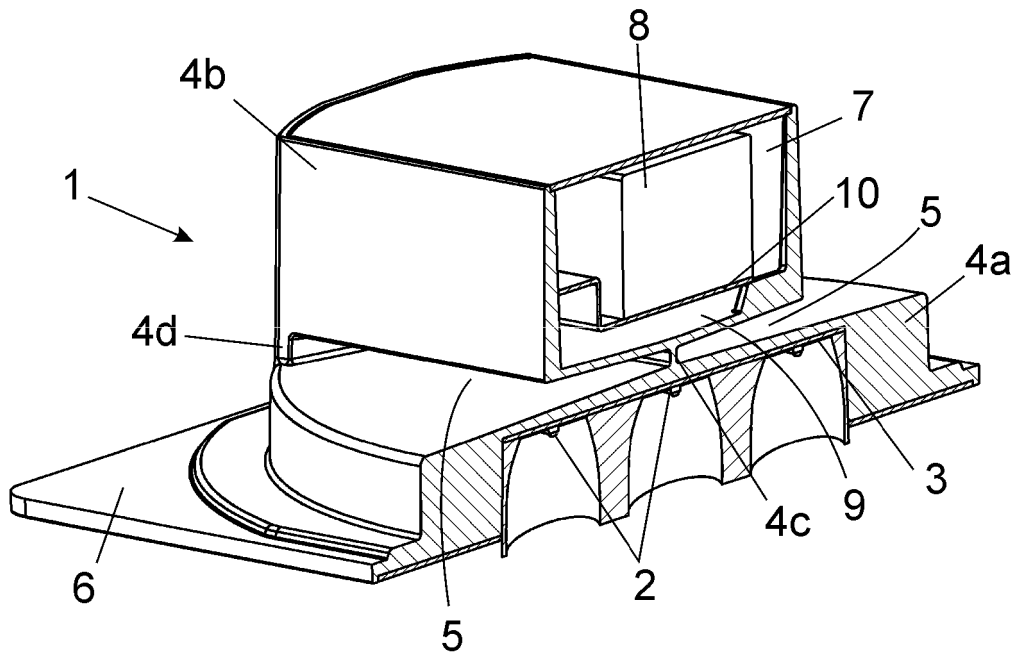


FIG. 2

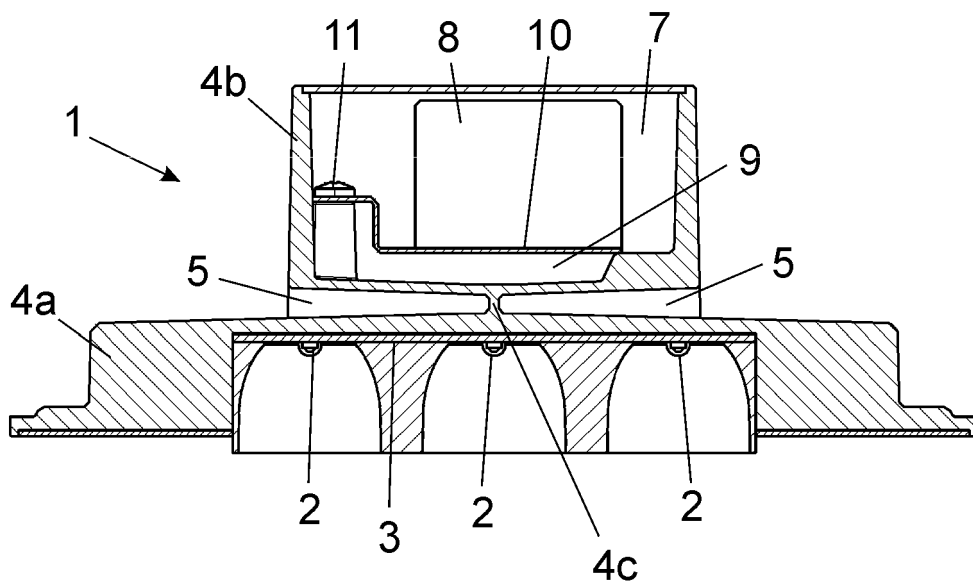

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2008159341 A [0007]