



(11) **EP 2 877 633 B9**

(12) **CORRECTED EUROPEAN PATENT SPECIFICATION**

(15) Correction information:
Corrected version no 1 (W1 B1)
Corrections, see
Claims EN 4, 7, 10

(51) Int Cl.:
D21H 21/00 (2006.01) **D21H 17/20** (2006.01)
D21H 17/33 (2006.01) **D21C 9/08** (2006.01)
D21H 17/46 (2006.01) **D21H 17/53** (2006.01)
D21H 21/02 (2006.01)

(48) Corrigendum issued on:
02.01.2019 Bulletin 2019/01

(86) International application number:
PCT/US2013/052338

(45) Date of publication and mention
of the grant of the patent:
29.08.2018 Bulletin 2018/35

(87) International publication number:
WO 2014/018898 (30.01.2014 Gazette 2014/05)

(21) Application number: **13822937.2**

(22) Date of filing: **26.07.2013**

(54) **GLYCEROL-BASED POLYMERS FOR REDUCING DEPOSITION OF ORGANIC CONTAMINANTS IN PAPERMAKING PROCESSES**

GLYCERINBASIERTE POLYMERE ZUR REDUZIERUNG DER ABLAGERUNG ORGANISCHER VERUNREINIGUNGEN IN PAPIERHERSTELLUNGSVERFAHREN

POLYMÈRES À BASE DE GLYCÉROL DESTINÉS À RÉDUIRE LE DÉPÔT DE CONTAMINANTS ORGANIQUES AU COURS DE PROCESSUS DE FABRICATION DE PAPIER

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

• **SHEVCHENKO, Sergey M.**
Aurora, Illinois 60502 (US)

(30) Priority: **27.07.2012 US 201213560771**

(74) Representative: **Godemeyer Blum Lenze**
Patentanwälte
Partnerschaft mbB - werkpatent
An den Gärten 7
51491 Overath (DE)

(43) Date of publication of application:
03.06.2015 Bulletin 2015/23

(73) Proprietor: **Ecolab USA Inc.**
St. Paul, MN 55102 (US)

(56) References cited:
EP-A1- 0 568 229 WO-A2-2007/002553
WO-A2-2011/112703 US-A- 5 429 718
US-A- 5 667 634 US-A1- 2003 124 710
US-A1- 2010 269 989 US-A1- 2011 092 743
US-A1- 2011 094 695 US-A1- 2011 220 307
US-B2- 8 048 268

(72) Inventors:
• **LI, Xiaojin Harry**
Palatine, Illinois 60063 (US)
• **RICHARDSON, Paul F.**
Pittsburgh, Pennsylvania 15216 (US)

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 877 633 B9

Description

FIELD OF THE INVENTION

5 **[0001]** The present invention relates to methods of reducing the deposition of organic contaminants, such as pitch and stickies, in papermaking processes.

BACKGROUND OF THE INVENTION

10 **[0002]** The deposition of organic contaminants on process equipment, screens, and containment vessels in paper-making can significantly reduce process efficiency and paper quality. Deposits on machine wires, felts, foils, headbox surfaces, screens, and instruments can result in costly downtime for cleaning to avoid the problems associated with poor process control, reduced throughput, and substandard sheet properties. Such contaminants are generically referred to in the paper industry as either "pitch" or "stickies". Pitch deposits generally originate from natural resins present in
 15 virgin pulp, including terpene hydrocarbons, rosin/fatty acids or salts thereof, such as pimaric acid, pinic acid and abietic acid, glyceryl esters of fatty acid, sterols, etc. Stickies and white pitch generally refers to the hydrophobic substances used in the manufacture of paper such as sizing agents, coating binders, and pressure sensitive or contact adhesives. Such substances can form deposits when reintroduced in recycled fiber systems. Other common organic contaminants that are chemically similar to stickies and found in recycle applications include wax, which originates primarily from wax-coated old corrugated containers, and polyisoprene. Pitch and stickies may also contain entrapped inorganic materials
 20 such as talc, calcium carbonate, or titanium dioxide.

[0003] Recycled fiber also refers to secondary fibers which are repulped to provide the papermaking furnish with raw material for the production of new papers. The secondary fibers may be either pre-consumer or post-consumer paper material that is suitable for use in the production of paper products. Sources of secondary fiber may include old newspaper
 25 (ONP), old corrugated containers (OCC), mixed office waste (MOW), computer printout (CPO), ledger, etc. These once-processed papers contain various types of adhesives (pressure sensitive, hot melts, etc.), inks, and coating binders.

[0004] Pitch and stickies are hydrophobic in nature and thus unstable as colloids in aqueous papermaking environments, thereby facilitating their deposition. The major problems arising from deposition are as follows: (1) reduced throughput due to plugging of forming fabrics and press felts (2) sheet holes or paper breaks due to large deposits
 30 breaking loose from the equipment, and (3) reduced sheet quality due to large particle contaminants incorporated in the final sheet.

[0005] Surfactant additives are often used to disperse pitch and stickies, but current products have limitations. For example, cationic polymer dispersants can be easily attracted to fiber surfaces, which may reduce their effectiveness, and they may further interfere with the charge dynamics of fibers, which may lower the effectiveness of other additives
 35 such as strength agents. Anionic polymer dispersants may cause precipitation problems with wet strength agents or inorganic components. Nonionic surfactants such as nonylphenol ethoxylates may cause foaming issues which can upset the system. Accordingly, improved methodologies for controlling contaminant deposition in the papermaking process are needed.

[0006] Document US 2011/220307 A discloses a method of improving the digestion of wood chips into pulp. The method involves: adding a lipohydrophilic glycerol-based polymer additive to a solution used in the digestion process.
 40 This additive is effective at facilitating digestion. The branched and ether structure of the additive allows it to withstand the harsh nature of a highly alkaline environment. In addition, it is more soluble in high pH than other surfactants. The structure, resistance, and particular balance between hydrophobic and hydrophilic regions, causes the additive to increase the interaction between the wood chips and the digestion chemicals.

SUMMARY OF THE INVENTION

[0007] The invention provides a method of reducing the deposition of contaminants in a papermaking process, comprising adding to pulp or a papermaking system an effective amount of a branched, cyclic glycerol-based polymer,
 50 according to claims 1 - 11. In some embodiments, the branched, cyclic glycerol-based polymer is a lipohydrophilic glycerol-based polymer.

In some embodiments, the branched, cyclic glycerol-based polymer is cross-linked.

[0008] In some embodiments, each R_1 is independently selected from hydrogen, C_6 - C_{18} alkyl, and $-C(O)CH(OH)CH_3$. In some embodiments, each R_1 is independently selected from hydrogen, C_{10} - C_{16} alkyl, and $-C(O)CH(OH)CH_3$.

55 **[0009]** In some embodiments, the method further comprises adding to the pulp or the papermaking system at least one component selected from the group consisting of fixatives, detackifiers, and other dispersants.

[0010] In some embodiments, the organic contaminants are hydrophobic contaminants. In some embodiments, the hydrophobic contaminants are stickies deposits. In some embodiments, the hydrophobic contaminants are pitch deposits.

In some embodiments, the hydrophobic contaminants are white pitch deposits.

[0011] In some embodiments, the branched, cyclic glycerol-based polymer is added to a pulp slurry in a pulper, latency chest, reject refiner chest, disk filter or Decker feed or accept, whitewater system, pulp stock storage chest, , blend chest, machine chest, headbox, saveall chest, or any combination thereof in the papermaking process. In some embodiments, the branched, cyclic glycerol-based polymer is added to a surface in the papermaking process selected from a pipe wall, a chest wall, a machine wire, a press roll, a felt, a foil, an Uhle box, a dryer, or any combination thereof. In some embodiments, the branched, cyclic glycerol-based polymer is added to a pulp slurry in the papermaking process. In some embodiments, the effective amount of the branched, cyclic glycerol-based polymer is from about 5 ppm to about 300 ppm. In some embodiments, the effective amount of the branched, cyclic glycerol-based polymer is from about 50 ppm to about 200 ppm. In some embodiments, the effective amount of the branched, cyclic glycerol-based polymer is about 100 ppm.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012]

FIG. 1 is an illustration of a branched, cyclic glycerol-based polymer.

FIG. 2 is an illustration of basic structural units that may be present in the glycerol-based polymers.

FIG. 3 illustrates pitch deposition data in Model Test 2, for a branched, cyclic glycerol-based polymer compared to a control.

FIG. 4 illustrates pitch deposition data in Model Test 1, for a branched, cyclic glycerol-based polymer compared to a control.

FIG. 5 illustrates pitch deposition data in Model Test 1, for two branched, cyclic glycerol-based polymers compared to currently available products and a control.

FIG. 6 illustrates pitch deposition data in Model Test 2, for a branched, cyclic glycerol-based polymer compared to a control.

FIG. 7 illustrates stickies deposition data in Mill Test, for a branched, cyclic glycerol-based polymer compared to a control.

DETAILED DESCRIPTION

[0013] Described herein are methods for controlling, reducing or eliminating the deposition of contaminants in a papermaking process. The method includes the step of adding to the papermaking process an effective amount of a branched, cyclic glycerol-based polymer such as one illustrated in FIG. 1. The inventors have discovered that adding a branched, cyclic glycerol-based polymer to a papermaking process can effectively decrease hydrophobic contaminant deposition at lower doses than current products. Both ester and alkyl ether functionalities of the branched, cyclic polyglycerol may result in strong lipophilic interactions with pitch and stickies in a flow of contaminated pulp slurry. The hydrophilic portion of the alkylated, branched, cyclic polyglycerol esters provides for dispersion of the pitch and stickies particles in water. The branching and cyclic structures in the backbone of the polymer may increase the polymer dimensions for the effective interactions to disperse organic deposits. These branched, cyclic glycerol-based polymers lack some of the disadvantages associated with current products such as cationic and anionic surfactants, as well as nonionic surfactants that cause foaming problems.

1. Definitions

[0014] The terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting. As used in the specification and the appended claims, the singular forms "a," "and" and "the" include plural references unless the context clearly dictates otherwise.

[0015] Any ranges given either in absolute terms or in approximate terms are intended to encompass both, and any definitions used herein are intended to be clarifying and not limiting. Notwithstanding that the numerical ranges and parameters setting forth the broad scope of the invention are approximations, the numerical values set forth in the specific examples are reported as precisely as possible. Any numerical value, however, inherently contains certain errors necessarily resulting from the standard deviation found in their respective testing measurements. Moreover, all ranges disclosed herein are to be understood to encompass any and all subranges (including all fractional and whole values) subsumed therein.

[0016] "Acyl" as used herein refers to a substituent having the general formula $-C(O)R$, wherein R is alkyl, alkenyl, alkynyl, aryl, heteroaryl or heterocyclyl, any of which may be further substituted

[0017] "Alkyl" as used herein refers a linear, branched, or cyclic saturated hydrocarbon group, such as a methyl group,

ethyl group, n-propyl group, isopropyl group, n-butyl group, isobutyl group, tert-butyl group, n-pentyl group, isopentyl group, n-hexyl group, isohexyl group, cyclopentyl group, cyclohexyl group, and the like. Alkyl groups may be optionally substituted.

[0018] As used herein, the term "branched" refers to a polymer having branch points that connect three or more chain segments. The degree of branching may be determined by ^{13}C NMR based on a known literature method described in Macromolecules, 1999, 32, 4240. As used herein, a branched polymer includes hyperbranched and dendritic polymers.

[0019] "Cyclic" means a polymer having cyclic or ring structures. The cyclic structure units can be formed by intramolecular cyclization or any other ways.

[0020] "Degree of branching" or DB means the mole fraction of monomer units at the base of a chain branching away from the main polymer chain relative to a perfectly branched dendrimer, determined by ^{13}C NMR based on a known literature method described in Macromolecules, 1999, 32, 4240. Cyclic units or branched alkyl chains derived from fatty alcohols or fatty acids are not included in the degree of branching. In a perfect dendrimer the DB is 1 (or 100%). FIG. 1 illustrates a compound with a DB of 1/7.

[0021] "Degree of cyclization" or DC means the mol fraction of cyclic structure units relative to the total monomer units in a polymer. The cyclic structure units can be formed by intramolecular cyclization of the polyols or any other ways to incorporate in the polyols. The cyclic structure units comprise basic structure units (V, VI and VII of FIG. 2) and the analogues thereof. The degree of cyclization may be determined by ^{13}C NMR.

[0022] "Glycerol-based polymers" refers to any polymers containing repeating glycerol monomer units such as polyglycerols, polyglycerol derivatives, and a polymer consisting of glycerol monomer units and at least another monomer units to other multiple monomers units regardless of the sequence of monomers unit arrangements. In embodiments, glycerol-based polymers include alkylated, branched, cyclic polyglycerol esters.

[0023] "Hyperbranched" means a polymer, which is highly branched with three-dimensional tree-like structures or dendritic architecture.

[0024] "Lipohydrophilic glycerol-based polymers" means glycerol-based polymers having lipophilic and hydrophilic functionalities, for example, lipohydrophilic polyglycerols resulting from lipophilic modification of polyglycerols (hydrophilic) in which at least a part of and up to all of the lipophilic character of the polymer results from a lipophilic carbon bearing group engaged to the polymer but not being an alkoxylate group, the lipophilic modification being one such as alkylation, and esterification modifications.

[0025] "Papermaking process" means a method of making paper products from pulp comprising forming an aqueous cellulosic papermaking furnish, draining the furnish to form a sheet and drying the sheet. The steps of forming the papermaking furnish, draining and drying may be carried out in any conventional manner generally known to those skilled in the art. The papermaking process may also include a pulping stage, i.e. making pulp from a lignocellulosic raw material and bleaching stage, i.e. chemical treatment of the pulp for brightness improvement.

[0026] "Substituted" as used herein may mean that any at least one hydrogen on the designated atom or group is replaced with another group provided that the designated atom's normal valence is not exceeded. For example, when the substituent is oxo (i.e., =O), then two hydrogens on the atom are replaced. Combinations of substituents and/or variables are permissible provided that the substitutions do not significantly adversely affect synthesis or use of the compound.

1. Papermaking processes

[0027] Disclosed herein are methods for controlling, i.e. reducing or eliminating the deposition of contaminants in a papermaking process, comprising adding a branched, cyclic glycerol-based polymer to a papermaking process, such as adding the polymer to pulp or to a papermaking system. The branched, cyclic glycerol-based polymer may be added to a papermaking process involving virgin pulp, recycled pulp or combination thereof at any one or more of various locations during the papermaking process. Suitable locations may include pulper, latency chest, reject refiner chest, disk filter or Decker feed or accept, whitewater system, pulp stock storage chests (either low density ("LD"), medium consistency (MC), or high consistency (HC)), blend chest, machine chest, headbox, saveall chest, paper machine whitewater system, and combinations thereof. The branched, cyclic glycerol-based polymer may be added to a pulp slurry in the papermaking process. The branched, cyclic glycerol-based polymer may also be applied to a surface in the papermaking process, such as a metal, plastic, or ceramic surfaces such as pipe walls, chest walls, machine wires, press rolls, felts, foils, Uhle boxes, dryers and any equipment surfaces that contact with fibers during the paper process. The method may include the step of contacting fibers with a branched, cyclic glycerol-based polymer. The fibers may be cellulose fibers, such as recycled fibers, virgin wood cellulose fibers, or combinations thereof.

[0028] In embodiments employing recycled fibers, the recycled fibers may be obtained from a variety of paper products or fiber containing products, such as paperboard, newsprint, printing grades, sanitary and other paper products. These products may comprise, for example, old corrugated containers (OCC), old newsprint (ONP), mixed office waste (MOW), old magazines and books, or combinations thereof. These types of paper products typically contain large amounts of

hydrophobic contaminants. In embodiments employing virgin fibers, the method may involve the use of pulp derived from softwood, hardwood or blends thereof. Virgin pulp can include bleached or unbleached Kraft, sulfite pulp or other chemical pulps, and groundwood (GW) or other mechanical pulps such as, for example, thermomechanical pulp (TMP).

[0029] Examples of organic hydrophobic contaminants include what is known in the industry as "stickies" that may include synthetic polymers resulting from adhesives and the like, glues, hot melts, coatings, coating binders, pressure sensitive binders, unpulped wet strength resins and "pitch" that may include wood resins, rosin and resin acid salts. These types of materials are typically found in paper containing products, such as newsprint, corrugated container, and/or mixed office waste. These hydrophobic contaminants can have polymers present, such as styrene butadiene rubber, vinyl acrylate polymers, polyisoprene, polybutadiene, natural rubber, ethyl vinyl acetate polymers, polyvinyl acetates, ethylvinyl alcohol polymers, polyvinyl alcohols, styrene acrylate polymers, and/or other synthetic type polymers.

[0030] The method may control hydrophobic contaminants in papermaking processes, e.g., the deposition of hydrophobic contaminants on components of a papermaking process. For example, the method may control hydrophobic contaminants present in paper mill furnish. For example, the method may reduce, inhibit or eliminate the deposition of hydrophobic contaminants in a papermaking process. The method may also reduce the size of contaminant particles through dispersion and suppressing agglomeration, and/or reduce the tackiness of the hydrophobic contaminants when compared to a papermaking process in which a branched, cyclic glycerol-based polymer is not employed. For example, the method may reduce the average size of contaminant particles by at least about 5% to about 40% (e.g., about 5%, 6%, 7%, 8%, 9%, 10%, 15%, 20%, 25%, 30%, 35% or 40%) when compared to a papermaking process in which a branched, cyclic glycerol-based polymer is not employed. In embodiments, the method may reduce the deposition of hydrophobic contaminants by at least about 5% to about 95% (e.g., about 5%, 6%, 7%, 8%, 9%, 10%, 15%, 20%, 25%, 30%, 35%, 40%, 45%, 50%, 55%, 60%, 65%, 70%, 75%, 80%, 85%, 90% or 95%) when compared to a papermaking process in which a branched, cyclic glycerol-based polymer is not employed.

[0031] In the method, a glycerol based polymer may be added to a papermaking process in an amount effective to reduce deposition of hydrophobic contaminants when compared to a papermaking process in which a branched, cyclic glycerol-based polymer is not employed. For example, a glycerol based polymer may be added to pulp slurry in an amount from about 10 ppm to about 300 ppm, e.g., from about 50 ppm to about 200 ppm, or about 50ppm, 60ppm, 70ppm, 80ppm, 90ppm, 100ppm, 110ppm, 120ppm, 130ppm, 140ppm, 150ppm, 160ppm, 170ppm, 180ppm, 190ppm, to about 200 ppm. The effective amount may reduce the deposition of hydrophobic contaminants by at least 5% to about 95% (e.g., about 5%, 6%, 7%, 8%, 9%, 10%, 15%, 20%, 25%, 30%, 35%, 40%, 45%, 50%, 55%, 60%, 65%, 70%, 75%, 80%, 85%, 90% or 95%) when compared to a papermaking process in which a branched, cyclic glycerol-based polymer is not employed. The method may further include adding to the papermaking system at least one component selected from the group consisting of fixatives, detackifiers and other dispersants.

2. Glycerol-based polymers

[0032] The method for reducing the deposition of contaminants in a papermaking process, comprises adding a branched, cyclic glycerol-based polymer to a papermaking process. The branched, cyclic glycerol-based polymer may be any polymer containing repeating glycerol monomer units such as polyglycerols, polyglycerol derivatives, and polymers consisting of glycerol monomer units and at least one other monomer unit, regardless of the sequence of monomers unit arrangements. Suitably, other monomers may be polyols or hydrogen active compounds such as pentaerythritol, glycols, amines, etc. capable of reacting with glycerol or any polyglycerol structures.

[0033] In embodiments, the branched, cyclic glycerol-based polymer may be modified with a lipophilic group, e.g., alkylated or esterified. Without being limited as to theory, modification of a branched, cyclic glycerol-based polymer with one or more lipophilic groups may produce branched, cyclic glycerol-based polymers with an advantageous balance of lipophilic and hydrophilic moieties. The lipophilic groups may interact with hydrophobic contaminants in a papermaking process, e.g., in a pulp slurry. The hydrophilic portion may aid dispersing the hydrophilic contaminants in water. The lipophilic groups may be introduced via known methods such as alkylation, alkoxylation esterification, or combinations thereof.

[0034] In embodiments, at least one portion of the branched, cyclic glycerol-based polymer has both alkyl and ester functionalities. The nature of different polarities from both functionalities may be adjusted to optimally perform in dispersing pitch and stickies.

[0035] The glycerol-based polymer is typically branched. The branching structure in the backbone of the polymer, not in the lipophilic chains, may increase the polymer dimensions for the effective interfacial interactions to result in exceptional organic deposit control. Branching may be particularly useful as it facilitates increased molecular weight of the branched, cyclic glycerol-based polymers. Branched polymers include both hyperbranched and dendritic structures. The branched, cyclic glycerol-based polymer may have a degree of branching of at least about 0.10, e.g., from about 0.20 to about 0.75 or from about 0.30 to about 0.50. For example, a branched, cyclic glycerol-based polymer may have a degree of branching of about 0.10, about 0.15, about 0.20, about 0.25, about 0.30, about 0.35, about 0.40, about 0.45, about 0.50,

about 0.55, about 0.60, about 0.65, about 0.70 or about 0.75.

[0036] The glycerol-based polymer is also typically cyclic, i.e. has at least one cyclic or ring structure. Such cyclic structures may be formed, for example, during the polymerization process via intramolecular cyclization reactions. The rigidity of cyclic structures in the polymer backbone may uniquely extend the molecular dimensions and increase the hydrodynamic volume, to better act interfacially for dispersing pitch and stickies. The branched, cyclic glycerol-based polymer may have a degree of cyclization of about 0.01 to about 0.50. For example, the branched, cyclic glycerol-based polymer may have a degree of cyclization of at least 0.01, e.g., about 0.02 to about 0.19 or about 0.05 to about 0.15. For example, a branched, cyclic glycerol-based polymer may have a degree of cyclization of about 0.01, about 0.02, about 0.03, about 0.04, about 0.05, about 0.06, about 0.07, about 0.08, about 0.09, about 0.10, about 0.11, about 0.12, about 0.13, about 0.14, about 0.15, about 0.16, about 0.17, about 0.18, or about 0.19.

[0037] Suitable branched, cyclic glycerol-based polymers include compounds as illustrated in FIG. 1. In these compounds, m, n, o, p, q and r are independently 0 to 700; R and R' are independently $-(CH_2)_x-$, wherein each x is independently 0 or 1; and each R_1 is independently selected from hydrogen, acyl and alkyl. Furthermore, it should be understood that the compounds illustrated in FIG. 1 are random polymers of the indicated monomeric units. For example, in an exemplary embodiment in which m, n, o, p, q and r are each 1, it is understood that the monomeric units may be present in any order and not necessarily in the order illustrated in FIG. 1. In another exemplary embodiment in which m, n, o, p, q and r are each 2, it is understood that the monomeric units may be present in any order, where the two "m" units may or may not be adjacent to each other, the two "n" units may or may not be adjacent to each other, and so on.

[0038] In embodiments of the formula illustrated in FIG. 1, each m, n, o and p is independently 1-700, and each q and r is independently 0-700. In embodiments of the formula illustrated in FIG. 1, each m, n, o and q is independently 1-700, and each p and r is independently 0-700.

[0039] In embodiments of the formula illustrated in FIG. 1, each m, n, o, p, q and r is independently selected from 0 to 50, 0 to 40, 0 to 30 or 0 to 25. Suitably, each of m, n, o, p, q and r are independently selected from 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49 and 50 (or more).

[0040] In embodiments of the formula illustrated in FIG. 1, each R_1 is independently selected from hydrogen, acyl and C_1 - C_{50} alkyl. When R_1 is alkyl, it may be, for example, a C_1 - C_{50} alkyl, C_1 - C_{40} alkyl, C_1 - C_{30} alkyl, C_1 - C_{24} alkyl, C_6 - C_{18} alkyl, C_{10} - C_{16} alkyl or C_{12} - C_{14} alkyl group. For example, each R_1 that is alkyl may independently be a C_1 , C_2 , C_3 , C_4 , C_5 , C_6 , C_7 , C_8 , C_9 , C_{10} , C_{11} , C_{12} , C_{13} , C_{14} , C_{15} , C_{16} , C_{17} , C_{18} , C_{19} , C_{20} , C_{21} , C_{22} , C_{23} or C_{24} alkyl group. The R_1 group may be optionally substituted with other hydrocarbon-based groups, such as branched, cyclic, saturated, unsaturated or unsaturated groups.

[0041] When R_1 is acyl, it may be, for example, a C_1 - C_{15} acyl group. When R_1 is acyl, it may be, for example, $-C(O)CH(OH)CH_3$ (lactate). In embodiments, lactate or lactic acid may be produced as a co-product during the synthesis of the branched, cyclic glycerol-based polymer, which may further react with the polymer.

[0042] In embodiments, the branched, cyclic glycerol-based polymer may comprise at least two repeating units selected from at least one of the structures listed in FIG. 2, including but not limited to linear structures I and II, branched structures III, IV and VIII, cyclic structures V, VI and VII, and any combination thereof. Any structure in FIG. 2 can be combined with any structure or structures including itself, in any order. The cyclic linkages of any basic cyclic structures in FIG. 2 may contain any structure or structures as a part or parts of linkages. In each of the repeating units depicted in FIG. 2, each R_1 is independently selected from hydrogen, acyl and alkyl, and each n and n' is independently 0 to 700.

[0043] In embodiments in which the branched, cyclic glycerol-based polymer is a lipohydrophilic glycerol-based polymer, it may be a polymer as illustrated in FIG. 1, wherein: m, n, o, p, q and r are independently 0 to 700; R and R' are independently $-(CH_2)_x-$, wherein each x is independently 0 or 1; and each R_1 is independently selected from hydrogen, acyl and alkyl, wherein at least R_1 is alkyl.

[0044] The branched, cyclic glycerol-based polymer may have a weight-average molecular weight of about 1000 Da to about 500000 Da, e.g., about 2000 Da to about 400000 Da, or about 3000 Da to about 300000 Da. For example, the branched, cyclic glycerol-based polymer may have a molecular weight of about 1000 Da, about 2000 Da, about 3000 Da, about 4000 Da, about 5000 Da, about 6000 Da, about 7000 Da, about 8000 Da, about 9000 Da, about 10000 Da, about 15000 Da, about 20000 Da, about 25000 Da, about 30000 Da, about 35000 Da, about 40000 Da, about 45000 Da, about 50000 Da, about 60000 Da, about 70000 Da, about 80000 Da, about 90000 Da, about 100000 Da, about 150000 Da, about 200000 Da, about 250000 Da, about 300000 Da, about 350000 Da, about 400000 Da, about 450000 Da, or about 500000 Da.

a. Cross-linked glycerol-based polymers

[0045] The branched, cyclic glycerol-based polymer may be crosslinked. In some embodiments the branched, cyclic glycerol-based polymer may self-crosslink, and in some embodiments the polymer may be crosslinked via addition of a crosslinking agent. Suitable crosslinking agents typically include at least two reactive groups such as double bonds,

aldehydes, epoxides, halides, and the like. For example, a cross-linking agent may have at least two double bonds, a double bond and a reactive group, or two reactive groups. Nonlimiting examples of such agents are diisocyanates, N,N-methylenebis(meth)acrylamide, polyethyleneglycol di(meth)acrylate, glycidyl(meth)acrylate, dialdehydes such as glyoxal, di- or tri-epoxy compounds such as glycerol diglycidyl ether and glycerol triglycidyl ether, dicarboxylic acids and anhydrides such as adipic acid, maleic acid, phthalic acid, maleic anhydride and succinic anhydride, phosphorus oxychloride, trimetaphosphates, dimethoxydimethylsilane, tetraalkoxysilanes, 1,2-dichloroethane, 1,2-dibromoethane, dichloroglycerols 2,4,6-trichloro-s-triazine and epichlorohydrin.

b. Methods of Preparing Glycerol-Based Polymers

[0046] The branched, cyclic glycerol-based polymer may be from a commercially available supplier, or synthesized according to known methods such as those described in U.S. Patent Nos. 3,637,774, 5,198,532 and 6,765,082 B2, and in U.S. Patent Application Publication Nos. 2008/0306211 and 2011/0092743, or from any combination thereof.

[0047] For example, in embodiments, a method of preparing a branched, cyclic glycerol-based polymer may include the step of: reacting a reaction mass comprising at least glycerol monomer in the presence of a strong base catalyst of a concentration above 2%, in a low reactivity atmospheric environment at a temperature above 200 °C, which produces a product comprising branched, cyclic polyols and a co-product comprising lactic acid, lactic salt, and any combination thereof. Such a method can further comprise the steps of providing a catalyst above 3%. The catalyst may be selected from the group consisting of: NaOH, KOH, CsOH, a base stronger than NaOH, and any combination thereof. The strong base catalyst in the particular amount can be used with combining a base weaker than NaOH. The atmospheric environment may be an atmospheric pressure of less than 760 mm Hg and/or may be a flow of an inert gas selected from the list of N₂, CO₂, He, other inert gases and any combination thereof and the flow is at a rate of 0.2 to 15 mol of inert gas per hour per mol of monomer. The particular atmospheric environment profile applied can be steady, gradual increase, gradual decrease or any combination thereof.

[0048] The method of preparing the branched, cyclic glycerol-based polymer may produce branched, cyclic glycerol-based polymer products selected from the group consisting of polyglycerols, polyglycerol derivatives, a polyol having both glycerol monomer units and non-glycerol monomer units and any combination thereof. The branched, cyclic glycerol-based polymer products have at least two hydroxyl groups. At least a portion of the produced polymers may have both at least a 0.1 degree of branching and at least a 0.01 degree of cyclization. The co-product may be at least 1% by weight.

[0049] The method of preparing the branched, cyclic glycerol-based polymer may make use of different forms of glycerol including pure, technical, crude, or any combination thereof. Such methods may further comprise other monomers selected from the group consisting of polyols such as pentaerythritol and glycols, amines, other monomers capable of reacting with glycerol or glycerol-based polyol intermediates and any combination thereof. The monomer(s) and/or catalyst(s) can be mixed at the very beginning of the reaction, at any time during the reaction and any combination thereof. The glycerol-based polyol products may be resistant to biological contamination for at least two years after synthesis. The method may further comprise the steps of pre-determining the desired molecular weight of the produced polyglycerol and adjusting the atmospheric environment to match the environment optimum for producing the desired molecular weight. The method may further comprise the steps of pre-determining the desired degree of branching and the desired degree of cyclization of the produced polyglycerol and the desired amount of co-product, and adjusting the atmospheric environment to match the environment optimum for producing the desired degree of branching, degree of cyclization and amount of co-product lactic acid and/or lactate salt.

[0050] A lipohydrophilic glycerol-based polymer may be produced from glycerol-based polymers, such as those that are commercially available or those described herein, according to known methods such as alkylation, esterification and any combinations thereof. For example, such polymers may be produced from glycerol-based polymers according to known methods such as alkylation, as described in German Patent Application No. 10307172, in Canadian Patent No. 2,613,704, in U.S. Patent Nos. 3,637,774, 5,198,532, 6,228,416 and 6,765,082 B2, in U.S. Patent Application Publication Nos. 2008/0306211 and 2011/0220307, in Markova et al. Polymer International, 2003, 52, 1600-1604, and the like.

[0051] Glycerol-based polymers may be produced according to known methods such as esterification of glycerol-based polymers as described in U.S. Patent No. 2,023,388, U.S. Patent Application Publication No. 2006/0286052 and the like. The esterification may be carried out with or without a catalyst such as acid(s) or base(s).

[0052] The crosslinked glycerol-based polymers may be produced in a continuous process under a low reactivity atmospheric environment according to a method described in US Patent Application No. 13/484,526, filed on May 31, 2012. The method may comprise the steps of: a) reacting a reaction mass comprising at least glycerol monomer in the presence of a strong base catalyst of a concentration of above 2% at a temperature above 200 degrees C which produces a first product comprising polyols which are both branched and cyclic, and a co-product comprising lactic acid, lactic salt, and any combination thereof, b) esterifying the first product in presence of an acid catalyst of a concentration above 5% at a temperature above 115 degrees C to produce a second product, c) alkylating the second product at a temperature above 115 degrees C to form a third product, and d) crosslinking the third product at a temperature above 115 degrees

C to form an end product.

[0053] The invention encompasses any and all possible combinations of some or all of the various embodiments described herein.

Example 1

Synthesis of a Glycerol-Based Polymer

[0054]

Step 1: 100 Units (or using different amounts) of glycerol were added to a reaction vessel followed by 3.0 to 4.0% of active NaOH relative to the reaction mixture. This mixture was agitated and then gradually heated up to 240 °C under a particular low reactivity atmospheric environment of nitrogen flow rate of 0.2 to 4 mol of nitrogen gas per hour per mol of monomer. This temperature was sustained for at least three hours to achieve the desired polyglycerol composition, while being agitated under a particular low reactivity atmospheric environment. An in-process polyglycerol sample was drawn before next step for the molecular weight/composition analysis/performance test. The analysis of polyglycerols (PG) is summarized in Table 1.

Step 2: To PG2 (Table 1) from step 1 were added lauryl alcohol (10% relative to PG2), sulfuric acid (2%) and *p*-toluenesulfonic acid (2%) at 100 °C while agitating under nitrogen atmosphere. The mixture was gradually heated up to 150 °C and kept there for 8 hours under a nitrogen flow. After cooling down, the product was dissolved in water as 50% solid (Table 2, Product 2).

Table 1: Polyglycerols

Polyglycerols in neat	Weight average MW*	Number average MW*	Polydispersity*	lactic acid weight by NMR**	Degree of branching**
Product 1 (or PG1)	6,700	2,000	3.3	20%	0.35
PG2	6,100	1,900	3.3	15%	0.32
PG3	7,800	2,000	3.8	14%	0.34
PG4	3,800	1,600	2.3	10%	0.31
PG5	3,900	1,700	2.3	12%	0.31
PG6	8,600	2,100	4.0	12%	0.35

Note: * Determined by borate aqueous SEC (size exclusion chromatography) method and calibrated with PEO/PEG standards; **determined by ¹³C NMR which is consistent with HPLC results.

Example 2

Synthesis of a Cross-linked Glycerol-Based Polymer

[0055] After cooling down, to a PG from the step 1 of Example 1 (Table 1, PG3 to PG6) was added sulfuric acid (10 to 22%). The mixture was again gradually heated up to 130° C-150 ° C and kept there for at least 30 minutes under a particular low reactivity atmospheric environment of nitrogen flow rate of 0.2 to 4 mol of nitrogen gas per hour per mol of monomer, to achieve the desired esterification. A 10 to 15% amount of C6-C16 alcohols was then added, and the mixture was heated up to 150° C and kept there under a particular low reactivity atmospheric environment for at least 30 minutes to achieve the desired alkylation. The resulting reaction mixture was stirred at 150° C under a particular low reactivity atmospheric environment for at least 30 minutes to achieve the crosslinking to produce the desired end product. After cooling down, the product was dissolved in water in as 50% solid, and directly used with or without after pH adjustment (Table 2, Product 3 to Product 6). During the whole process in-process samples were drawn every 30 minutes to 2 hours as needed to monitor the reaction progress in each step and determine the composition as needed.

Table 2: Glycerol-based polymer surface active products

Products in 50%	Polyglycerol used	Alcohols used	Weight average MW*	Number average MW*	Polydispersity*	lactic acid by HPLC**
Product 2	PG2	lauryl alcohol	7,200	1,400	5.0	5.20%
Product 3	PG3	C10-C16 alcohols	18,000	2,400	7.6	0.56%
Product 4	PG4	C10-C16 alcohols	21,000	3000	7.3	-
Product 5	PG5	1-hexanol	24,000	3,300	7.4	-
Product 6	PG6	C10-C16 alcohols	17,000	2,000	8.6	1.66%

Note: * determined by SEC method using PLgel Guard Mixed-D column and DMSO as mobile phase, and calibrated with polysaccharide standards; ** measured by HPLC external standard quantification and calibrated with lactic acid standard.

Example 3

Performance Tests

[0056] Performance testing was carried out as model pitch tests, based on the deposition of synthetic softwood pitch induced by calcium ions and mild acidification and as an on-line stickies test in an actual mill.

Model test 1. 1000 mL 0.5% softwood Kraft pulp slurry, which pH was adjusted to 10.6, was placed in an SRM -3 instrument cell and mixed with a glycerol-based polymer (5 min), followed by addition of 100 mL of a 1% solution of synthetic softwood pitch Nalco TX-6226 in isopropanol. Upon homogenization, 5 ml of 5000 ppm (as Ca²⁺ ion) solution of calcium chloride was added and the pH was adjusted to 3.5 with 5N hydrochloric acid. The deposit accumulation was then recorded.

Model test 2. 15 L of 0.4% pulp slurry (Kraft softwood) at pH 10.6 was prepared at room temperature and used as a stock sample. In each test, 1 L of the stock sample was placed in an SRM-3 cell under continuous stirring (magnetic, 300 rpm). When needed, the tested chemical was added (100 ppm as product; 11 ml of aqueous solution 1:100). The recording started, and upon equilibration (flat baseline), 100 ml 1% solution of synthetic pitch (Nalco TX-6226) in isopropanol added. The pH dropped to 8.5, and slow accumulation of a water-insoluble colloidal component was recorded for approx. 10 min. Then 4 ml 10% solution of calcium chloride dihydrate (100 ppm) was added and deposition of calcium salts was recorded at pH 8.1 for approx. 20 min (Stage 1). Then the pH was adjusted to 3.5 with a few drops of 10% HCl and deposition of free acids and calcium salts recorded under acidic conditions (Stage 2). The data clearly demonstrate the effect of new chemistries at the first (calcium only) and second (upon acidification) stages of the test.

[0057] Mill test. A DRM-II on-line instrument was used that allowed recording continuous deposition from the same stream with and without (Blank) chemical feed (headbox, 1% consistency, recycled board mill).

[0058] The glycerol-based polymers were compared to two current commercial products. Comparison 1 is a solution of an ethoxylated fatty amide with EDTA and an alkyl aryl sulfonate. Comparison 2 is a cyanoguanidine condensation polymer (dicyandiamide-ureaformaldehyde resin).

[0059] Results are illustrated in Figures 3-7. Figure 3 shows results from Model test 2, as a graph of the accumulated mass ($\mu\text{g}/\text{cm}^2$) vs. time (min). Blank = no chemistry. Product 1 = PG1 from Table 2 at 100 ppm.

[0060] Figure 4 shows results from Model test 1, as a graph of the accumulated mass ($\mu\text{g}/\text{cm}^2$) vs. time (min). Blank = no chemistry. Product 2 (Table 2) at 100 ppm.

[0061] Figure 5 shows results from Model test 1, as a graph of the accumulated mass ($\mu\text{g}/\text{cm}^2$) vs. time (min). Blank = no chemistry. Comparisons 1 and 2 at 300 ppm. Products 3 and 4 (Table 2) at 100 ppm.

[0062] Figure 6 shows results from Model test 2 (Stage 2), as a graph of the accumulated mass ($\mu\text{g}/\text{cm}^2$) vs. time (min). Blank = no chemistry. Product 5 (Table 2) at 100 ppm.


[0063] Figure 7 shows results from a Mill test of Product 6 (Table 2) at 100 ppm, in actual 1% recycled pulp flow vs. untreated stream.

[0064] Based on the test results, the branched cyclic polyglycerol (Table 1, Product 1 or PG1) shows reduced pitch deposition compared to the control (Figure 3), and the Product 2 from alkylation of PG2 with lauryl alcohol appears to perform better than PG1. Furthermore, the crosslinked, branched, cyclic glycerol-based polymer products having both alkyl and ester functionalities perform well in comparison with current products and un-crosslinked products (Tables 1 and 2, and Figures 3 to 5). Additionally, the crosslinked Product 5, alkylated with a lower hydrocarbon chain alcohol (C6), performs organic deposit control well (Table 2, and Figure 6). In a field evaluation of a recycled mill, the crosslinked Product 6 performs deposition control well, which demonstrates that the chemistry works well for reducing stickies deposition.

[0065] SRM-3 and DRM-II are Nalco proprietary instruments based on the quartz crystal microbalance technology, which use the same sensors but different experimental setups and electronic controllers (Appita, 2011, 64, 25-29). They can be best described as sensitive microcoupons that record mass deposition continuously either in a benchtop batch experiment (SRM-3) or on-line (DRM-II). In a series of benchtop tests the samples are tested consecutively - first, blank, then slurries containing the products. In an on-line experiment, the blank and treated stream are recorded simultaneously - the DRM-II instrument collects data from two sensors sidestream, and the product is fed after the first sensor to a mixing system before the second sensor in the same stream.

Claims

1. A method of reducing the deposition of organic contaminants in a papermaking process, comprising adding to pulp or a papermaking system an effective amount of a branched, cyclic glycerol-based polymer, wherein the branched, cyclic glycerol-based polymer has a weight-average molecular weight of 1,000 Da to 500,000 Da, wherein the branched, cyclic glycerol-based polymer is a random polymer of the monomeric units indicated in the following formula:

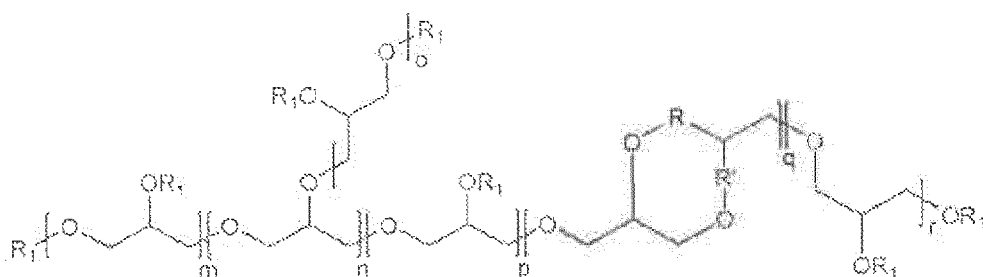

wherein:

m, n, o, p, q and r are independently selected from 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49 and 50;

R and R' are independently $-(CH_2)_x-$, wherein each x is independently 0 or 1; and


each R₁ is independently selected from hydrogen, acyl and C₁-C₅₀ alkyl, wherein the branched, cyclic glycerol-based polymer has a degree of branching of from 0.20 to 0.75 wherein the branched, cyclic glycerol-based polymer has a degree of cyclization of from 0.01 to 0.50, wherein the branched, cyclic glycerol-based polymer is added to a pulp slurry in the papermaking process, and wherein the effective amount of the branched, cyclic glycerol-based polymer is from 5 ppm to 300 ppm.

2. The method of claim 1, wherein the branched, cyclic glycerol-based polymer is a lipohydrophilic glycerol based polymer.
3. The method of claim 1, wherein the branched, cyclic glycerol-based polymer is cross-linked.
4. The method of claim 1, wherein each R₁ is independently selected from hydrogen, C₆-C₁₈ alkyl, and -C(O)CH(OH)CH₃, or wherein each R₁ is independently selected from hydrogen, C₁₀-C₁₆, alkyl, and -C(O)CH(OH)CH₃.

5. The method of claim 1, further comprising adding to the pulp or the papermaking system at least one component selected from the group consisting of fixatives, detackifiers, and other dispersants.
6. The method of claim 1, wherein the contaminants are hydrophobic contaminants.
7. The method of claim 6, wherein the hydrophobic contaminants are stickles, or wherein the hydrophobic contaminants are pitch.
8. The method of claim 1, wherein the branched, cyclic glycerol-based polymer is added to a pulp slurry in a pulper, reject refiner chest, whitewater system, pulp stock storage chest, blend chest, machine chest, headbox, or any combination thereof in the papermaking process.
9. The method of claim 1, wherein the branched, cyclic glycerol-based polymer is added to a surface in the papermaking process selected from a pipe wall, a chest wall, a machine wire, a press roll, a felt, a foil, an Uhle box, a dryer, or any combination thereof.
10. The method of claim 1, wherein the effective amount of the branched, cyclic glycerol-based polymer is from 50 ppm to 200 ppm.
11. The method of claim 1, wherein the effective amount of the branched, cyclic glycerol-based polymer is 100 ppm.

Patentansprüche

1. Verfahren zum Verringern der Ablagerung von organischen Verunreinigungen in einem Papierherstellungsvorgang, umfassend das Hinzufügen einer wirksamen Menge eines verzweigten, cyclischen Glycerin-basierten Polymers zu Zellstoff oder einem Papierherstellungssystem, wobei das verzweigte, cyclische Glycerin-basierte Polymer ein gewichtsgemittelter Molekulargewicht von 1.000 Da bis 500.000 Da aufweist, wobei das verzweigte, cyclische Glycerin-basierte Polymer ein Random-Polymer der in der folgenden Formel angegebenen Monomereinheiten ist:

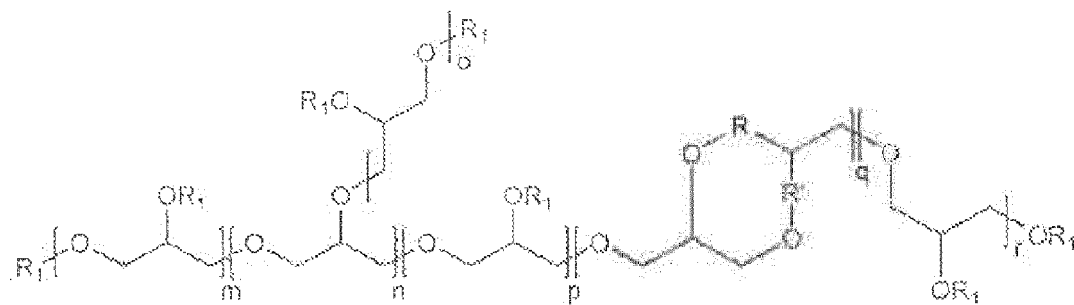


wobei:

- m, n, o, p, q und r unabhängig ausgewählt sind aus 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49 und 50;
R und R' unabhängig voneinander $-(CH_2)_x-$ sind, wobei jedes x unabhängig 0 oder 1 ist; und jedes R₁ unabhängig ausgewählt ist aus Wasserstoff, Acyl und C₁-C₅₀-Alkyl, wobei das verzweigte, cyclische Glycerin-basierte Polymer einen Verzweigungsgrad von 0,20 bis 0,75 aufweist, wobei das verzweigte, cyclische Glycerin-basierte Polymer einen Zyklisierungsgrad von 0,01 bis 0,50 aufweist, wobei das verzweigte, cyclische Glycerol-basierte Polymer einer Zellstoffaufschlämmung in dem Papierherstellungsvorgang hinzugefügt wird, und wobei die wirksame Menge des verzweigten, cyclischen Glycerin-basierten Polymers von 5 ppm bis 300 ppm beträgt.
2. Verfahren nach Anspruch 1, wobei das verzweigte cyclische Glycerin-basierte Polymer ein lipohydrophiles Glycerin-basiertes Polymer ist.
3. Verfahren nach Anspruch 1, wobei das verzweigte, cyclische Glycerin-basierte Polymer vernetzt ist.

4. Verfahren nach Anspruch 1, wobei jedes R_1 unabhängig aus Wasserstoff, C_6 - C_{18} -Alkyl und $-C(O)CH(OH)CH_3$ ausgewählt ist, oder wobei jedes R_1 unabhängig aus Wasserstoff, C_{10} - C_{16} -Alkyl und $-C(O)CH(OH)CH_3$ ausgewählt ist.
5. Verfahren nach Anspruch 1, ferner umfassend das Hinzufügen von mindestens einer Komponente, ausgewählt aus der Gruppe bestehend aus Fixativen, Entklebungsmitteln und anderen Dispergiermitteln, zu der Pulpe oder dem Papierherstellungssystem.
6. Verfahren nach Anspruch 1, wobei die Verunreinigungen hydrophobe Verunreinigungen sind.
7. Verfahren nach Anspruch 6, wobei die hydrophoben Verunreinigungen Stickies sind oder wobei die hydrophoben Verunreinigungen Pech sind.
8. Verfahren nach Anspruch 1, wobei das verzweigte, cyclische Glycerin-basierte Polymer zu einer Zellstoffaufschlämmung in einem Pulper, einem Reject-Refiner-Kasten, einem Weißwassersystem, einem Zellstofflagerungskasten, einem Mischkasten, einem Maschinenkasten, einem Stoffauflaufkasten oder einer beliebigen Kombination davon im Papierherstellungsvorgang hinzugefügt wird.
9. Verfahren nach Anspruch 1, wobei das verzweigte, cyclische Glycerin-basierte Polymer zu einer Oberfläche in dem Papierherstellungsvorgang, ausgewählt aus einer Rohrwand, einer Kastenwand, einem Maschinendraht, einer Presswalze, einem Filz, einer Folie, einer Uhle-Box, einem Trockner oder einer beliebigen Kombination davon hinzugefügt wird.
10. Verfahren nach Anspruch 1, wobei die wirksame Menge des verzweigten, cyclischen Glycerin-basierten Polymers von 50 ppm bis 200 ppm beträgt.
11. Verfahren nach Anspruch 1, wobei die wirksame Menge des verzweigten, cyclischen Glycerin-basierten Polymers 100 ppm beträgt.

Revendications

1. Procédé de réduction du dépôt de contaminants organiques dans un procédé de fabrication de papier, comprenant l'ajout dans la pâte à papier ou dans le système de fabrication de papier d'une quantité efficace d'un polymère ramifié, cyclique à base de glycérol, le polymère ramifié, cyclique à base de glycérol ayant une masse moléculaire moyenne en poids de 1 000 Da à 500 000 Da, le polymère ramifié, cyclique à base de glycérol étant un polymère statistique des motifs monomères répondant à la formule suivante :

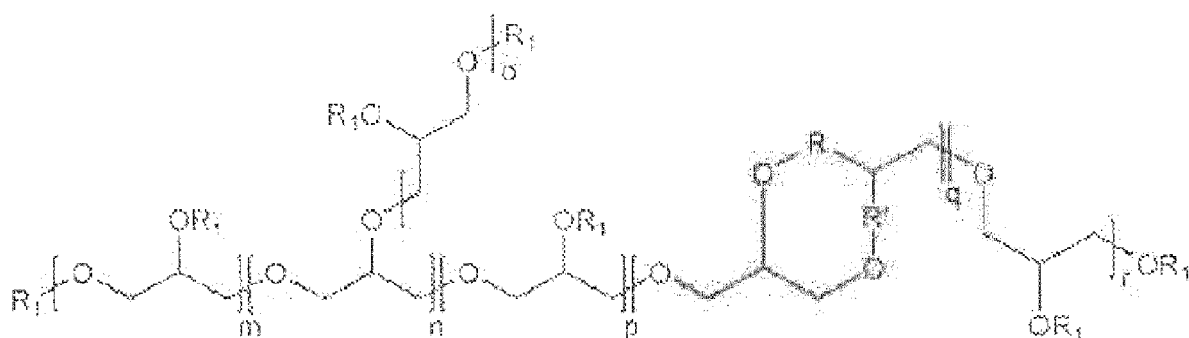

dans laquelle :

m , n , o , p , q et r sont indépendamment choisis parmi 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49 et 50,

R et R' représentent indépendamment $-(CH_2)_x-$, chaque x valant indépendamment 0 ou 1 ; et chaque R_1 est indépendamment choisi parmi l'hydrogène, un acyle ou un alkyle en C_{1-50} , le polymère ramifié, cyclique à base de glycérol ayant un degré de ramification compris entre 0,20 et 0,75, le polymère ramifié,

cyclique à base de glycérol ayant un degré de cyclisation compris entre 0,01 et 0,50, le polymère ramifié, cyclique à base de glycérol étant ajouté dans une suspension de pâte à papier lors du processus de fabrication de papier, et la quantité efficace du polymère ramifié, cyclique à base de glycérol étant comprise entre 5 et 300 ppm.

5

2. Procédé selon la revendication 1, dans lequel le polymère ramifié, cyclique à base de glycérol est un polymère lipophile à base de glycérol.

10

3. Procédé selon la revendication 1, dans lequel le polymère ramifié, cyclique à base de glycérol est réticulé.

4. Procédé selon la revendication 1, dans lequel chaque R_1 est indépendamment choisi parmi l'hydrogène, un alkyle en C_{6-18} et $-C(O)CH(OH)CH_3$, ou dans lequel chaque R_1 est indépendamment choisi parmi l'hydrogène, un alkyle en C_{10-16} et $-C(O)CH(OH)CH_3$.

15

5. Procédé selon la revendication 1, comprenant en outre l'ajout, dans la pâte à papier ou dans le système de fabrication de papier, d'au moins un composant choisi dans l'ensemble constitué de fixateurs, des antiadhésifs et d'autres dispersants.

20

6. Procédé selon la revendication 1, dans lequel les contaminants sont des contaminants hydrophobes.

7. Procédé selon la revendication 6, dans lequel les contaminants hydrophobes sont des matières collantes, ou dans lequel les contaminants hydrophobes forment une poix.

25

8. Procédé selon la revendication 1, dans lequel le polymère ramifié, cyclique à base de glycérol est ajouté dans la suspension de pâte à papier dans un tritrateur, un coffre de raffineur de rejets, un système pour eaux collées, un coffre de stockage de stock de pâte à papier, un coffre de mélange, un coffre de machine, une caisse d'arrivée ou toute combinaison de ceux-ci lors du procédé de fabrication de papier.

30

9. Procédé selon la revendication 1, dans lequel le polymère ramifié, cyclique à base de glycérol est ajouté à une surface choisie parmi une paroi de tuyau, une paroi de coffre, un fil de machine, un rouleau de presse, un feutre, une feuille, une caisse Uhle, un séchoir ou toute combinaison de ceux-ci lors du procédé de fabrication de papier.

10. Procédé selon la revendication 1, dans lequel la quantité efficace du polymère ramifié, cyclique à base de glycérol est comprise entre 50 et 200 ppm.

35

11. Procédé selon la revendication 1, dans lequel la quantité efficace du polymère ramifié, cyclique à base de glycérol vaut 100 ppm.

40

45

50

55

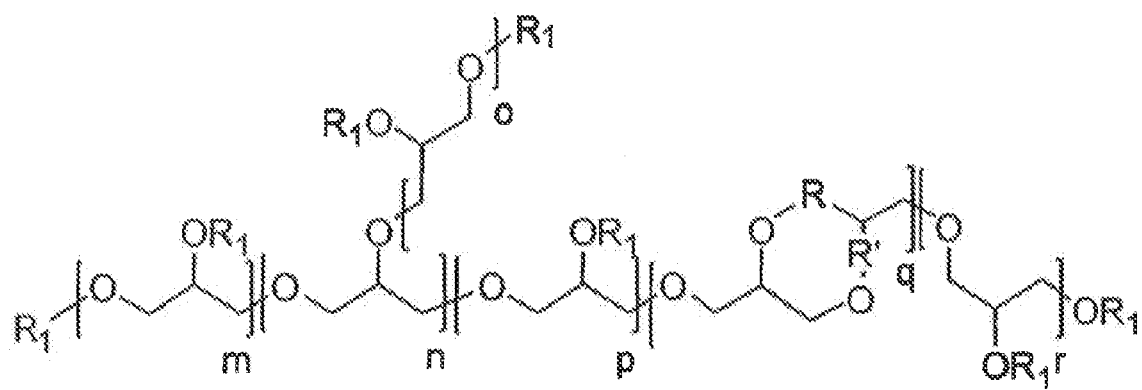


FIGURE 1

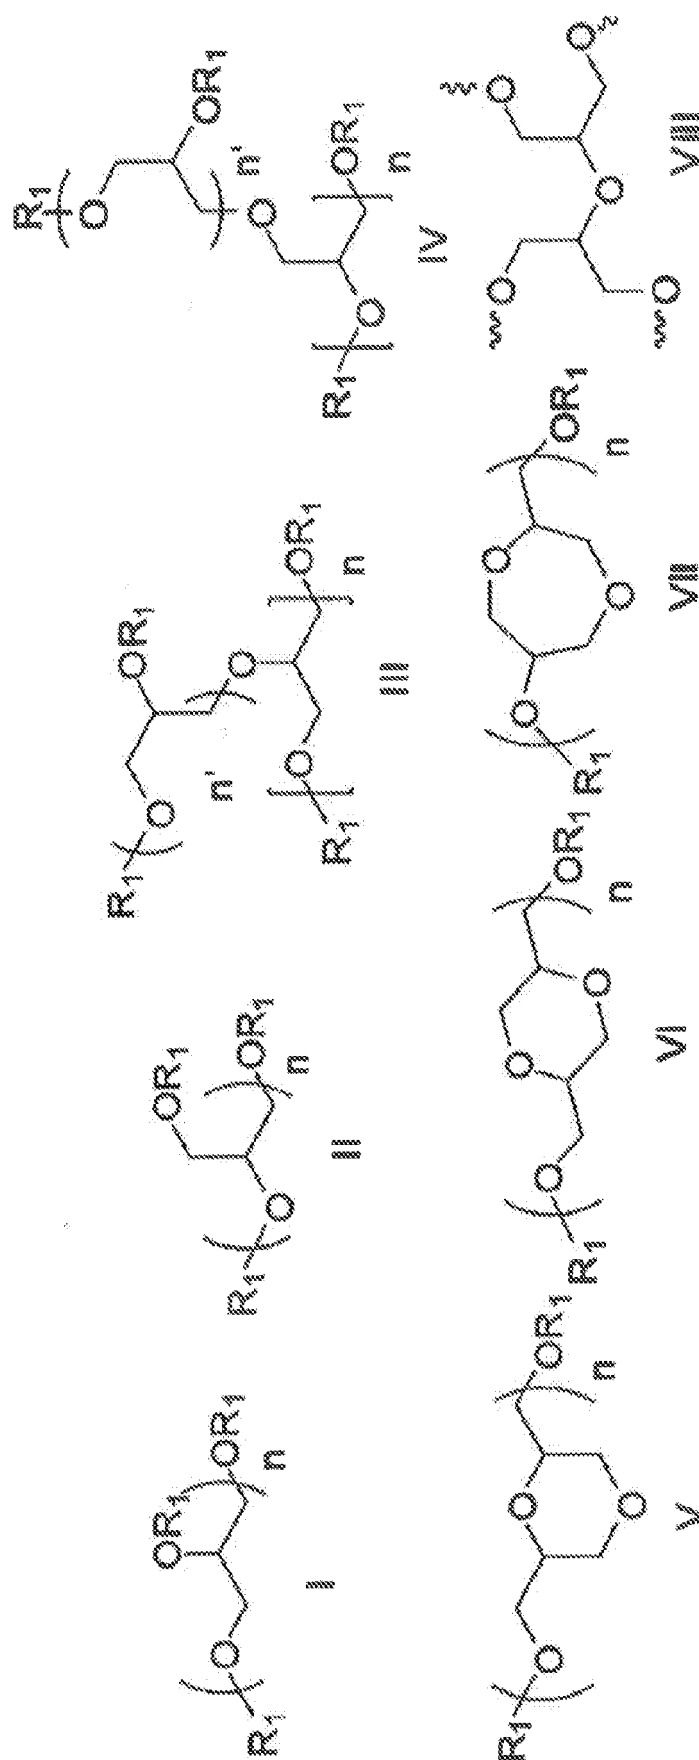


FIGURE 2

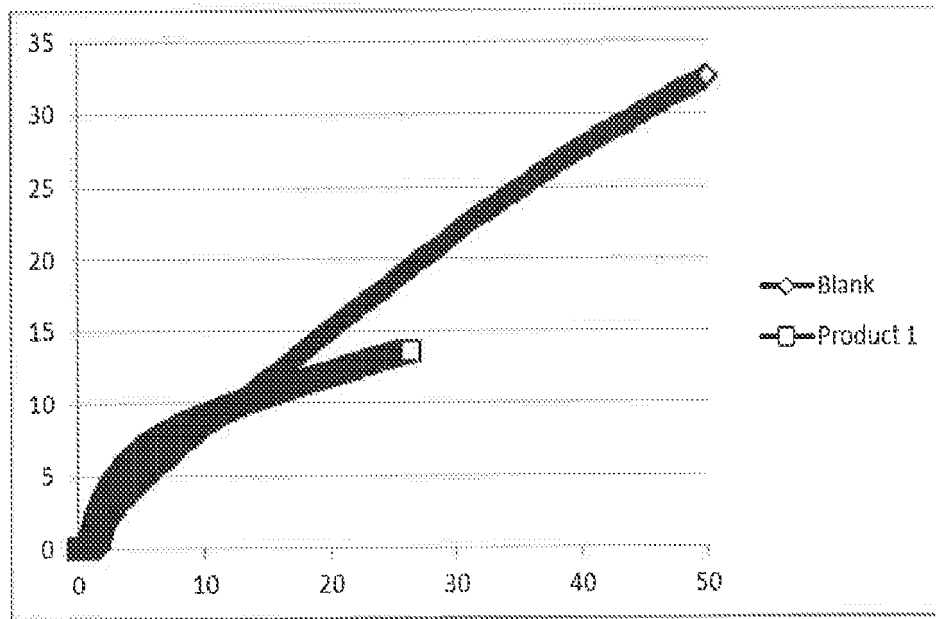


FIGURE 3

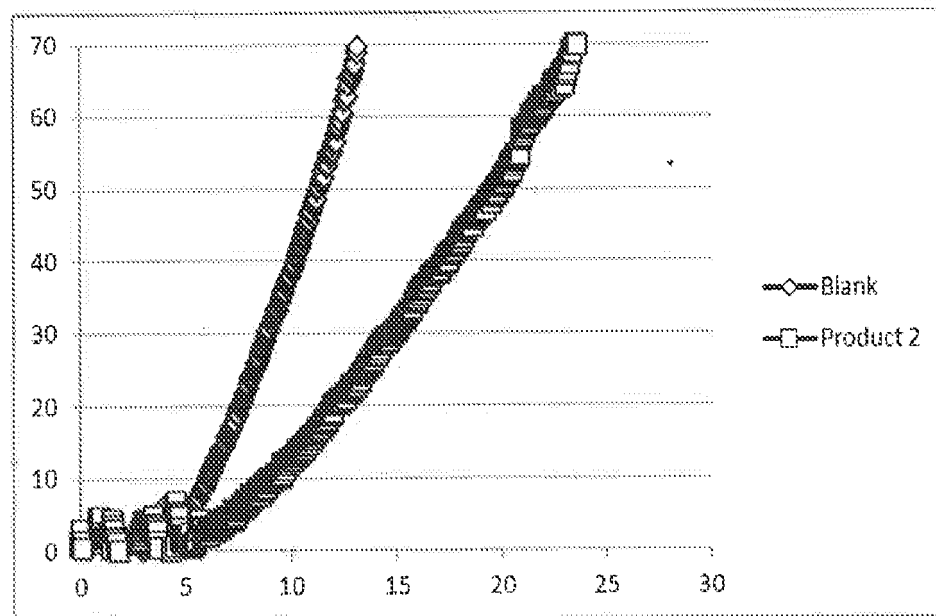


FIGURE 4

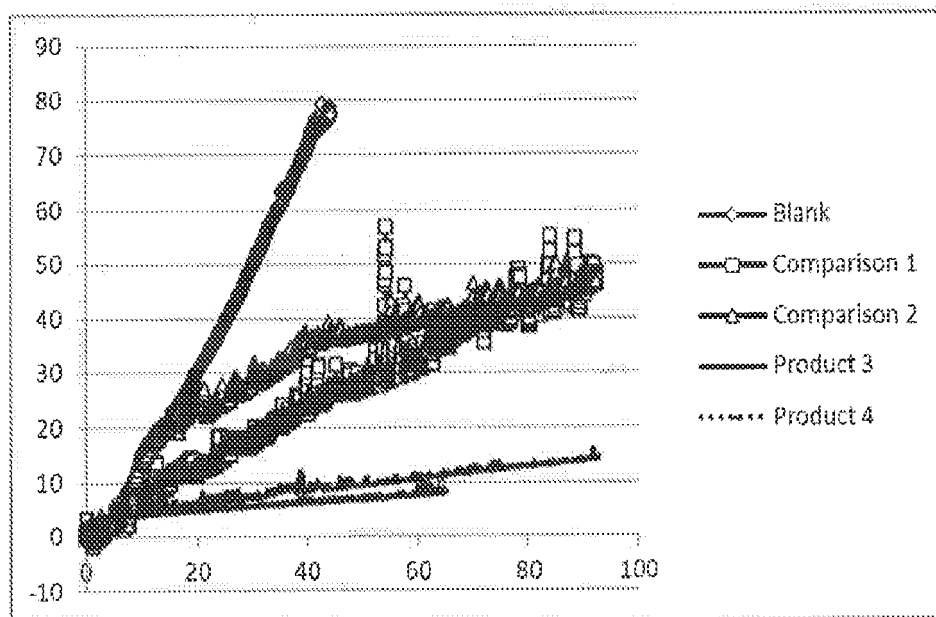


FIGURE 5

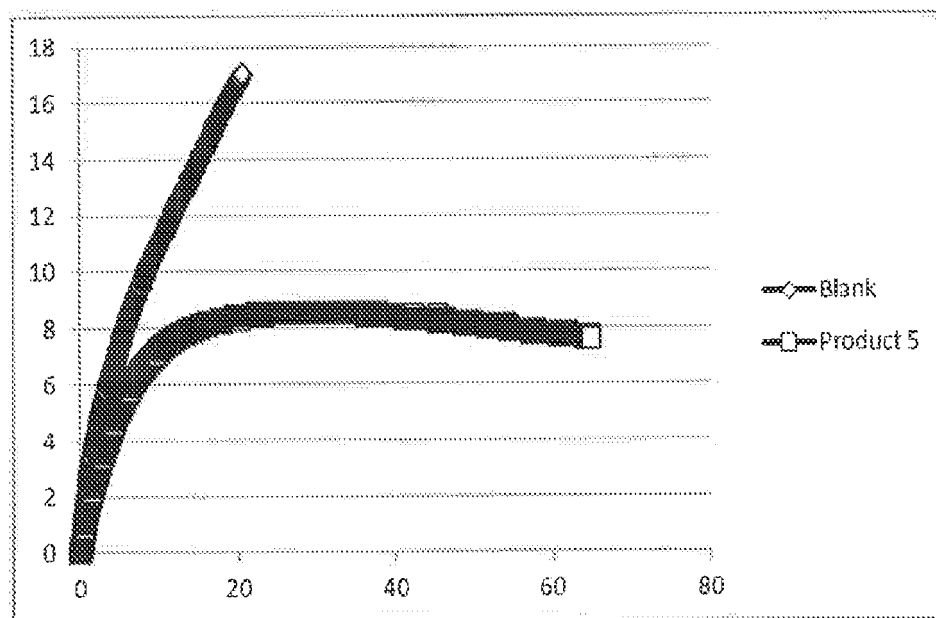


FIGURE 6

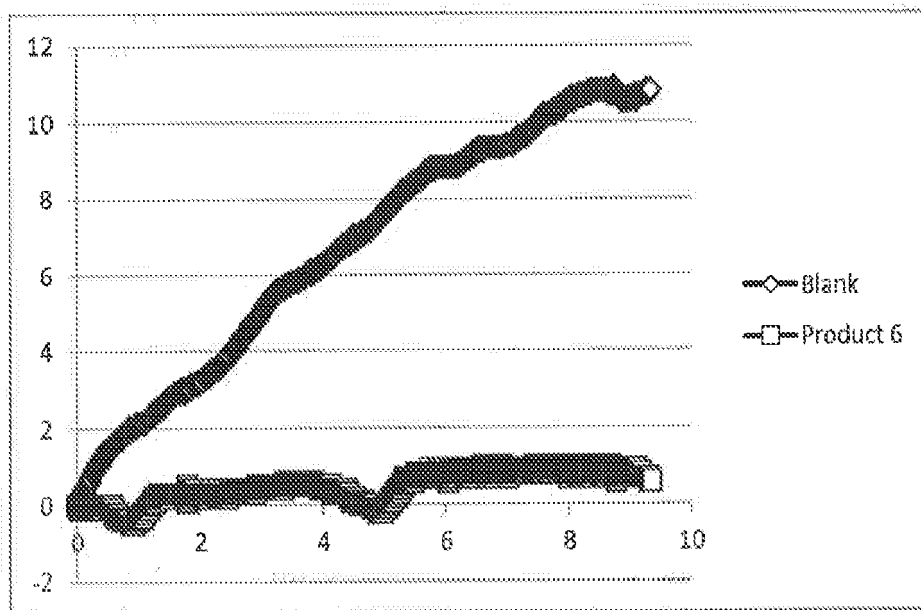


FIGURE 7

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 2011220307 A [0006]
- US 3637774 A [0046] [0050]
- US 5198532 A [0046] [0050]
- US 6765082 B2 [0046] [0050]
- US 20080306211 A [0046] [0050]
- US 20110092743 A [0046]
- DE 10307172 [0050]
- CA 2613704 [0050]
- US 6228416 B [0050]
- US 20110220307 A [0050]
- US 2023388 A [0051]
- US 20060286052 A [0051]
- US 13484526 B [0052]

Non-patent literature cited in the description

- **MARKOVA et al.** *Polymer International*, 2003, vol. 52, 1600-1604 [0050]
- *Appita*, 2011, vol. 64, 25-29 [0065]