



(11) **EP 2 888 974 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
05.10.2016 Bulletin 2016/40

(51) Int Cl.:
A47C 1/03 (2006.01)

(21) Application number: **14198234.8**

(22) Date of filing: **16.12.2014**

(54) **Armrest device**

Armlehnavorrichtung

Dispositif d'accoudoir

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **31.12.2013 TW 102224945**

(43) Date of publication of application:
01.07.2015 Bulletin 2015/27

(73) Proprietor: **Karma Medical Products Co., Ltd.
Minsyong Township
Chiayi County 621 (TW)**

(72) Inventors:
• **Olst, Eric Van
7591 CV Denekamp (NL)**

- **Yang, Chih-Chuan
Minsyong Township
Chiayi County 621 (TW)**
- **Tien, Cheng-Jy
Minsyong Township
Chiayi County 621 (TW)**

(74) Representative: **Stöckeler, Ferdinand
Schoppe, Zimmermann, Stöckeler
Zinkler, Schenk & Partner mbB
Patentanwälte
Radlkoferstrasse 2
81373 München (DE)**

(56) References cited:
**EP-A2- 1 532 897 US-A- 5 009 467
US-A- 6 164 725 US-B1- 6 508 513**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The invention relates to an armrest device, more particularly to an armrest device that can be suitably mounted on a body supporting apparatus, such as, a seat, an office chair, a wheelchair, an electric wheelchair, an electric mobility scooter, a walker, etc.

[0002] A conventional body supporting apparatus, such as a seat, an office chair, a wheelchair, an electric wheelchair, an electric mobility scooter, a walker, etc., generally has an armrest device connected to a backrest thereof. The armrest device includes a fixed bracket, and two armrest boards fixedly mounted on the fixed bracket for a user to rest his/her arms thereon. Although the conventional armrest device can provide resting of the user's arms, the width thereof is fixed. When the width of the backrest is changed or the stature of the user is different, the armrest device must be redesigned to match the backrest or the stature of the user. In view of this, the armrest device of the conventional body supporting apparatus may not only be inconvenient to manufacture and assemble, but also may not be comfortable to use when the distance between the armrest boards does not fit the stature of the user.

[0003] EP 1 532 897 A2 discloses a task chair equipped with a mechanism for independently adjusting the height and width of support arms by the manual operation of a single adjustment knob. Each of the support arms includes a first arm portion and a second arm portion that are pivotally coupled by corresponding pivot joints. Each second arm portion carries one of a pair of arm pads. Each second arm portion may be inclined relative to the corresponding first arm portion for inclining the corresponding arm pad relative to a seat plate of the task chair. Each arm pad is joined with the corresponding second arm portion by a coupling mechanism that permits movement of each arm pad with two degrees of translational freedom and one degree of rotational freedom.

[0004] An object of this invention is to provide an armrest device that is capable of overcoming the aforesaid drawbacks of the prior art.

[0005] Accordingly, an armrest device of this invention includes a connecting mechanism and two armrest units. The connecting mechanism includes two connecting rods and at least one fixing member. Each connecting rod has an armrest mounting portion and an overlapping portion connected to the armrest mounting portion. The overlapping portions of the connecting rods are overlapped with each other. The overlapping length of the overlapping portions is adjustable. The at least one fixing member detachably interconnects the overlapping portions of the connecting rods. The armrest units are mounted pivotably and respectively to the armrest mounting portions of the connecting rods. The overlapping portion of each of said connecting rods has a plurality of fixing holes spaced apart from each other along the length of said overlapping portion, and said at least one fixing

member includes two said fixing members extending through two of said fixing holes in one of said connecting rods and selectively engaging two of said fixing holes in the other one of said connecting rods.

[0006] A beneficial effect of this invention resides in that because the armrest units are respectively mounted on the connecting rods and because the overlapping length of the connecting rods is adjustable, the width between the armrest units can be adjusted, so that the armrest device of this invention can be suitably mounted on the body supporting apparatus 1 with different widths. Hence, easy manufacturing and assembling thereof can be enhanced. Furthermore, the width between the armrest units 3 and the heights of the armrest units 3 can be adjusted to cope with the different stature of users to thereby enhance use comfort.

[0007] Other features and advantages of the present invention will become apparent in the following detailed description of the embodiment with reference to the accompanying drawings, of which:

Figure 1 is a fragmentary perspective view of a body supporting apparatus incorporating an armrest device according to the embodiment of the present invention;

Figure 2 is an exploded perspective view of a left armrest unit and a left connecting rod of the armrest device of the embodiment;

Figure 3 is a schematic top view of the embodiment; Figure 4 is a sectional view of the embodiment taken along line IV-IV of Figure 3;

Figure 5 is a sectional view of the embodiment taken along line V-V of Figure 3;

Figure 6 is a view similar to Figure 5, but with a second adjustment screw being moved toward an outer side of a second threaded hole to permit adjustment of an armrest unit of the embodiment; and

Figure 7 is a sectional view of the embodiment taken along line VII-VII of Figure 3, with the solid lines representing the armrest unit of the embodiment in a horizontal arm-resting position and with the phantom lines representing the armrest unit of this embodiment in a vertical non-resting position.

[0008] Referring to Figures 1 to 7, an armrest device according to the embodiment of the present invention is suitable for mounting on a body supporting apparatus 1, such as a seat, an office chair, a wheelchair, an electric wheelchair, an electric mobility scooter, a walker, etc., and is adjustable according to the width of the body supporting apparatus 1. The body supporting apparatus 1 includes a backrest 11, and a rear cap 12 fixed to a rear side of the backrest 11 by a plurality of fasteners 10. The backrest 11 has a semicircular mounting portion 111 facing the rear cap 12. The rear cap 12 has two spaced-apart through holes 121. The body supporting apparatus 1 further includes a mounting passage 13 cooperatively defined by the backrest mounting portion 111 and the

rear cap 12, and a telescopic rod 14 disposed at a rear lower portion of the backrest 11. The armrest device of this embodiment comprises a connecting mechanism 2 and two armrest units 3.

[0009] The connecting mechanism 2 includes two connecting rods 21 adjustably and movably mounted in the mounting passage 13, two reinforcing plates 23 respectively fixed to the connecting rods 21 by a plurality of fixing screws 22, and two fixing members 24 detachably interconnecting the connecting rods 21. Each of the connecting rods 21 has an armrest mounting portion 211, and an overlapping portion 212 connected to and disposed inwardly of the armrest mounting portion 211. The armrest mounting portion 211 includes an inner sleeve section 213 connected to the overlapping portion 212, and an outer sleeve section 214 connected to the inner sleeve section 213 opposite to the overlapping portion 212. In this embodiment, each of the reinforcing plates 23 is fixed to the overlapping portion 212 of the respective connecting rod 21 by using two fixing screws 22, and is proximate to the inner sleeve section 213 of the respective connecting rod 21. The inner sleeve section 213 has a circular main body, and a notched part 215 formed in the main body adjacent to a junction between the inner and outer sleeve sections 213, 214. The outer sleeve section 214 has a circular main body, a notched part 218 with two diametrically opposite notches 2181 formed in an outer end of the main body of the outer sleeve section 214 and distal from the notched part 215, and a threaded connecting hole 216 extending axially and inwardly from the outer end of the outer sleeve main body between the notches 218.

[0010] The overlapping portion 212 has a semi-circular cross section, and is formed with a plurality of fixing holes 217 spaced apart from each other along the length thereof. The overlapping portions 212 of the connecting rods 21 are overlapped with each other. The length of the connecting mechanism 2 after assembly can be altered by adjusting the overlapping length of the overlapping portions 212 of the connecting rods 21.

[0011] With reference to Figures 1, 4 and 5, the armrest units 3 are symmetrically disposed on left and right sides of the connecting mechanism 2, and are mounted pivotably and respectively to the armrest mounting portions 211 of the connecting rods 21. Each of the armrest units 3 includes an engaging ring 39, two compressible rings 31, a pivot limiting seat 30, a wear-resistant piece 32, an angle fixing seat 33, and an armrest assembly 34. Since the structures of the armrest units 3 are similar, only the armrest unit 3 mounted to the armrest mounting portion 211 of a left one of the connecting rods 21 will be described hereinafter.

[0012] The engaging ring 39 is sleeved fixedly on the inner sleeve section 213 of the armrest mounting portion 211. The two compressible rings 31 are sleeved side by side on the inner sleeve section 213. The pivot limiting seat 30 is sleeved fixedly and non-rotatably on the notched part 215 of the inner sleeve section 213. The

wear-resistant piece 32, the angle fixing seat 33, and the armrest assembly 34 are sequentially sleeved on the outer sleeve section 214 of the armrest mounting portion 211 from an inner side to an outer side thereof. The compressible rings 31 are disposed between the engaging ring 39 and the pivot limiting seat 30. The wear-resistant piece 32 is sandwiched between the pivot limiting seat 30 and the angle fixing seat 33. The armrest unit 3 further includes a mounting assembly 35, a first adjustment screw 37 threadedly and adjustably connected to the angle fixing seat 33, and a second adjustment screw 38 threadedly and adjustably connected to the armrest assembly 34.

[0013] The pivot limiting seat 30 has a seat main body 301 fixedly sleeved on the notched part 215 of the inner sleeve section 213, a protruding portion 302 extending rearwardly from the seat main body 301, a pivot limiting member 303 projecting from the seat main body 301 toward the angle fixing seat 33, and a coupling rod 304 coupling the protruding portion 302 to the telescopic rod 14 (see Figure 1) of the body supporting apparatus 1. The wear-resistant piece 32 is circular, and has a first axial hole 321 for extension of the armrest mounting portion 211 therethrough, and an insertion hole 322 offset from the first axial hole 321 for extension of the pivot limiting member 303 therethrough.

[0014] The angle fixing seat 33 includes a circular main body 331 defining a central hole, an axial tubular wall 339 projecting from an outer surface of the main body 331 toward the armrest assembly 34 and defining a second axial hole 330 communicating with the central hole in the main body 331, and a first stopping block 332 projecting from the outer surface of the main body 331 and surrounding an outer periphery of the axial tubular wall 339. An inner surface 333 of the main body 331 faces the wear-resistant piece 32, and has an arcuate pivot limiting groove 334 surrounding the central hole in the main body 331. The pivot limiting groove 334 has a first groove end 335 and a second groove end 336 opposite to the first groove end 335. The first stopping block 332 has a first stopping face 337, and a first threaded hole 338 spaced apart from the first stopping face 337.

[0015] The armrest assembly 34 includes an armrest rod 340, and an armrest board 348 adjustably mounted on the armrest rod 340. The armrest rod 340 has a mounting portion 341 for mounting of the armrest board 348 thereon, and a pivot connection portion 342 mounted coaxially on and pivotable relative to the angle fixing seat 33. The pivot connection portion 342 has a third axial hole 343 axially aligned with the second axial hole 330, and a second stopping block 344 protruding toward the angle fixing seat 33 and surrounding the third axial hole 343. The second stopping block 344 has a second stopping face 345 (see Fig. 5), and a second threaded hole 347 spaced apart from the second stopping face 345. As shown in Figs. 2 and 5, each of the first and second adjustment screws 37, 38 is configured as a headless screw, and is inserted threadedly and adjustably into a

respective one of the first and second threaded holes 338, 347. An inner end of the first adjustment screw 37 is abutable against the second stopping face 345, while an inner end of the second adjustment screw 38 is abutable against the first stopping face 337. How to adjust an angular position of the armrest board 348 relative to the armrest rod 34 is not an important aspect of this invention, so that a detailed description thereof is dispensed herewith.

[0016] The mounting assembly 35 includes a first cushion pad 351 sleeved non-rotatably on the notched part 218 of the outer sleeve section 214 of the armrest mounting portion 211, a second cushion pad 352 abutting against the first cushion pad 351, and a connecting screw 353 extending through the first and second cushion pads 351, 352 and threadedly engaging the threaded hole 216 in the outer sleeve section 214. Through this, the armrest assembly 34 is mounted on the connecting rod 21.

[0017] With reference to Figures 1 to 3, to use the armrest device of this embodiment, the overlapping length of the overlapping portions 212 of the connecting rods 21 is first adjusted according to the width of the backrest 11 of the body supporting apparatus 1, after which the fixing members 24 are inserted through the through holes 121 in the rear cap 12 and two of the fixing holes 217 in one of the connecting rods 21, and are threadedly and selectively engaged with two of the fixing holes 217 in the other connecting rod 21, thereby fixedly coupling the overlapping portions 212 of the connecting rods 21. Next, the armrest units 3 are respectively mounted and connected to the armrest mounting portions 211 of the connecting rods 21. After assembly, the armrest assemblies 34 of the armrest units 3 are respectively disposed on the left and right sides of the backrest 11 of the body supporting apparatus 1.

[0018] It should be noted that during adjustment of the overlapping length of the overlapping portions 212 of the connecting rods 21, there is no need to detach the rear cap 12 from the rear side of the backrest 11. It is only necessary to remove the fixing screws 24, so that the connecting rods 21 can be adjustably moved within the mounting passage 13 until the desired overlapping length of the overlapping portions 212 thereof is obtained. Hence, the armrest device of this embodiment can be adjusted according to the width of the backrest 11 of the body supporting apparatus 1 without much effort.

[0019] With reference to Figures 1, 2, 5 and 6, when it is desired to adjust the height of the armrest board 348 of the armrest assembly 34 of each armrest unit 3, one of the first and second adjustment screws 37, 38 is first threadedly adjusted to move toward an outer side of the respective first or second threaded holes 338, 347 so that the inner end thereof is moved away from the respective second or first stopping face 345, 337. During this time, the armrest assembly 34 of each armrest unit 3 is pivotable about the armrest mounting portion 211 of the respective connecting rod 21. When a desired angle or height of the armrest assembly 34 is reached, the other

one of the first and second adjustment screws 37, 38 is threadedly adjusted to move further into the respective first or second threaded hole 338, 347, so that the inner end thereof pushes the respective second or first stopping face 345, 337, thereby moving the inner end of the one of the first and second adjustment screws 37, 38 to abut against the respective second or first stopping face 345, 337. At this time, the armrest assembly 34 of each armrest unit 3 cannot pivot further, and is retained at the desired angle or height. During adjustment, because the first cushion pad 351 is sleeved non-rotatably on the outer sleeve section 214 of the armrest mounting portion 211 of the respective connecting rod 21, and because the connecting screw 353 presses the second cushion pad 352 against the first cushion pad 351, the armrest assembly 34 is not only mounted coaxially and pivotably to the armrest mounting portion 211 of the respective connecting rod 21, but also the connecting screw 353 is not likely to loosen during the pivot movement of the armrest assembly 34.

[0020] With reference to Figure 7, in combination with Figures 1, 2 and 5, when a user desires to enter or exit the body supporting apparatus 1 from a single side thereof, the armrest assembly 34 of one of the armrest units 3 is pivoted upward and rearward. That is, when the user pulls the armrest assembly 34, because the first and second adjustment screws 37, 38 respectively abut against the second and first stopping blocks 334, 332, the pulling force exerted on the armrest assembly 34 drives the angle fixing seat 33 to pivot along with the armrest assembly 34. When the pivot limiting member 303 abuts against the second groove end 336 of the pivot limiting groove 334 of the angle fixing seat 33, the angle fixing seat 33 and the armrest assembly 34 cannot pivot further. At this moment, the armrest unit 3 is moved from a horizontal arm-resting position, as shown in solid lines in Figure 7, to a vertical non-resting position, as shown in phantom lines in Figure 7.

[0021] In other words, when the armrest device of this embodiment is in normal use, because the compressible rings 31, the pivot limiting seat 30, the wear-resistant piece 32, the angle fixing seat 33 and the armrest rod 340 of the armrest assembly 34 of each armrest unit 3 are disposed tightly close to each other, and because the pivot limiting member 303 is inserted into the pivot limiting groove 334 of the angle fixing seat 33 and abuts against the first groove end 335 thereof, each armrest unit 3 is disposed in the horizontal arm-resting position at this time, and the armrest assembly 34 thereof is retained at a fixed angle for an arm of the user to rest thereon.

[0022] When it is desired to adjust the height of the armrest board 348 of the armrest assembly 34, the first and second adjustment screws 37, 38 are simply rotated. Further, when it is desired to enter or exit the body supporting apparatus 1, the armrest assemblies 34 of the armrest units 3 are simply pulled upward and rearward to drive the angle fixing seat 33 to move upward the-

realong. Hence, the armrest device of this invention not only has a novel structure, but also can be adjusted according to the requirement of the body supporting apparatus 1. That is, the width between the armrest units 3 can be adjusted so that the armrest device of this invention can be mounted to the body supporting apparatus 1 with different widths. The purpose of easy manufacturing and assembling can thus be achieved. Simultaneously, the width between the armrest units 3 and the heights of the armrest units 3 can be adjusted to cope with the different stature of users to thereby enhance use comfort.

Claims

1. An armrest device comprising:

a connecting mechanism (2) including two connecting rods (21) and at least one fixing member (24), each of said connecting rods (21) having an armrest mounting portion (211) and an overlapping portion (212) connected to said armrest mounting portion (211), said overlapping portions (212) of said connecting rods (21) being overlapped with each other, the overlapping length of said overlapping portions (212) being adjustable, said at least one fixing member (24) detachably interconnecting said overlapping portions (212) of said connecting rods (21); and two armrest units (3) mounted pivotably and respectively to said armrest mounting portions (211) of said connecting rods (21), **characterized in that** said overlapping portion (212) of each of said connecting rods (21) has a plurality of fixing holes (217) spaced apart from each other along the length of said overlapping portion (212), and said at least one fixing member (24) includes two said fixing members (24) extending through two of said fixing holes (217) in one of said connecting rods (21) and selectively engaging two of said fixing holes (217) in the other one of said connecting rods (21).

2. The armrest device as claimed in Claim 1, **characterized in that** each of said armrest units (3) includes an angle fixing seat (33) mounted on said armrest mounting portion (211) of a respective one of said connecting rods (21), an armrest assembly (34) mounted on said armrest mounting portion (211) of the respective one of said connecting rods (21) and pivotable relative to said angle fixing seat (33), a first adjustment screw (37) threadedly and adjustably connected to said angle fixing seat (33), and a second adjustment screw (38) threadedly and adjustably connected to said armrest assembly (34), said angle fixing seat (33) having a first stopping face (337) abutable against said second adjustment screw (38), said armrest assembly (34) having a sec-

ond stopping face (345) abutable against said first adjustment screw (37).

3. The armrest device as claimed in Claim 2, **characterized in that:**

said armrest mounting portion (211) of each of said connecting rods (21) includes an inner sleeve section (213) connected to said overlapping portion (212), and an outer sleeve section (214) connected to said inner sleeve section (213) opposite to said overlapping portion (212), said inner sleeve section (213) having a notched part (215) adjacent to a junction between said inner and outer sleeve sections (213, 214), said angle fixing seat (33) is sleeved rotatably on said outer sleeve section (214) and further has an axial hole (330) and a pivot limiting groove (334) surrounding said axial hole (330), said pivot limiting groove (334) having a first groove end (335) and a second groove end (336) opposite to said first groove end (335), and each of said armrest units (3) further includes a pivot limiting seat (30) fixed to said notched part (215) of said inner sleeve section (213) of the respective one of said connecting rods (21), said pivot limiting seat (30) having a pivot limiting member (303) movably extending into said pivot limiting groove (334) of said angle fixing seat (33), each of said armrest units (3) being disposed in a horizontal arm-resting position when said pivot limiting member (303) abuts against said first groove end (335) of said pivot limiting groove (334), and being disposed in a vertical non-resting position when said pivot limiting member (303) abuts against said second groove end (336) of said pivot limiting groove (334).

4. The armrest device as claimed in Claim 3 **characterized in that** said armrest assembly (34) of each of said armrest units (3) includes an armrest rod (340), and an armrest board (348) mounted on said armrest rod (340), said armrest rod (340) having a pivot connection portion (342) mounted coaxially on said angle fixing seat (33), each of said armrest units (3) further including an engaging ring (39) sleeved engagingly on said inner sleeve section (213) of the respective one of said connecting rods (21), at least one compressible ring (31) disposed between said engaging ring (39) and said pivot limiting seat (30), and a wear-resistant piece (32) sandwiched between said pivot limiting seat (30) and said angle fixing seat (33).

5. The armrest device as claimed in Claim 4, **characterized in that** said connecting mechanism (2) further includes two reinforcing plates (23), and a plurality of fixing screws (22) fixing said reinforcing

plates (23) on said overlapping portions (212) of said connecting rods (21), respectively, said reinforcing plates (23) being respectively proximate to said inner sleeve sections (213) of said armrest mounting portions (211) of said connecting rods (21).

6. The armrest device as claimed in Claim 5, **characterized in that** each of said armrest units (3) further includes a mounting assembly (35) mounting said armrest assembly (34) on the respective one of said connecting rods (21), said mounting assembly (35) including a first cushion pad (351) sleeved non-rotatably on said outer sleeve section (214) of said armrest mounting portion (211), a second cushion pad (352) abutting against said first cushion pad (351), and a connecting screw (353) extending through said first and second cushion pads (351, 352) and threadedly engaging said outer sleeve section (214) of the respective one of said connecting rods (21).

7. The armrest device as claimed in Claim 1, **characterized in that** said armrest mounting portion (211) of each of said connecting rods (21) includes an outer sleeve section (214), and a connecting hole (216) extending axially and inwardly from an outer end of said outer sleeve section (214), each of said armrest units (3) further including an armrest assembly (34), and a mounting assembly (35) mounting said armrest assembly (34) on the respective one of said connecting rods (21), said mounting assembly (35) including a first cushion pad (351) sleeved non-rotatably on said outer sleeve section (214) of said armrest mounting portion (211), a second cushion pad (352) abutting against said first cushion pad (351), and a connecting screw (353) extending through said first and second cushion pads (351, 352) and threadedly engaging said connecting hole (216) in said outer sleeve section (214) of the respective one of said connecting rods (21).

Patentansprüche

1. Eine Armlehnenvorrichtung, die folgende Merkmale aufweist:

einen Verbindungsmechanismus (2), der zwei Verbindungsstäbe (21) und zumindest ein Fixierbauglied (24) umfasst, wobei jeder der Verbindungsstäbe (21) einen Armlehnenbefestigungsabschnitt (211) und einen Überlappungsabschnitt (212) aufweist, der mit dem Armlehnenbefestigungsabschnitt (211) verbunden ist, wobei die Überlappungsabschnitte (212) der Verbindungsstäbe (21) einander überlappen, wobei die Überlappungslänge der Überlappungsabschnitte (212) einstellbar ist, wobei das

zumindest eine Fixierbauglied (24) die Überlappungsabschnitte (212) der Verbindungsstäbe (21) lösbar miteinander verbindet; und zwei Armlehneneinheiten (3), die schwenkbar jeweils an den Armlehnenbefestigungsabschnitten (211) der Verbindungsstäbe (21) befestigt sind,

dadurch gekennzeichnet, dass der Überlappungsabschnitt (212) von jedem der Verbindungsstäbe (21) eine Mehrzahl von Fixierlöchern (217) aufweist, die entlang der Länge des Überlappungsabschnitts (212) voneinander beabstandet sind, und das zumindest eine Fixierbauglied (24) zwei der Fixierbauglieder (24) umfasst, die sich durch zwei der Fixierlöcher (217) in einem der Verbindungsstäbe (21) erstrecken und selektiv zwei der Fixierlöcher (217) in dem anderen der Verbindungsstäbe (21) in Eingriff nehmen.

2. Die Armlehnenvorrichtung gemäß Anspruch 1, **dadurch gekennzeichnet, dass** jede der Armlehneneinheiten (3) einen Winkelfixiersitz (33), der an dem Armlehnenbefestigungsabschnitt (211) eines jeweiligen der Verbindungsstäbe (21) befestigt ist, eine Armlehnenanordnung (34), die an dem Armlehnenbefestigungsabschnitt (211) des jeweiligen der Verbindungsstäbe (21) befestigt ist und relativ zu dem Winkelfixiersitz (33) schwenkbar ist, eine erste Einstellschraube (37), die gewindemäßig und einstellbar mit dem Winkelfixiersitz (33) verbunden ist, und eine zweite Einstellschraube (38), die gewindemäßig und einstellbar mit der Armlehnenanordnung (34) verbunden ist, umfasst, wobei der Winkelfixiersitz (33) eine erste Stoppfläche (337) aufweist, die gegen die zweite Einstellschraube (38) anstoßen kann, wobei die Armlehnenanordnung (34) eine zweite Stoppfläche (345) aufweist, die gegen die erste Einstellschraube (37) anstoßen kann.

3. Die Armlehnenvorrichtung gemäß Anspruch 2, **dadurch gekennzeichnet, dass:**

der Armlehnenbefestigungsabschnitt (211) von jedem der Verbindungsstäbe (21) ein inneres Hülsenteil (213), das mit dem Überlappungsabschnitt (212) verbunden ist, und ein äußeres Hülsenteil (214), das mit dem inneren Hülsenteil (213) gegenüber dem Überlappungsabschnitt (212) verbunden ist, umfasst, wobei das innere Hülsenteil (213) ein eingekerbtes Stück (215) aufweist, das benachbart ist zu einem Übergang zwischen dem inneren und äußeren Hülsenteil (213, 214),

wobei der Winkelfixiersitz (33) drehbar auf das äußere Hülsenteil (214) geschoben ist und ferner ein Axialloch (330) und eine Schwenkbegrenzungsrinne (334) aufweist, die das Axialloch

- (330) umgibt, wobei die Schwenkbegrenzungsrille (334) ein erstes Rillende (335) und ein zweites Rillende (336) gegenüber dem ersten Rillende (335) aufweist, und
jede der Armlehneneinheiten (3) ferner einen Schwenkbegrenzungssitz (30) umfasst, der an dem eingekerbten Stück (215) des inneren Hülseanteils (213) des jeweiligen der Verbindungsstäbe (21) fixiert ist, wobei der Schwenkbegrenzungssitz (30) ein Schwenkbegrenzungsbauglied (303) aufweist, das sich bewegbar in die Schwenkbegrenzungsrille (334) des Winkelfixiersitzes (33) erstreckt, wobei jede der Armlehneneinheiten (3) in einer horizontalen Armlehnenposition angeordnet ist, wenn das Schwenkbegrenzungsbauglied (303) gegen das erste Rillende (335) der Schwenkbegrenzungsrille (334) anstößt, und in einer vertikalen Nichtanlehnenposition angeordnet ist, wenn das Schwenkbegrenzungsbauglied (303) gegen das zweite Rillende (336) der Schwenkbegrenzungsrille (334) anstößt.
4. Die Armlehnenvorrichtung gemäß Anspruch 3, **dadurch gekennzeichnet, dass** die Armlehnenanordnung (34) von jeder der Armlehneneinheiten (3) einen Armlehnenstab (340) und eine Armlehnenplatte (348) umfasst, die an dem Armlehnenstab (340) befestigt ist, wobei der Armlehnenstab (340) einen Schwenkverbindungsabschnitt (342) aufweist, der koaxial an dem Winkelfixiersitz (33) befestigt ist, jede der Armlehneneinheiten (3) ferner einen Eingriffnahmering (39) umfasst, der auf Eingriff nehmende Weise auf das innere Hülseenteil (213) des jeweiligen der Verbindungsstäbe (21) geschoben ist, zumindest ein zusammendrückbarer Ring (31) zwischen dem Eingriffnahmering (39) und dem Schwenkbegrenzungssitz (30) angeordnet ist, und ein verschleißbeständiges Stück (32) zwischen dem Schwenkbegrenzungssitz (30) und dem Winkelfixiersitz (33) angeordnet ist.
5. Die Armlehnenvorrichtung gemäß Anspruch 4, **dadurch gekennzeichnet, dass** der Verbindungsmechanismus (2) ferner zwei Verstärkungsplatten (23) und eine Mehrzahl von Fixierschrauben (22) umfasst, die die Verstärkungsplatten (23) jeweils an den Überlappungsabschnitten (22) der Verbindungsstäbe (21) fixieren, wobei die Verstärkungsplatten (23) jeweils nahe zu den inneren Hülseanteilen (213) der Armlehnenbefestigungsabschnitte (211) der Verbindungsstäbe (21) sind.
6. Die Armlehnenvorrichtung gemäß Anspruch 5, **dadurch gekennzeichnet, dass** jede der Armlehneneinheiten (3) ferner eine Befestigungsanordnung (35) umfasst, die die Armlehnenanordnung (34) an dem jeweiligen der Verbindungsstäbe (21) befestigt,

wobei die Befestigungsanordnung (35) eine erste Dämpfungsunterlage (351), die nicht drehbar auf das äußere Hülseenteil (214) des Armlehnenbefestigungsabschnitts (211) geschoben ist, eine zweite Dämpfungsunterlage (352), die gegen die erste Dämpfungsunterlage (351) anstößt, und eine Verbindungsschraube (353) aufweist, die sich durch die erste und zweite Dämpfungsunterlage (351, 352) erstreckt und das äußere Hülseenteil (214) des jeweiligen der Verbindungsstäbe (21) gewindemäßig in Eingriff nimmt.

7. Die Armlehnenvorrichtung gemäß Anspruch 1, **dadurch gekennzeichnet, dass** der Armlehnenbefestigungsabschnitt (211) von jedem der Verbindungsstäbe (21) ein äußeres Hülseenteil (214) umfasst und ein Verbindungsloch (216), das sich von einem Außenende des äußeren Hülseanteils (214) axial und nach innen erstreckt, wobei jede der Armlehneneinheiten (3) ferner eine Armlehnenanordnung (34) umfasst und eine Befestigungsanordnung (35), die die Armlehnenanordnung (34) an dem jeweiligen der Verbindungsstäbe (21) befestigt, wobei die Befestigungsanordnung (35) eine erste Dämpfungsunterlage (351), die nicht drehbar auf das äußere Hülseenteil (214) des Armlehnenbefestigungsabschnitts (211) geschoben ist, eine zweite Dämpfungsunterlage (352), die gegen die erste Dämpfungsunterlage (351) anstößt, und eine Verbindungsschraube (353) umfasst, die sich durch die erste und zweite Dämpfungsunterlage (351, 352) erstreckt und das Verbindungsloch (216) in dem äußeren Hülseenteil (214) des jeweiligen der Verbindungsstäbe (21) gewindemäßig in Eingriff nimmt.

Revendications

1. Dispositif d'accoudoir comprenant:

un mécanisme de connexion (2) comportant deux tiges de connexion (21) et au moins un élément de fixation (24), chacune desdites tiges de connexion (21) présentant une partie de montage d'accoudoir (211) et une partie venant en recouvrement (212) connectée à ladite partie de montage d'accoudoir (211), lesdites parties venant en recouvrement (212) desdites tiges de connexion (21) venant en recouvrement l'une avec l'autre, la longueur de recouvrement desdites parties venant en recouvrement (212) étant réglable, ledit au moins un élément de fixation (24) interconnectant de manière amovible lesdites parties venant en recouvrement (212) desdites tiges de connexion (21); et
deux unités d'accoudoir (3) montées de manière pivotante et respectivement auxdites parties de montage d'accoudoir (211) desdites tiges de

connexion (21),

caractérisé par le fait que ladite partie venant en recouvrement (212) de chacune desdites tiges de connexion (21) présente une pluralité de trous de fixation (217) espacés l'un de l'autre sur la longueur de ladite partie venant en recouvrement (212), et ledit au moins un élément de fixation (24) comporte deux dits éléments de fixation (24) s'étendant à travers deux desdits trous de fixation (217) dans l'une desdites tiges de connexion (21) et venant en prise de manière sélective avec deux desdits trous de fixation (217) dans l'autre desdites tiges de connexion (21).

2. Dispositif d'accoudoir selon la revendication 1, **caractérisé par le fait que** chacune desdites unités d'accoudoir (3) comporte un siège de fixation de cornière (33) montée sur ladite partie de montage d'accoudoir (211) de l'une respective desdites tiges de connexion (21), un ensemble d'accoudoir (34) monté sur ladite partie de montage d'accoudoir (211) de l'une respective desdites tiges de liaison (21) et pouvant pivoter par rapport audit siège de fixation de cornière (33), une première vis de réglage (37) connectée par vissage et de manière réglable audit siège de fixation de cornière (33), et une deuxième vis de réglage (38) connectée par vissage et de manière réglable audit ensemble d'accoudoir (34), ledit siège de fixation de cornière (33) présentant une première face d'arrêt (337) pouvant venir en butée contre ladite deuxième vis de réglage (38), ledit ensemble d'accoudoir (34) présentant une deuxième face d'arrêt (345) pouvant venir en butée contre ladite première vis de réglage (37).

3. Dispositif d'accoudoir selon la revendication 2, **caractérisé par le fait que:**

ladite partie de montage d'accoudoir (211) de chacune desdites tiges de connexion (21) comporte un segment de manchon intérieur (213) connecté à ladite partie venant en recouvrement (212), et un segment de manchon extérieur (214) connecté audit segment de manchon intérieur (213) opposé à ladite partie venant en recouvrement (212), ledit segment de manchon intérieur (213) présentant une partie entaillée (215) adjacente à une jonction entre lesdits segments de manchon intérieur et extérieur (213, 214), ledit siège de fixation de cornière (33) est emmanché de manière rotative sur ledit segment de manchon extérieur (214) et présente par ailleurs un trou axial (330) et une rainure de limitation de pivot (334) entourant ledit trou axial (330), ladite rainure de limitation de pivot (334) présentant une première extrémité de rainure

(335) et une deuxième extrémité de rainure (336) opposée à ladite première extrémité de rainure (335), et

chacune desdites unités d'accoudoir (3) comporte par ailleurs un siège de limitation de pivot (30) fixé à ladite partie entaillée (215) dudit segment de manchon intérieur (213) de l'une respective desdites tiges de connexion (21), ledit siège de limitation de pivot (30) présentant un élément de limitation de pivot (303) s'étendant de manière mobile dans ladite rainure de limitation de pivot (334) dudit siège de fixation de cornière (33), chacune desdites unités d'accoudoir (3) étant disposée en une position d'appui de bras horizontale lorsque ledit élément de limitation de pivot (303) vient en butée contre ladite première extrémité de rainure (335) de ladite rainure de limitation de pivot (334), et étant disposée en une position de non-appui verticale lorsque ledit élément de limitation de pivot (303) vient en butée contre ladite deuxième extrémité de rainure (336) de ladite rainure de limitation de pivot (334).

4. Dispositif d'accoudoir selon la revendication 3, **caractérisé par le fait que** ledit ensemble d'accoudoir (34) de chacune desdites unités d'accoudoir (3) comporte une tige d'accoudoir (340) et un panneau d'accoudoir (348) monté sur ladite tige d'accoudoir (340), ladite tige d'accoudoir (340) présentant une partie de connexion de pivot (342) montée de manière coaxiale sur ledit siège de fixation de cornière (33), chacune desdites unités d'accoudoir (3) comportant par ailleurs une bague de venue en prise (39) emmanchée en prise sur ledit segment de manchon intérieur (213) de l'une respective desdites tiges de connexion (21), au moins une bague compressible (31) disposée entre ladite bague de venue en prise (39) et ledit siège de limitation de pivot (30), et une pièce résistant à l'usure (32) prise en sandwich entre ledit siège de limitation de pivot (30) et ledit siège de fixation de cornière (33).

5. Dispositif d'accoudoir selon la revendication 4, **caractérisé par le fait que** ledit mécanisme de connexion (2) comporte par ailleurs deux plaques de renforcement (23), et une pluralité de vis de fixation (22) fixant respectivement lesdites plaques de renforcement (23) sur lesdites parties venant en recouvrement (212) desdites tiges de connexion (21), lesdites plaques de renforcement (23) se trouvant respectivement à proximité desdits segments de manchon intérieurs (213) desdites parties de montage d'accoudoir (211) desdites tiges de connexion (21).

6. Dispositif d'accoudoir selon la revendication 5, **caractérisé par le fait que** chacune desdites unités d'accoudoir (3) comporte par ailleurs un ensemble

de montage (35) pour monter ledit ensemble d'accoudoir (34) sur l'une respective desdites tiges de connexion (21), ledit ensemble de montage (35) comportant un premier coussin amortisseur (351) emmanché de manière non rotative sur ledit segment de manchon extérieur (214) de ladite partie de montage d'accoudoir (211), un deuxième coussin d'amortissement (352) venant en butée contre ledit premier coussin d'amortissement (351), et une vis de connexion (353) s'étendant à travers lesdits premier et deuxième coussins d'amortissement (351, 352) et venant en prise par vissage avec ledit segment de manchon extérieur (214) de l'une respective desdites tiges de connexion (21).

7. Dispositif d'accoudoir selon la revendication 1, **caractérisé par le fait que** ladite partie de montage d'accoudoir (211) de chacune desdites tiges de connexion (21) comporte un segment de manchon extérieur (214), et un trou de connexion (216) s'étendant axialement et vers l'intérieur à partir d'une extrémité extérieure dudit segment de manchon extérieur (214), chacune desdites unités d'accoudoir (3) comportant par ailleurs un ensemble d'accoudoir (34), et un ensemble de montage (35) pour monter ledit ensemble d'accoudoir (34) sur l'une respective desdites tiges de connexion (21), ledit ensemble de montage (35) comportant un premier coussin d'amortissement (351) emmanché de manière non rotative sur ledit segment de manchon extérieur (214) de ladite partie de montage d'accoudoir (211), un deuxième coussin d'amortissement (352) venant en butée contre ledit premier coussin d'amortissement (351), et une vis de connexion (353) s'étendant à travers lesdits premier et deuxième coussins d'amortissement (351, 352) et venant en prise par vissage avec ledit trou de connexion (216) dans ledit segment de manchon extérieur (214) de l'une respective desdites tiges de connexion (21).

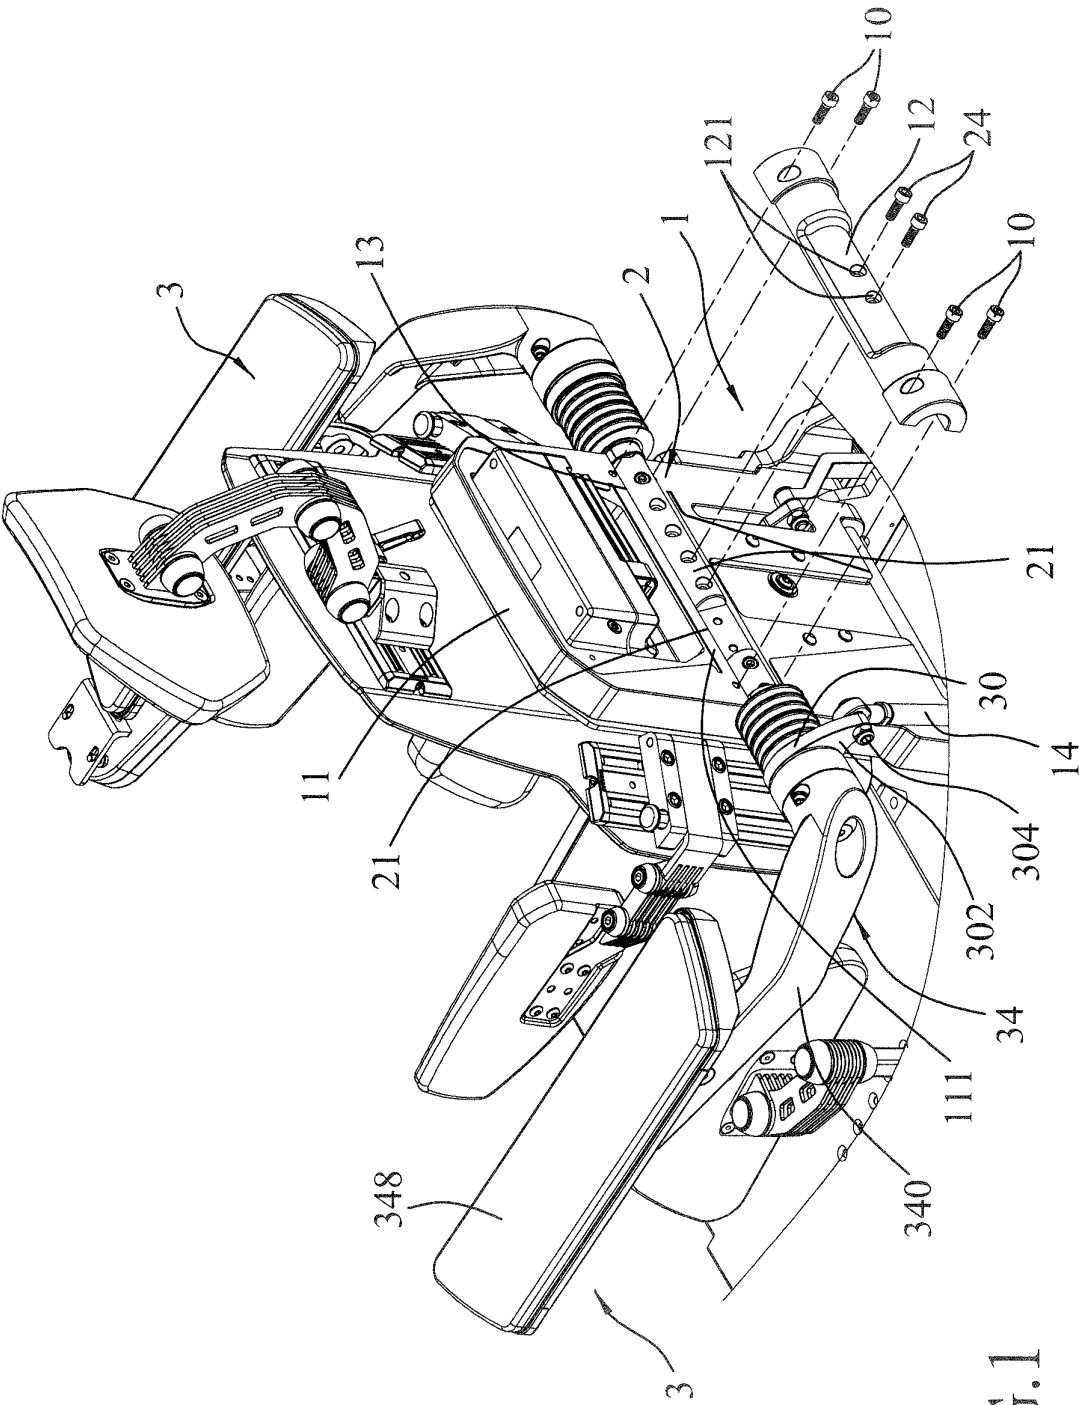


FIG.1

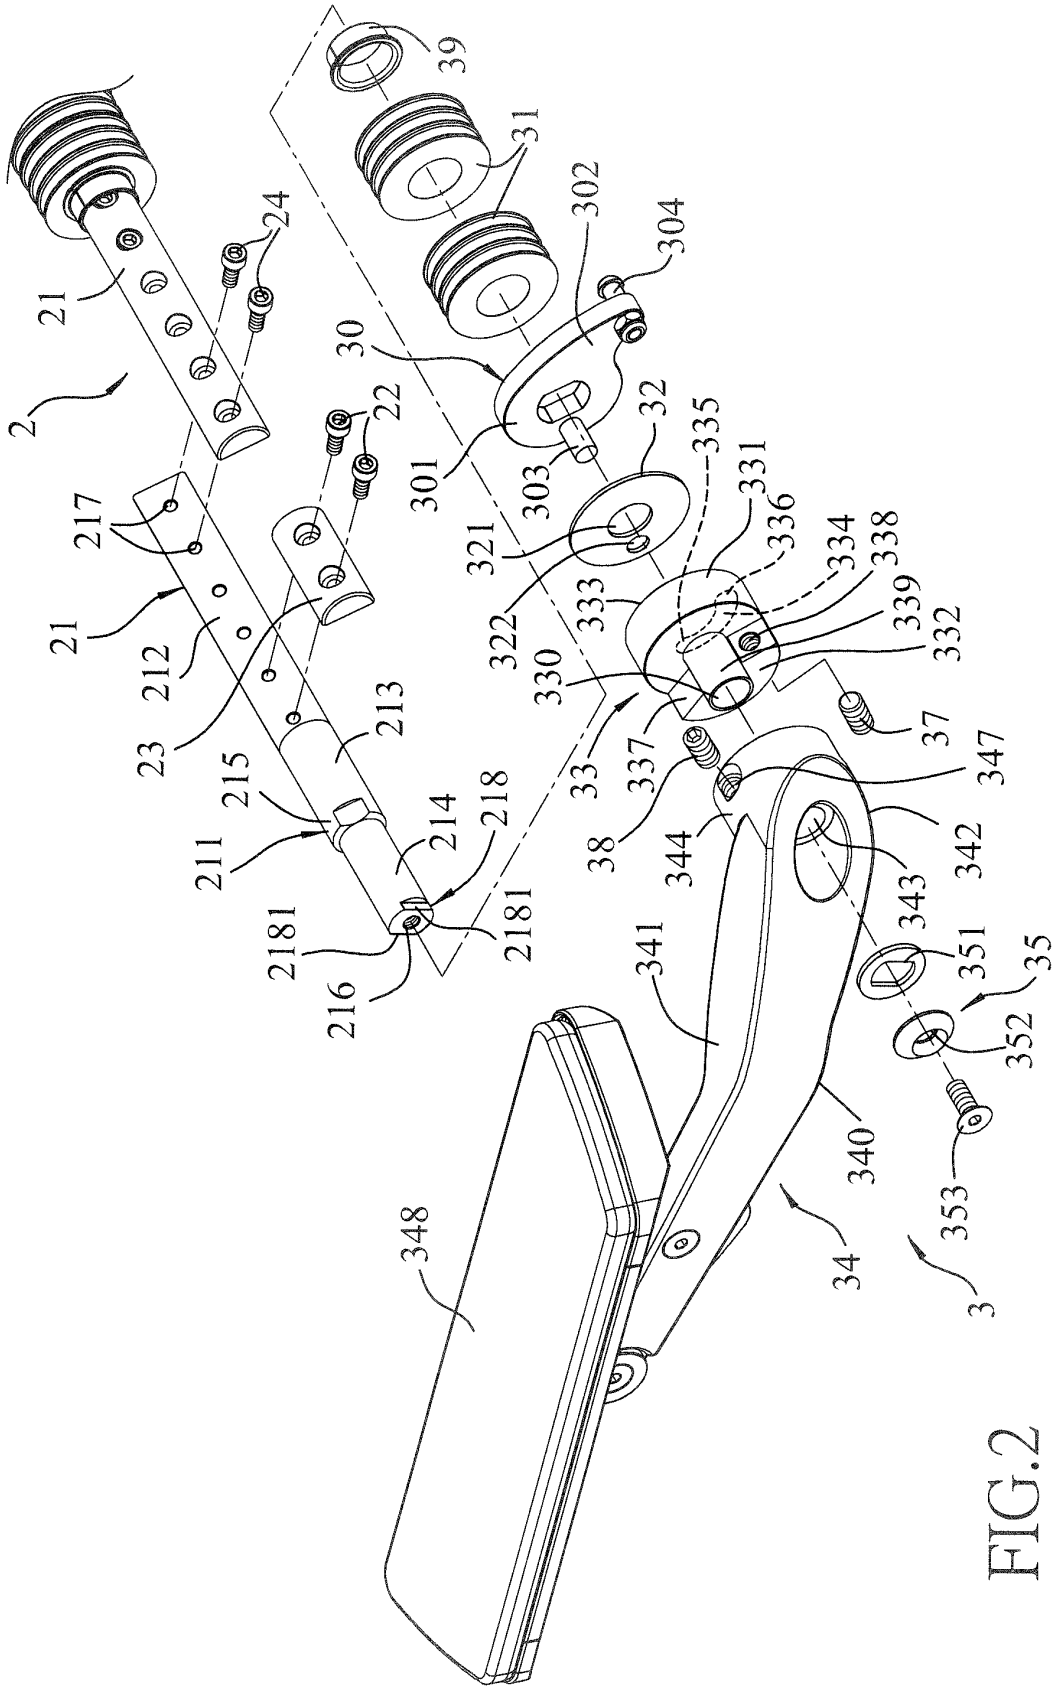


FIG.2

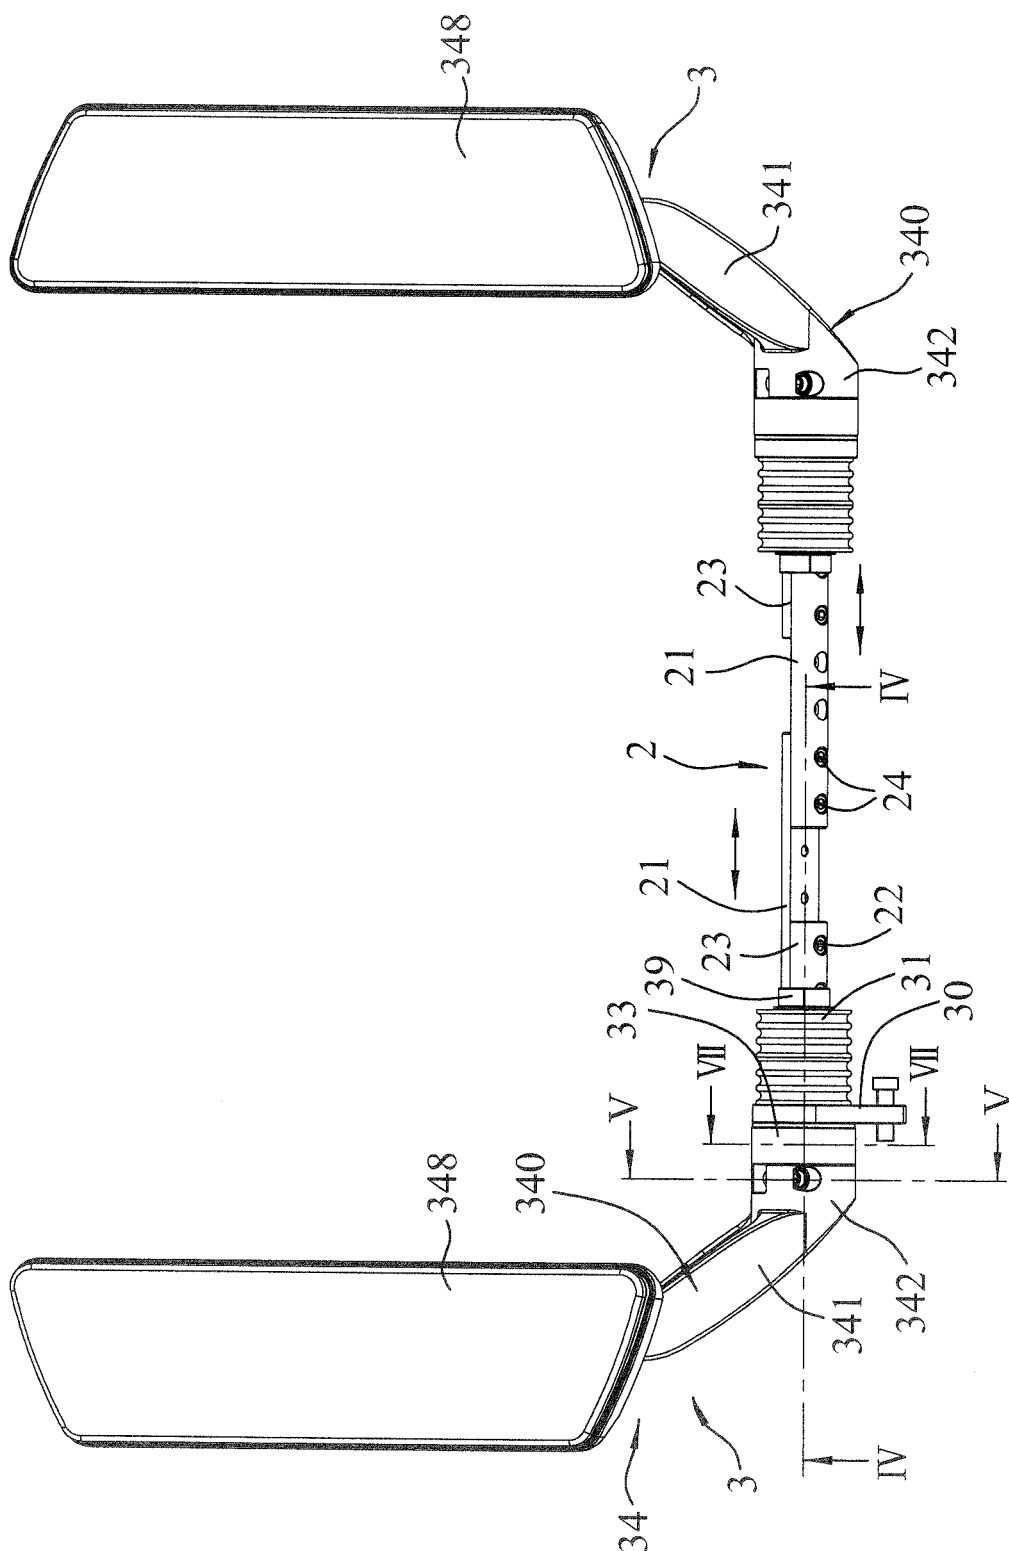


FIG. 3

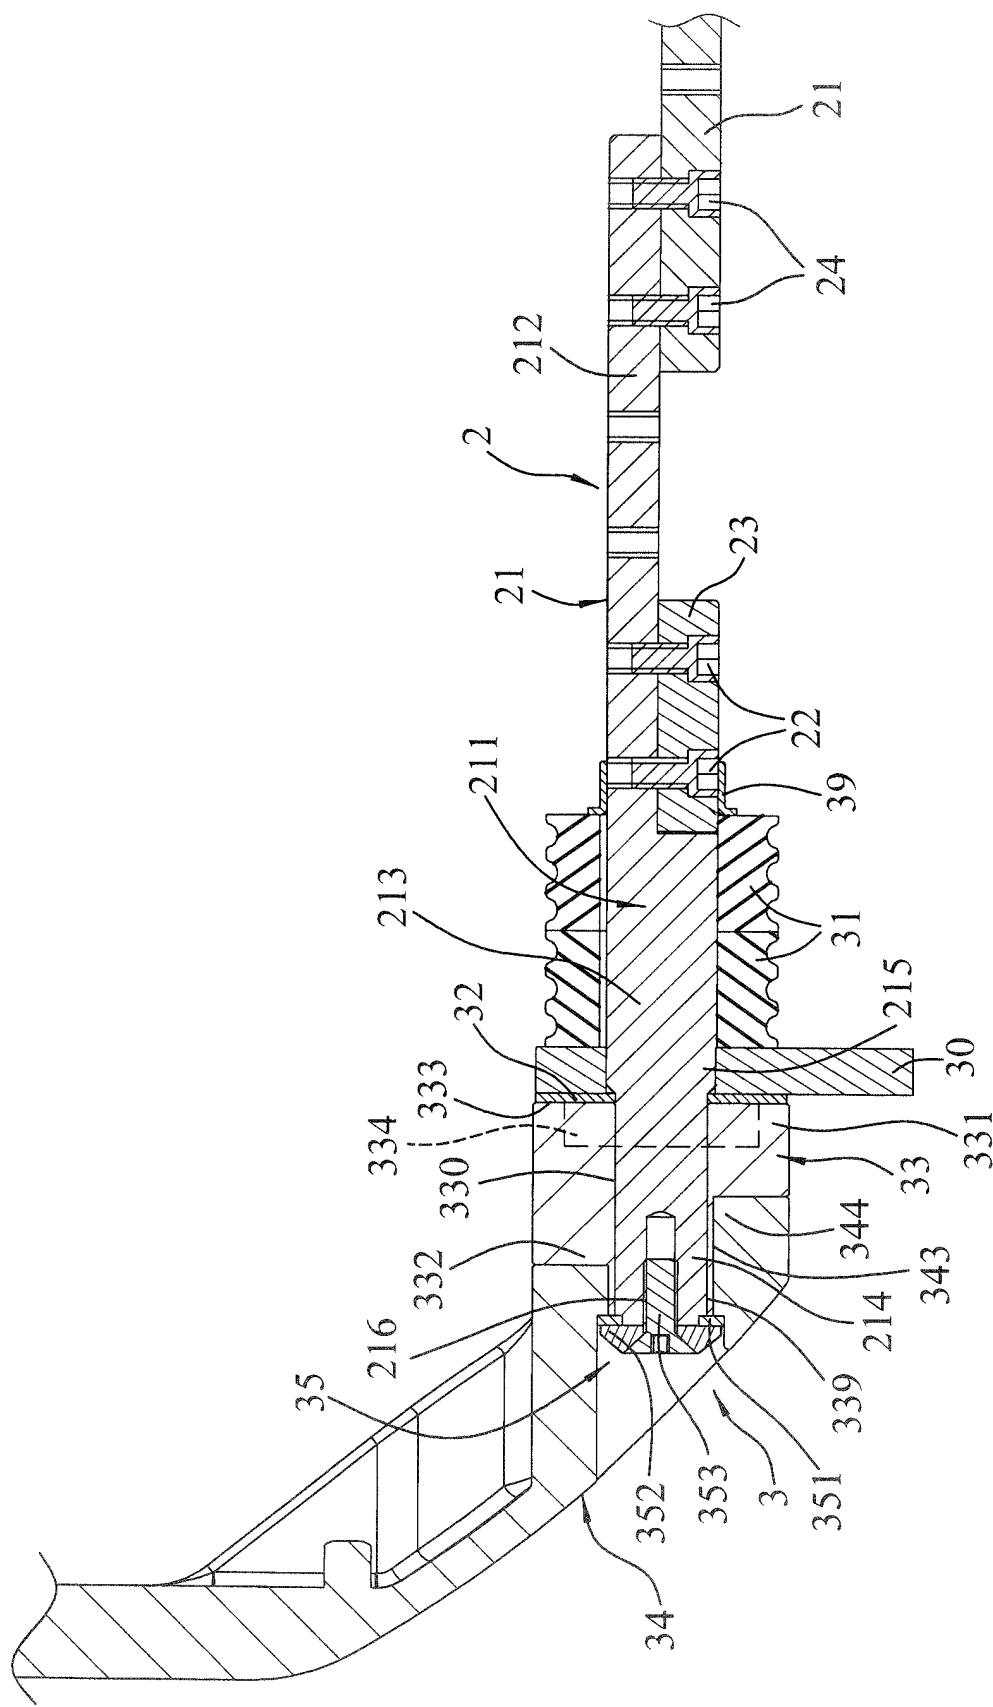


FIG.4

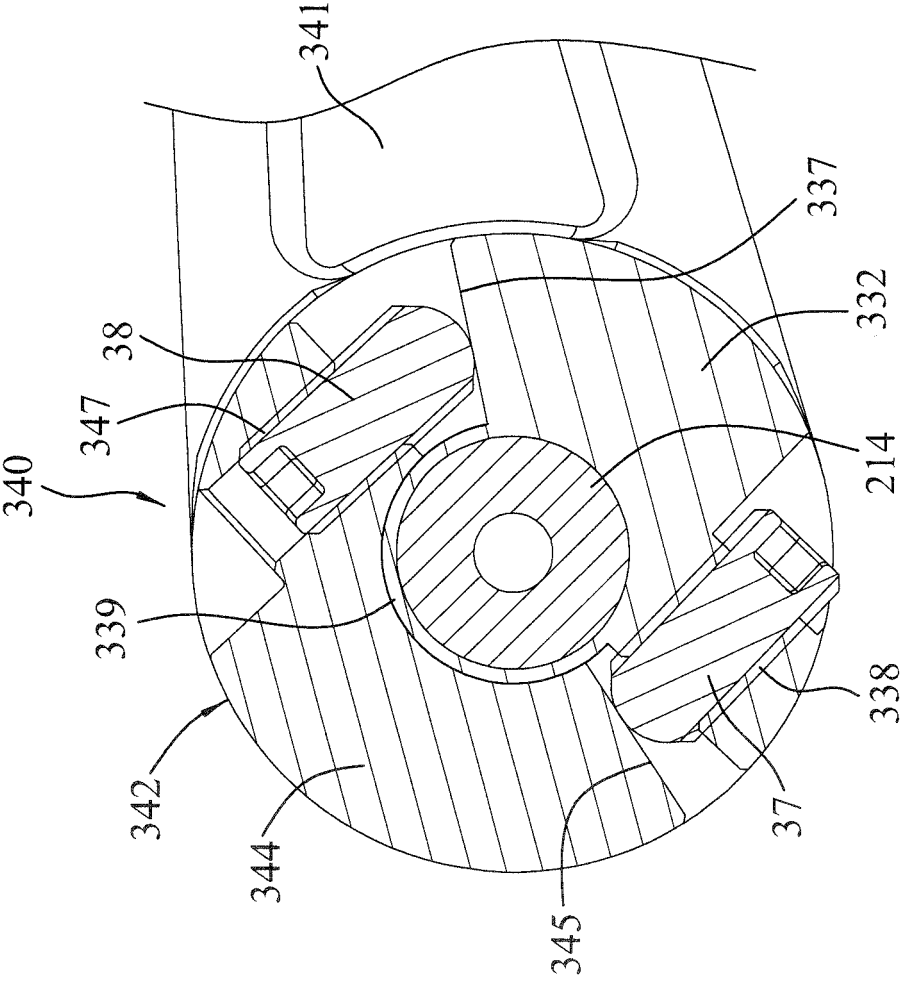


FIG. 5


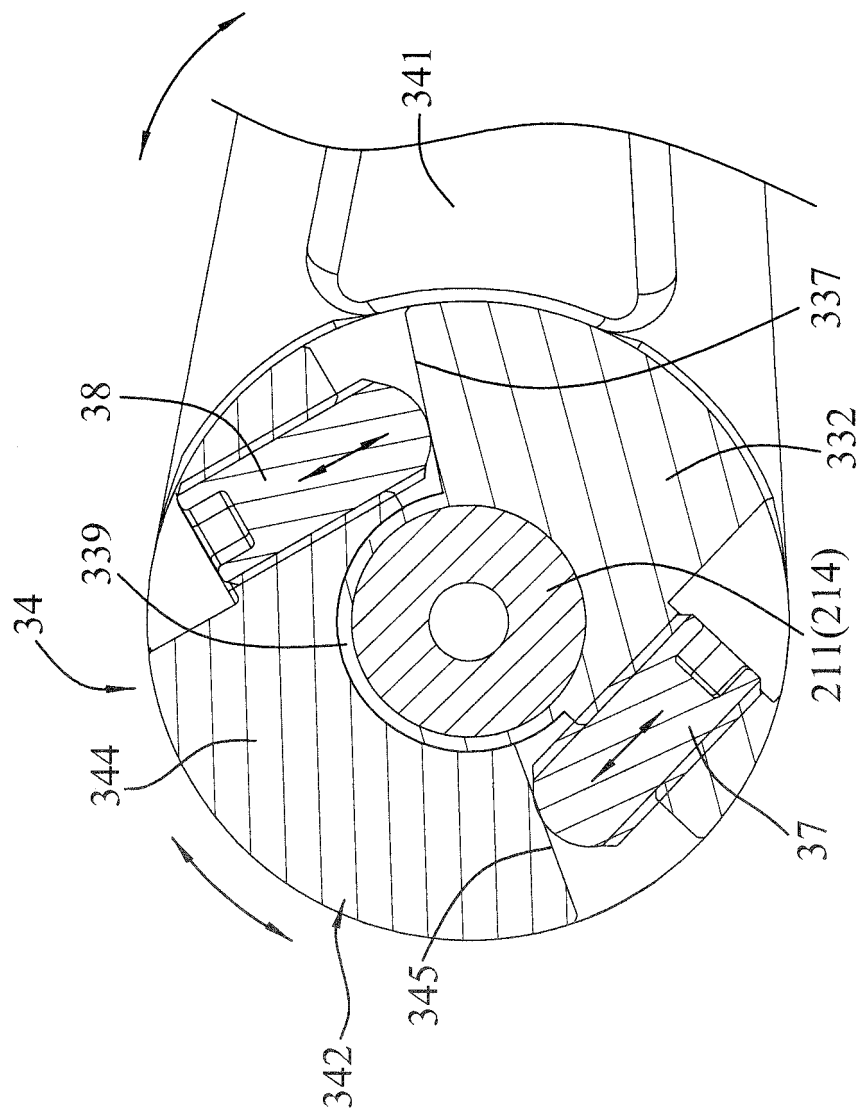


FIG. 6

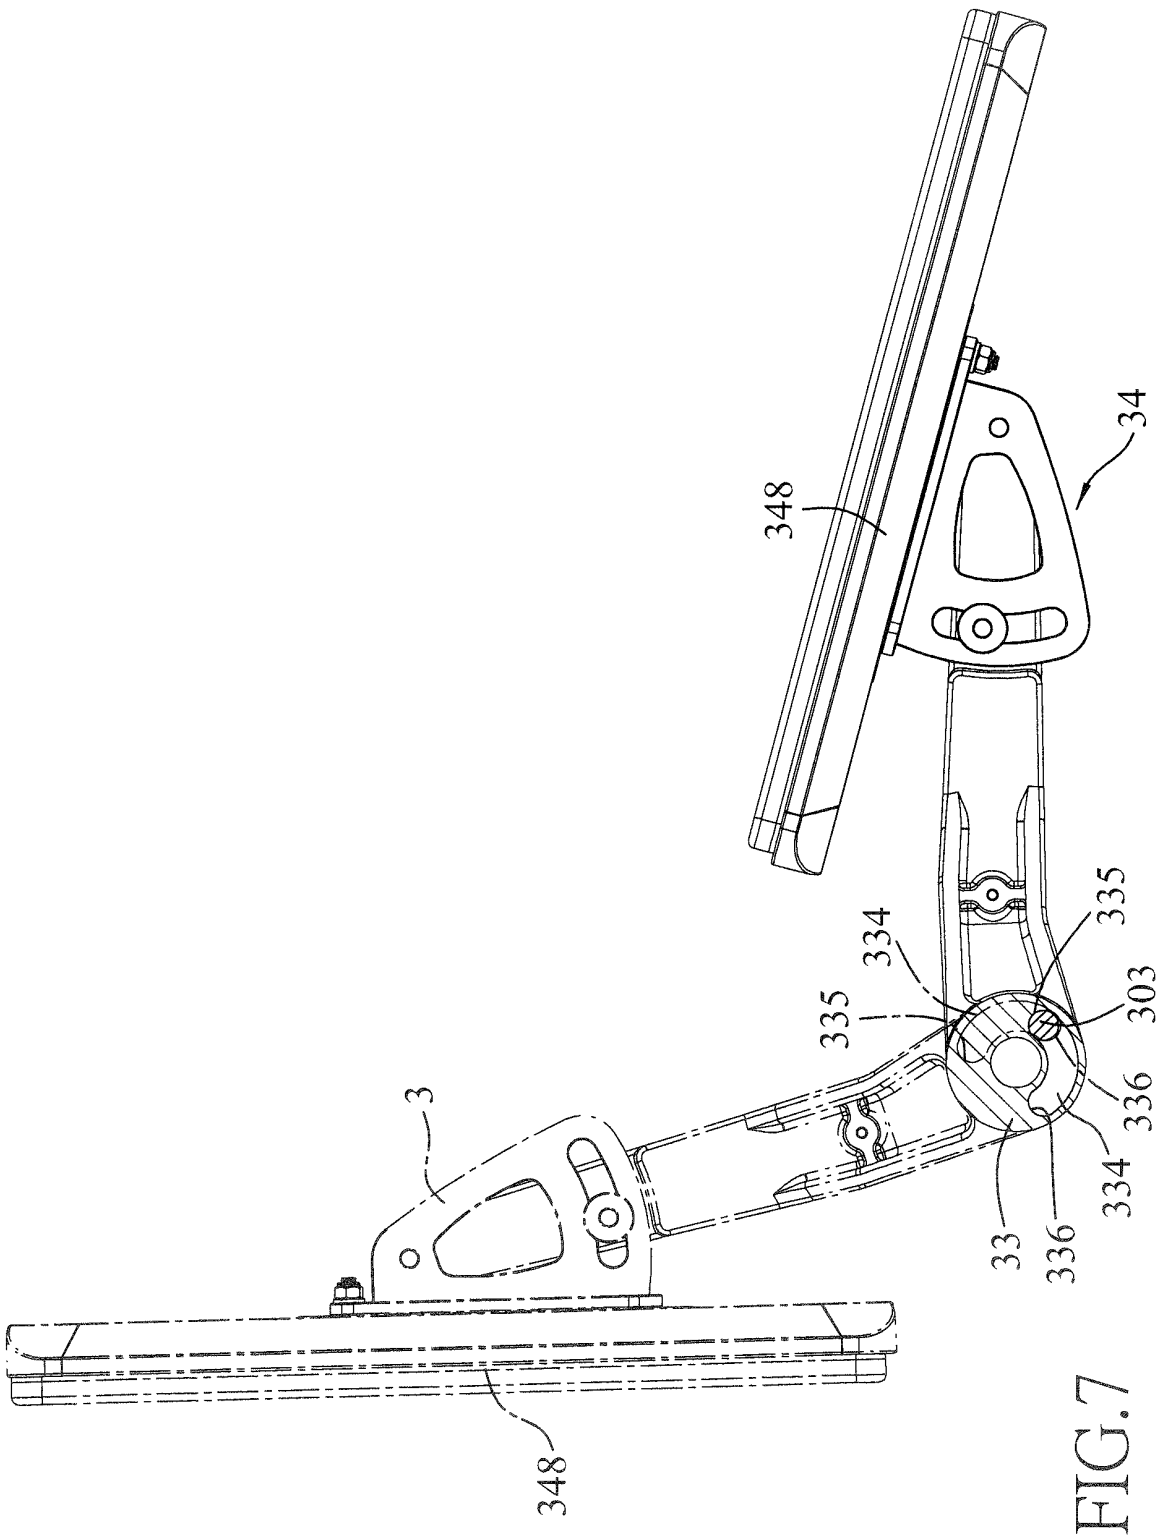

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 1532897 A2 [0003]