



(11) **EP 2 898 313 B9**

(12) **CORRECTED EUROPEAN PATENT SPECIFICATION**

(15) Correction information:
Corrected version no 1 (W1 B1)
Corrections, see
Claims EN 1

(51) Int Cl.:
G01N 21/84 ^(2006.01) **G01J 3/50** ^(2006.01)
H04N 7/18 ^(2006.01)

(48) Corrigendum issued on:
17.06.2020 Bulletin 2020/25

(86) International application number:
PCT/US2013/060632

(45) Date of publication and mention
of the grant of the patent:
22.01.2020 Bulletin 2020/04

(87) International publication number:
WO 2014/047296 (27.03.2014 Gazette 2014/13)

(21) Application number: **13773966.0**

(22) Date of filing: **19.09.2013**

(54) **MULTI-ANGULAR COLOR, OPACITY, PIGMENT CHARACTERIZATION AND TEXTURE ANALYSIS OF A PAINTED SURFACE VIA VISUAL AND/OR INSTRUMENTAL TECHNIQUES**

MEHRWINKLIGE FARB- UND OPAZITÄTSCHARAKTERISIERUNG VON PIGMENTEN UND TEXTURANALYSE EINER BEMALTEN OBERFLÄCHE DURCH VISUELLE ODER INSTRUMENTELLE VERFAHREN

CARACTÉRISATION DE PIGMENT, OPACITÉ, COULEUR MULTI-ANGULAIRE ET ANALYSE DE TEXTURE D'UNE SURFACE PEINTE PAR L'INTERMÉDIAIRE DE TECHNIQUES VISUELLES ET/OU INSTRUMENTALES

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(72) Inventors:
• **BEYMORE, Paul Michael**
Vermilion, Ohio 44089 (US)
• **PEREKSTA, James**
Rocky River, Ohio 44116 (US)

(30) Priority: **19.09.2012 US 201261702959 P**
15.03.2013 US 201313832088

(74) Representative: **f & e patent**
Fleischer, Engels & Partner mbB, Patentanwälte
Braunsberger Feld 29
51429 Bergisch Gladbach (DE)

(43) Date of publication of application:
29.07.2015 Bulletin 2015/31

(73) Proprietor: **PPG Industries Ohio, Inc.**
Cleveland, OH 44111 (US)

(56) References cited:
EP-A2- 0 828 144 WO-A1-2006/030028
US-A1- 2009 274 827

EP 2 898 313 B9

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

DescriptionCROSS REFERENCE TO RELATED APPLICATION

[0001] The present application claims priority to U.S. Provisional Patent Application No. 61/702,959, filed September 19, 2012.

FIELD OF THE INVENTION

[0002] In various embodiments, the present invention generally relates to a method and apparatus for evaluating colorimetric and physical property attributes of cured complex coating (e.g., paint) mixtures.

BACKGROUND OF THE INVENTION

[0003] Various techniques (e.g., SAE® J361) that are used to evaluate the properties of complex coating (e.g., paint) mixtures typically include a variety of in-plane viewing conditions that are often combined with microscopic evaluation of a sample. However, such techniques generally do not adequately address new effect pigmentations in complex paint mixtures. Further, they are largely focused on textiles and use obscurely identified out-of-plane viewing angles that require at least two light sources for viewing effect pigmentations properly. Other techniques involve using a spectrophotometer (i.e., in-plane multi-angle devices for effect samples and spherical devices for straight shade samples) that are generally effective for analyzing pigmentations. However, such techniques are generally not able to adequately characterize new pigments due to the unique properties of, for example, Colorstream® pigments that include pearls, colored aluminums, etc. because it is very difficult to view the coarseness of colored aluminums. Thus, a microscope is required to adequately determine special effect pigments, thus adding time and complexity while not satisfactorily addressing application issues which modify the characteristics of the sample and the effect of the special pigments.

[0004] Laboratory gonio spectrophotometers are not able to be effectively used in either the field or the laboratory due to constraints such as size, cost, performance, and measurement time. Portable gonio spectrophotometer devices include CCD cameras such as the Byk Mac® device from Byk-Gardner, or under-sampled bidirectional reflectance devices such as the MA98 device from X-Rite, Inc. While these devices demonstrate an improvement over the existing portable equipment available to provide coarseness, sparkle, and additional previously unavailable information, the devices do not provide simple data streams or conclusive texture and opacity information. CCD cameras generating sparkle and graininess values are inaccurate and provide generic values so that pigment identification/characterization and textural information is inaccurate even when used in conjunction with texture scales and spectral data. Under-sampled bidirectional

reflectance devices use a complex amount of datastreams and rely on overcomplicated scattering properties of pigments to either "fingerprint" pigments or sample defects.

[0005] None of the aforementioned devices provide adequate information for identification of and property analysis of effect pigmentations, such as colored aluminums because, in part, the devices provide inadequate results due to the underlying assumption that coarseness is not an attributable characteristic and only sparkle is an appropriate measure. However, different aluminums (colored or otherwise) clearly demonstrate coarseness qualities in collimated light and thus there may be confusion with regard to visually different aluminum pigments that appear identical to the devices, and the suggested usage of those devices. Furthermore, the devices typically require traditional, advanced, or complex proprietary colorimetric functions that use weighting functions to produce moderate results.

[0006] Further strategies have been developed using painted or virtual samples that represent various textures and that are compared to unknown samples. These techniques require substantial user intervention and are subjective in nature and thus may yield inconsistent results depending on the skill of the user.

[0007] US2009/0274827 discloses a method for examining vehicle paint formulation. WO2006/030028 is concerned with paint toner analysis. In EP0828144 the reflection area of a colour tone of a coloured surface coating is determined with a Gonio spectral-photometer over the visible spectral region under variation of the measuring angle.

[0008] Thus, a need exists for a simplified approach that uses limited multiangle, multiplanar spectral and/or visual data with or without a color camera that can produce improved and simplified results for pigment characterization and sample properties so that application (opacity) issues and texture issues can be quickly and clearly identified to allow for faster and better color matching.

SUMMARY OF THE INVENTION

[0009] In various embodiments the present invention is directed a computer implemented method. The method includes performing at least one of a visual evaluation and an instrument measurement of a target coating on a target sample to generate colorimetric information, and identifying, using a processor, a bulk toner that is present in the target coating by determining a color and a color intensity at different viewing angles relative to the target sample. The method also includes identifying, using the processor, at least one specific toner that is present in the target coating by detecting a presence and an orientation of colored and/or non-colored pigmentation effects that are present in the target coating, and outputting, using the processor, a formulation of the target coating that includes at least the at least one specific toner.

[0010] In various embodiments the present invention is directed to a system. The system includes a user interface and a processor in communication with the user interface and programmed to receive data from at least one of a visual evaluation and an instrument measurement of a target coating on a target sample to generate colorimetric information. The processor is also programmed to identify a bulk toner that is present in the target coating by determining a color and a color intensity at different viewing angles relative to the target sample and identify at least one specific toner that is present in the target coating by detecting a presence and an orientation of colored and/or non-colored pigmentation effects that are present in the target coating. The processor is further programmed to output a formulation of the target coating that includes at least the at least one specific toner.

[0011] In various embodiments the present invention is directed to an apparatus. The apparatus includes means for receiving data from at least one of a visual evaluation and an instrument measurement of a target coating on a target sample to generate colorimetric information, and means for identifying a bulk toner that is present in the target coating by determining a color and a color intensity at different viewing angles relative to the target sample. The apparatus also includes means for identifying at least one specific toner that is present in the target coating by detecting a presence and an orientation of colored and/or non-colored pigmentation effects that are present in the target coating, and means for outputting a formulation of the target coating that includes at least the at least one specific toner.

[0012] In various embodiments, the present invention is directed to a non-transitory computer readable medium including software for causing a processor to:

receive data from at least one of a visual evaluation and an instrument measurement of a target coating on a target sample to generate colorimetric information;

identify a bulk toner that is present in the target coating by determining a color and a color intensity at different viewing angles relative to the target sample; identify at least one specific toner that is present in the target coating by detecting a presence and an orientation of colored and/or non-colored pigmentation effects that are present in the target coating; and output a formulation of the target coating that includes at least the at least one specific toner.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013]

Fig. 1 illustrates angles labeled according to standard mathematical terminology.

Fig. 2 illustrates the angles of Fig. 1 labeled according to standard multi-angle spectrophotometer ter-

minology.

Fig. 3 illustrates specific angles at which visual and/or spectral information may be captured to characterize toners.

5 Fig. 4 illustrates a maximum number of angles at which visual and/or spectral information may be captured to characterize toners.

Fig. 5 illustrates various angles with respect to a painted sample and light interaction with a typical transparent or semi-transparent effect flake.

10 Fig. 6 illustrates how diffuse light sources provide unfocused light to provide randomized information.

Fig. 7 illustrates a flowchart of an embodiment of a process for identifying toners used to match a target sample coating.

15 Fig. 8 illustrates a flowchart of an embodiment of a process for identifying toners used to match a target sample coating.

20 Fig. 9 illustrates an embodiment of a system which may be used to identify toners used to match a target sample coating.

DETAILED DESCRIPTION OF THE INVENTION

25 **[0014]** In various aspects, embodiments of the invention include a spectrophotometer and a method that may be used to obtain target spectral and visual information for a target sample, characterize toners to identify a plurality of bulk toner types (*i.e.*, a grouping of toner types such as pearls, aluminums, colored aluminums, etc. that have similar physical layering and properties) that can be used to produce a coating having a color, texture *i.e.*, the non-uniform topographical appearance), and opacity that is similar to the target sample, and determine if the coating composition meets user specified acceptance criteria.

30 **[0015]** Various embodiments of the invention include the identification of "best fit" individual/specific toners that can be used to produce a paint having color, texture, opacity, and effect properties nearly or substantially identical to those in the target sample. Embodiments may also identify inadequacies of toners such that specific missing toners are identified which are necessary to make a paint formulation match that meets user specified acceptance criteria.

35 **[0016]** Various embodiments of the invention include an apparatus that has a device for capturing information for a target sample and a processor for identifying bulk toner types and specific toners that can be used to produce a paint having a color that is similar to the target sample. The processor also determines if the modified paint composition or formula meets user specified acceptance criteria. An output device may be used for conveying the paint formula information to a user to visualize how a coating will appear on one or more surfaces. In various embodiments, the invention provides a method and apparatus for a user to visualize how an interior or exterior surface of an object such as a portion of a struc-

ture (e.g., a wall), an automobile, etc., will appear after the surface has been coated with, for example, one or more paint colors.

[0017] While the description herein generally refers to paint, it should be understood that the devices, systems and methods apply to other types of coatings, including stain and industrial coatings. The described embodiments of the invention should not be considered as limiting. A method consistent with the present invention may be practiced in a variety of fields such as the matching and/or coordination of apparel and fashion products.

[0018] Embodiments of the invention may be used with or incorporated in a computer system that may be a stand alone unit or include one or more remote terminals or devices in communication with a central computer via a network such as, for example, the Internet or an intranet. As such, the computer or "processor" and related components described herein may be a portion of a local computer system or a remote computer or an on-line system or combinations thereof. The database and software described herein may be stored in computer internal memory or in a non-transitory computer readable medium.

[0019] Traditional spectrophotometers and visual viewing conditions consider the angles and light sources illustrated in Figs. 1 and 2. Figs. 1 and 2 illustrate the same angles, but Fig. 2 uses generally accepted terminology to describe the angles in relation to the specular angle (*i.e.*, the angle of specular reflection of the incident light source) when discussing multi-angle spectrophotometers. However, for clarity the angle labeling system illustrated in Fig. 1 is used herein. In various embodiments, traditional light sources may be used that employ diffuse or collimated color corrected light.

[0020] In various embodiments, in order to properly identify the type of toners used in the coating that is applied to the surface of an unknown or target sample, observations are taken at appropriate angles and the observed data are compared to existing known toners in a database. The database may include properties of existing toners with which the comparison is made.

[0021] In various embodiments, two incident light sources may be used to characterize toners. As illustrated in Fig. 3 the incident light at 105° acts as a bright spotlight on the sample and allows an observer (which may also be a camera) and/or a spectrophotometer to capture reflectance details regarding the target's color and flake (*i.e.*, effect) orientation. The incident light may be brighter and more direct than what would be present when an individual observes the painted surface in a natural light environment. By using the incident light, the properties of the coating are thus exaggerated, making it easier to quantify the minute characteristics of the particles within the coating. A second incident light at 170° that is representative of an individual looking along the length of a coated surface (e.g., a vehicle) allows for better evaluation of the color and toner characteristics. As illustrated in Fig. 5, the incident light that is nearly parallel

to the target interacts substantially different with translucent toners such as micas, pearls, xirallics, glass flakes, etc. than light sources at angles more normal to the target. At the 10° (where 170° is the equal, but opposite) angle of illumination the coating layer is able to be "seen" from the underside, which results in much more transmitted light returned to the viewer than reflected light. This provides opacity information, unique color data, and identifies flake orientation for characterization of toners in a simple or complex coating mixture. Furthermore, light reflected at this angle provides a greater span of reflected information and colors which may be critical for identification of certain effect pigments with significant color variation over the travel.

[0022] Due to the complex interaction of translucent toners with light, direct, collimated light sources may be used to ensure consistency and repeatability when reviewing a target sample. FIG. 6 illustrates how diffuse light sources provide an unfocused light and allow for significant "random" interactions with effects such as metallic flakes, resulting in inadequately repeatable measurements by providing randomized information to the viewer at all angles. Stray light from a diffuse source is able to strike pigment effects in an inconsistent variety of locations at a variety of angles, resulting in non-reproducible reflections, thus providing information to the sensors in a spectrophotometer or to the receptors in an observer's eyes. The unique characteristics of the effect pigments are diffused, thus eliminating the possibility of identification of the effect pigment. Collimated light has no stray light emanating from the source beam, so it returns the same reflections every time a target surface is viewed. This rationale may be used to populate pigment data in a database. It may also be desirable to use similar lights in similar orientations when developing a database to which to compare the target information.

[0023] As illustrated in Fig. 7, embodiments of the present invention are directed to a method of analyzing a target surface to determine the composition of the coating on a target surface. At step 70, the target sample having the target surface is acquired and is prepared for analysis at step 72. At step 73, it is determined, based on user input, whether a visual observation or instrument measurement is to be conducted. If an instrument measurement is to be conducted, at step 74 color cameras included within a device such as a spectrophotometer acquire Red, Green and Blue (RGB) information. At the same time a spectrophotometer could supply colorimetric values such as L*, a*, b*, C, and h. At step 76 the information is exported from the device to a user device. The information can be used to directly compare information viewed at different angles. A tolerance difference in the RGB or colorimetric information of 0.5 to 1.0 during a comparison for any of the three values is generally indicative of a different color or different color intensity.

[0024] Visual evaluation of a target coating composition is performed at step 78, and may require an observer to make a decision at step 80 as to which color is most

prominent at a given angle. In various embodiments, this may be resolved based on the most chromatic hue observed at the given angle. For example, at a particular viewing angle a target coating may appear dull green, but may contain substantial flecks of violet. Because violet is the most prominent color at the given angle, violet is designated as the color of the angle and used for the purposes of comparison. The color may also be interpreted as having a particular intensity which would be designated as the intensity of the color at the given angle. The intensity may be measured on, for example, a 3 to 5 point scale that ranges from less intense to moderately intense to highly intense.

[0025] Spectral data provided by a spectrophotometer requires data manipulation at step 82, but can eliminate the subjectivity of visual observation or the restrictiveness of using a camera. In various embodiments, the comparison of spectral data between angles involves one of two procedures. The first procedure is to evaluate the peak of greatest reflectance and compare that reflectance value at a given wavelength to those in a database in which colors have been assigned to a range of wavelengths. For example, a spectral reflectance may peak at or around 550 nm for a sample. When compared to wavelength values for particular colors in a database, the color may be matched with "Green," which has a range of 525-575 nm stored in the database (*i.e.*, "Green" would be the most prominent color at the evaluated angle). Following the visual process the "color" at the evaluated angle is compared to a color observed at another angle. The difference between the magnitudes of the spectral reflectance at the peak of each angle signifies the intensity difference between the angles under consideration. Following the procedure for comparing spectral data between angles involves the generation of an augmented similarity, or reflective, index (SI). The spectral curve at the angles under consideration is normalized and the division of the absolute values of the differences between the normalized values at each wavelength summed by 2 times the number of wavelengths considered yields the augmented SI. Exceeding a value range of 0.2 - 0.4 may indicate that the colors under consideration are different. A value of 0.2 may be desirable for tighter control given a large overall starting comparison pool or in a white/silver/black color whereas a value of 0.4 may be desirable for a smaller overall starting comparison pool or larger inclusion of similar colors from the pool. In various embodiments, the process for considering intensity is substantially the same as the process described herein in connection with the first procedure for comparing spectral data between angles.

[0026] Equation 1: Similarity Index for a given single angle

$$SI = \frac{\sum_0^n |R_s - R_d|}{2n_\lambda}$$

Where: n = total number of wavelengths

R = normalized reflectance value

s = sample

d = database

[0027] Bulk characterization of toners is performed because the correct interpretation of a toner type will lead to the correct texture of the final coating. For example, pearls generally have identical coarseness values, but specific pearls result in unique colored sparkle characteristics. Furthermore, aluminums have similar color values, but may have unique overall texture properties. Therefore, further characterization of the toner present in the coating is performed at step 84, and once a suitable toner is identified as an option for use via angular comparisons, the texture of the coating will thus be properly identified (*i.e.*, the proper texture will be present with a reasonable toner selection). It is not necessary to identify the exact toner used in the coating, but rather a suitable selection of toners will address color and texture issues. At step 86, the coating formulation that matches (or substantially matches in an acceptable manner) the target coating is output.

[0028] In order to determine the bulk toner characteristics of a target coating at step 82, different viewing angles may be assessed and compared to one another using a light source, for example at 170°. For example, the 30° and 60° in-plane angles may be assessed for color (red, green, etc.) via a visual evaluation, a color camera, or interpretation of the spectral curve as discussed hereinabove. The 90° and 30° out-of-plane angles at a 45° elevation may then also be assessed for color in the same manner. If the colors are not within a particular tolerance of one another then there is a pearl effect (*e.g.*, mica, xirallic, colorstream, harlequin, etc.) in the target coating. Depending on the color and color intensity difference there may also be a colored aluminum flake present (color intensity will be much higher in the in-plane angles and the color of the aluminum will be much more prevalent there also). Further consideration may also be given to the travel of the target over the range of in-plane angles. If the color intensity changes between the 125°, 60°, and 30° angles then the target likely contains an aluminum flake. If the color or color intensity does not change across any of the angles, then the target coating does not contain effect toners and only has straight shade toners present.

[0029] As described hereinabove, once the toner type has been generally determined at step 82, toners may be more specifically characterized and compared to a database for selection from one or more toners at step 84. The target at each angle may be evaluated and compared to data in a database that contains angular information for each toner. The angular information may include spectral data, visual color assignments, application implications of each toner, generic application information that can be applied to individual toners, alignment/opacity information based on the comparison of the

out-of-plane angles which are within opposing planes compared to the in-plane angles, and any other appropriate data.

[0030] A colored aluminum is determined to be within a target coating based on a comparison with the characteristics of colored aluminum at specific angles. A colored aluminum is largely not visible at most angles disclosed when a 170° light source is used and colored aluminum is not visible in the 90° out of plane angle. Thus, nearly all color contributed to the target by the colored aluminum is not present in the out of plane 90° angle with a 170° light source. A comparison of the colors from the in plane angles using a 105° light source to the colors (or lack thereof) from the 90° out of plane angle using a 170° light source may allow for a definite or near definite determination that a colored aluminum is present. In order to determine if the specific colored aluminum is present, the out of plane 30° angle may be evaluated with a 105° light source. The color present at such an angle may be compared to data in the database for confirmation of the more specific type of colored aluminum present (e.g., gold, red, orange, etc.). Further confirmation can be gained via a comparison of the data at other angles using a 105° light source to data in the database. However, the texture of a colored aluminum is most clearly apparent at a 30° out of plane angle using a 105° light source. Thus, the position of a spectral receptor, a visual evaluation, and/or a colored camera may be used at such an angle with such a light source.

[0031] A pearl effect present in a complex mixture may be more specifically defined by comparing the out of plane 90° angle using a 170° light source. Most effect pigmentations become substantially less color intense at such an angle with such a light source. This is illustrated in FIG. 5. Pearl effects, however, are the exception because when a pearl effect is viewed at the out of plane 90° angle using a 170° light source it becomes noticeably more color intense. The color determined to be most prominent at such an angle with such a light source may be compared to data in a database to determine the specific pearl effects that most closely exhibit the same behavior and color as observed. The characteristic colors of the target at other angles may also be compared and evaluated to ensure the correct pearl effect has been selected by considering the out of plane to in plane travel characteristic data of the pearl effect in the database as compared to the target, with, in one embodiment, the primary angle of concern being a 90° angle using a 170° light source. Color intensity of the pearl effect at such an angle with such a light source may be further compared to data in the database to determine the presence of a flattening agent and/or misalignment of the particles in the target coating. Once a pearl effect has been identified as present within the target coating, a further analysis/comparison may be made with more comprehensive data in the database that include the exact spectral curve information for each of the toners present in the database. A comparison of the spectral curves of the target to the

proposed toners from the database may further identify the presence of a standard mica or xirallic (or Colorstream® xirallic) effect using the similarity index discussed hereinabove.

5 **[0032]** Micronized white can be identified by evaluating the travel of the target sample using in plane angles and a 105° or 170° light source. The angles nearest the light source may not be impacted by micronized white, but the angles further from the light source may exhibit a white/light blue hue.

10 **[0033]** Aluminum flake may be more specifically identified by comparing the characteristics of the target coating to data in the database using the process that is used for colored aluminums, as described hereinabove, with additional considerations. As discussed hereinabove, the presence of aluminum may be evaluated by determining the travel of the target coating along with the overall color of the target coating. If the overall color of the target coating appears grey or white, but substantial changes in intensity are present between angles, then there is most likely aluminum present (this may be less obvious if a white or silver pearl effect has already been characterized). The aluminum flake will exhibit a silver appearance without additional toners present. The characteristics of the target coating at a 30° out of plane angle using a 105° light source may be compared to the color intensity data for aluminum effects in the database. Because texture for aluminums is most apparent at such an angle and with such a light source, the intensity of the color at the angle may be compared to data in the database to select the proper aluminum flake by ignoring the color information of the target coating at the angle. Aluminum flakes (including colored aluminum pigments) are generally susceptible to spray variation and in various embodiments are compared against databases which contain comparative out of plane information from the 90° and 30° angles that is stored in a database. For example, the database in various embodiments contains 170° and 105° information on aluminums that have been sprayed in various alignment conditions (particularly with wet, dry, and/or electrostatic applications). Similarity comparisons at these angles determines the need for flake alignment adjusting ingredients - flop adjusters (i.e., if the aluminum response will look similar a particular application type indicating if flop adjustment pigments are necessary to add to the mixture). Additional evaluations may be performed to determine the presence of aluminum in a target sample, and the specific type of aluminum may be identified by using observations at the specular angles (a 75° angle for a 105° light source and a 10° angle for a 170° light source). Although embodiments of the present invention are described herein as contemplating light sources and observations being taken at specific angles, it should be understood that such angles are not limiting, and include ranges or less specific angles.

55 **[0034]** In various embodiments, remaining toners, for example solids, may initially be identified by considering

data relating to the 90° and 30° out of plane angles with a 170° light source. Without the presence of pearl effects in the target, a 90° angle may be used to determine the remaining solid toners in the target coating. A data comparison with the most similar solid colored toners (SI comparison) or a Kubelka-Munk matching tool may be used with the spectral curve of the target coating at such an angle to provide a selection of solid toners. If a colored aluminum or effect is not present then the solid toners may be selected by comparing data at the in-plane angles to data in the database using either or both of the light sources. If a pearl effect and/or a colored aluminum is/are present then the toners most similar to the colors of the in-plane angles and the 30° out of plane angle may be selected from the database.

[0035] Via the utilization of a spectrophotometer, the process may also be used iteratively to optimize the identification process. Reflectance data from a sample made using the toners selected from the process may be subtracted from reflectance data of an unknown sample. This results in a new, "darker," reflectance curve which may then be reiterated through the process for additional toner identification. The toners selected through the latest iteration can be added to the toners from the prior iteration(s).

[0036] Fig. 8 illustrates a flowchart of an embodiment of a process for identifying toners used to match a target sample coating. At steps 88 and 90, the bulk toner is identified by determining the color at all the observed angles (step 88) and determining the intensity at all the observed angles (step 90) and described hereinabove with step 82 of Fig. 7. At step 92, it is determined whether colored aluminum and/or pearl effects are present in the target sample and, if so, at step 94 the effect (*e.g.*, mica, xirrallic, colored aluminum, glass, etc.) is identified and the effect orientation is considered as described hereinabove. At step 96, non-colored aluminum and solid effects are identified and the effect orientation is considered as described hereinabove.

[0037] Fig. 9 illustrates an embodiment of a system 90 which may be used to identify toners used to match a target sample coating. A user 92 may utilize a user interface 94, such as a graphical user interface, to operate a spectrophotometer 96 to measure the properties of a target sample 98. The data from the spectrophotometer 96 may be transferred to a computer 100, such as a personal computer, a mobile device, or any type of processor. The computer 100 may in communication, via a network 102, with a server 104. The network 102 may be any type of network, such as the Internet, a local area network, an intranet, or a wireless network. The server 104 is in communication with a database 106 that may store the data and information that is used by the methods of embodiments of the present invention for comparison purposes. Various steps of the methods of embodiments of the present invention may be performed by the computer 100 and/or the server 106.

[0038] In another aspect, the invention can be imple-

mented as a non-transitory computer readable medium containing software for causing a computer or computer system to perform the method described above. The software can include various modules that are used to enable a processor and a user interface to perform the methods described herein.

[0039] It will be readily appreciated by those skilled in the art that modifications may be made to the invention without departing from the concepts disclosed in the foregoing description. Such modifications are to be considered as included within the following claims unless the claims, by their language, expressly state otherwise. Accordingly, the particular embodiments described in detail herein are illustrative only and are not limiting to the scope of the invention which is to be given the full breadth of the appended claims and any and all equivalents thereof.

Claims

1. A computer implemented method for evaluating colorimetric and physical property attributes of cured complex coating mixtures, the method comprising:
 - performing at least one of a visual evaluation and an instrument measurement of a target coating on a target sample to generate colorimetric information;
 - identifying, using a processor and the colorimetric information, a bulk toner that is present in the target coating by determining a color and a color intensity at different viewing angles relative to the target sample, wherein the identified bulk toner comprises a particular toner type;
 - identifying, using the processor, at least one specific toner of the identified bulk toner that is present in the target coating by detecting a presence and an orientation of colored and/or non-colored pigmentation effects that are present in the target coating; and
 - outputting, using the processor, a formulation of the target coating that includes the at least one specific toner.
2. The method of claim 1, wherein performing the at least one of a visual evaluation and an instrument measurement includes measuring the target sample with a spectrophotometer.
3. The method of claim 1, wherein identifying the at least one specific toner includes determining whether a colored aluminum and/or a pearl effect is present in the target coating.
4. The method of claim 1, wherein identifying the at least one specific toner includes identifying at least one of a solid effect and a non-colored aluminum.

5. The method of claim 1, further comprising preparing the target sample for analysis.
6. The method of claim 1, wherein performing at least one of a visual evaluation and an instrument measurement includes visually determining a prominent color.
7. The method of claim 1, wherein determining a color intensity includes calculating a similarity index.
8. A system for evaluating colorimetric and physical property attributes of cured complex coating mixtures, the system comprising:
- a user interface; and
a processor in communication with the user interface and programmed to:
- receive data from at least one of a visual evaluation and an instrument measurement of a target coating on a target sample to generate colorimetric information;
identify, using the colorimetric information, a bulk toner that is present in the target coating by determining a color and a color intensity at different viewing angles relative to the target sample, wherein the identified bulk toner comprises a particular toner type;
identify at least one specific toner of the identified bulk toner that is present in the target coating by detecting a presence and an orientation of colored and/or non-colored pigmentation effects that are present in the target coating; and
output a formulation of the target coating that includes the at least one specific toner.
9. The system of claim 8, further comprising any one of:
- a database in communication with the processor
 - a display in communication with the processor
 - a spectrophotometer in communication with the processor.
10. The system of claim 8, wherein the processor is programmed to identify the at least one specific toner by determining whether a colored aluminum and/or a pearl effect is present in the target coating.
11. The system of claim 8, wherein the processor is programmed to identify the at least one specific toner by identifying at least one of a solid effect and a non-colored aluminum.
12. An apparatus for evaluating colorimetric and physical property attributes of cured complex coating mix-

tures, the apparatus comprising:

means for receiving data from at least one of a visual evaluation and an instrument measurement of a target coating on a target sample to generate colorimetric information;
means for identifying, using the colorimetric information, a bulk toner that is present in the target coating by determining a color and a color intensity at different viewing angles relative to the target sample, wherein the identified bulk toner comprises a particular toner type;
means for identifying at least one specific toner of the identified bulk toner that is present in the target coating by detecting a presence and an orientation of colored and/or non-colored pigmentation effects that are present in the target coating; and
means for outputting a formulation of the target coating that includes the at least one specific toner.

13. The apparatus of claim 12, wherein the means for identifying the at least one specific toner includes means for determining whether a colored aluminum and/or a pearl effect is present in the target coating.
14. The apparatus of claim 13, wherein the means for identifying the at least one specific toner includes means for identifying at least one of a solid effect and a non-colored aluminum.
15. A non-transitory computer readable medium including software for causing a processor to:

receive data from at least one of a visual evaluation and an instrument measurement of a target coating on a target sample to generate colorimetric information;
identify, using the colorimetric information, a bulk toner that is present in the target coating by determining a color and a color intensity at different viewing angles relative to the target sample, wherein the identified bulk toner comprises a particular toner type;
identify at least one specific toner of the identified bulk toner that is present in the target coating by detecting a presence and an orientation of colored and/or non-colored pigmentation effects that are present in the target coating; and
output a formulation of the target coating that includes the at least one specific toner.

55 Patentansprüche

1. Ein computerimplementiertes Verfahren zur Auswertung kolorimetrischer und physikalischer Eigen-

schaftsattribute von gehärteten komplexen Beschichtungsmischungen, das Verfahren umfassend:

- ein Durchführen von wenigstens einem von einer visuellen Beurteilung und einer instrumentellen Messung einer Zielbeschichtung auf einer Zielprobe, um kolorimetrische Information zu generieren;
 ein Identifizieren, unter Verwendung eines Prozessors und der kolorimetrischen Information, eines Massentoners, der in der Zielbeschichtung vorhanden ist, durch Bestimmen einer Farbe und einer Farbintensität bei verschiedenen Betrachtungswinkeln bezogen auf die Zielprobe, wobei der identifizierte Massentoner einen bestimmten Tonertyp umfasst;
 ein Identifizieren, unter Verwendung des Prozessors, von wenigstens einem spezifischen Toner des identifizierten Massentoners, der in der Zielbeschichtung vorhanden ist, durch Detektieren eines Vorhandenseins und einer Orientierung von farbigen und/oder nicht-farbigen Pigmentierungseffekten, die in der Zielbeschichtung vorhanden sind; und
 ein Ausgeben, unter Verwendung des Prozessors, einer Formulierung der Zielbeschichtung, die den wenigstens einen spezifischen Toner enthält.
2. Das Verfahren des Anspruchs 1, wobei das Durchführen des wenigstens einen von einer visuellen Beurteilung und einer instrumentellen Messung ein Messen der Zielprobe mit einem Spektrophotometer beinhaltet.
3. Das Verfahren des Anspruchs 1, wobei das Identifizieren des wenigstens einen spezifischen Toners ein Bestimmen, ob ein farbiges Aluminiumpigment und/oder ein Perleffektpigment in der Zielbeschichtung vorhanden ist, beinhaltet.
4. Das Verfahren des Anspruchs 1, wobei das Identifizieren des wenigstens einen spezifischen Toners ein Identifizieren von wenigstens einem von einem Deckeffektpigment und einem nicht-farbigen Aluminiumpigment beinhaltet.
5. Das Verfahren des Anspruchs 1, des Weiteren umfassend ein Präparieren der Zielprobe zur Analyse.
6. Das Verfahren des Anspruchs 1, wobei das Durchführen von wenigstens einem von einer visuellen Beurteilung und einer instrumentellen Messung ein visuelles Bestimmen einer markanten Farbe beinhaltet.
7. Das Verfahren des Anspruchs 1, wobei das Bestimmen einer Farbintensität das Berechnen eines Ähn-

lichkeitsindex beinhaltet.

8. Ein System zur Auswertung kolorimetrischer und physikalischer Eigenschaftsattribute von gehärteten komplexen Beschichtungsmischungen, das System umfassend:

eine Benutzerschnittstelle; und
 einen Prozessor in Verbindung mit der Benutzerschnittstelle und programmiert um:

Daten von wenigstens einem von einer visuellen Beurteilung und einer instrumentellen Messung einer Zielbeschichtung auf einer Zielprobe zu empfangen, um kolorimetrische Information zu generieren;
 unter Verwendung der kolorimetrischen Information einen Massentoner, der in der Zielbeschichtung vorhanden ist, durch Bestimmen einer Farbe und einer Farbintensität bei verschiedenen Betrachtungswinkeln bezogen auf die Zielprobe zu identifizieren, wobei der identifizierte Massentoner einen bestimmten Tonertyp umfasst;
 wenigstens einen spezifischen Toner des identifizierten Massentoners, der in der Zielbeschichtung vorhanden ist, durch Detektieren eines Vorhandenseins und einer Orientierung von farbigen und/oder nicht-farbigen Pigmentierungseffekten, die in der Zielbeschichtung vorhanden sind, zu identifizieren; und
 eine Formulierung der Zielbeschichtung, die den wenigstens einen spezifischen Toner enthält, auszugeben.

9. Das System des Anspruchs 8, des Weiteren umfassend irgendeines von:

- einer Datenbank in Verbindung mit dem Prozessor
 - einer Anzeige in Verbindung mit dem Prozessor
 - einem Spektrophotometer in Verbindung mit dem Prozessor.

10. Das System des Anspruchs 8, wobei der Prozessor programmiert ist, den wenigstens einen spezifischen Toner durch Bestimmen, ob ein farbiges Aluminiumpigment und/oder ein Perleffektpigment in der Zielbeschichtung vorhanden ist, zu identifizieren.

11. Das System des Anspruchs 8, wobei der Prozessor programmiert ist, den wenigstens einen spezifischen Toner durch Identifizieren von wenigstens einem vom einem Deckeffektpigment und einem nicht-farbigen Aluminiumpigment zu identifizieren.

12. Ein Apparat zum Auswerten kolorimetrischer und physikalischer Eigenschaftsattribute von gehärteten komplexen Beschichtungsmischungen, der Apparat umfassend:

Mittel zum Empfangen von Daten von wenigstens einem von einer visuellen Beurteilung und einer instrumentellen Messung einer Zielbeschichtung auf einer Zielprobe, um kolorimetrische Information zu generieren;

Mittel zum Identifizieren, unter Verwendung der kolorimetrischen Information, eines Massentoners, der in der Zielbeschichtung vorhanden ist, durch Bestimmen einer Farbe und einer Farbintensität bei verschiedenen Betrachtungswinkeln bezogen auf die Zielprobe, wobei der identifizierte Massentoner einen bestimmten Tonertyp umfasst;

Mittel zum Identifizieren von wenigstens einem spezifischen Toner des identifizierten Massentoners, der in der Zielbeschichtung vorhanden ist, durch Detektieren eines Vorhandenseins und einer Orientierung von farbigen und/oder nicht-farbigen Pigmentierungseffekten, die in der Zielbeschichtung vorhanden sind; und Mittel zum Ausgeben einer Formulierung der Zielbeschichtung, die den wenigstens einen spezifischen Toner enthält.

13. Der Apparat des Anspruchs 12, wobei die Mittel zum Identifizieren des wenigstens einen spezifischen Toners Mittel zum Bestimmen, ob ein farbiges Aluminiumpigment und/oder ein Perleffektpigment in der Zielbeschichtung vorhanden sind, beinhaltet.

14. Der Apparat des Anspruchs 13, wobei die Mittel zum Identifizieren des wenigstens einen spezifischen Toners Mittel zum Identifizieren von wenigstens einem von einem Deckeffektpigment und einem nicht-farbigem Aluminiumpigment enthalten.

15. Ein nicht-flüchtiges computerlesbares Medium enthaltend Software, um einen Prozessor zu konfigurieren:

Daten von wenigstens einem von einer visuellen Beurteilung und einer instrumentellen Messung von einer Zielbeschichtung auf einer Zielprobe zu empfangen, um kolorimetrische Information zu generieren;

unter Verwendung der kolorimetrischen Information einen Massentoner, der in der Zielbeschichtung vorhanden ist, durch Bestimmen einer Farbe und einer Farbintensität bei verschiedenen Betrachtungswinkeln bezogen auf die Zielprobe zu identifizieren, wobei der identifizierte Massentoner einen bestimmten Tonertyp umfasst;

wenigstens einen spezifischen Toner des identifizierten Massentoners, der in Zielbeschichtung vorhanden ist, durch Detektieren eines Vorhandenseins und einer Orientierung von farbigen und/oder nicht-farbigen Pigmentierungseffekten, die in der Zielbeschichtung vorhanden sind, zu identifizieren; und

eine Formulierung der Zielbeschichtung, die den wenigstens einen spezifischen Toner enthält, auszugeben.

Revendications

1. Procédé mis en œuvre par ordinateur pour évaluer des attributs de propriétés colorimétriques et physiques de mélanges de revêtement complexes durcis, le procédé comprenant :

la réalisation d'au moins une opération parmi une évaluation visuelle et une mesure instrumentale d'un revêtement cible sur un échantillon cible afin de générer des informations colorimétriques ;

l'identification, à l'aide d'un processeur et des informations colorimétriques, d'un colorant pigmentaire global qui est présent dans le revêtement cible par détermination d'une couleur et d'une intensité de couleur à différents angles de vision par rapport à l'échantillon cible, le colorant pigmentaire global identifié comprenant un type de colorant pigmentaire particulier ;

l'identification, à l'aide du processeur, d'au moins un colorant pigmentaire spécifique du colorant pigmentaire global identifié qui est présent dans le revêtement cible par détection d'une présence et d'une orientation d'effets de pigmentation colorés et/ou non colorés qui sont présents dans le revêtement cible ; et

la délivrance en sortie, à l'aide du processeur, d'une formulation du revêtement cible qui comprend l'au moins un colorant pigmentaire spécifique.

2. Procédé selon la revendication 1, dans lequel la réalisation de l'au moins une opération parmi une évaluation visuelle et une mesure instrumentale comprend la mesure de l'échantillon cible avec un spectrophotomètre.

3. Procédé selon la revendication 1, dans lequel l'identification de l'au moins un colorant pigmentaire spécifique comprend la détermination de la présence ou non de paillettes d'aluminium colorées et/ou d'un effet nacré dans le revêtement cible.

4. Procédé selon la revendication 1, dans lequel l'identification de l'au moins un colorant pigmentaire spé-

- cifique comprend l'identification d'au moins un élément parmi un effet opaque et des paillettes d'aluminium non colorées.
5. Procédé selon la revendication 1, comprenant en outre la préparation de l'échantillon cible en vue d'une analyse. 5
6. Procédé selon la revendication 1, dans lequel la réalisation d'au moins une opération parmi une évaluation visuelle et une mesure instrumentale comprend la détermination visuelle d'une couleur dominante. 10
7. Procédé selon la revendication 1, dans lequel la détermination d'une intensité de couleur comprend le calcul d'un indice de similarité. 15
8. Système pour évaluer des attributs de propriétés colorimétriques et physiques de mélanges de revêtement complexes durcis, le système comprenant : 20
- une interface utilisateur ; et
un processeur en communication avec l'interface utilisateur et programmé pour : 25
- recevoir des données issues d'au moins une opération parmi une évaluation visuelle et une mesure instrumentale d'un revêtement cible sur un échantillon cible afin de générer des informations colorimétriques ; 30
- identifier, à l'aide des informations colorimétriques, un colorant pigmentaire global qui est présent dans le revêtement cible par détermination d'une couleur et d'une intensité de couleur à différents angles de vision par rapport à l'échantillon cible, le colorant pigmentaire global identifié comprenant un type de colorant pigmentaire particulier ; 35
- identifier au moins un colorant pigmentaire spécifique du colorant pigmentaire global identifié qui est présent dans le revêtement cible par détection d'une présence et d'une orientation d'effets de pigmentation colorés et/ou non colorés qui sont présents dans le revêtement cible ; et 40
- délivrer en sortie une formulation du revêtement cible qui comprend l'au moins un colorant pigmentaire spécifique. 45
9. Système selon la revendication 8, comprenant en outre un élément quelconque parmi : 50
- une base de données en communication avec le processeur
 - un dispositif d'affichage en communication avec le processeur
 - un spectrophotomètre en communication avec le processeur. 55
10. Système selon la revendication 8, dans lequel le processeur est programmé pour identifier l'au moins un colorant pigmentaire spécifique par détermination de la présence ou non de paillettes d'aluminium colorées et/ou d'un effet nacré dans le revêtement cible.
11. Système selon la revendication 8, dans lequel le processeur est programmé pour identifier l'au moins un colorant pigmentaire spécifique par identification d'au moins un élément parmi un effet opaque et des paillettes d'aluminium non colorées.
12. Appareil pour évaluer des attributs de propriétés colorimétriques et physiques de mélanges de revêtement complexes durcis, l'appareil comprenant : 20
- un moyen pour recevoir des données issues d'au moins une opération parmi une évaluation visuelle et une mesure instrumentale d'un revêtement cible sur un échantillon cible afin de générer des informations colorimétriques ;
un moyen pour identifier, à l'aide des informations colorimétriques, un colorant pigmentaire global qui est présent dans le revêtement cible par détermination d'une couleur et d'une intensité de couleur à différents angles de vision par rapport à l'échantillon cible, le colorant pigmentaire global identifié comprenant un type de colorant pigmentaire particulier ;
un moyen pour identifier au moins un colorant pigmentaire spécifique du colorant pigmentaire global identifié qui est présent dans le revêtement cible par détection d'une présence et d'une orientation d'effets de pigmentation colorés et/ou non colorés qui sont présents dans le revêtement cible ; et
un moyen pour délivrer en sortie une formulation du revêtement cible qui comprend l'au moins un colorant pigmentaire spécifique. 25
13. Appareil selon la revendication 12, dans lequel le moyen pour identifier l'au moins un colorant pigmentaire spécifique comprend un moyen pour déterminer si des paillettes d'aluminium colorées et/ou un effet nacré sont présents dans le revêtement cible. 30
14. Appareil selon la revendication 13, dans lequel le moyen pour identifier l'au moins un colorant pigmentaire spécifique comprend un moyen pour identifier au moins un élément parmi un effet opaque et des paillettes d'aluminium non colorées. 35
15. Support non transitoire lisible par ordinateur contenant un logiciel servant à amener un processeur à : 40
- recevoir des données issues d'au moins une opération parmi une évaluation visuelle et une 45

mesure instrumentale d'un revêtement cible sur un échantillon cible afin de générer des informations colorimétriques ;
identifier, à l'aide des informations colorimétriques, un colorant pigmentaire global qui est présent dans le revêtement cible par détermination d'une couleur et d'une intensité de couleur à différents angles de vision par rapport à l'échantillon cible, le colorant pigmentaire global identifié comprenant un type de colorant pigmentaire particulier ;
identifier au moins un colorant pigmentaire spécifique du colorant pigmentaire global identifié qui est présent dans le revêtement cible par détection d'une présence et d'une orientation d'effets de pigmentation colorés et/ou non colorés qui sont présents dans le revêtement cible ; et délivrer en sortie une formulation du revêtement cible qui comprend l'au moins un colorant pigmentaire spécifique.

5

10

15

20

25

30

35

40

45

50

55

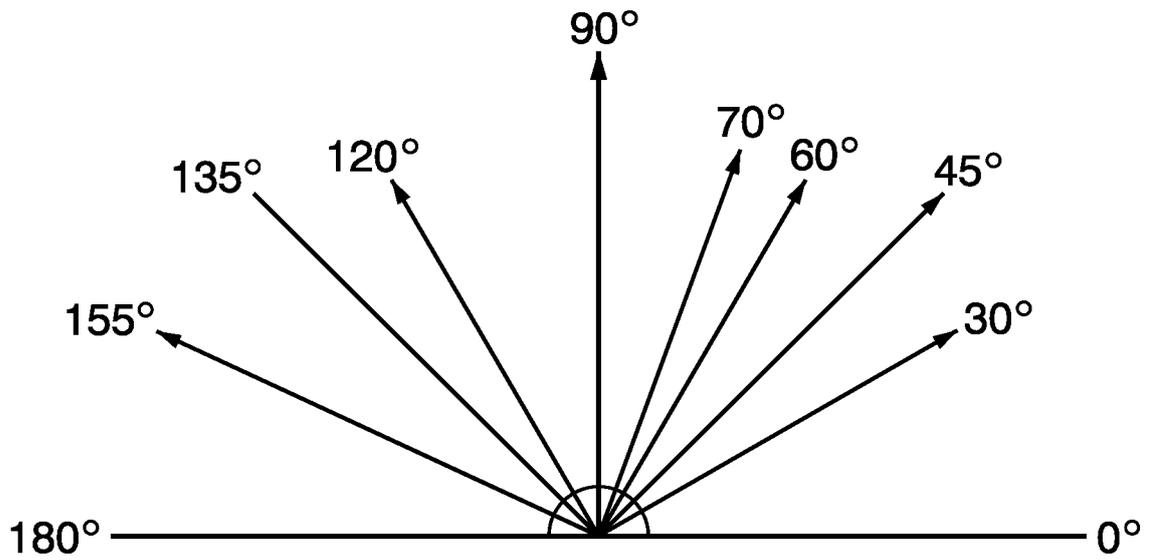


FIG. 1

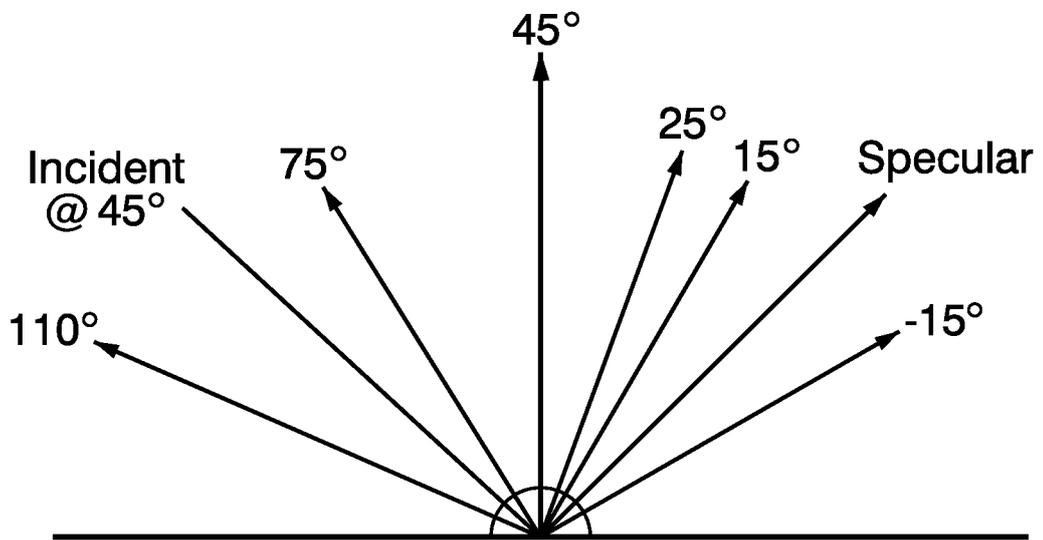


FIG. 2

* Ring is @ 45° Elevation

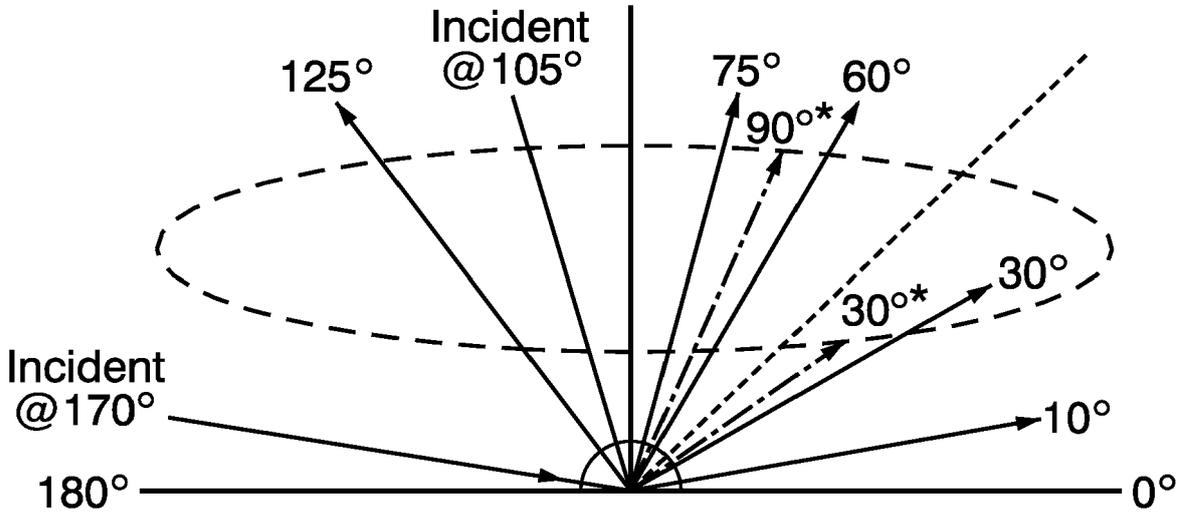


FIG. 3

* Ring is @ 45° Elevation
' Ring is @ 30° Elevation

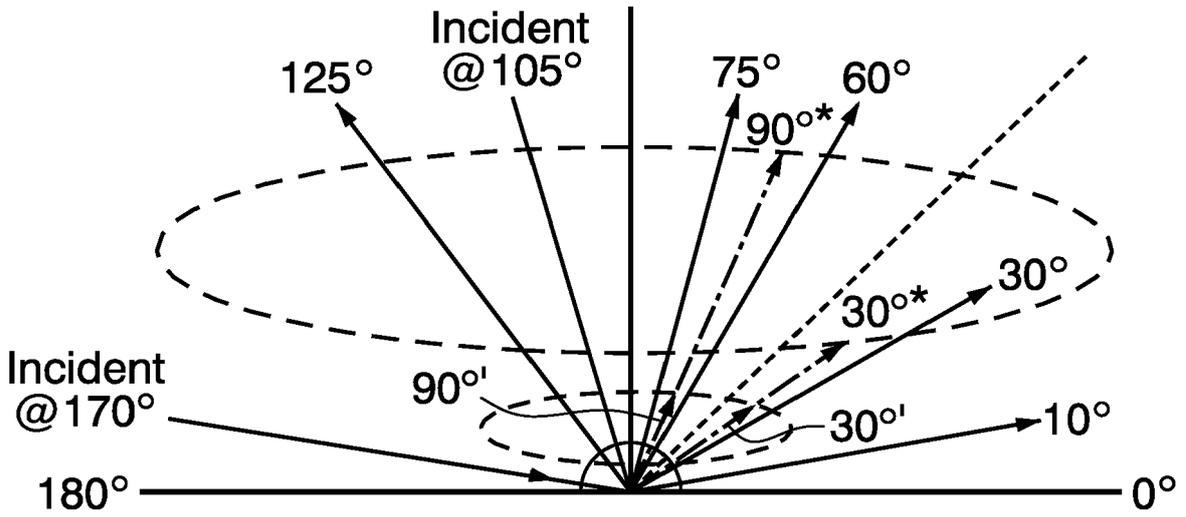


FIG. 4

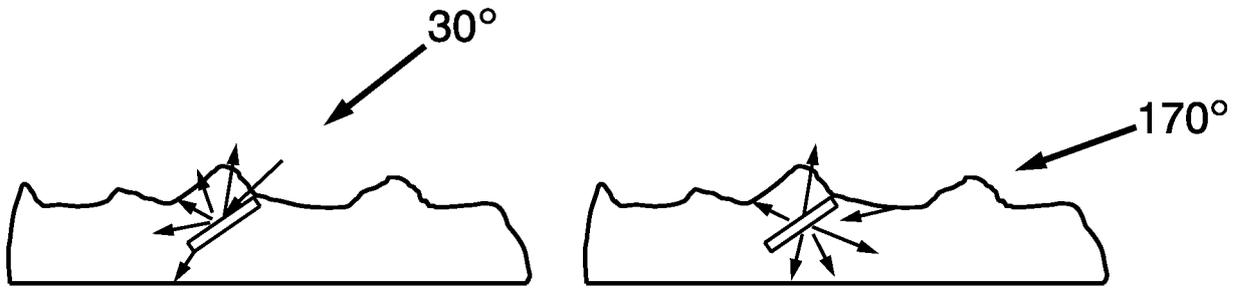


FIG. 5

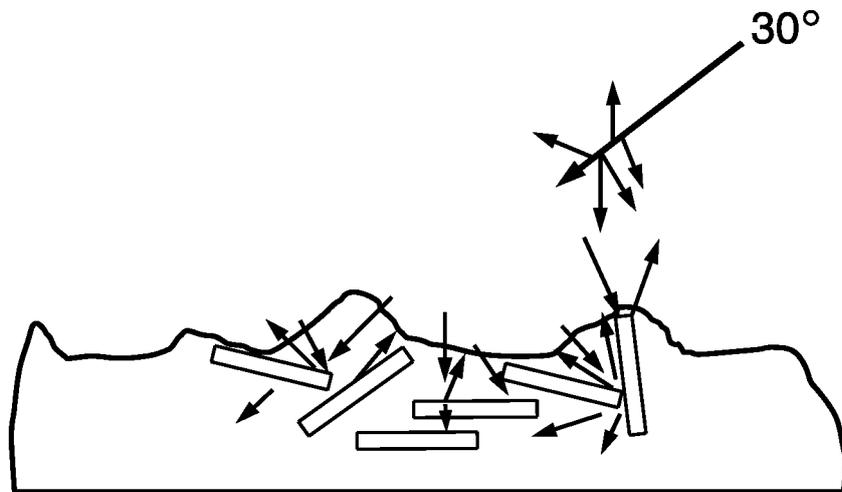


FIG. 6

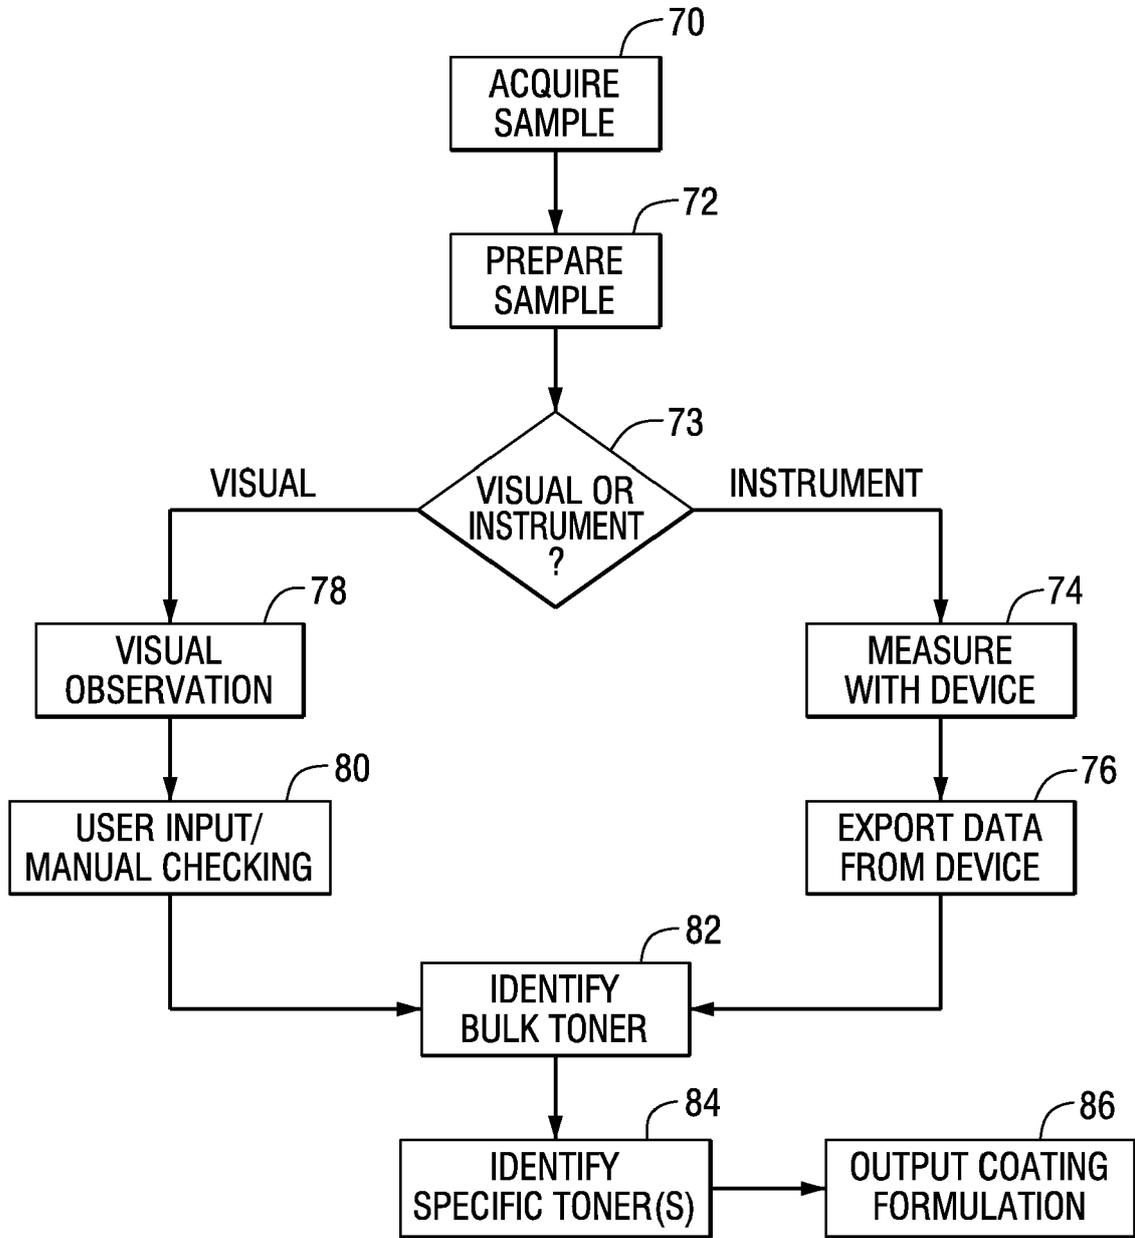


FIG. 7

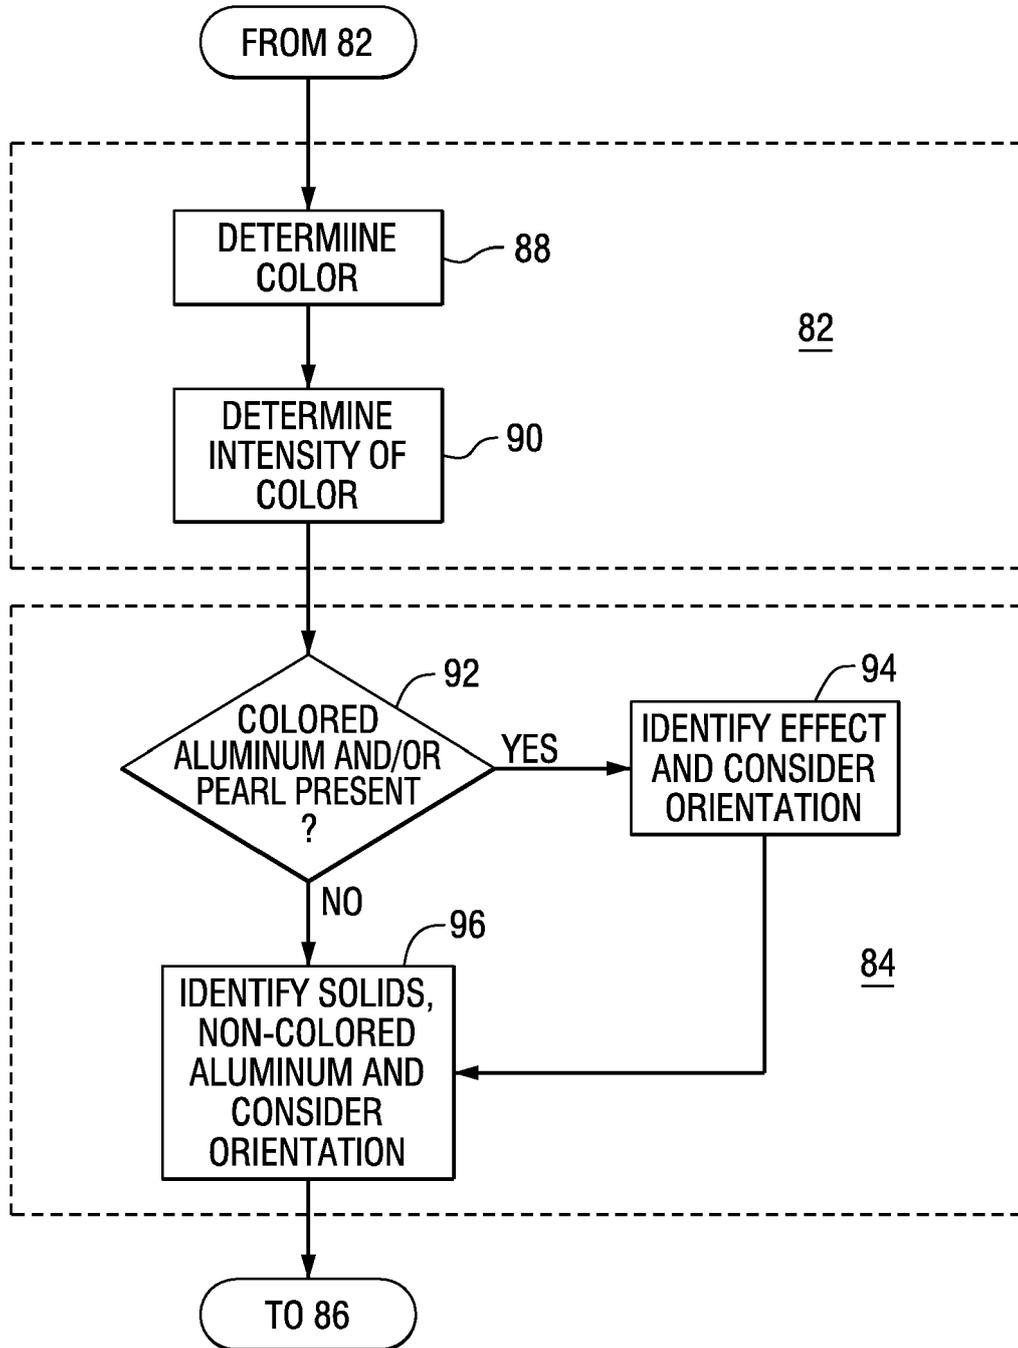


FIG. 8

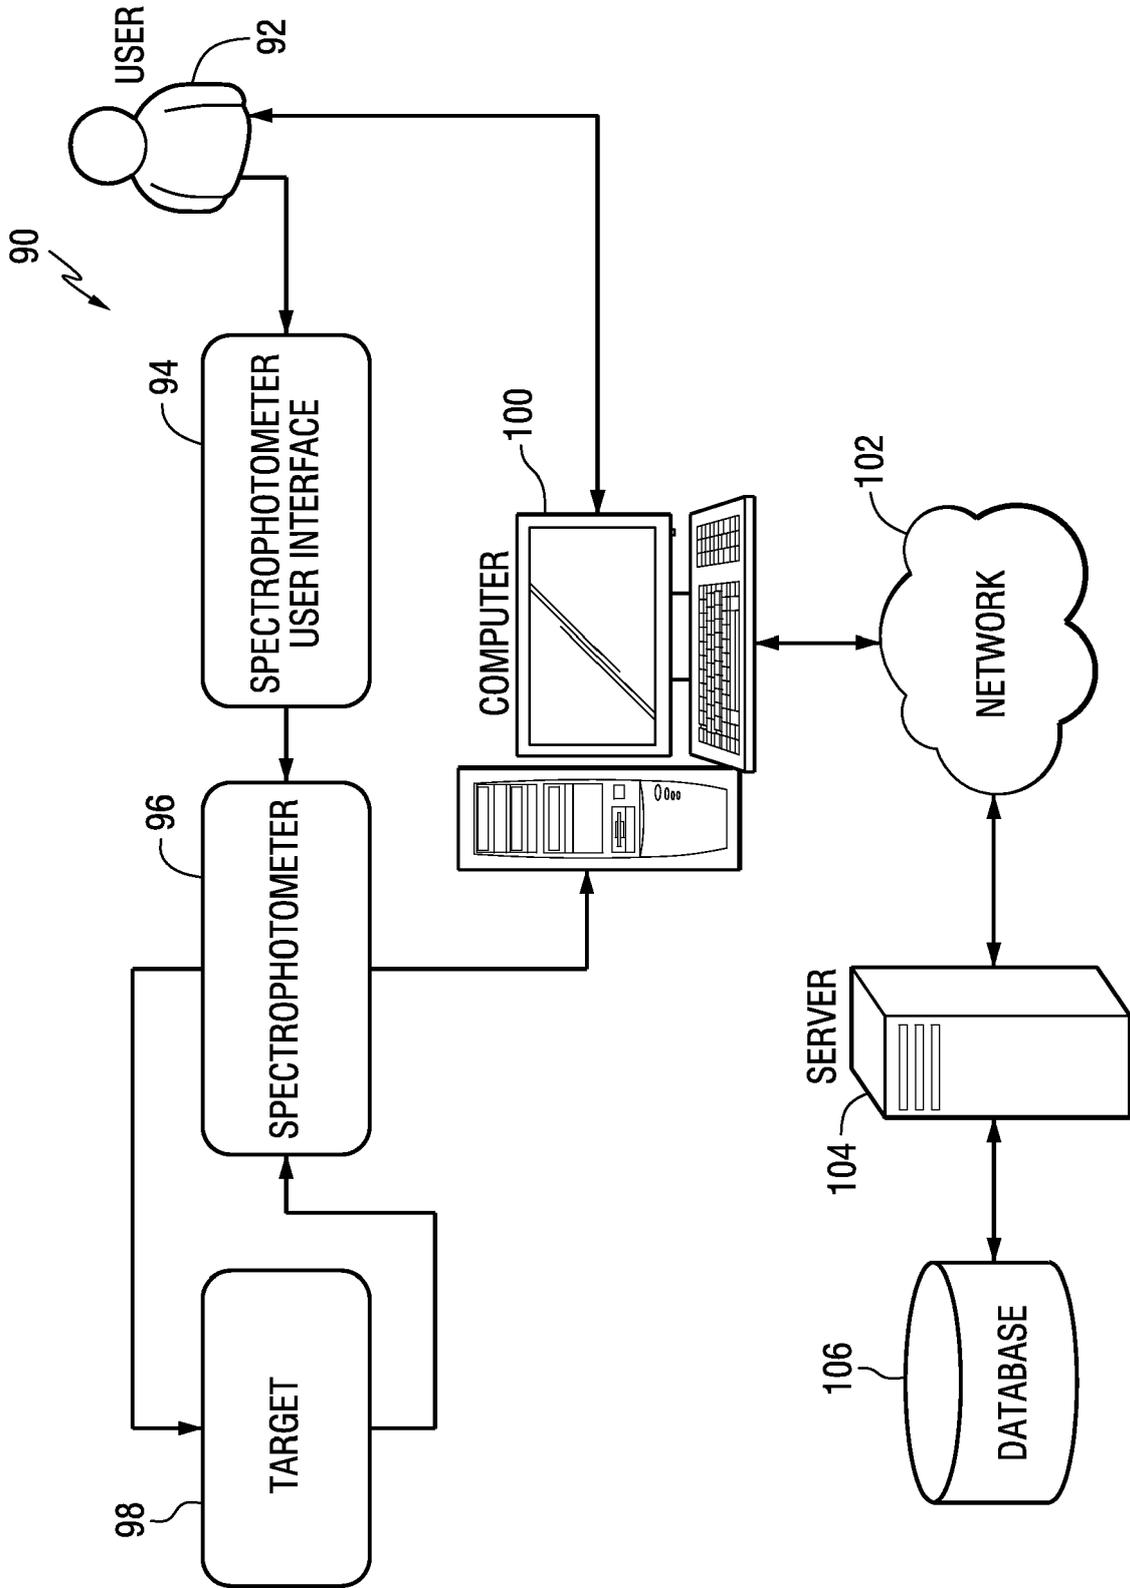


FIG. 9

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 61702959 [0001]
- US 20090274827 A [0007]
- WO 2006030028 A [0007]
- EP 0828144 A [0007]