



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**12.08.2015 Bulletin 2015/33**

(51) Int Cl.:  
**H01H 1/025 (2006.01) H01H 1/22 (2006.01)**

(21) Application number: **14197126.7**

(22) Date of filing: **10.12.2014**

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**  
Designated Extension States:  
**BA ME**

- **Shen, Xian**  
**200030 Shanghai (CN)**
- **Wang, Yang**  
**201108 Shanghai (CN)**
- **Zhou, Gang**  
**200030 Shanghai (CN)**

(30) Priority: **07.01.2014 CN 201410006862**

(74) Representative: **Isarpatent**  
**Patentanwälte Behnisch Barth Charles**  
**Hassa Peckmann & Partner mbB**  
**Friedrichstrasse 31**  
**80801 München (DE)**

(71) Applicant: **Siemens Aktiengesellschaft**  
**80333 München (DE)**

(72) Inventors:  
• **Bao, Zhang Yao**  
**93049 Regensburg (DE)**

(54) **Static contact support for circuit breaker and circuit breaker thereof**

(57) A static contact support (12) for a circuit breaker, comprising a base layer (122) and a reinforcing layer (124). The base layer is made of a material with good heat-conducting and electricity-conducting properties. The reinforcing layer is superposed on the base layer, and made of a material with good mechanical strength and magnetic permeability. The base layer has good electricity-conducting and heat-conducting properties, so on the one hand, produces very little heat; on the other hand, the base layer enables the static contact support to cool the arc, helping to extinguish it. The reinforcing layer on the one hand can reinforce the mechanical strength of the base layer; on the other hand, the magnetically permeable reinforcing layer can channel the arc into an arc extinguishing mechanism of the circuit breaker, so it is extinguished quickly. Furthermore, being superposed, the base layer and reinforcing layer can be conveniently fitted into the circuit breaker.

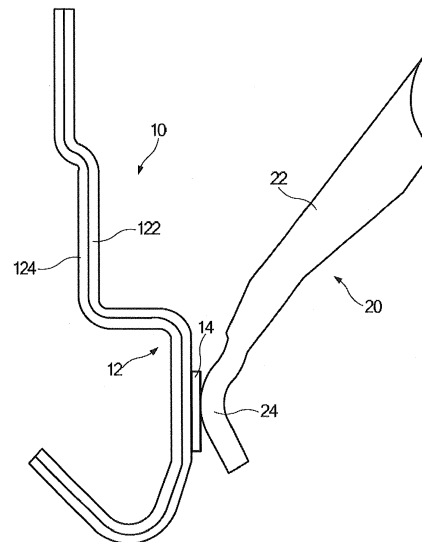


Fig. 1

## Description

### Technical field

[0001] The present invention relates to a static contact support, in particular to a static contact support for a small circuit breaker.

### Background art

[0002] In a small circuit breaker, the current in a circuit under normal operating conditions can be established, carried and cut off by joining and separating a moving contact and a static contact. A micro circuit breaker can also carry and cut off an abnormal current within a given time in specified scenarios, for example under abnormal operating conditions such as overload and open circuit.

[0003] A static contact is mounted on a static contact support. When the moving contact separates from the static contact, the static contact support carries a very large current, and must also channel the arc produced between the moving and static contacts to an arc extinguishing system disposed in the circuit breaker. Existing static contact supports are made of copper-plated steel or pure copper. Static contact mounting supports of copper-plated steel have very good mechanical strength, but high resistivity, so generate a lot of heat when carrying a current. Static mounting supports of pure copper have low resistivity, but also low mechanical strength and low magnetic permeability, so they are unable to extinguish the arc produced between the moving and static contacts.

### Content of the invention

[0004] An object of the present invention is to provide a static contact support for a circuit breaker, which can help to extinguish an arc produced between a moving contact and a static contact in a circuit breaker.

[0005] Another object of the present invention is to provide a circuit breaker which uses the static contact support.

[0006] The present invention provides a static contact support for a circuit breaker, comprising a base layer and a reinforcing layer. The base layer is for transferring current passing through the circuit breaker. The reinforcing layer is superposed on the base layer, can provide the base layer with structural support, and can attract an arc produced between a moving contact and a static contact in the circuit breaker into an arc extinguishing mechanism of the circuit breaker.

[0007] In the static contact support of the circuit breaker, an electrically conductive base layer on the one hand means that current flowing through the static contact support produces very little heat; on the other hand, good heat-conducting properties in the base layer enable the static contact support to cool the arc, helping to extinguish it. The reinforcing layer has good mechanical strength

and magnetic permeability. On the one hand, this means it can reinforce the mechanical strength of the base layer; on the other hand, the magnetically permeable reinforcing layer can channel the arc into the arc extinguishing mechanism of the circuit breaker, so it is extinguished quickly. Furthermore, being superposed, the base layer and reinforcing layer can be conveniently fitted into the circuit breaker.

[0008] In another schematic embodiment of the static contact support of the circuit breaker, the base layer is made of copper metal.

[0009] In another schematic embodiment of the static contact support of the circuit breaker, the reinforcing layer is made of steel. In another schematic embodiment of the static contact support of the circuit breaker, the reinforcing layer and base layer are superposed by a process for combining two metals.

[0010] In another schematic embodiment of the static contact support of the circuit breaker, the ratio of the thickness of the base layer to the thickness of the reinforcing layer is 1 - 2.5 : 1.

[0011] The present invention also provides a circuit breaker, comprising a moving contact assembly and a static contact assembly. The moving contact assembly comprises a moving contact support and a moving contact disposed on the moving contact support. The static contact assembly comprises a static contact support as described above, and a static contact disposed on the static contact support and capable of contacting the moving contact.

[0012] In another schematic embodiment of the circuit breaker, the side of the static contact support which is close to the moving contact assembly is the base layer, while the side of the static contact support which is remote from the moving contact assembly is the reinforcing layer.

[0013] In another schematic embodiment of the circuit breaker, the static contact is connected to the base layer.

### Description of the accompanying drawing

[0014] The accompanying drawing below merely illustrates and explains the present invention schematically, without defining the scope thereof.

[0015] Fig. 1 is a structural schematic diagram intended to illustrate a schematic embodiment of a static contact support for a circuit breaker.

[0016] Key to labels

10	static contact assembly
12	static contact support
122	base layer
124	reinforcing layer
14	static contact
20	moving contact assembly
22	moving contact support
24	moving contact.

## Particular embodiments

**[0017]** To give a clearer understanding of the technical features, objects and effects of the present invention, particular embodiments thereof are now explained with reference to the accompanying drawings, in which identical labels denote identical components.

**[0018]** In this text, "schematic" means "serving as a real instance, example or illustration". No drawing or embodiment described herein as "schematic" should be interpreted as being a more preferred or more advantageous technical solution.

**[0019]** To make the drawings uncluttered, only those parts which are relevant to the present invention are shown schematically in each drawing; these parts do not represent the actual structure of the present invention as a product. Moreover, to make the drawings uncluttered and easy to understand, in certain drawings where there are components having the same structure or function, only one of these components is drawn schematically, or only one is labeled.

**[0020]** In this text, "one" not only means "just this one", but may also mean "more than one".

**[0021]** In this text, "upper", "lower", "front", "rear", "left" and "right", etc. are used only to indicate the positional relationship between relevant parts, without defining their absolute positions.

**[0022]** Fig. 1 is a structural schematic diagram intended to illustrate a schematic embodiment of a static contact support for a circuit breaker. As the figure shows, the circuit breaker comprises a static contact assembly 10 and a moving contact assembly 20.

**[0023]** The static contact assembly 10 comprises a static contact support 12 and a static contact 14. The static contact 14 can be mounted on the static contact support 12.

**[0024]** The static contact support 12 comprises a base layer 122 and a reinforcing layer 124; the reinforcing layer 124 is superposed on the base layer 122. The base layer 122 is made of a material with good heat-conducting and electricity-conducting properties, such as copper metal; the reinforcing layer 124 is made of a material with good mechanical strength and magnetic permeability, such as steel. In a schematic embodiment of the static contact support for a circuit breaker, the reinforcing layer 124 is superposed on the base layer 122 by a process for combining two metals.

**[0025]** The moving contact assembly 20 comprises a moving contact support 22 and a moving contact 24; the moving contact 24 can be mounted on the moving contact support 22.

**[0026]** In a schematic embodiment of the static contact support for a circuit breaker, the side of the static contact support 12 which is close to the moving contact assembly 20 is the base layer 122, while the side of the static contact support which is remote from the moving contact assembly 20 is the reinforcing layer 124. The static contact 14 which contacts the moving contact 24 is connect-

ed to the base layer 122. With such an arrangement, the path formed by the static contact and base layer for conducting electricity and heat is the shortest, while the reinforcing layer can provide the base layer with mechanical support, and attract the arc between the moving contact and static contact into an arc extinguishing mechanism.

**[0027]** In the static contact support for a circuit breaker, the base layer has good electricity-conducting and heat-conducting properties. On the one hand, this means that current flowing through the static contact support produces very little heat; on the other hand, the good heat-conducting properties of the base layer enable the static contact support to cool the arc, helping to extinguish it. The reinforcing layer has good mechanical strength and magnetic permeability. On the one hand, this means it can reinforce the mechanical strength of the base layer; on the other hand, the magnetically permeable reinforcing layer can channel the arc into the arc extinguishing mechanism of the circuit breaker, so it is extinguished quickly. Furthermore, being superposed, the base layer and reinforcing layer can be conveniently fitted into the circuit breaker.

**[0028]** In a schematic embodiment of the static contact support for a circuit breaker, by adjusting the ratio of the thicknesses of the base layer and reinforcing layer, it is possible to adjust the heat-conducting properties, electricity-conducting properties, mechanical strength and magnetic permeability of the static contact support correspondingly. When the base layer is thicker, the static contact support has better heat-conducting and electricity-conducting properties, whereas when the reinforcing layer is thicker, the static contact support has better mechanical strength and magnetic permeability. For example, the ratio of the thickness of the base layer to the thickness of the reinforcing layer could be 2.5 : 1 or 1 : 1.

**[0029]** It should be understood that although the description given herein is based on different embodiments, it is by no means the case that each embodiment comprises just one independent technical solution. The description is written in this way purely for the sake of clarity. Those skilled in the art should consider the description in its entirety; technical solutions from different embodiments can also be suitably combined to form other embodiments capable of being understood by those skilled in the art.

**[0030]** The detailed explanations set out above are merely specific explanations of feasible embodiments, and are not intended to limit the scope of protection of the present invention. All equivalent embodiments or changes made without deviating from the artistic spirit of the present invention, such as combinations, fragmenting or repetitions of features, shall be included in the scope of protection of the present invention.

## Claims

1. A static contact support (12) for a circuit breaker,  
**characterized in that** it comprises:
 

a base layer (122) for transferring current passing through the circuit breaker; and

a reinforcing layer (124), which is superposed on the base layer (122) and can provide the base layer (122) with structural support, wherein the reinforcing layer (124) can attract an arc produced between a moving contact and a static contact in the circuit breaker into an arc extinguishing mechanism of the circuit breaker.
2. The static contact support according to claim 1, wherein the base layer (122) is made of copper metal.
3. The static contact support according to any of the preceding claims, wherein the reinforcing layer (124) is made of steel.
4. The static contact support according to any of the preceding claims, wherein the reinforcing layer (124) and the base layer (122) are superposed by a process for combining two metals.
5. The static contact support according to any of the preceding claims, wherein the ratio of the thickness of the base layer to the thickness of the reinforcing layer is 1 - 2.5 : 1.
6. A circuit breaker, **characterized in that** it comprises:
 

a moving contact assembly (20), comprising a moving contact support (22) and a moving contact (24) disposed on the moving contact support (22); and

a static contact assembly (10), comprising a static contact support (12) according to any one of claims 1 to 5 and a static contact (14) disposed on the static contact support (12) and capable of contacting the moving contact (24).
7. The circuit breaker according to claim 6, wherein the side of the static contact support (12) which is close to the moving contact assembly (20) is the base layer (122), while the side of the static contact support which is remote from the moving contact assembly (20) is the reinforcing layer (124).
8. The circuit breaker according to claim 6 or 7, wherein the static contact (14) is connected to the base layer (122).

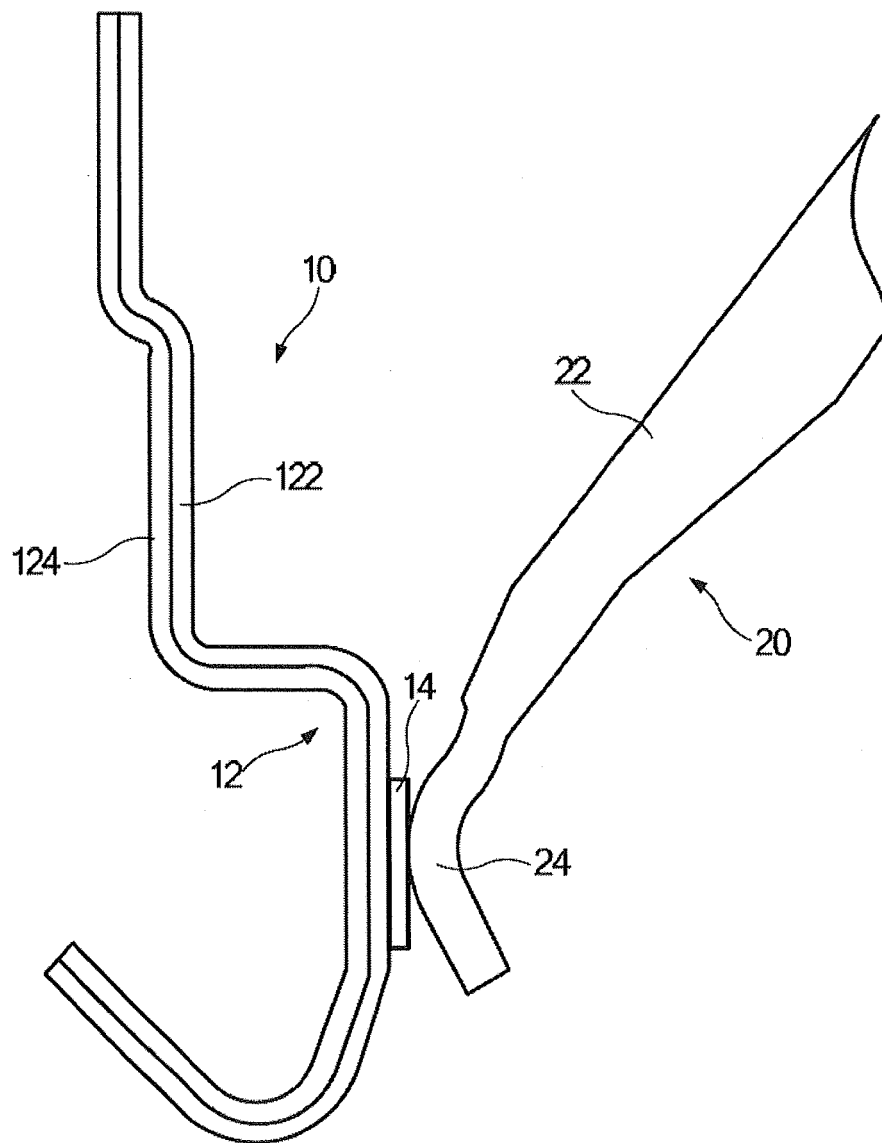


Fig. 1



## EUROPEAN SEARCH REPORT

Application Number  
EP 14 19 7126

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	WO 2006/120140 A1 (ABB SERVICE SRL [IT]; ELIDI ROMANO [IT]; MAURA MASSIMO [IT]) 16 November 2006 (2006-11-16)	1,2,4	INV. H01H1/025 H01H1/22
Y	* abstract; figure 4 *	6	
A	* page 4, line 16 - page 5, line 40 *	3,5,7,8	
Y	WO 2010/079106 A1 (ABB SPA [IT]; BONETTI LUIGI [IT]; FERRARI MICHELE [IT]) 15 July 2010 (2010-07-15)	6	
A	* abstract; figures 17-27 *	1	
	* page 8, line 33 - page 11, line 18 *		
A	EP 2 535 908 A1 (FURUKAWA ELECTRIC CO LTD [JP]) 19 December 2012 (2012-12-19) * paragraph [0010] - paragraph [0015] *	1,2,6	
A	AT 251 684 B (LICENTIA GMBH [DE]) 10 January 1967 (1967-01-10) * figures *	1,2,6	
	* page 1, line 1 - line 18 *		
	* page 2, line 26 - page 3, line 17 *		
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (IPC)
			H01H
Place of search		Date of completion of the search	Examiner
Munich		16 June 2015	Serrano Funcia, J
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ..... & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

2  
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 14 19 7126

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

16-06-2015

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2006120140 A1	16-11-2006	CN 101176175 A	07-05-2008
		EP 1883938 A1	06-02-2008
		US 2008199716 A1	21-08-2008
		WO 2006120140 A1	16-11-2006
-----			
WO 2010079106 A1	15-07-2010	CN 102265365 A	30-11-2011
		EP 2382642 A1	02-11-2011
		ES 2461497 T3	20-05-2014
		US 2011266121 A1	03-11-2011
		WO 2010079106 A1	15-07-2010
-----			
EP 2535908 A1	19-12-2012	CN 102667989 A	12-09-2012
		EP 2535908 A1	19-12-2012
		JP 5705738 B2	22-04-2015
		KR 20120132622 A	06-12-2012
		TW 201137187 A	01-11-2011
		US 2012301745 A1	29-11-2012
		WO 2011099574 A1	18-08-2011
-----			
AT 251684 B	10-01-1967	NONE	
-----			