



EUROPEAN PATENT APPLICATION

(43) Date of publication:
30.09.2015 Bulletin 2015/40

(51) Int Cl.:
F04C 29/04 (2006.01)

(21) Application number: **15158472.9**

(22) Date of filing: **10.03.2015**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**
Designated Extension States:
BA ME
Designated Validation States:
MA

- **Guidry, Mike**
Morristown, NJ New Jersey 07962-2245 (US)
- **Mason, John**
Morristown, NJ New Jersey 07962-2245 (US)
- **Johnson, Rick**
Morristown, NJ New Jersey 07962-2245 (US)
- **Beresewicz, Patrick**
Morristown, NJ New Jersey 07962-2245 (US)

(30) Priority: **26.03.2014 US 201414226309**

(71) Applicant: **Honeywell International Inc.**
Morristown, NJ 07962-2245 (US)

(72) Inventors:
• **Thompson, Glenn F.**
Morristown, NJ New Jersey 07962-2245 (US)

(74) Representative: **Houghton, Mark Phillip**
Patent Outsourcing Limited
1 King Street
Bakewell, Derbyshire DE45 1DZ (GB)

(54) **ELECTRIC MOTOR-DRIVEN COMPRESSOR HAVING A HEAT SHIELD FORMING A WALL OF A DIFFUSER**

(57) An electric motor-driven compressor includes a housing assembly comprising a motor housing and a compressor housing mounted thereto. The compressor housing contains a centrifugal compressor wheel that is mounted on a shaft of the motor rotor and also defines an air inlet that leads air into the compressor wheel, and a volute that collects the compressed air. Air bearings rotatably support the shaft. Cooling air passages are defined in the housing assembly for supplying cooling air

to the air bearings. A diffuser between the exit of the compressor wheel and the volute serves to diffuse the compressed air. The compressor includes a heat shield formed separately from the compressor housing and the motor housing and disposed between them. The heat shield defines one wall of the diffuser and also cooperates with the housing assembly to define part of the cooling air passages for the cooling air supplied to the bearings.

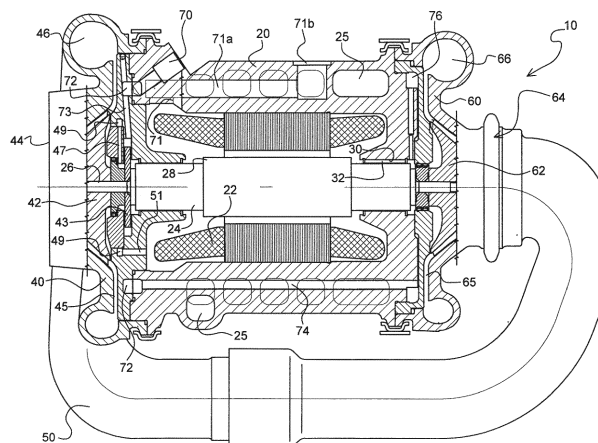


FIG. 1

Description

CROSS-REFERENCE TO RELATED APPLICATION

[0001] The present application is related to commonly owned, co-pending Application No. 14/184,122 filed on February 19, 2014, the entire disclosure of which is hereby incorporated herein by reference.

BACKGROUND

[0002] The present disclosure relates to electric motor-driven compressors such as used for fuel cells.

[0003] Air compressors can be used to increase the efficiency of a fuel cell by providing compressed air to the cathode side of the fuel cell. A two-stage compressor may be used in some applications requiring a higher pressure than achievable in a single compressor stage. In a two-stage compressor, a low-pressure compressor wheel is provided on a shaft, and a high-pressure compressor wheel is provided on the same shaft. The shaft is driven by an electric motor so that the compressor wheels are rotated, and air enters the low-pressure compressor wheel and is compressed to a first pressure. The compressed air is then passed on to the high-pressure wheel for a further increase in pressure. The air from the high-pressure compressor wheel is then delivered to the fuel cell to promote the fuel cell reaction.

[0004] The electric motor used in a compressor for a fuel cell is typically a high-speed, high-output motor that generates a significant amount of heat. It is generally desirable to minimize the heat transfer between the motor and the air being compressed in the compressor, and the heat transfer between the motor and the bearings for the compressor shaft.

BRIEF SUMMARY OF THE DISCLOSURE

[0005] The present disclosure describes embodiments of electric motor-driven compressors such as useful with fuel cells or in other applications. In one embodiment, for example, an electric motor-driven compressor includes a housing assembly comprising a motor housing and a compressor housing mounted to the motor housing. The motor housing contains a motor stator and a motor rotor, and defines a bore through which a rotatable shaft passes. The compressor housing contains a centrifugal compressor wheel that is mounted on the shaft for rotation about the shaft axis. The compressor housing also defines an air inlet that leads air into the compressor wheel, and a volute that collects compressed air that has passed through the compressor wheel. A diffuser between the exit of the compressor wheel and the volute serves to diffuse the compressed air to a lower velocity and consequently a higher static pressure.

[0006] The electric motor-driven compressor in one embodiment includes air bearings that rotatably support the shaft. Cooling air passages are defined in the housing

assembly for supplying cooling air to the air bearings.

[0007] In accordance with the present disclosure, the electric motor-driven compressor includes a heat shield that is formed separately from the compressor housing and the motor housing and is disposed between them. The heat shield defines one wall of the diffuser for the compressed air delivered into the volute. The heat shield also cooperates with the housing assembly to define part of the cooling air passages for the cooling air supplied to the air bearings.

[0008] In one embodiment, the motor housing defines a liquid coolant passage for circulating a liquid coolant, and the heat shield defines a mounting flange captured between the motor housing and the first compressor housing. The mounting flange is in contact with a portion of the motor housing cooled by the liquid coolant so as to facilitate heat transfer from the mounting flange to said portion of the motor housing.

[0009] In one embodiment, the heat shield and the motor housing are arranged so as to define an annular space therebetween for receiving cooling air, and the cooling air passages are arranged for receiving cooling air from the annular space. A cooling air gap additionally can be defined between the heat shield and the motor housing, the cooling air gap being arranged to receive cooling air from the annular space.

[0010] The compressor can also include a first seal carrier affixed to the shaft intermediate the first compressor wheel and the air bearings, and a first seal ring engaged in a circumferential groove formed about the first seal carrier. The first seal ring is positioned to seal against a radially inner surface of the heat shield so as to discourage air leakage between the first compressor flow path and the air bearings.

[0011] The features of the present invention can be applied to a two-stage serial compressor, such as the embodiment illustrated and described herein. In the case of such a two-stage compressor, a second compressor housing is mounted to an opposite end of the motor housing and a second centrifugal compressor wheel is contained in the second compressor housing and is affixed to an opposite end of the shaft. The second compressor housing defines a second compressor flow path including a second air inlet that leads air into the second compressor wheel, and a second volute that collects compressed air that has passed through and been compressed by the second compressor wheel. An interstage duct connects the second volute to the first air inlet such that air compressed by the second compressor wheel is led by the interstage duct from the second volute into the first air inlet and is further compressed by the first compressor wheel and delivered into the first volute. The second compressor wheel thus constitutes a low-pressure compressor wheel and the first compressor wheel constitutes a high-pressure compressor wheel.

[0012] In the two-stage compressor embodiment, the heat shield and the motor housing are arranged so as to define an annular space therebetween for receiving cool-

ing air, and the cooling air passages are arranged for receiving cooling air from the annular space. The motor housing defines a cooling air inlet for supplying the cooling air that is received in the annular space. The housing assembly can define an annulus adjacent the low-pressure compressor wheel, the annulus receiving cooling air from the cooling air inlet, and the motor housing can define an axially extending conduit for feeding cooling air from said annulus into the annular space defined between the heat shield and the motor housing.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING(S)

[0013] Having thus described the present disclosure in general terms, reference will now be made to the accompanying drawings, which are not necessarily drawn to scale, and wherein:

FIG. 1 is a side view, partly in section, of an electric motor-driven compressor in accordance with one embodiment of the invention, comprising a two-stage compressor having a low-pressure compressor and a high-pressure compressor in series;

FIG. 2 is a magnified view of a portion of FIG. 1, showing details of how cooling air is supplied into an annular space between the heat shield and the motor housing; and

FIG. 3 is a magnified view of a portion of FIG. 1, showing details of the heat shield and its arrangement in the high-pressure compressor.

DETAILED DESCRIPTION OF THE DRAWINGS

[0014] The present invention now will be described more fully hereinafter with reference to the accompanying drawings in which some but not all embodiments of the invention are shown. Indeed, aspects of the invention may be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will satisfy applicable legal requirements. Like numbers refer to like elements throughout.

[0015] The present invention may be applied in a variety of types of electric motor-driven compressors, including single-stage as well as multi-stage electric motor-driven compressors. The particular embodiment described herein for purposes of explaining the principles of the invention is a serial two-stage compressor having two centrifugal compressors arranged in series, but the invention is applicable to parallel two-stage compressors as well as other types. Thus, a simplified cross-sectional view of a serial two-stage electric motor-driven compressor **10** for use with a fuel cell (such as a proton exchange membrane (PEM) fuel cell) is shown in FIG. 1. The two-stage compressor **10** includes a housing assembly com-

prising a motor housing **20**, a low-pressure compressor housing **40** mounted to one end of the motor housing, and a high-pressure compressor housing **60** mounted to the other end of the motor housing. The motor housing **20** contains a motor stator **22** and a motor rotor **24** having a shaft **26** about which permanent magnets **28** are fixedly mounted. The motor housing **20** defines a bore **30** through which the motor rotor **24** and the shaft **26** pass. Air bearings **32** are disposed in the motor housing **20** for rotatably supporting the rotor **24** and shaft **26**.

[0016] The low-pressure compressor housing **40** contains a centrifugal low-pressure compressor wheel **42** that is mounted on one end of the shaft **26** for rotation therewith, the low-pressure compressor housing also defining a low-pressure compressor flow path including an air inlet **44** that leads air into the low-pressure compressor wheel, and a low-pressure volute **46** that collects compressed air that has passed through and been compressed by the low-pressure compressor wheel. The low-pressure compressor also includes a diffuser **45** that leads the compressed air from the low-pressure compressor wheel **42** into the low-pressure volute **46**, and serves to reduce the velocity and increase the static pressure of the air going into the volute.

[0017] The high-pressure compressor housing **60** contains a centrifugal high-pressure compressor wheel **62** that is mounted on the opposite end of the shaft **26** for rotation therewith. The high-pressure compressor housing defines a high-pressure compressor flow path including an air inlet **64** that leads air into the high-pressure compressor wheel, and a high-pressure volute **66** that collects compressed air that has passed through and been compressed by the high-pressure compressor wheel. The high-pressure compressor also includes a diffuser **65** that leads the compressed air from the high-pressure compressor wheel **62** into the high-pressure volute **66**, and serves to reduce the velocity and increase the static pressure of the air going into the volute.

[0018] The compressor further includes an interstage duct **50** that is connected between the low-pressure volute **46** and the inlet **64** to the high-pressure compressor for routing the compressed air from the low-pressure volute **46** to the high-pressure compressor for further pressurizing in a second-stage compression process.

[0019] Cooling air passages are defined in the housing assembly for supplying cooling air to the air bearings **32**. In particular, with reference to FIG. 2, cooling air is supplied into a cooling air supply inlet **70** defined in the motor housing **20**. For example, in the case of the compressor **10** being used in a fuel cell system for a vehicle, where the compressed air from the high-pressure volute **66** is passed through a vehicle heat exchanger to cool the air before it is supplied to the fuel cell, a portion of the air exiting the heat exchanger can be tapped off and supplied into the cooling air supply inlet **70**. From there, the cooling air passes into an annulus **72** defined cooperatively by the motor housing **20** and low-pressure compressor housing **40**. A portion of the cooling air in the annulus **72**

is directed radially inwardly through passage **73** and is fed to both sides of a thrust plate **43** for the low-pressure side air thrust bearing. The air on the inboard (motor) side of the thrust plate **43** feeds the journal air bearing **32** (also cooling the rotor magnet **28**) and is then discharged into the motor cavity. The air on the outboard side of the thrust plate **43** proceeds radially outwardly through passages **47** into an annular space **49** defined in the compressor housing, and from there it proceeds through a passage **51** into the motor cavity.

[0020] The remainder of the cooling air in the annulus **72** is directed through an axially extending cooling air conduit **74** that extends from the annulus **72** through the motor housing **20** and connects with a further annulus **76** (FIGS. 1 and 3) in the region of the high-pressure compressor. With reference to FIG. 3, the motor housing **20** defines cooling air passages **78** that lead from the annulus **76** generally radially inwardly into a generally annular space **80** at the high-pressure end of the motor rotor **24**. Cooling air fed into the generally annular space **80** passes generally axially (to the left in FIG. 3) and feeds the journal air bearing **32** for the rotor **24** (also cooling the rotor magnet **28**) and is then discharged into the motor cavity.

[0021] The cooling air in the motor cavity is evacuated from the motor cavity via a port **71**, which is connected via a conduit **71a** to a housing discharge port **71b** (FIG. 1).

[0022] With reference now to FIG. 3, the high-pressure compressor includes a generally annular heat shield **100** that is formed separately from the high-pressure compressor housing **60** and the motor housing **20** and is disposed therebetween. In particular, the heat shield **100** has a flange **102** at its radially outer periphery, and the flange **102** is disposed, with respect to the radial direction, between a flange **68** of the compressor housing **60** and a shoulder **21** of the motor housing **20**, and is sandwiched between the flange **68** and shoulder **21** so as to constrain the heat shield radially. The heat shield flange **102** is captured and constrained axially between a motor housing flange **23** and a shoulder **67** on the HP compressor housing **60**. A V-band clamp **35** clamps together the motor housing flange **23** and HP compressor housing flange **68**, and a sealing ring **69** disposed between the HP compressor housing shoulder **67** and the heat shield flange **102** is thereby axially compressed between these parts, thereby sealing the interface between the heat shield and the compressor housing. The heat shield **100** includes a radially directed wall portion **104** that extends radially inwardly from the flange **102** and defines one wall of the diffuser **65** for the compressed air delivered into the HP volute **66**, an opposite wall of the diffuser being defined by the HP compressor housing **60**.

[0023] With continued reference to FIG. 3, the previously described cooling air annulus **76** is defined cooperatively by the heat shield **100** and the motor housing **20**. The cooling air passages **78** in the motor housing extend from the annulus **76** radially inwardly and feed the cooling air into the space **80** from which the air feeds

the journal bearing as previously described. Thus, the heat shield **100** cooperates with the housing assembly to define part of the cooling air passages for the cooling air supplied to the air bearings.

5 [0024] The heat shield **100** also helps minimize heat transfer from the hot motor housing **20** to the air passing through the high-pressure compressor. To this end, the motor housing **20** makes little contact with the heat shield **100**. The motor housing **20** defines a liquid coolant pas-
10 sage **25** for circulating a liquid coolant through the housing around the stator **22**. The heat shield's mounting flange **102** captured between the motor housing **20** and the HP compressor housing **60** is in contact with a portion of the motor housing cooled by the liquid coolant in the liquid coolant passage **25** (note the close proximity of the
15 flange **102** to the coolant passage **25** in FIG. 3) so as to facilitate heat transfer from the mounting flange to said portion of the motor housing. There is also an air gap **77** between the heat shield **100** and the motor housing **20**. Air from the annulus **76** supercharges this dead-headed
20 air gap **77**. All of these features contribute toward the minimization of heat transfer from the motor housing, via the heat shield, to the air being compressed in the HP compressor.

25 [0025] The heat shield **100** additionally serves yet another function, namely, providing a sealing surface for the seals that substantially isolate the HP compressor discharge air from the HP journal bearing. Thus, the compressor includes a seal carrier **63** affixed about the shaft
30 **26** at a location intermediate the HP compressor wheel **62** and the air journal bearing **32**. A seal ring **63a** is engaged in a circumferential groove formed about the seal carrier **63**, and the seal ring is positioned to seal against a radially inner surface of the heat shield **100** (FIG. 3) so
35 as to discourage air leakage from the HP compressor flow path into the journal air bearings. In the illustrated embodiment, there is also a second seal ring **63b** in a second groove in the seal carrier **63** to further enhance the sealing.

40 [0026] While the invention has been described by reference to an electric motor-driven two-stage serial compressor, the invention may also be applied to other electric motor-driven compressors, such as a single-stage compressor. In the appended claims, references to a
45 "first compressor wheel" are to be understood as applying either to the HP compressor wheel of a two-stage serial compressor (in which case the "second compressor wheel" is the LP compressor wheel), or to a compressor wheel in a single-stage compressor.

50 [0027] Many modifications and other embodiments of the inventions set forth herein will come to mind to one skilled in the art to which these inventions pertain having the benefit of the teachings presented in the foregoing descriptions and the associated drawings. Therefore, it
55 is to be understood that the inventions are not to be limited to the specific embodiments disclosed and that modifications and other embodiments are intended to be included within the scope of the appended claims. Although

specific terms are employed herein, they are used in a generic and descriptive sense only and not for purposes of limitation.

Claims

1. An electric motor-driven compressor comprising:

a housing assembly comprising a motor housing and a first compressor housing mounted to one end of the motor housing, the motor housing containing a motor stator and a motor rotor having a shaft, the motor housing defining a bore through which the motor rotor and the shaft pass;

the first compressor housing containing a first centrifugal compressor wheel that is mounted on one end of the shaft for rotation therewith, the first compressor housing also defining a first compressor flow path including a first air inlet that leads air into the first compressor wheel, and a first volute that collects compressed air that has passed through and been compressed by the first compressor wheel;

a first diffuser between an exit of the first compressor wheel and the first volute, the first diffuser serving to diffuse the compressed air to a lower velocity and deliver the compressed air into the volute;

air bearings disposed in the motor housing and rotatably supporting the shaft;

cooling air passages defined in the housing assembly for supplying cooling air to the air bearings; and

a heat shield that is formed separately from the first compressor housing and the motor housing and is disposed therebetween, the heat shield defining one wall of the first diffuser for the compressed air delivered into the first volute, the heat shield also cooperating with the housing assembly to define part of the cooling air passages for the cooling air supplied to the air bearings.

2. The electric motor-driven compressor of claim 1, wherein the motor housing defines a liquid coolant passage for circulating a liquid coolant, and the heat shield defines a mounting flange captured between the motor housing and the first compressor housing, the mounting flange being in contact with a portion of the motor housing cooled by the liquid coolant so as to facilitate heat transfer from the mounting flange to said portion of the motor housing.

3. The electric motor-driven compressor of claim 1, wherein the heat shield and the motor housing are arranged so as to define an annular space therebe-

tween for receiving cooling air, and the cooling air passages are arranged for receiving cooling air from the annular space.

4. The electric motor-driven compressor of claim 3, wherein a cooling air gap is defined between the heat shield and the motor housing, the cooling air gap being arranged to receive cooling air from the annular space.

5. The electric motor-driven compressor of claim 1, further comprising a first seal carrier affixed to the shaft intermediate the first compressor wheel and the air bearings, and a first seal ring engaged in a circumferential groove formed about the first seal carrier, and wherein the first seal ring is positioned to seal against a radially inner surface of the heat shield so as to discourage air leakage between the first compressor flow path and the air bearings.

5. The electric motor-driven compressor of claim 5, further comprising a second seal ring engaged in a second circumferential groove formed about the first seal carrier and positioned to seal against the radially inner surface of the heat shield.

7. The electric motor-driven compressor of claim 1, further comprising a second compressor housing mounted to an opposite end of the motor housing and a second centrifugal compressor wheel contained in the second compressor housing and affixed to an opposite end of the shaft, the second compressor housing defining a second compressor flow path including a second air inlet that leads air into the second compressor wheel, and a second volute that collects compressed air that has passed through and been compressed by the second compressor wheel, and further comprising an interstage duct that connects the second volute to the first air inlet such that air compressed by the second compressor wheel is led by the interstage duct from the second volute into the first air inlet and is further compressed by the first compressor wheel and delivered into the first volute, the second compressor wheel thus constituting a low-pressure compressor wheel and the first compressor wheel constituting a high-pressure compressor wheel.

8. The electric motor-driven compressor of claim 7, wherein the heat shield and the motor housing are arranged so as to define an annular space therebetween for receiving cooling air, and the cooling air passages are arranged for receiving cooling air from the annular space.

9. The electric motor-driven compressor of claim 8, wherein the motor housing defines a cooling air inlet for supplying the cooling air that is received in the

annular space.

10. The electric motor-driven compressor of claim 9, wherein the housing assembly defines an annulus adjacent the low-pressure compressor wheel, the annulus receiving cooling air from the cooling air inlet, and wherein the motor housing defines an axially extending conduit for feeding cooling air from said annulus into the annular space defined between the heat shield and the motor housing.

5

10

15

20

25

30

35

40

45

50

55

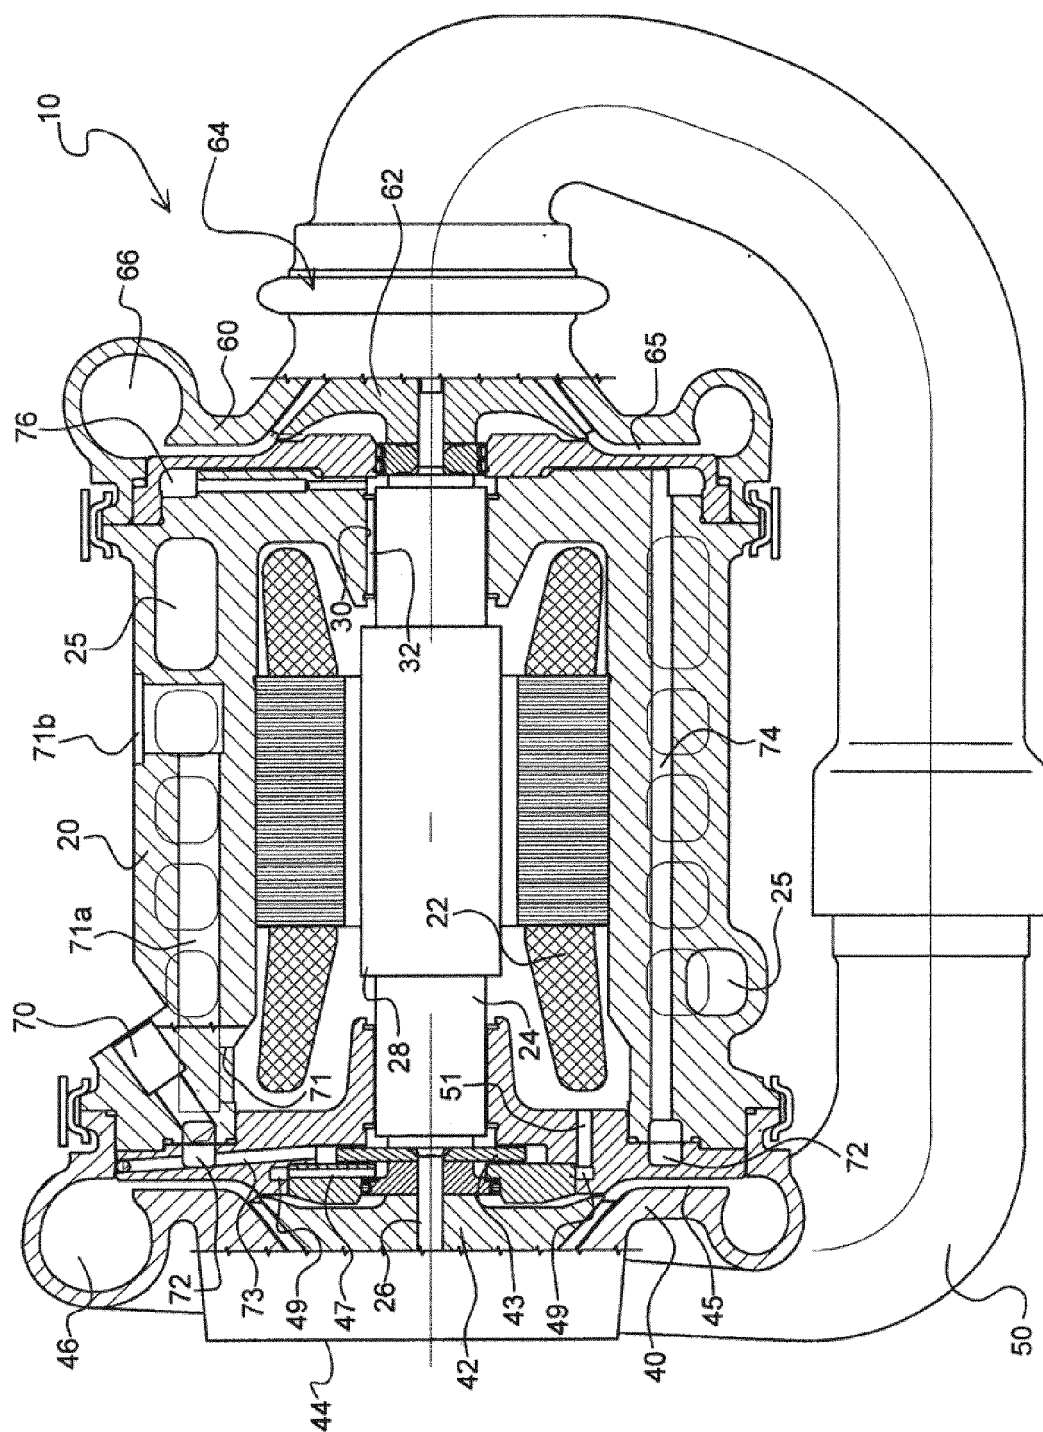


FIG. 1

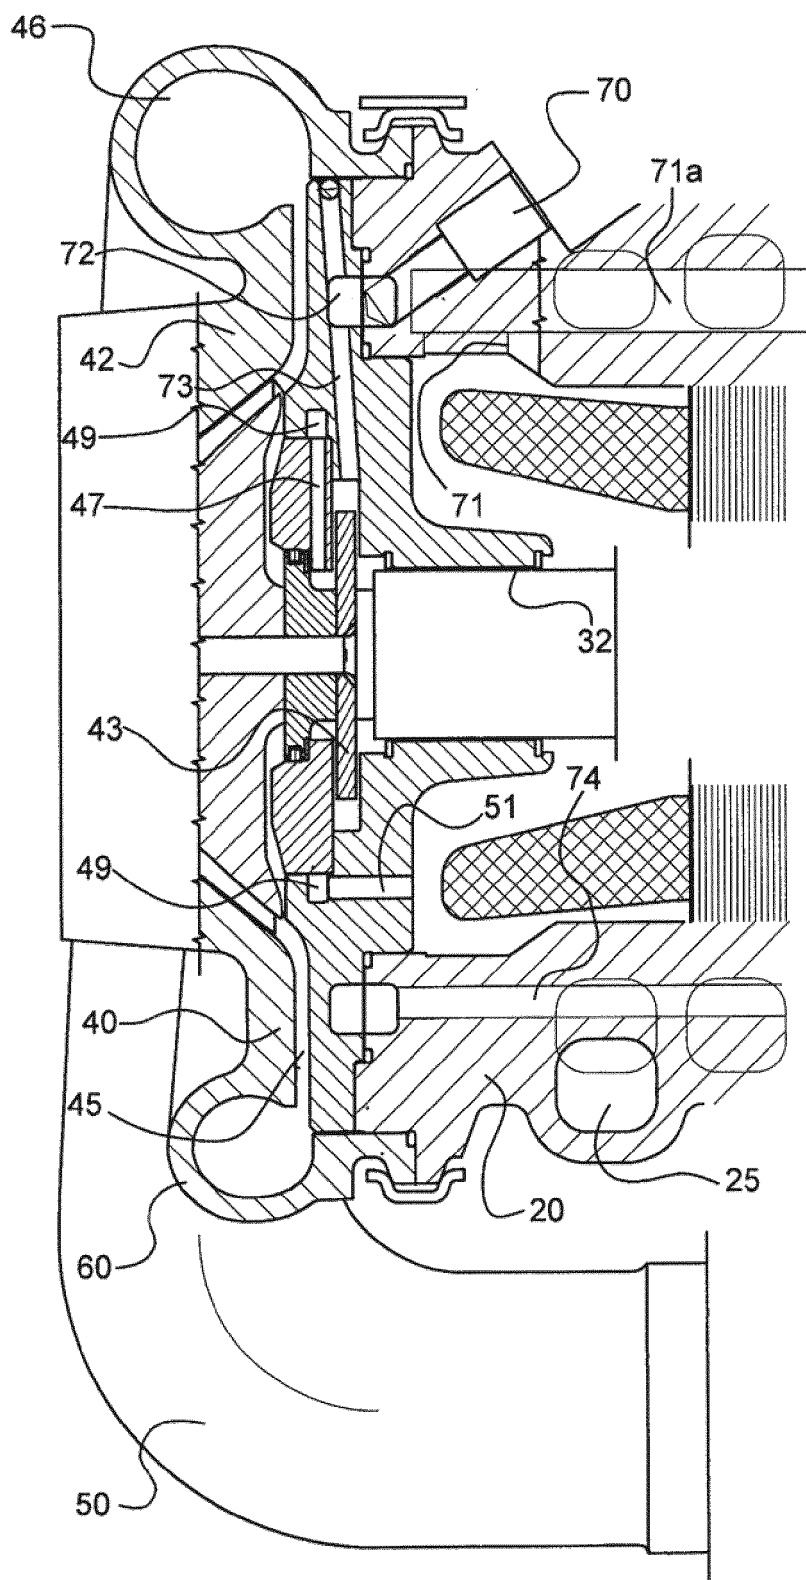


FIG. 2

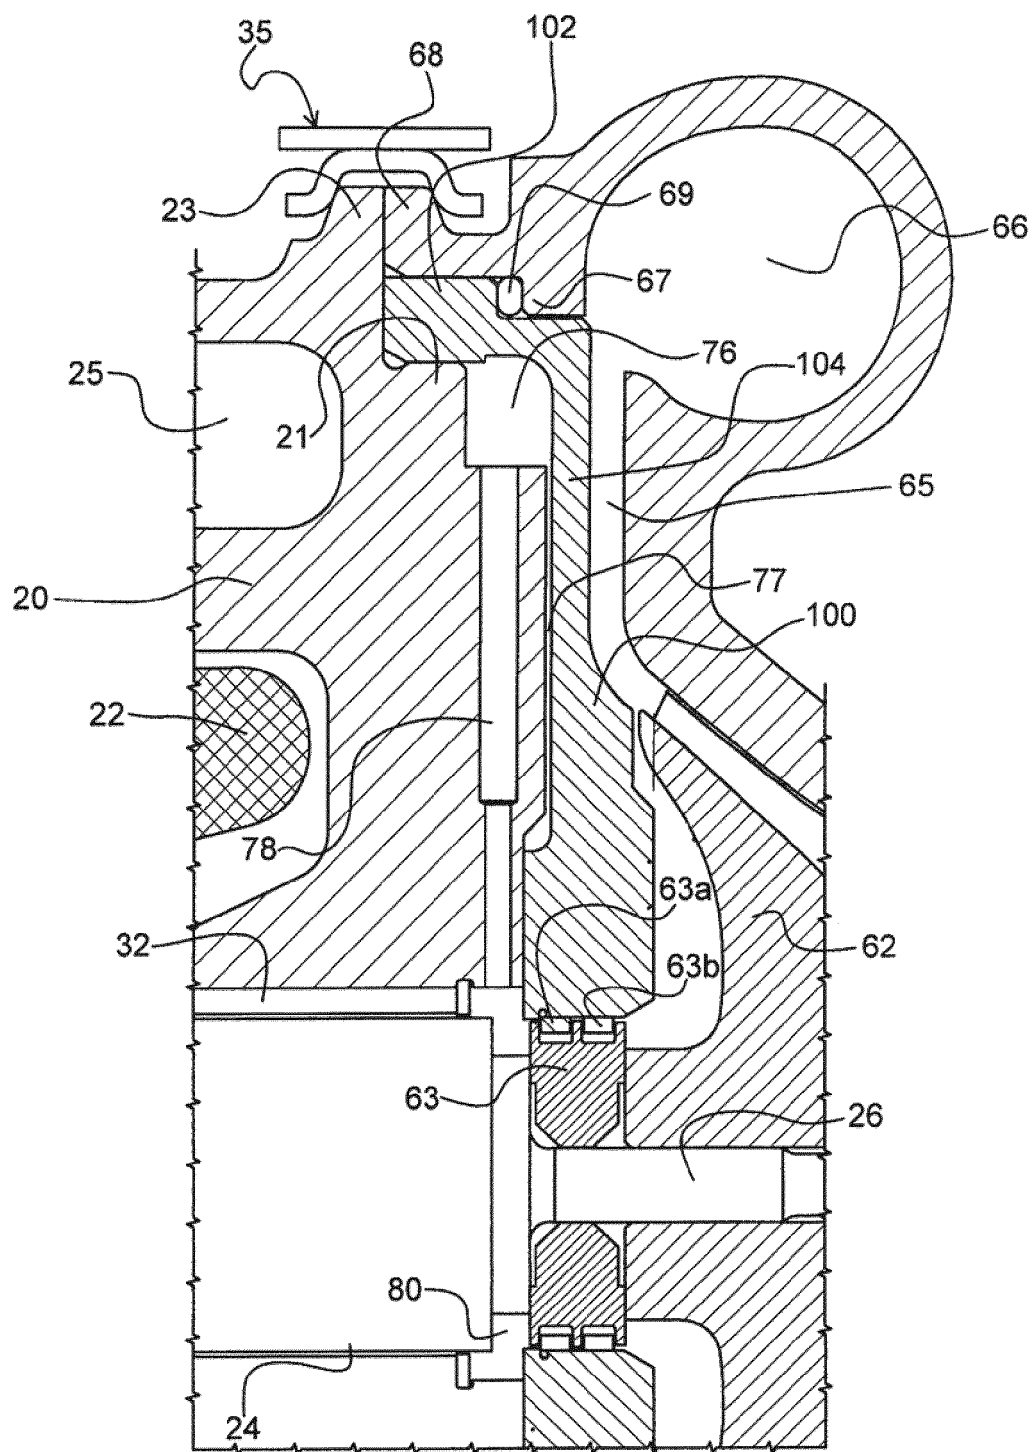


FIG. 3

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 14184122 B [0001]