



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
14.10.2015 Bulletin 2015/42

(51) Int Cl.:
A47B 88/00 (2006.01)

(21) Application number: **14164165.4**

(22) Date of filing: **10.04.2014**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME

- **Huang, Shih-Lung**
Kaohsiung City (TW)
- **Kuo, Chien-Hung**
Kaohsiung City (TW)
- **Wang, Chun-Chiang**
Kaohsiung City (TW)

(71) Applicants:
• **King Slide Works Co., Ltd.**
Kaohsiung City (TW)
• **King Slide Technology Co., Ltd.**
Kaohsiung City (TW)

(74) Representative: **Viering, Jentschura & Partner**
Patent- und Rechtsanwälte
Kennedydamm 55 / Roßstrasse
40476 Düsseldorf (DE)

(72) Inventors:
• **Chen, Ken-Ching**
Kaohsiung City (TW)

Remarks:
Amended claims in accordance with Rule 137(2) EPC.

(54) **Adjusting device**

(57) An adjusting device (10) includes a fixed member (12, 200); first and second plates (14, 16), both connected to the fixed member (12, 200); a first adjusting member (20a); and a first locking member (22a). The fixed member (12, 200) has a first hole (28a, 202) and a window (30). The second plate (16) has first and second contact portions (46, 48). The first adjusting member (20a) has an adjusting portion (52a) contacting against

the second contact portion (48) and has an eccentric portion (54a) extending through the window (30) and movably connected to the first plate (14). The first locking member (22a) partially extends through the first contact portion (46) and the first hole (28a, 202) to connect with the first plate (14). The second plate (16) can be displaced relative to the fixed member (12, 200) in response to displacement of the first adjusting member (20a).

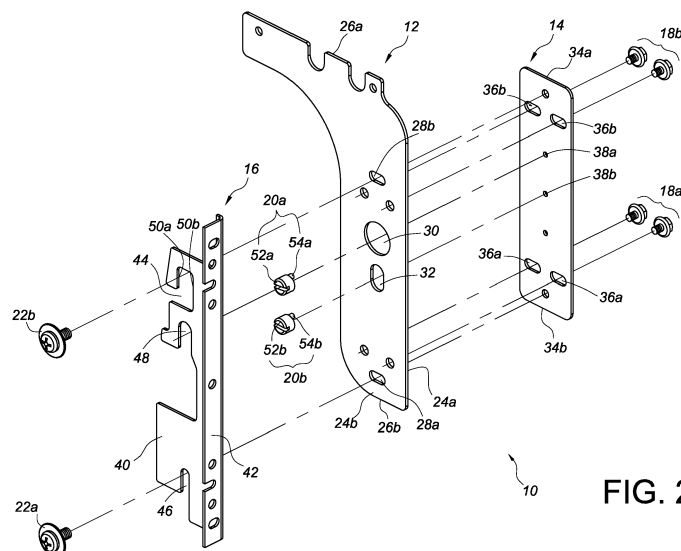


FIG. 2a

Description

Field of the Invention

[0001] The present invention relates to an adjusting device and more particularly to an adjusting device applicable to a furniture system to facilitate the adjustment of the angle and/or position of a drawer face panel relative to a drawer housing.

Background of the Invention

[0002] FIG. 1 shows a drawer system 2 which includes a drawer housing 4 and a plurality of drawers 6a, 6b, 6c. Generally, a pair of slide rail assemblies is mounted between each drawer 6a, 6b, 6c and the drawer housing 4 so that each drawer 6a, 6b, 6c can be easily pulled out from or pushed into the drawer housing 4 by means of the corresponding slide rail assembly.

[0003] However, should the assembly tolerance of any component of the drawer system (i.e., the drawer housing 4, any of the drawers 6a, 6b, 6c, or any of the slide rail assemblies) be too great, or should the components be improperly assembled, or should the assembly quality be otherwise impaired, the drawers 6a, 6b, 6c may become tilted and have problem in fitting snugly into the drawer housing 4. In FIG. 1, the drawers 6a and 6b are in an abnormal condition in which the two drawers are obliquely positioned and form an angle $\theta 1$ and an angle $\theta 2$ with the drawer housing 4 respectively. The drawer 6c, on the other hand, is in a normal condition.

[0004] US Patent No. 6, 390, 576 B1, granted to Walburn, discloses a drawer face panel which is adjustable with respect to a drawer slide and whose position, therefore, can be adjusted relative to the drawer housing. The adjusting means of the '576 patent is implemented by the user manually supporting the drawer face panel and then fixing the drawer face panel in position with screws. As the user is required to hold the drawer face panel with a hand, the adjusting means is physically demanding and leaves something to be desired.

Summary of the Invention

[0005] The present invention relates to an adjusting device applicable to a slide rail assembly to facilitate the adjustment of the angle and/or position of a drawer face panel relative to a drawer housing.

[0006] According to one aspect of the present invention, an adjusting device includes: a fixed member which includes a first face portion, a second face portion opposite the first face portion, a first hole, and a window; a first plate which is connected to the first face portion of the fixed member, the first plate having a first axial portion corresponding in position to the window of the fixed member; a second plate which is connected to the second face portion of the fixed member, the second plate having a first contact portion and a second contact portion,

wherein the first contact portion corresponds in position to the first hole of the fixed member, and the second contact portion corresponds in position to the window of the fixed member; a first adjusting member which includes an adjusting portion and an eccentric portion connected to the adjusting portion, the adjusting portion contacting against the second contact portion of the second plate, the eccentric portion extending through the window of the fixed member and being movably connected to the first axial portion of the first plate; and a first locking member which has a portion extending sequentially through the first contact portion of the second plate and the first hole of the fixed member and connected to the first plate. The second plate is displaceable relative to the fixed member in response to displacement of the first adjusting member.

[0007] Preferably, the adjusting device further includes a second adjusting member connected to the fixed member and the first plate, the fixed member has a longitudinal hole, and the first plate has a second axial portion. The second adjusting member includes an adjusting portion and an eccentric portion connected to the adjusting portion. The adjusting portion of the second adjusting member contacts against a hole wall of the longitudinal hole of the fixed member. The eccentric portion of the second adjusting member is movably connected to the second axial portion of the first plate. The first plate is displaceable relative to the fixed member in response to displacement of the second adjusting member so as to displace the first locking member relative to the fixed member, and the second plate is displaceable relative to the fixed member in response to displacement of the first locking member.

[0008] Preferably, the first plate has a pair of first transverse holes. By passing a pair of first connecting elements through the pair of first transverse holes respectively, the first plate is connected to the fixed member in such a way that the first plate is transversely displaceable relative to the fixed member.

[0009] Preferably, the first plate has a pair of second transverse holes. By passing a pair of second connecting elements through the pair of second transverse holes respectively, the first plate is connected to the fixed member in such a way that the first plate is transversely displaceable relative to the fixed member.

[0010] Preferably, the fixed member has a second hole, and the second plate has a connecting portion corresponding in position to the second hole of the fixed member. The connecting portion has a first sidewall and a second sidewall. The first sidewall and the second sidewall are spaced apart by a predetermined distance. The first plate and the second plate are locked to the fixed member by a second locking member, which has a portion extending sequentially through the connecting portion of the second plate and the second hole of the fixed member and connected to the first plate.

[0011] Preferably, the second plate has a first plate section and a second plate section substantially perpen-

dicularly connected to the first plate section. The first contact portion and the second contact portion are provided by the first plate section.

[0012] Preferably, the second hole of the fixed member has a first width and a first height, and the connecting portion of the second plate has a second width and a second height. The first width of the second hole is greater than or equal to the second width of the connecting portion of the second plate. The first height of the second hole is greater than the second height of the connecting portion of the second plate.

[0013] According to another aspect of the present invention, an adjusting device applicable to a furniture system is provided, wherein the furniture system includes a drawer housing, a drawer face panel, and a slide rail assembly. The slide rail assembly at least includes a fixed rail and a movable rail slidable relative to the fixed rail. The fixed rail is fixedly mounted to the drawer housing. The adjusting device includes: a fixed member fixedly mounted to the movable rail of the slide rail assembly, the fixed member including a first hole and a window; a first plate connected to the fixed member, the first plate having a first axial portion corresponding in position to the window of the fixed member; a second plate connected to the fixed member, the second plate having a first plate section and a second plate section substantially perpendicularly connected to the first plate section, the drawer face panel being mounted to the second plate section, the first plate section having a first contact portion and a second contact portion, wherein the first contact portion corresponds in position to the first hole of the fixed member, and the second contact portion corresponds in position to the window of the fixed member; a first adjusting member including an adjusting portion and an eccentric portion connected to the adjusting portion, wherein the adjusting portion contacts against the second contact portion of the second plate, and the eccentric portion extends through the window of the fixed member and is movably connected to the first axial portion of the first plate; and a first locking member having a portion which extends sequentially through the first contact portion of the second plate and the first hole of the fixed member and is connected to the first plate. The second plate is angularly adjustable relative to the fixed member in response to displacement of the first adjusting member such that the drawer face panel is angularly adjustable relative to the drawer housing.

Brief Description of the Drawings

[0014] The invention as well as a preferred mode of use and the advantages thereof will be best understood by referring to the following detailed description of some illustrative embodiments in conjunction with the accompanying drawings, wherein:

FIG. 1 is a perspective view of a conventional drawer system;

FIG. 2a is an exploded perspective view of the adjusting device in an embodiment of the present invention;

FIG. 2b is a perspective view of the first adjusting member in the foregoing embodiment;

FIG. 2c is a perspective view of the fixed member in another embodiment of the present invention;

FIG. 2d schematically shows the relationship between the fixed member and the second plate in the embodiment in FIG. 2c;

FIG. 3 is an assembled perspective view of the adjusting device in an embodiment of the present invention;

FIG. 4a schematically shows how the adjusting device in an embodiment of the present invention is assembled;

FIG. 4b schematically shows how the adjusting device in FIG. 4a is further assembled;

FIG. 4c schematically shows how the adjusting device in FIG. 4b is further assembled;

FIG. 5a is a schematic drawing in which the adjusting device in an embodiment of the present invention has been adjusted by a first angle;

FIG. 5b is a schematic drawing in which the adjusting device in the embodiment in FIG. 5a has been adjusted by a second angle;

FIG. 6a is a schematic drawing in which the adjusting device in an embodiment of the present invention has been adjusted to a first position;

FIG. 6b is a schematic drawing in which the adjusting device in the embodiment in FIG. 6a has been adjusted to a second position;

FIG. 7 is a perspective view showing how the adjusting device in an embodiment of the present invention is mounted to a furniture system;

FIG. 8a is a schematic drawing in which the drawer face panel in an embodiment of the present invention has been adjusted by the first angle;

FIG. 8b is a schematic drawing in which the drawer face panel in the embodiment in FIG. 8a has been adjusted by the second angle; and

FIG. 8c is a schematic drawing in which the drawer face panel in the embodiment in FIG. 8a has been

adjusted to a proper position.

Detailed Description of the Invention

[0015] FIG. 2a, FIG. 2b, and FIG. 3 illustrate the adjusting device 10 in a preferred embodiment of the present invention. The adjusting device 10 includes a fixed member 12, a first plate 14, a second plate 16, a pair of first connecting elements 18a, a pair of second connecting elements 18b, a first adjusting member 20a, a second adjusting member 20b, a first locking member 22a, and a second locking member 22b.

[0016] The fixed member 12 includes a first face portion 24a, a second face portion 24b opposite the first face portion 24a, a top edge 26a, a bottom edge 26b, a first hole 28a adjacent to the bottom edge 26b, a second hole 28b adjacent to the top edge 26a, a window 30, and a longitudinal hole 32. The window 30 and the longitudinal hole 32 are located between the first hole 28a and the second hole 28b. Preferably, the first hole 28a and the second hole 28b are transverse holes.

[0017] The first plate 14 is connected to the first face portion 24a of the fixed member 12. The first plate 14 includes a top edge 34a, a bottom edge 34b, a pair of first transverse holes 36a adjacent to the bottom edge 34b, a pair of second transverse holes 36b adjacent to the top edge 34a, a first axial portion 38a, and a second axial portion 38b. The first axial portion 38a and the second axial portion 38b are located between the pair of first transverse holes 36a and the pair of second transverse holes 36b. The first axial portion 38a corresponds in position to the window 30 of the fixed member 12. The second axial portion 38b corresponds in position to the longitudinal hole 32 of the fixed member 12.

[0018] The second plate 16 is connected to the second face portion 24b of the fixed member 12. The second plate 16 has a first plate section 40 and a second plate section 42 substantially perpendicularly connected to the first plate section 40. The first plate section 40 has a connecting portion 44, a first contact portion 46, and a second contact portion 48 located between the connecting portion 44 and the first contact portion 46. The connecting portion 44 corresponds in position to the second hole 28b of the fixed member 12. Moreover, the connecting portion 44 has a first sidewall 50a and a second sidewall 50b. The first sidewall 50a and the second sidewall 50b are spaced apart by a predetermined distance. The first contact portion 46 corresponds in position to the first hole 28a of the fixed member 12. The second contact portion 48 corresponds in position to the window 30 of the fixed member 12. In one preferred embodiment, the connecting portion 44, the first contact portion 46, and the second contact portion 48 are all hook-shaped; however, the configurations of these three portions are not limited to such a shape.

[0019] The pair of first connecting elements 18a corresponds in position to the pair of first transverse holes 36a of the first plate 14 respectively. Each of the first

connecting elements 18a has a portion extending through one of the first transverse holes 36a so as to connect the first plate 14 to the fixed member 12. Similarly, the pair of second connecting elements 18b corresponds in position to the pair of second transverse holes 36b of the first plate 14 respectively. Each of the second connecting elements 18b has a portion extending through one of the second transverse holes 36b so as to connect the first plate 14 to the fixed member 12. Thus, the first plate 14 is rendered transversely displaceable relative to the fixed member 12.

[0020] The first adjusting member 20a includes an adjusting portion 52a and an eccentric portion 54a connected to the adjusting portion 52a. The adjusting portion 52a of the first adjusting member 20a contacts against the second contact portion 48 of the first plate section 40 of the second plate 16. The eccentric portion 54a of the first adjusting member 20a extends through the window 30 of the fixed member 12 and is movably connected to the first axial portion 38a of the first plate 14.

[0021] The second adjusting member 20b is configured in the same way as the first adjusting member 20a. The second adjusting member 20b includes an adjusting portion 52b and an eccentric portion 54b connected to the adjusting portion 52b. The adjusting portion 52b of the second adjusting member 20b contacts against the hole wall of the longitudinal hole 32 of the fixed member 12. The eccentric portion 54b of the second adjusting member 20b is movably connected to the second axial portion 38b of the first plate 14.

[0022] The first locking member 22a has a portion which, after extending through the first contact portion 46 of the second plate 16 and then through the first hole 28a of the fixed member 12, is connected to the first plate 14 to lock the first plate 14 and the second plate 16 to the fixed member 12.

[0023] The second locking member 22b has a portion extending sequentially through the connecting portion 44 of the second plate 16 and the second hole 28b of the fixed member 12 and connected to the first plate 14 to lock the first plate 14 and the second plate 16 to the fixed member 12.

[0024] When the first locking member 22a and the second locking member 22b are fastened, the first plate 14 and the second plate 16 are fixed to the fixed member 12. Once the first locking member 22a and the second locking member 22b are unfastened, the first plate 14 and the second plate 16 can be displaced relative to the fixed member 12.

[0025] FIG. 2c shows the fixed member 200 in another embodiment of the present invention. The fixed member 200 is similar in configuration to the fixed member 12. The fixed member 200 has a first hole 202 and a second hole 204. While the first hole 202 is identical to the first hole 28a of the fixed member 12, the second hole 204 is larger than the second hole 28b of the fixed member 12 to make it easier for the second locking member 22b to extend sequentially through the connecting portion 44 of

the second plate 16 and the second hole 204 and connect with the first plate 14.

[0026] As shown in FIG. 2d, the second hole 204 of the fixed member 200 has a first width w_1 and a first height h_1 , and the connecting portion 44 of the second plate 16 has a second width w_2 and a second height h_2 . The first width w_1 of the second hole 204 of the fixed member 200 is greater than or equal to the second width w_2 of the connecting portion 44 of the second plate 16. The first height h_1 of the second hole 204 of the fixed member 200 is greater than the second height h_2 of the connecting portion 44 of the second plate 16.

[0027] In FIG. 4a, the first plate 14 is connected to the fixed member 12 by the pair of first connecting elements 18a and the pair of second connecting elements 18b. In addition, the fixed member 12 and the first plate 14 are connected by the first locking member 22a and the second locking member 22b. To put the second plate 16 in place, the connecting portion 44 and the first contact portion 46 of the second plate 16 are respectively brought to the second locking member 22b and the first locking member 22a from the lateral side. As shown in FIG. 4b, the second plate 16 is moved in the direction F1 so that the connecting portion 44 and the first contact portion 46 are located above the second locking member 22b and the first locking member 22a respectively. Then, in FIG. 4c, the second plate 16 is moved in the direction F2 due to its own weight and is thus movably mounted to the fixed member 12.

[0028] Referring to FIG. 5a, the first adjusting member 20a generates an eccentric force with respect to the second plate 16 when rotationally displaced in a first direction A1 to a first predetermined position. This eccentric force drives the second plate 16 to displace about an axis defined by the first locking member 22a. More specifically, the second plate 16 is rotated by a first angle B1 with respect to the fixed member 12 while the first sidewall 50a of the connecting portion 44 of the second plate 16 is pressed against the second locking member 22b. Referring to FIG. 5b, the first adjusting member 20a generates another eccentric force with respect to the second plate 16 when rotationally displaced in a second direction A2 to a second predetermined position. This eccentric force also drives the second plate 16 to displace about the axis defined by the first locking member 22a, but in a different way. The second plate 16 is rotated by a second angle B2 with respect to the fixed member 12 while the second sidewall 50b of the connecting portion 44 of the second plate 16 is pressed against the second locking member 22b. In other words, the angle by which the second plate 16 is rotated with respect to the fixed member 12 can be adjusted by displacing the first adjusting member 20a. Therefore, the second plate 16 is angularly adjustable with respect to the fixed member 12.

[0029] Referring to FIG. 6a, when the second adjusting member 20b is rotationally displaced in the first direction A1 to a first predetermined position, the first plate 14 is displaced relative to the fixed member 12 in response to

the eccentric displacement of the second adjusting member 20b due to the fact that the adjusting portion 52b of the second adjusting member 20b contacts against the hole wall of the longitudinal hole 32 of the fixed member 12 and that the eccentric portion 54b of the second adjusting member 20b is movably connected to the second axial portion 38b of the first plate 14. As a result, the first locking member 22a and the second locking member 22b are driven to displace relative to the fixed member 12, and the second plate 16 is displaced relative to the fixed member 12 in response to the displacement of the first locking member 22a. Hence, by adjusting the second adjusting member 20b, the second plate 16 can be displaced to a first position C1 relative to the fixed member 12.

[0030] Similarly, referring to FIG. 6b, when the second adjusting member 20b is rotationally displaced in the second direction A2 to a second predetermined position, the first plate 14 is displaced relative to the fixed member 12 in response to the eccentric displacement of the second adjusting member 20b. Consequently, the first locking member 22a and the second locking member 22b are displaced relative to the fixed member 12, and the second plate 16 is displaced relative to the fixed member 12 in response to the displacement of the first locking member 22a. Therefore, by adjusting the second adjusting member 20b, the second plate 16 can be displaced to a second position C2 relative to the fixed member 12.

[0031] FIG. 7 shows a drawer housing 56, a drawer face panel 58, and a slide rail assembly 60, in addition to the adjusting device 10. The slide rail assembly 60 is mounted between the drawer housing 56 and the adjusting device 10. The slide rail assembly 60 at least includes a fixed rail 62 and a movable rail 64 slidable relative to the fixed rail 62. Preferably, the slide rail assembly 60 further includes a middle rail 66 slidably connected between the fixed rail 62 and the movable rail 64 so that the movable rail 64 can be pulled out relative to the fixed rail 62 by a greater distance via the middle rail 66. In practice, the fixed rail 62 is fixedly mounted to the drawer housing 56, the fixed member 12 of the adjusting device 10 is fixedly mounted to the movable rail 64 of the slide rail assembly 60, and the drawer face panel 58 is mounted to the second plate section 42 of the second plate 16 of the adjusting device 10.

[0032] Referring to FIG. 8a and FIG. 8b, when the drawer face panel 58 is obliquely positioned relative to the drawer housing 56, the first adjusting member 20a and/or the second adjusting member 20b can be adjusted to bring the drawer face panel 58 to a proper position relative to the drawer housing 56, as shown in FIG. 8c.

[0033] While the present invention has been disclosed via the foregoing preferred embodiments, the embodiments are not intended to restrict the scope of the present invention. The scope of the present invention is defined by the appended claims.

Claims

1. An adjusting device (10) comprising:

a fixed member (12, 200) comprising a first hole (28a, 202), and a window (30);
 a first plate (14) connected to the fixed member (12, 200), the first plate (14) having a first axial portion (38a) corresponding in position to the window (30) of the fixed member (12, 200);
 a second plate (16) connected to the fixed member (12, 200), **characterized in that** the second plate (16) has a first contact portion (46) and a second contact portion (48), wherein the first contact portion (46) corresponds in position to the first hole (28a, 202) of the fixed member (12, 200), and the second contact portion (48) corresponds in position to the window (30) of the fixed member (12, 200);
 a first adjusting member (20a) comprising an adjusting portion (52a) and an eccentric portion (54a) connected to the adjusting portion (52a), the adjusting portion (52a) contacting against the second contact portion (48) of the second plate (16), the eccentric portion (54a) extending through the window (30) of the fixed member (12, 200) and being movably connected to the first axial portion (38a) of the first plate (14); and
 a first locking member (22a) having a portion which extends sequentially through the first contact portion (46) of the second plate (16) and the first hole (28a, 202) of the fixed member (12, 200) and is connected to the first plate (14);
 wherein the second plate (16) is displaceable relative to the fixed member (12, 200) in response to displacement of the first adjusting member (20a).

2. The adjusting device (10) of claim 1, further comprising a second adjusting member (20b) connected to the fixed member (12, 200) and the first plate (14), wherein the fixed member (12, 200) has a longitudinal hole (32), the first plate (14) has a second axial portion (38b), and the second adjusting member (20b) comprises an adjusting portion (52b) and an eccentric portion (54b) connected to the adjusting portion (52b), the adjusting portion (52b) of the second adjusting member (20b) contacting against a hole wall of the longitudinal hole (32) of the fixed member (12, 200), the eccentric portion (54b) of the second adjusting member (20b) being movably connected to the second axial portion (38b) of the first plate (14), the first plate (14) being displaceable relative to the fixed member (12, 200) in response to displacement of the second adjusting member (20b) so as to displace the first locking member (22a) relative to the fixed member (12, 200), causing the second plate (16) to displace relative to the fixed mem-

ber (12, 200) in response to displacement of the first locking member (22a).

3. The adjusting device (10) of claim 1, wherein the first plate (14) has a pair of first transverse holes (36a), and the first plate (14) is connected to the fixed member (12, 200) by passing a pair of first connecting elements (18a) through the pair of first transverse holes (36a) respectively, the first plate (14) thus being transversely displaceable relative to the fixed member (12, 200).

4. The adjusting device (10) of claim 1, wherein the fixed member (12, 200) has a second hole (28b, 204), and the second plate (16) has a connecting portion (44) corresponding in position to the second hole (28b, 204) of the fixed member (12, 200), the connecting portion (44) having a first sidewall (50a) and a second sidewall (50b), the first sidewall (50a) and the second sidewall (50b) being spaced apart by a predetermined distance, the first plate (14) and the second plate (16) being locked to the fixed member (12, 200) by a second locking member (22b), the second locking member (22b) having a portion which extends through the connecting portion (44) of the second plate (16) and then through the second hole (28b, 204) of the fixed member (12, 200) and is connected to the first plate (14).

5. The adjusting device (10) of claim 1, wherein the second plate (16) has a first plate section (40) and a second plate section (42) substantially perpendicularly connected to the first plate section (40), the first contact portion (46) and the second contact portion (48) being located on the first plate section (40).

6. The adjusting device (10) of claim 4, wherein the second hole (28b, 204) of the fixed member (12, 200) has a first width (w1) and a first height (h1), and the connecting portion (44) of the second plate (16) has a second width (w2) and a second height (h2), the first width (w1) of the second hole (28b, 204) being greater than or equal to the second width (w2) of the connecting portion (44) of the second plate (16), the first height (h1) of the second hole (28b, 204) being greater than the second height (h2) of the connecting portion (44) of the second plate (16).

7. The adjusting device (10) of claim 1 being applicable to a furniture system, the furniture system including a drawer housing (56), a drawer face panel (58), and a slide rail assembly (60), the slide rail assembly (60) at least including a fixed rail (62) and a movable rail (64) slidable relative to the fixed rail (62), the fixed rail (62) being fixedly mounted to the drawer housing (56), wherein the fixed member (12, 200) further comprises a first face portion (24a) and a second face portion (24b) opposite the first face portion (24a)

and is fixedly mounted to the movable rail (64) of the slide rail assembly (60);

wherein the first plate (14) is connected to the first face portion (24a) of the fixed member (12, 200);

wherein the second plate (16) is connected to the second face portion (24b) of the fixed member (12, 200) and has a first plate section (40) and a second plate section (42) substantially perpendicularly connected to the first plate section (40), and wherein the first contact portion (46) and the second contact portion (48) are provided on the first plate section (40) of the second plate (16), and the drawer face panel (58) is mounted to the second plate section (42) of the second plate (16); and

wherein the second plate (16) is angularly adjustable relative to the fixed member (12, 200) in response to displacement of the first adjusting member (20a) such that the drawer face panel (58) is angularly adjustable relative to the drawer housing (56).

8. The adjusting device (10) of claim 7, further comprising a second adjusting member (20b) connected to the fixed member (12, 200) and the first plate (14), wherein the fixed member (12, 200) has a longitudinal hole (32), the first plate (14) has a second axial portion (38b), and the second adjusting member (20b) comprises an adjusting portion (52b) and an eccentric portion (54b) connected to the adjusting portion (52b), the adjusting portion (52b) of the second adjusting member (20b) contacting against a hole wall of the longitudinal hole (32) of the fixed member (12, 200), the eccentric portion (54b) of the second adjusting member (20b) being movably connected to the second axial portion (38b) of the first plate (14), the first plate (14) being displaceable relative to the fixed member (12, 200) in response to displacement of the second adjusting member (20b) so as to displace the first locking member (22a) relative to the fixed member (12, 200), causing the second plate (16) to displace relative to the fixed member (12, 200) in response to displacement of the first locking member (22a).

9. The adjusting device (10) of claim 7, wherein the first plate (14) has a pair of first transverse holes (36a) and a pair of second transverse holes (36b), and the first plate (14) is connected to the fixed member (12, 200) by passing a pair of first connecting elements (18a) through the pair of first transverse holes (36a) respectively and passing a pair of second connecting elements (18b) through the pair of second transverse holes (36b) respectively, the first plate (14) thus being transversely displaceable relative to the fixed member (12, 200).

10. The adjusting device (10) of claim 7, wherein the fixed member (12, 200) has a second hole (28b, 204), and the second plate (16) has a connecting

portion (44) corresponding in position to the second hole (28b, 204) of the fixed member (12, 200), the connecting portion (44) having a first sidewall (50a) and a second sidewall (50b), the first sidewall (50a) and the second sidewall (50b) being spaced apart by a predetermined distance, the first plate (14) and the second plate (16) being locked to the fixed member (12, 200) by a second locking member (22b), the second locking member (22b) having a portion which extends through the connecting portion (44) of the second plate (16) and then through the second hole (28b, 204) of the fixed member (12, 200) and is connected to the first plate (14).

Amended claims in accordance with Rule 137(2) EPC.

1. An adjusting device (10) comprising:

a fixed member (12, 200) comprising a first hole (28a, 202), and a window (30);

a first plate (14) connected to the fixed member (12, 200), the first plate (14) having a first axial portion (38a) corresponding in position to the window (30) of the fixed member (12, 200);

a second plate (16) connected to the fixed member (12, 200), wherein the second plate (16) has a first contact portion (46) and a second contact portion (48), wherein the first contact portion (46) corresponds in position to the first hole (28a, 202) of the fixed member (12, 200), and the second contact portion (48) corresponds in position to the window (30) of the fixed member (12, 200);

a first adjusting member (20a) comprising an adjusting portion (52a) and an eccentric portion (54a) connected to the adjusting portion (52a), the adjusting portion (52a) contacting against the second contact portion (48) of the second plate (16), the eccentric portion (54a) extending through the window (30) of the fixed member (12, 200) and being movably connected to the first axial portion (38a) of the first plate (14); and a first locking member (22a) having a portion which extends sequentially through the first contact portion (46) of the second plate (16) and the first hole (28a, 202) of the fixed member (12, 200) and is connected to the first plate (14);

wherein the second plate (16) is displaceable relative to the fixed member (12, 200) in response to displacement of the first adjusting member (20a),

characterized by a second adjusting member (20b) connected to the fixed member (12, 200) and the first plate (14), wherein the fixed member (12, 200) has a longitudinal hole (32), the first plate (14) has a second axial portion (38b), and the second adjusting member (20b) com-

- prises an adjusting portion (52b) and an eccentric portion (54b) connected to the adjusting portion (52b), the adjusting portion (52b) of the second adjusting member (20b) contacting against a hole wall of the longitudinal hole (32) of the fixed member (12, 200), the eccentric portion (54b) of the second adjusting member (20b) being movably connected to the second axial portion (38b) of the first plate (14), the first plate (14) being displaceable relative to the fixed member (12, 200) in response to displacement of the second adjusting member (20b) so as to displace the first locking member (22a) relative to the fixed member (12, 200), causing the second plate (16) to displace relative to the fixed member (12, 200) in response to displacement of the first locking member (22a).
2. The adjusting device (10) of claim 1, wherein the first plate (14) has a pair of first transverse holes (36a), and the first plate (14) is connected to the fixed member (12, 200) by passing a pair of first connecting elements (18a) through the pair of first transverse holes (36a) respectively, the first plate (14) thus being transversely displaceable relative to the fixed member (12, 200).
 3. The adjusting device (10) of claim 1, wherein the fixed member (12, 200) has a second hole (28b, 204), and the second plate (16) has a connecting portion (44) corresponding in position to the second hole (28b, 204) of the fixed member (12, 200), the connecting portion (44) having a first sidewall (50a) and a second sidewall (50b), the first sidewall (50a) and the second sidewall (50b) being spaced apart by a predetermined distance, the first plate (14) and the second plate (16) being locked to the fixed member (12, 200) by a second locking member (22b), the second locking member (22b) having a portion which extends through the connecting portion (44) of the second plate (16) and then through the second hole (28b, 204) of the fixed member (12, 200) and is connected to the first plate (14).
 4. The adjusting device (10) of claim 1, wherein the second plate (16) has a first plate section (40) and a second plate section (42) substantially perpendicularly connected to the first plate section (40), the first contact portion (46) and the second contact portion (48) being located on the first plate section (40).
 5. The adjusting device (10) of claim 3, wherein the second hole (28b, 204) of the fixed member (12, 200) has a first width (w1) and a first height (h1), and the connecting portion (44) of the second plate (16) has a second width (w2) and a second height (h2), the first width (w1) of the second hole (28b, 204) being greater than or equal to the second width (w2) of the connecting portion (44) of the second plate (16), the first height (h1) of the second hole (28b, 204) being greater than the second height (h2) of the connecting portion (44) of the second plate (16).
 6. The adjusting device (10) of claim 1 being applicable to a furniture system, the furniture system including a drawer housing (56), a drawer face panel (58), and a slide rail assembly (60), the slide rail assembly (60) at least including a fixed rail (62) and a movable rail (64) slidable relative to the fixed rail (62), the fixed rail (62) being fixedly mounted to the drawer housing (56), wherein the fixed member (12, 200) further comprises a first face portion (24a) and a second face portion (24b) opposite the first face portion (24a) and is fixedly mounted to the movable rail (64) of the slide rail assembly (60); wherein the first plate (14) is connected to the first face portion (24a) of the fixed member (12, 200); wherein the second plate (16) is connected to the second face portion (24b) of the fixed member (12, 200) and has a first plate section (40) and a second plate section (42) substantially perpendicularly connected to the first plate section (40), and wherein the first contact portion (46) and the second contact portion (48) are provided on the first plate section (40) of the second plate (16), and the drawer face panel (58) is mounted to the second plate section (42) of the second plate (16); and wherein the second plate (16) is angularly adjustable relative to the fixed member (12, 200) in response to displacement of the first adjusting member (20a) such that the drawer face panel (58) is angularly adjustable relative to the drawer housing (56).
 7. The adjusting device (10) of claim 6, wherein the first plate (14) has a pair of first transverse holes (36a) and a pair of second transverse holes (36b), and the first plate (14) is connected to the fixed member (12, 200) by passing a pair of first connecting elements (18a) through the pair of first transverse holes (36a) respectively and passing a pair of second connecting elements (18b) through the pair of second transverse holes (36b) respectively, the first plate (14) thus being transversely displaceable relative to the fixed member (12, 200).
 8. The adjusting device (10) of claim 6, wherein the fixed member (12, 200) has a second hole (28b, 204), and the second plate (16) has a connecting portion (44) corresponding in position to the second hole (28b, 204) of the fixed member (12, 200), the connecting portion (44) having a first sidewall (50a) and a second sidewall (50b), the first sidewall (50a) and the second sidewall (50b) being spaced apart by a predetermined distance, the first plate (14) and the second plate (16) being locked to the fixed member (12, 200) by a second locking member (22b), the

second locking member (22b) having a portion which extends through the connecting portion (44) of the second plate (16) and then through the second hole (28b, 204) of the fixed member (12, 200) and is connected to the first plate (14).

5

10

15

20

25

30

35

40

45

50

55

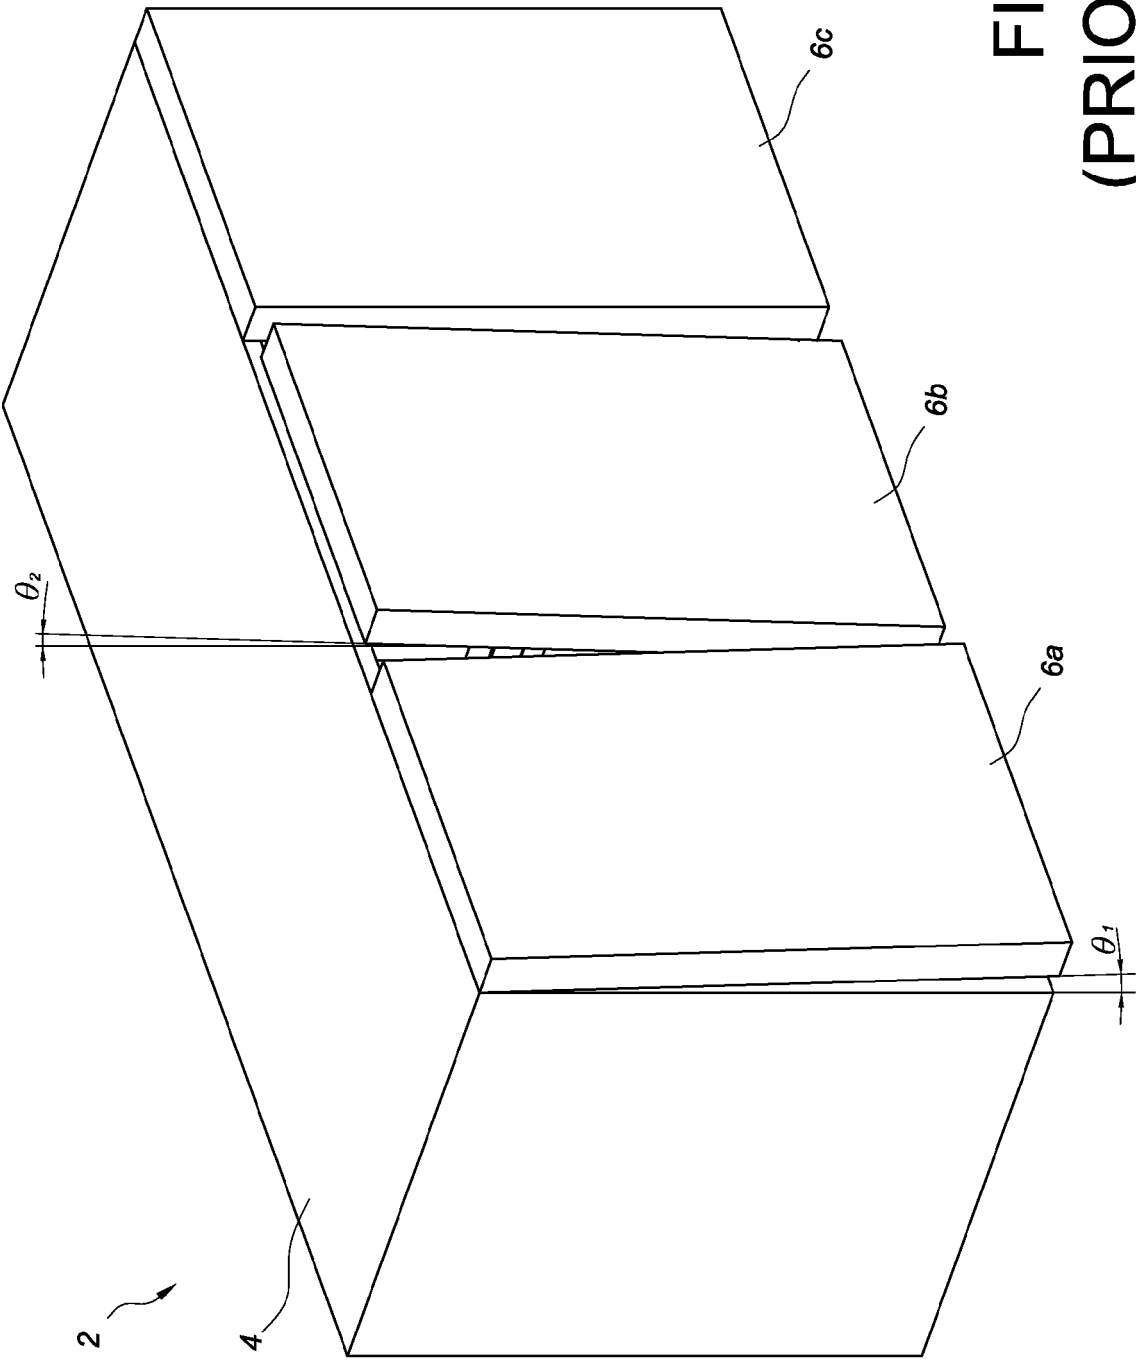
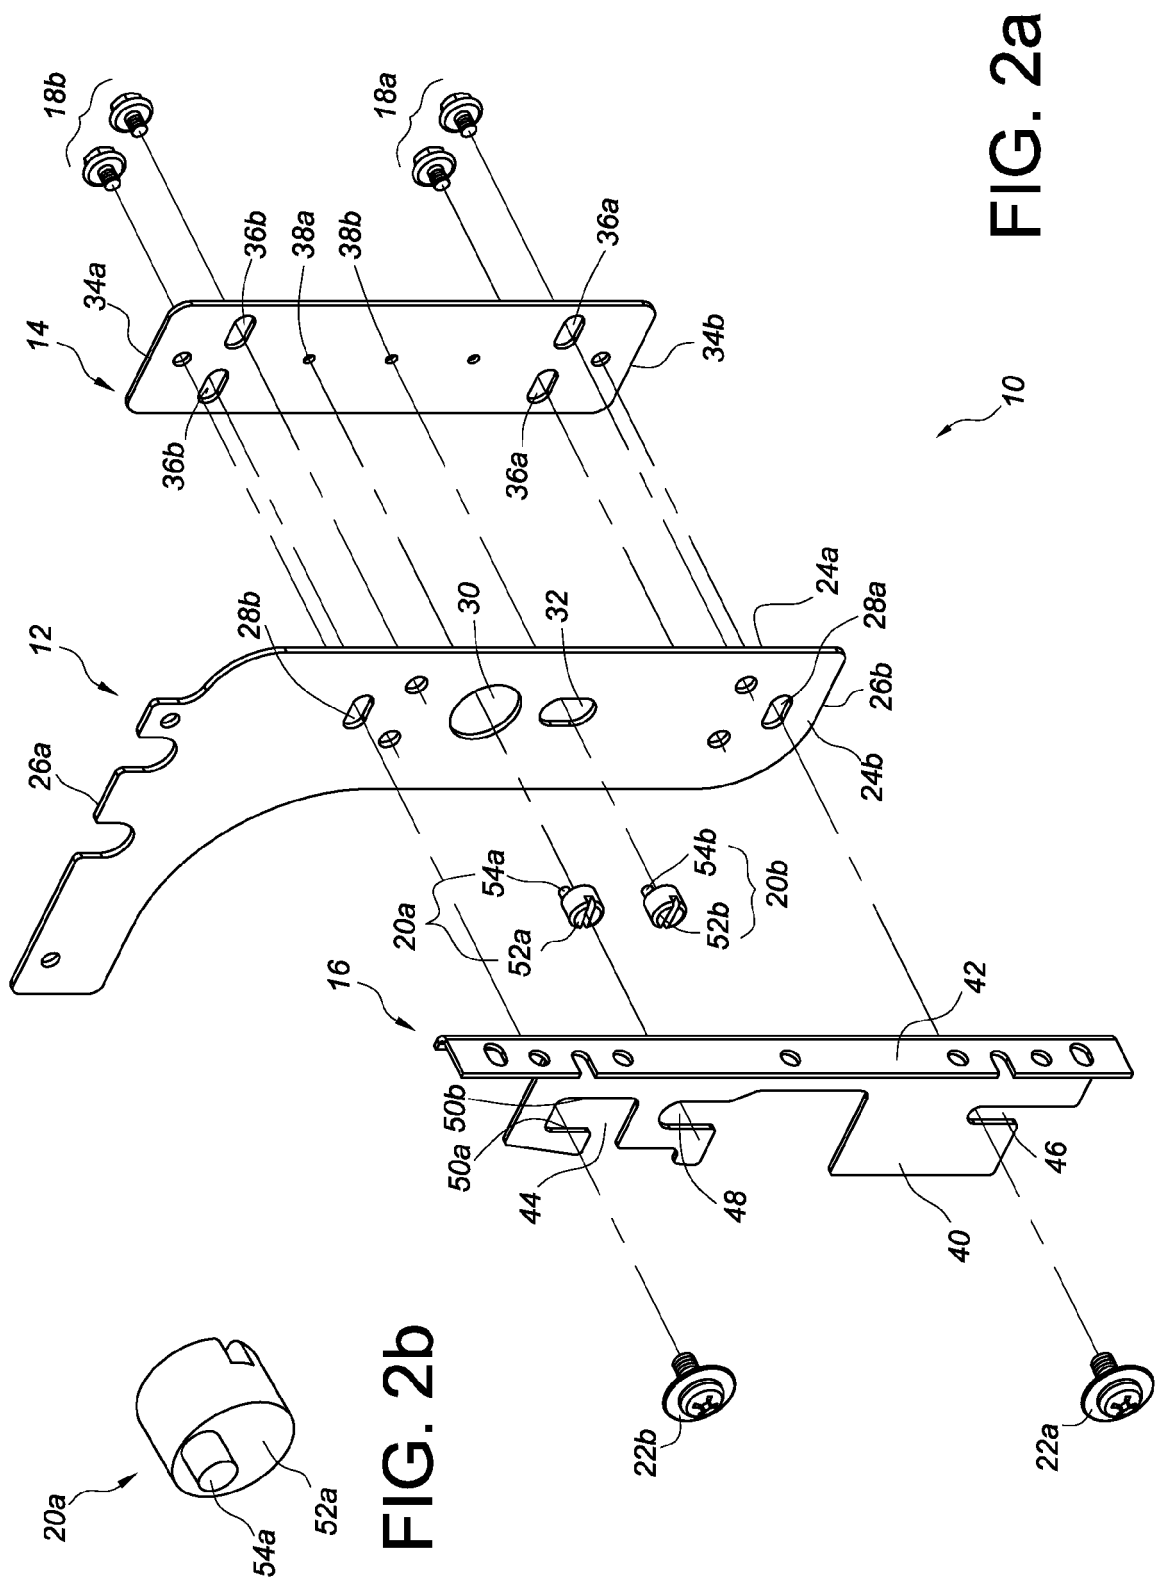


FIG. 1
(PRIOR ART)



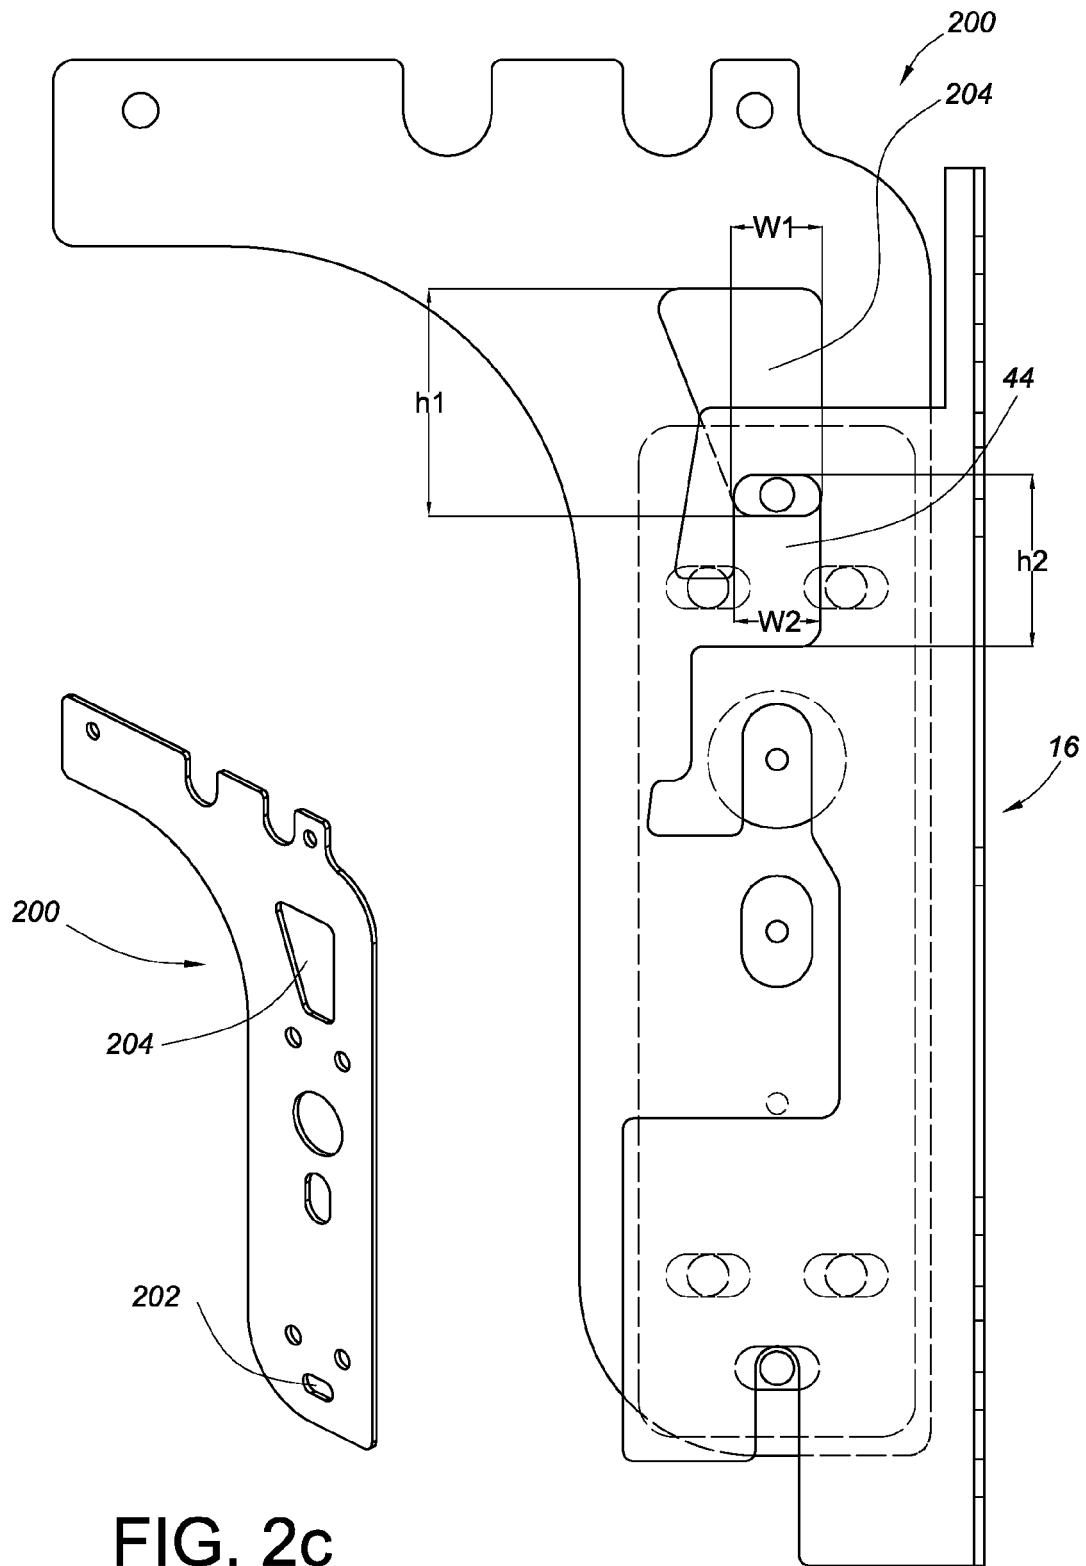


FIG. 2c

FIG. 2d

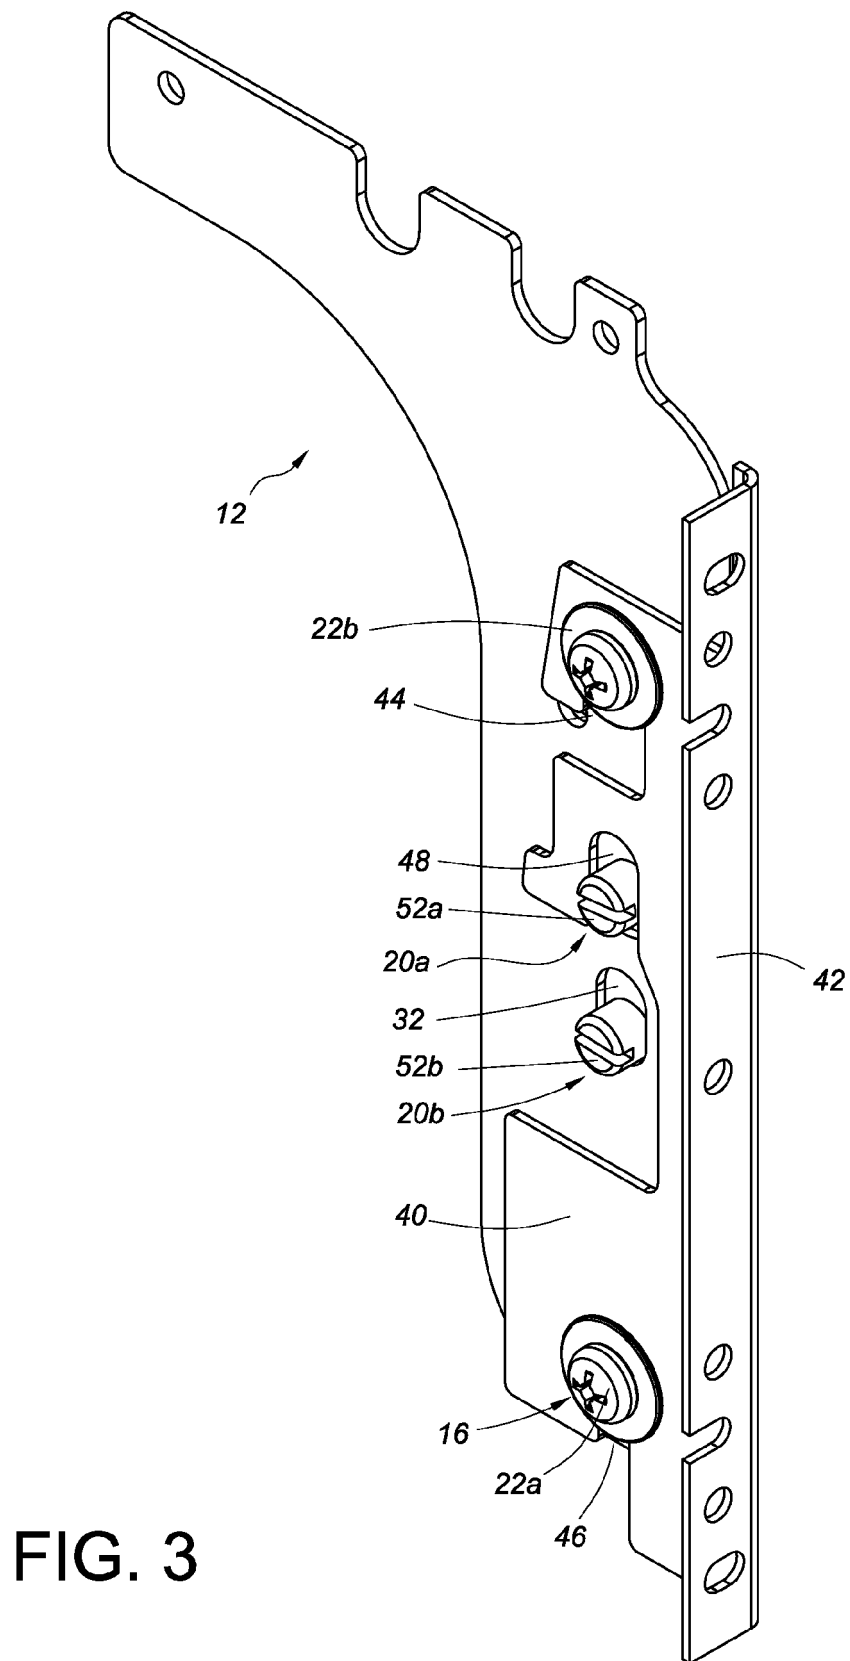


FIG. 3

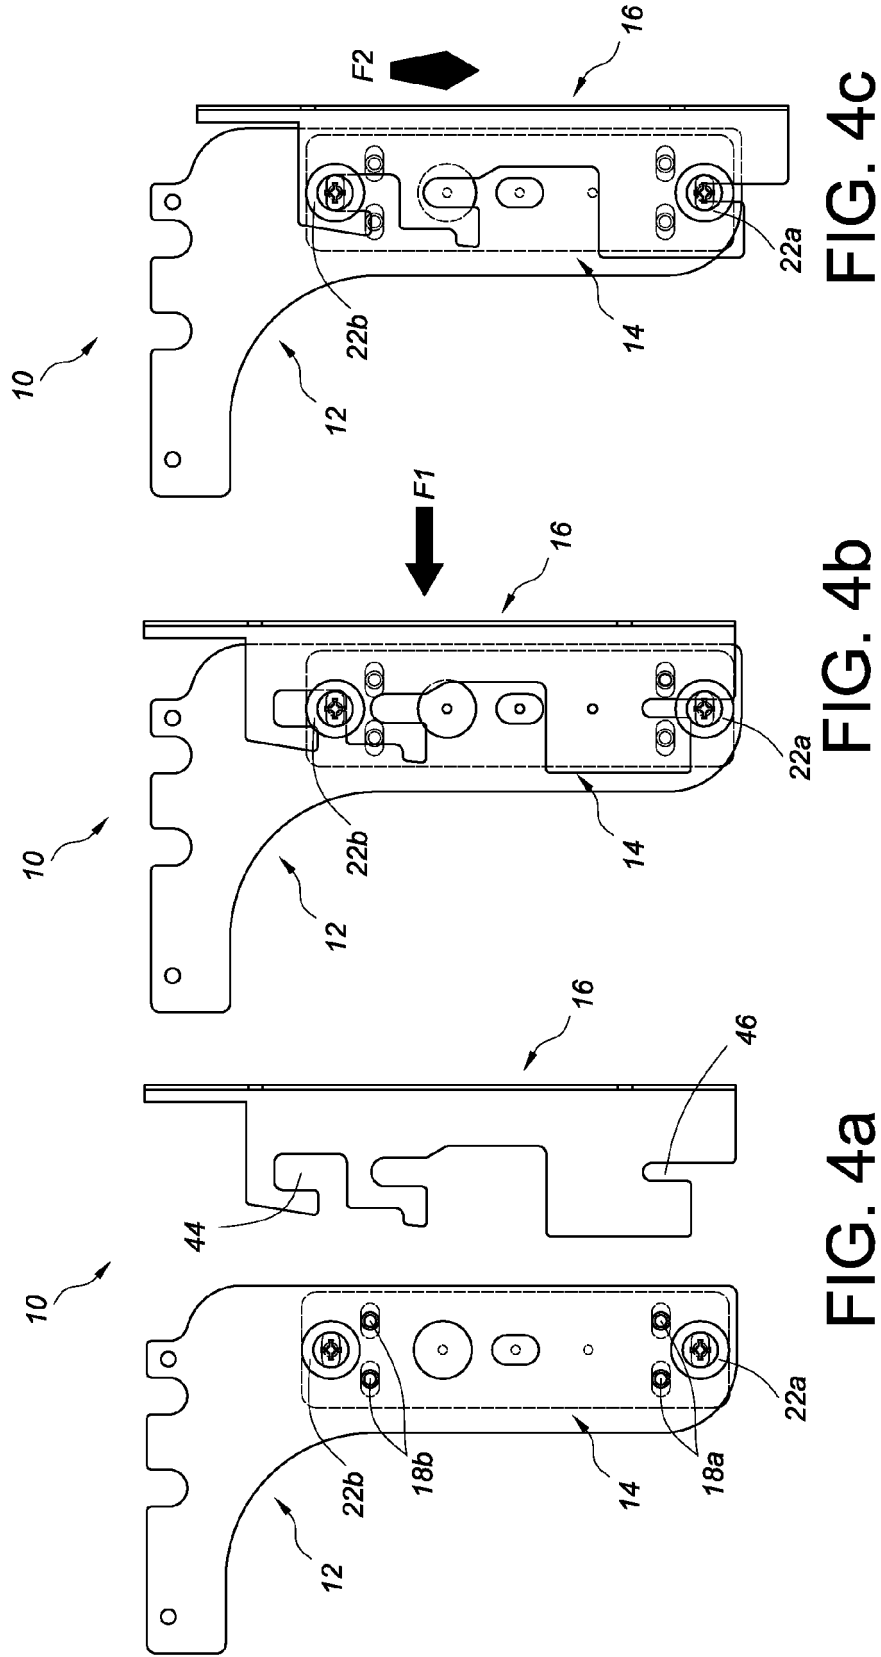


FIG. 4c

FIG. 4b

FIG. 4a

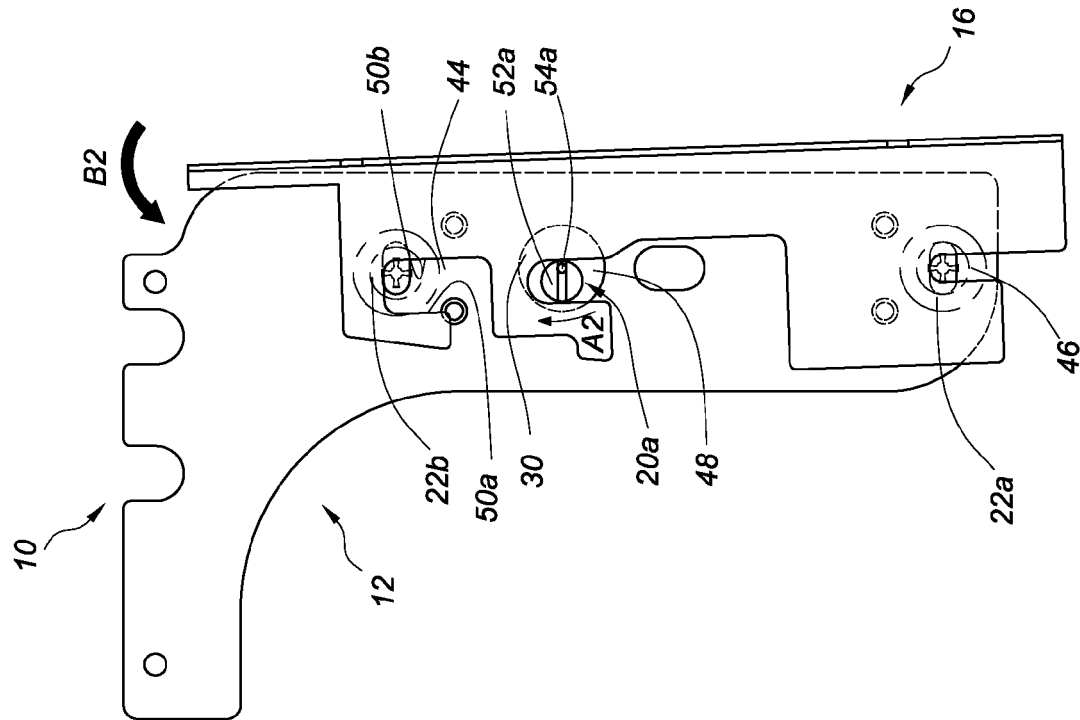


FIG. 5b

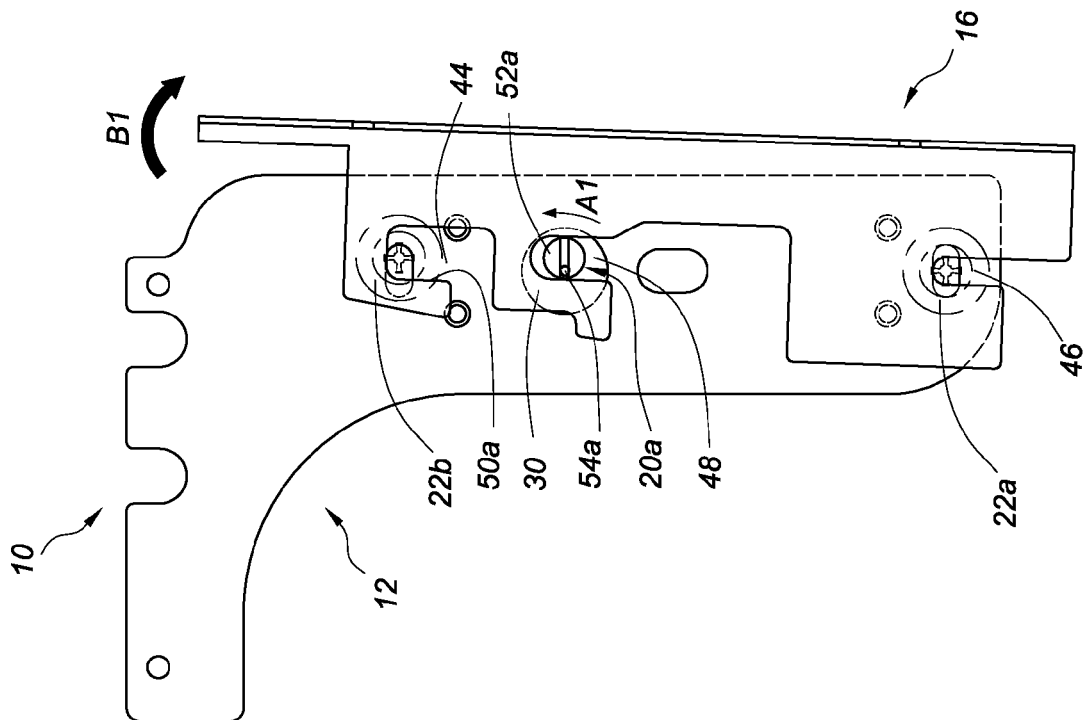
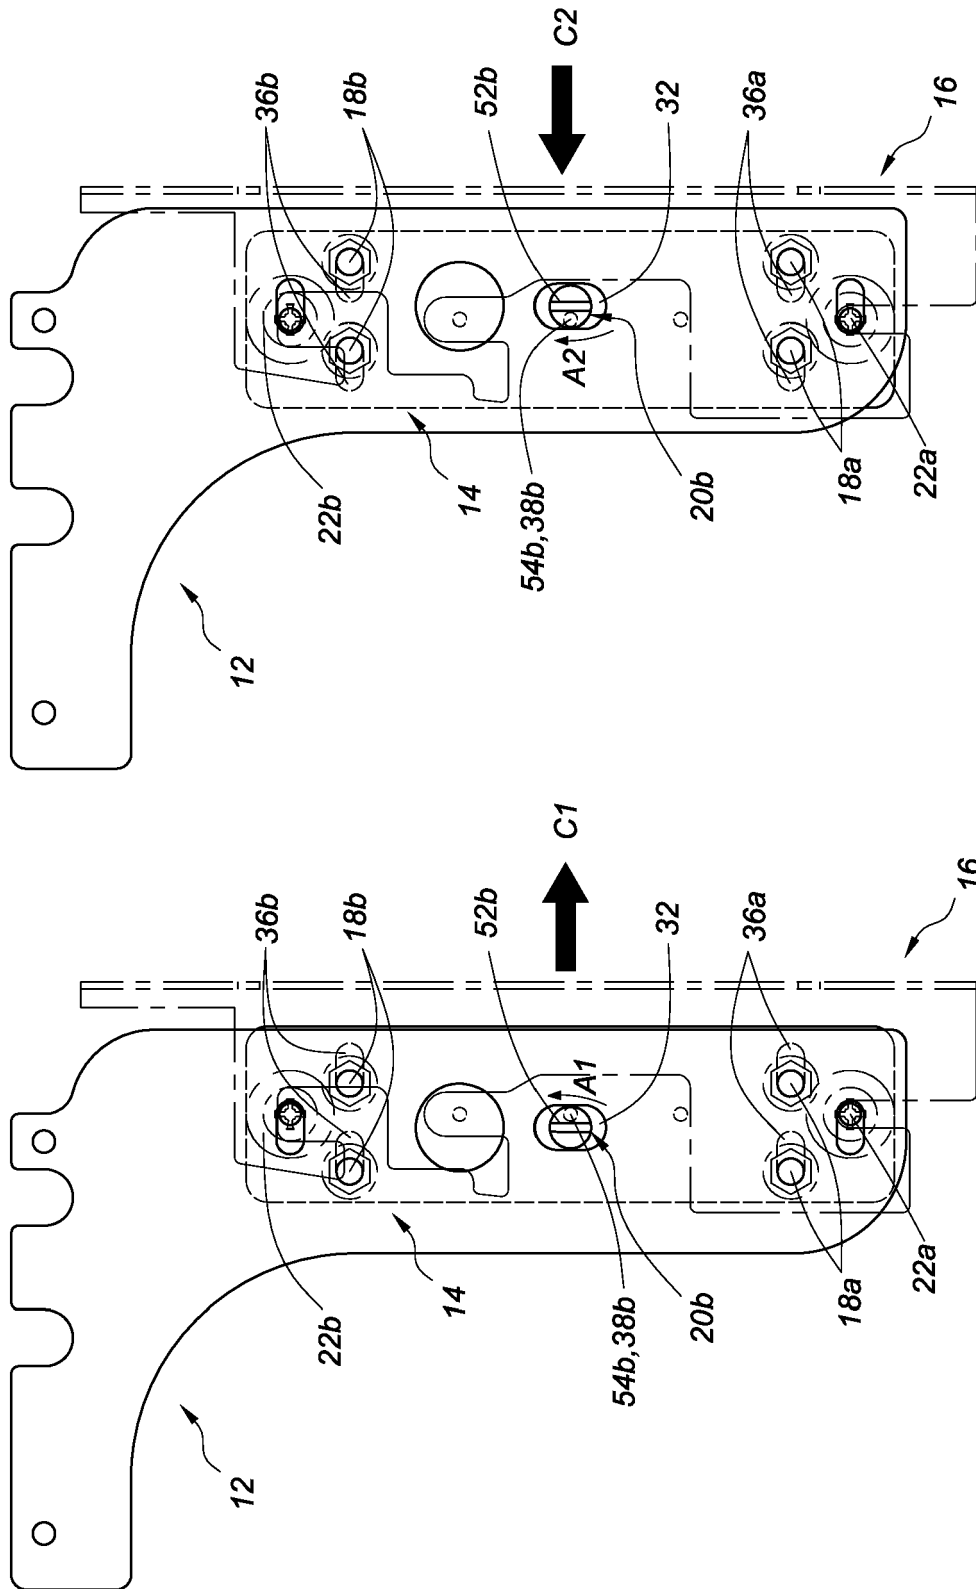


FIG. 5a



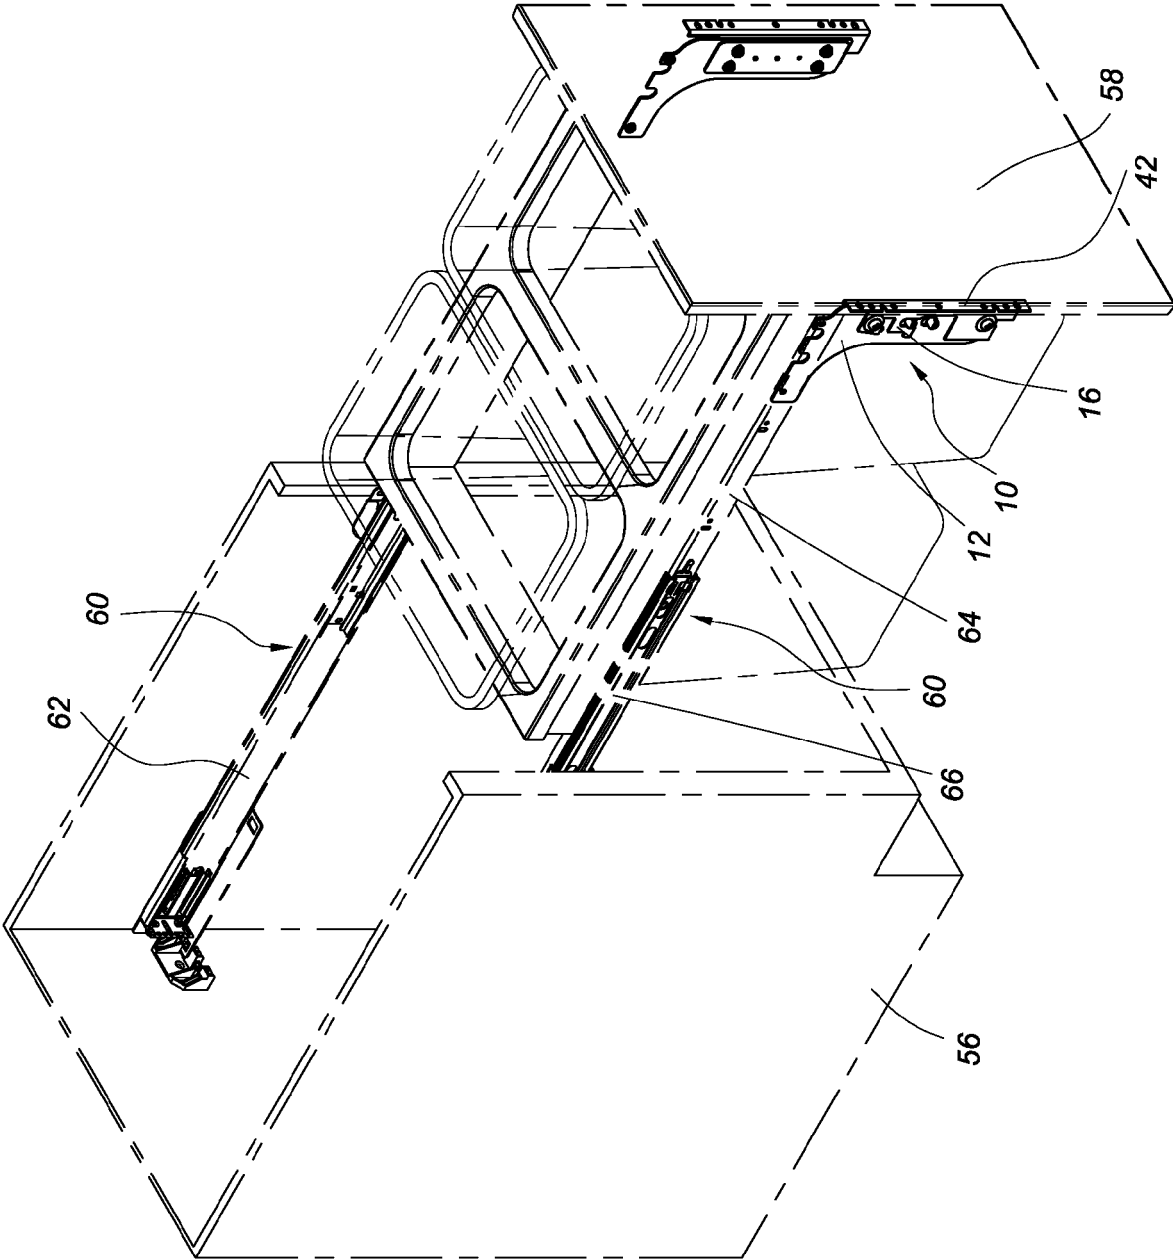


FIG. 7

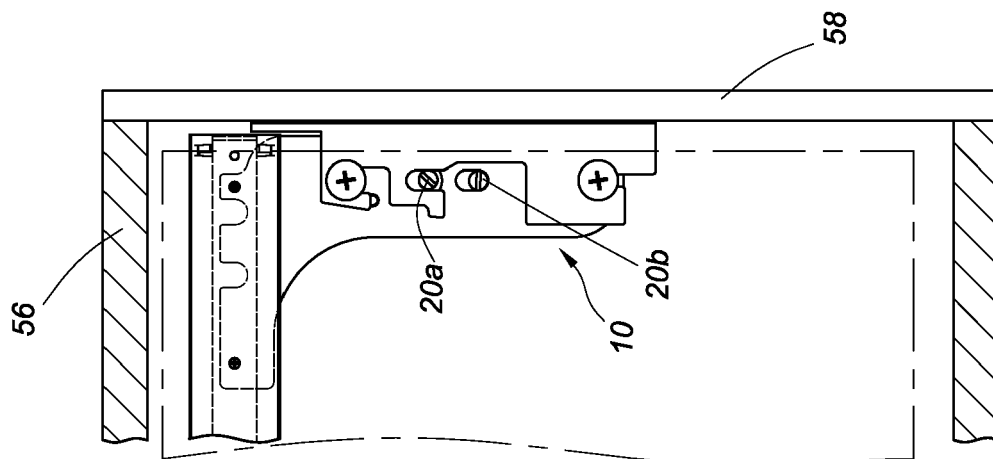


FIG. 8a

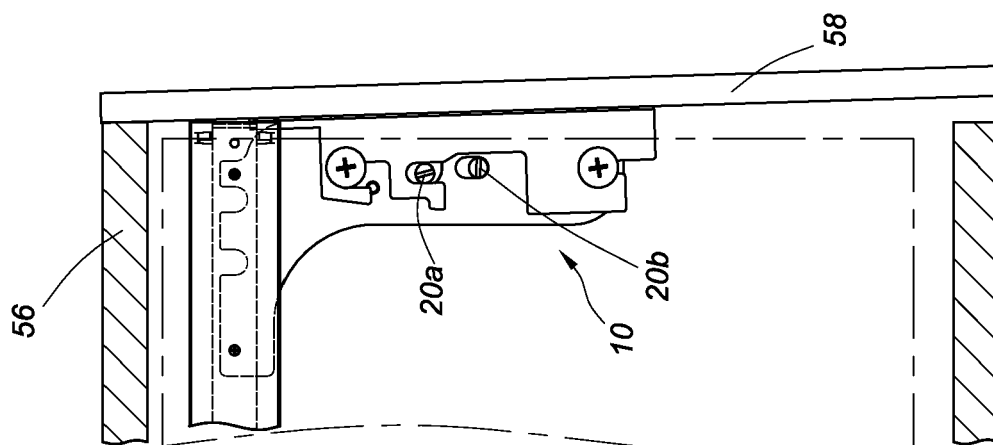


FIG. 8b

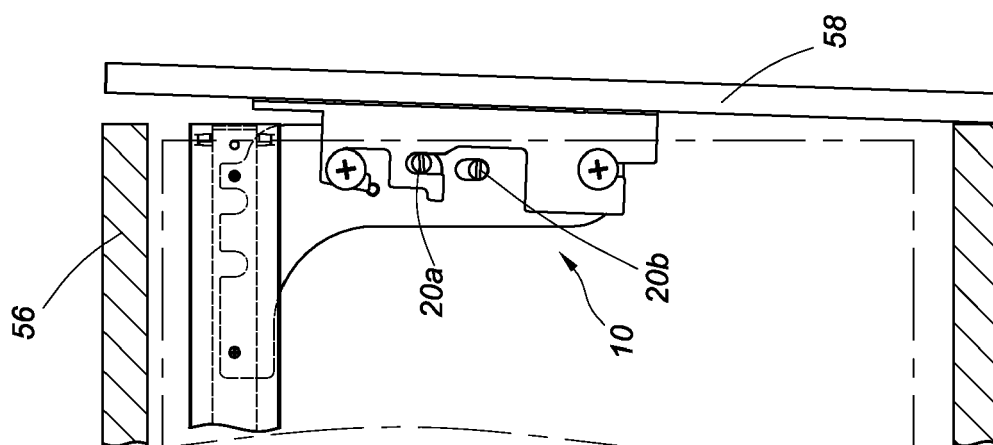


FIG. 8c



EUROPEAN SEARCH REPORT

Application Number
EP 14 16 4165

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	WO 2012/068599 A1 (BLUM GMBH JULIUS [AT]; HOLZAPFEL ANDREAS [AT]; HOFFMANN BENJAMIN [AT]) 31 May 2012 (2012-05-31)	1,3-6	INV. A47B88/00
A	* page 8, line 4 - line 31 *	2	
	* figures 7-9 *		

A	WO 2011/094774 A1 (BLUM GMBH JULIUS [AT]; GASSER INGO [AT]) 11 August 2011 (2011-08-11)	1	
	* page 7, paragraph 1 *		
	* figures 1,4 *		

A	DE 20 2011 050248 U1 (WESTERMANN KG [DE]) 27 August 2012 (2012-08-27)	1	
	* the whole document *		

A	US 4 705 328 A (ROECK ERICH [AT] ET AL) 10 November 1987 (1987-11-10)	1	
	* column 2, line 56 - column 3, line 19 *		
	* figures 1-3 *		

The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (IPC)
			A47B
Place of search		Date of completion of the search	Examiner
The Hague		29 September 2014	Bitton, Alexandre
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		& : member of the same patent family, corresponding document	

 4
EPO FORM 1503 03.92 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 14 16 4165

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

29-09-2014

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2012068599 A1	31-05-2012	AT 510779 A1	15-06-2012
		CN 103228177 A	31-07-2013
		EP 2642892 A1	02-10-2013
		JP 2014503237 A	13-02-2014
		US 2013257252 A1	03-10-2013
		WO 2012068599 A1	31-05-2012

WO 2011094774 A1	11-08-2011	AT 509411 A1	15-08-2011
		AU 2011213518 A1	30-08-2012
		CN 102834033 A	19-12-2012
		EP 2531065 A1	12-12-2012
		JP 2013518622 A	23-05-2013
		RU 2012137214 A	10-03-2014
		TW 201138677 A	16-11-2011
		US 2012286116 A1	15-11-2012
		WO 2011094774 A1	11-08-2011

DE 202011050248 U1	27-08-2012	DE 202011050248 U1	27-08-2012
		EP 2526820 A1	28-11-2012

US 4705328 A	10-11-1987	AT 391406 B	10-10-1990
		CA 1277699 C	11-12-1990
		DE 3620450 A1	08-01-1987
		IT 1192063 B	31-03-1988
		US 4705328 A	10-11-1987

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 6390576 B1, Walburn [0004]