

(19)



(11)

EP 2 931 930 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

09.01.2019 Bulletin 2019/02

(51) Int Cl.:

C22C 14/00 (2006.01)

C22F 1/18 (2006.01)

(86) International application number:

PCT/US2013/071801

(21) Application number: **13812249.4**

(22) Date of filing: **26.11.2013**

(87) International publication number:

WO 2014/093009 (19.06.2014 Gazette 2014/25)

(54) METHODS FOR PROCESSING TITANIUM ALLOYS

VERFAHREN ZUR VERARBEITUNG VON TITANLEGIERUNGEN

PROCÉDÉS DE TRAITEMENT D'ALLIAGES DE TITANE

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(56) References cited:

WO-A1-98/17836

US-A1- 2005 145 310

US-A1- 2012 060 981

(30) Priority: **14.12.2012 US 201213714465**

(43) Date of publication of application:

21.10.2015 Bulletin 2015/43

(73) Proprietor: **ATI Properties LLC**

Albany OR 97321 (US)

(72) Inventors:

- **BRYAN, David J.**
Indian Trail, North Carolina 28079 (US)
- **MANTIONE, John V.**
Indian Trail, North Carolina 28079 (US)
- **THOMAS, Jean-Philippe**
Monroe
North Carolina 28110 (US)

(74) Representative: **Potter Clarkson LLP**

**The Belgrave Centre
Talbot Street
Nottingham NG1 5GG (GB)**

- **RENATIMAYEV: "principles of fabrication of Bulk Ultrafine-grained and nanostructured materials by multiple isothermal forging", MATERIALS SCIENCE FORUM, TRANS TECH PUBLICATIONS LTD- SWITZERLAND, CH, vol. 638-642, 1 January 2010 (2010-01-01), pages 1702-1707, XP009152758, ISSN: 0255-5476**
- **G.A. SALISHCHEV ET AL: "Effect of Deformation Conditions on Grain Size and Microstructure Homogeneity of [beta]-Rich Titanium Alloys", JOURNAL OF MATERIALS ENGINEERING AND PERFORMANCE, vol. 14, no. 6, 1 December 2005 (2005-12-01), pages 709-716, XP055008642, ISSN: 1059-9495, DOI: 10.1361/105994905X75493**
- **SALISHCHEV G A ET AL: "Characterisation of Submicron-grained Ti-6Al-4V sheets with enhanced superplastic properties", MATERIALS SCIENCE FORUM, TRANS TECH PUBLICATIONS LTD- SWITZERLAND, CH, vol. 447-448, 1 January 2004 (2004-01-01), pages 441-446, XP009152759, ISSN: 0255-5476**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 931 930 B1

Description

BACKGROUND OF THE TECHNOLOGY

FIELD OF THE TECHNOLOGY

[0001] The present disclosure relates to methods for processing titanium alloys.

DESCRIPTION OF THE BACKGROUND OF THE TECHNOLOGY

[0002] Methods for producing titanium and titanium alloys having coarse grain (CG), fine grain (FG), very fine grain (VFG), or ultrafine grain (UFG) microstructure involve the use of multiple reheats and forging steps. Forging steps may include one or more upset forging steps in addition to draw forging on an open die press.

[0003] As used herein, when referring to the microstructure of titanium alloys: the term "coarse grain" refers to alpha grain sizes of 400 μm down to greater than about 14 μm ; the term "fine grain" refers to alpha grain sizes in the range of 14 μm down to greater than 10 μm ; the term "very fine grain" refers to alpha grain sizes of 10 μm down to greater than 4.0 μm ; and the term "ultrafine grain" refers to alpha grain sizes of 4.0 μm or less.

[0004] Known commercial methods of forging titanium and titanium alloys to produce coarse grain or fine grain microstructures employ strain rates of 0.03 s^{-1} to 0.10 s^{-1} using multiple reheats and forging steps.

[0005] Known methods intended for the manufacture of fine grain, very fine grain, or ultrafine grain microstructures apply a multi-axis forging (MAF) process at an ultra-slow strain rate of 0.001 s^{-1} or slower (see, for example, G. Salishchev, et. al., Materials Science Forum, Vol. 584-586, pp. 783-788 (2008)). The generic MAF process is described in, for example, C. Desrayaud, et. al, Journal of Materials Processing Technology, 172, pp. 152-156 (2006).

[0006] The key to grain refinement in the ultra-slow strain rate MAF process is the ability to continually operate in a regime of dynamic recrystallization that is a result of the ultra-slow strain rates used, *i.e.*, 0.001 s^{-1} or slower. During dynamic recrystallization, grains simultaneously nucleate, grow, and accumulate dislocations. The generation of dislocations within the newly nucleated grains continually reduces the driving force for grain growth, and grain nucleation is energetically favorable. The ultra-slow strain rate MAF process uses dynamic recrystallization to continually recrystallize grains during the forging process.

[0007] Relatively uniform cubes of ultrafine grain Ti-6-4 alloy (UNS R56400) can be produced using the ultra-slow strain rate MAF process, but the cumulative time taken to perform the MAF steps can be excessive in a commercial setting. In addition, conventional large scale, commercially available open die press forging equipment may not have the capability to achieve the ultra-slow strain rates required in such embodiments and, therefore, custom forging equipment may be required for carrying out production-scale ultra-slow strain rate MAF.

[0008] Accordingly, it would be advantageous to develop a process for producing titanium alloys having coarse, fine, very fine, or ultrafine grain microstructure that does not require multiple reheats, accommodates higher strain rates, reduces the time necessary for processing, and/or eliminates the need for custom forging equipment.

SUMMARY

[0009] The invention provides a method of refining the grain size of a workpiece comprising a titanium alloy selected from Ti-6Al-2Sn-4Zr-6Mo alloy (UNS R56260), Ti-6Al-2Sn-4Zr-2Mo-0.08Si alloy (UNS R54620), Ti-4Al-2.5V alloy (UNS R54250), Ti-6Al-7Nb alloy (UNS R56700), and Ti-6Al-6V-2Sn alloy (UNS R56620), in accordance with claim 1 or claim 2 of the appended claims.

[0010] According to the present disclosure, a method of refining the grain size of a workpiece comprising a titanium alloy comprises beta annealing the workpiece. After beta annealing, the workpiece is cooled to a temperature below the beta transus temperature of the titanium alloy. The workpiece is then multi-axis forged. Multi-axis forging comprises: press forging the workpiece at a workpiece forging temperature in a workpiece forging temperature range in the direction of a first orthogonal axis of the workpiece with a strain rate sufficient to adiabatically heat an internal region of the workpiece; press forging the workpiece at a workpiece forging temperature in the workpiece forging temperature range in the direction of a second orthogonal axis of the workpiece with a strain rate that is sufficient to adiabatically heat the internal region of the workpiece; and press forging the workpiece at a workpiece forging temperature in the workpiece forging temperature range in the direction of a third orthogonal axis of the workpiece with a strain rate that is sufficient to adiabatically heat the internal region of the workpiece. Optionally, intermediate to successive press forging steps, the adiabatically heated internal region of the workpiece is allowed to cool to a temperature at or near the workpiece forging temperature in the workpiece forging temperature range, and an outer surface region of the workpiece is heated to a temperature at or near the workpiece forging temperature in the workpiece forging temperature range. At least one of the press forging steps is repeated until a total strain of at least 1.0 up to less than 3.5 is achieved in at least a region

of the workpiece. In a non-limiting embodiment, a strain rate used during press forging is in the range of 0.2 s^{-1} to 0.8 s^{-1} .

[0011] After beta annealing, the workpiece is cooled to a temperature below the beta transus temperature of the titanium alloy. The workpiece is then multi-axis forged using a sequence comprising the following forging steps.

[0012] The workpiece is press forged at a workpiece forging temperature in a workpiece forging temperature range in the direction of a first orthogonal A-axis of the workpiece to a major reduction spacer height with a strain rate that is sufficient to adiabatically heat an internal region of the workpiece. As used herein, a major reduction spacer height is a distance equivalent to the final forged dimension desired for each orthogonal axis of the workpiece.

[0013] The workpiece is press forged at the workpiece forging temperature in the workpiece forging temperature range in the direction of a second orthogonal B-axis of the workpiece in a first blocking reduction to a first blocking reduction spacer height. The first blocking reduction is applied to bring the workpiece back to substantially the pre-forging shape of the workpiece. While the strain rate of the first blocking reduction may be sufficient to adiabatically heat an internal region of the workpiece, in a non-limiting embodiment, adiabatic heating during the first blocking reduction may not occur because the total strain incurred in the first blocking reduction may not be sufficient to significantly adiabatically heat the workpiece. The first blocking reduction spacer height is larger than the major reduction spacer height.

[0014] The workpiece is press forged at the workpiece forging temperature in the workpiece forging temperature range in the direction of a third orthogonal C-axis of the workpiece in a second blocking reduction to a second blocking reduction spacer height. The second blocking reduction is applied to bring the workpiece back to substantially the pre-forging shape of the workpiece. While the strain rate of the second blocking reduction may be sufficient to adiabatically heat an internal region of the workpiece, in a non-limiting embodiment, adiabatic heating during the second blocking reduction may not occur because the total strain incurred in the second blocking reduction may not be sufficient to significantly adiabatically heat the workpiece. The second blocking reduction spacer height is greater than the major reduction spacer height.

[0015] The workpiece is press forged at a workpiece forging temperature in the workpiece forging temperature range in the direction of the second orthogonal B-axis of the workpiece to the major reduction spacer height with a strain rate that is sufficient to adiabatically heat an internal region of the workpiece.

[0016] The workpiece is press forged at the workpiece forging temperature in the workpiece forging temperature range in the direction of the third orthogonal C-axis of the workpiece in a first blocking reduction to the first blocking reduction spacer height. The first blocking reduction is applied to bring the workpiece back to substantially the pre-forging shape of the workpiece. While the strain rate of the first blocking reduction may be sufficient to adiabatically heat an internal region of the workpiece, in a non-limiting embodiment, adiabatic heating during the first blocking reduction may not occur because the total strain incurred in the first blocking reduction may not be sufficient to significantly adiabatically heat the workpiece. The first blocking reduction spacer height is larger than the major reduction spacer height.

[0017] The workpiece is press forged at the workpiece forging temperature in the workpiece forging temperature range in the direction of the first orthogonal A-axis of the workpiece in a second blocking reduction to the second blocking reduction spacer height. The second blocking reduction is applied to bring the workpiece back to substantially the pre-forging shape of the workpiece. While the strain rate of the second blocking reduction may be sufficient to adiabatically heat an internal region of the workpiece, in a non-limiting embodiment, adiabatic heating during the second blocking reduction may not occur because the total strain incurred in the second blocking reduction may not be sufficient to significantly adiabatically heat the workpiece. The second blocking reduction spacer height is larger than the major reduction spacer height.

[0018] The workpiece is press forged at the workpiece forging temperature in the workpiece forging temperature range in the direction of the third orthogonal C-axis of the workpiece in a major reduction to the major reduction spacer height with a strain rate that is sufficient to adiabatically heat an internal region of the workpiece.

[0019] The workpiece is press forged at the workpiece forging temperature in the workpiece forging temperature range in the direction of the first orthogonal A-axis of the workpiece in a first blocking reduction to the first blocking reduction spacer height. The first blocking reduction is applied to bring the workpiece back to substantially the pre-forging shape of the workpiece. While the strain rate of the first blocking reduction may be sufficient to adiabatically heat an internal region of the workpiece, in a non-limiting embodiment, adiabatic heating during the first blocking reduction may not occur because the total strain incurred in the first blocking reduction may not be sufficient to significantly adiabatically heat the workpiece. The first blocking reduction spacer height is larger than the major reduction spacer height.

[0020] The workpiece is press forged at the workpiece forging temperature in the workpiece forging temperature range in the direction of the second orthogonal B-axis of the workpiece in a second blocking reduction to the second blocking reduction spacer height. The second blocking reduction is applied to bring the workpiece back to substantially the pre-forging shape of the workpiece. While the strain rate of the second blocking reduction may be sufficient to adiabatically heat an internal region of the workpiece, in a non-limiting embodiment, adiabatic heating during the second blocking reduction may not occur because the total strain incurred in the second blocking reduction may not be sufficient to significantly adiabatically heat the workpiece. The second blocking reduction spacer height is larger than the major reduction spacer height.

[0021] Optionally, intermediate successive press forging steps of the foregoing method embodiment, the adiabatically heated internal region of the workpiece is allowed to cool to about the workpiece forging temperature in the workpiece forging temperature range, and the outer surface region of the workpiece is heated to about the workpiece forging temperature in the workpiece forging temperature range.

[0022] At least one of the press forging steps is repeated until a total strain of at least 1.0 and up to less than 3.5 is achieved in at least a region of the workpiece. In a non-limiting embodiment, a strain rate used during press forging is in the range of 0.2 s^{-1} to 0.8 s^{-1} .

BRIEF DESCRIPTION OF THE DRAWINGS

[0023] The features and advantages of apparatus and methods described herein may be better understood by reference to the accompanying drawings in which:

FIG. 1 is graph plotting a calculated prediction of the volume fraction of equilibrium alpha phase present in Ti-6-4, Ti-6-2-4-6, and Ti-6-2-4-2 alloys as a function of temperature;

FIG. 2 is a flow chart listing steps of a non-limiting embodiment of a method for processing titanium alloys according to the present disclosure;

FIG. 3 is a schematic representation of aspects of a non-limiting embodiment of a high strain rate multi-axis forging method using thermal management for processing titanium alloys for the refinement of grain sizes, wherein FIGS. 2(a), 2(c), and 2(e) represent non-limiting press forging steps, and FIGS 2(b), 2(d), and 2(f) represent optional non-limiting cooling and heating steps according to non-limiting aspects of the present disclosure;

FIG. 4 is a schematic representation of aspects of a prior art slow strain rate multi-axis forging technique known to be used to refine grain size of small scale samples;

FIG. 5 is a flow chart listing steps of a non-limiting embodiment of a method for processing titanium alloys according to the present disclosure including major orthogonal reductions to the final desired dimension of the workpiece and first and second blocking reductions;

FIG. 6 is a temperature-time thermomechanical process chart for a non-limiting embodiment of a high strain rate multi-axis forging method according to the present disclosure;

FIG. 7 is a temperature-time thermomechanical process chart for a non-limiting embodiment of a multi-temperature high strain rate multi-axis forging method according to the present disclosure;

FIG. 8 is a temperature-time thermomechanical process chart for a non-limiting embodiment of a through beta transus high strain rate multi-axis forging method according to the present disclosure;

FIG. 9 is a schematic representation of aspects of a non-limiting embodiment of a multiple upset and draw method for grain size refinement according to the present disclosure;

FIG. 10 is a flow chart listing steps of a non-limiting embodiment of a method for multiple upset and draw processing titanium alloys to refine grain size according to the present disclosure;

FIG. 11(a) is a micrograph of the microstructure of a commercially forged and processed Ti-6-2-4-2 alloy;

FIG. 11(b) is a micrograph of the microstructure of a Ti-6-2-4-2 alloy processed by the thermally managed high strain MAF embodiment described in Example 1 of the present disclosure;

FIG. 12(a) is a micrograph that depicts the microstructure of a commercially forged and processed Ti-6-2-4-6 alloy;

FIG. 12(b) is a micrograph of the microstructure of a Ti-6-2-4-6 alloy processed by the thermally managed high strain MAF embodiment described in Example 2 of the present disclosure;

FIG. 13 is a micrograph of the microstructure of a Ti-6-2-4-6 alloy processed by the thermally managed high strain MAF embodiment described in Example 3 of the present disclosure;

FIG. 14 is a micrograph of the microstructure of a Ti-6-2-4-2 alloy processed by the thermally managed high strain MAF embodiment described in Example 4 of the present disclosure, which applies equal strain on each axis;

FIG. 15 is a micrograph of the microstructure of a Ti-6-2-4-2 alloy processed by the thermally managed high strain MAF embodiment, described in Example 5 of the present disclosure, wherein blocking reductions are used to minimize bulging of the workpiece that occurs after each major reduction;

FIG. 16(a) is a micrograph of the microstructure of the center region of a Ti-6-2-4-2 alloy processed by the thermally managed high strain MAF embodiment utilizing through beta transus MAF that is described in Example 6 of the present disclosure; and

FIG. 16(b) is a micrograph of the microstructure of the surface region of a Ti-6-2-4-2 alloy processed by the thermally managed high strain MAF embodiment utilizing through beta transus MAF that is described in Example 6 of the present disclosure.

[0024] The reader will appreciate the foregoing details, as well as others, upon considering the following detailed description of certain non-limiting embodiments according to the present disclosure.

DETAILED DESCRIPTION

[0025] The grammatical articles "one", "a", "an", and "the", as used herein, are intended to include "at least one" or "one or more", unless otherwise indicated. Thus, the articles are used herein to refer to one or more than one (i.e., to at least one) of the grammatical objects of the article. By way of example, "a component" means one or more components, and thus, possibly, more than one component is contemplated and may be employed or used in an implementation of the described embodiments.

[0026] The present disclosure includes descriptions of various embodiments. It is to be understood that all embodiments described herein are exemplary, illustrative, and non-limiting. Thus, the invention is not limited by the description of the various exemplary, illustrative, and non-limiting embodiments. Rather, the invention is defined solely by the claims.

[0027] An aspect of the present disclosure is directed to a multi-axis forging process for titanium alloys that includes the application of high strain rates during the forging steps to refine grain size. These method embodiments are generally referred to in the present disclosure as "high strain rate multi-axis forging" or "high strain rate MAF". As used herein, the terms "reduction" and "hit" interchangeably refer to an individual press forging step, wherein a workpiece is forged between die surfaces. As used herein, the phrase "spacer height" refers to the dimension or thickness of a workpiece measured along one orthogonal axis after a reduction along that axis. For example, after a press forging reduction along a particular axis to a spacer height of 10.2cm (4.0inches), the thickness of the press forged workpiece measured along that axis will be about 10.2cm (4.0 inches). The concept and use of spacer heights are well known to those having ordinary skill in the field of press forging and need not be further discussed herein.

[0028] It was previously determined that for alloys such as Ti-6Al-4V alloy (ASTM Grade 5; UNS R56400), which also may be referred to as "Ti-6-4" alloy, high strain rate multi-axis forging, wherein the workpiece was forged at least to a total strain of 3.5, could be used to prepare ultrafine grain billets. This process is disclosed in U.S. Patent Application Serial No. 12/882,538, filed September 15, 2010, entitled "Processing Routes for Titanium and Titanium Alloys" ("the '538 Application"),.

Imparting strain of at least 3.5 may require significant processing time and complexity, which adds cost and increases the opportunity for unanticipated problems. The present disclosure discloses a high strain rate multi-axis forging process that can provide ultrafine grain structures using total strain in the range of from at least 1.0 up to less than 3.5.

[0029] Methods according to the present disclosure involve the application of multi-axis forging and its derivatives, such as the multiple upset and draw (MUD) process disclosed in the '538 Application, to titanium alloys exhibiting slower effective alpha precipitation and growth kinetics than Ti-6-4 alloy. In particular, Ti-6Al-2Sn-4Zr-2Mo-0.08Si alloy (UNS R54620), which also may be referred to as "Ti-6-2-4-2" alloy, has slower effective alpha kinetics than Ti-6-4 alloy as a result of additional grain pinning elements such as Si. Also, Ti-6Al-2Sn-4Zr-6Mo alloy (UNS R56260), which also may be referred to as "Ti-6-2-4-6" alloy, has slower effective alpha kinetics than Ti-6-4 alloy as a result of increased beta stabilizing content. It is recognized that in terms of alloying elements, the growth and precipitation of the alpha phase is a function of the diffusion rate of the alloying element in the titanium-base alloy. Molybdenum is known to have one of the slower diffusion rates of all titanium alloying additions. In addition, beta stabilizers, such as molybdenum, lower the beta transus temperature (T_β) of the alloy, wherein the lower T_β results in general slower diffusion of atoms in the alloy at the processing temperature for the alloy. A result of the relatively slow effective alpha precipitation and growth kinetics of the Ti-6-2-4-2 and Ti-6-2-4-6 alloys is that the beta heat treatment that is used prior to MAF according to embodiments of the present disclosure produces a fine and stable alpha lath size when compared to the effect of such processing on

Ti-6-4 alloy. In addition, after beta heat treating and cooling, the Ti-6-2-4-2 and Ti-6-2-4-6 alloys possess a fine beta grain structure that limits the kinetics of alpha grain growth.

[0030] The effective kinetics of alpha growth can be evaluated by identifying the slowest diffusing species at a temperature immediately below the beta transus. This approach has been theoretically outlined and experimentally verified in literature (see Semiatin et al., Metallurgical and Materials Transactions A: Physical Metallurgy and Materials Science 38 (4), 2007, pp. 910-921). In titanium and titanium alloys, diffusivity data for all of the potential alloying elements is not readily available; however, literature surveys such as that in Titanium (Second Edition, 2007), by Lutjering and Williams, generally agree to the following relative ranking for some common alloying elements:

$$D_{Mo} < D_{Nb} < D_{Al} \sim D_{V} \sim D_{Sn} \sim D_{Zr} \sim D_{Hf} < D_{Cr} \sim D_{Ni} \sim D_{Co} \sim D_{Mn} \sim D_{Fe}$$

[0031] Therefore, alloys such as Ti-6-2-4-6 alloy and Ti-6-2-4-2 alloy, which contain molybdenum, show the desirable, slow alpha kinetics required to achieve ultrafine grain microstructures at comparatively lower strain than Ti-6-4 alloy where the kinetics are controlled by the diffusion of aluminum. Based on periodic table group relationships, one could also reasonably postulate that tantalum and tungsten belong to the group of slow diffusers.

[0032] In addition to the inclusion of slow diffusing elements to reduce the effective kinetics of the alpha phase, reducing the beta transus temperature in alloys controlled by aluminum diffusion will have a similar effect. A beta transus temperature reduction of 100°C will reduce the diffusivity of aluminum in the beta phase by approximately an order of magnitude at the beta transus temperature. The alpha kinetics in alloys such as ATI 425® alloy (Ti-4Al-2.5V; UNS 54250) and Ti-6-6-2 alloy (Ti-6Al-6V-2Sn; UNS 56620) are likely controlled by aluminum diffusion; however, the lower beta transus temperatures of these alloys relative to Ti-6Al-4V alloy also result in the desirable, slower effective alpha kinetics. Ti-6Al-7Nb alloy (UNS R56700), normally a biomedical version of Ti-6Al-4V alloy, may also exhibit slower effective alpha kinetics because of the niobium content.

[0033] It was initially expected that alpha+beta alloys other than Ti-6-4 alloy could be processed under conditions similar to those disclosed in the '538 Application at temperatures that would result in similar volume fractions of the alpha phase. For example, according to predictions using PANDAT software, a commercially available computational tool available from CompuTherm, LLC, Madison, Wisconsin, USA, it was predicted that Ti-6-4 alloy at 1500°F (815.6°C) should have approximately the same volume fraction of the alpha phase as both Ti-6-2-4-2 alloy at 1600°F (871.1°C) and Ti-6-2-4-6 alloy at 1200°F (648.9°C) See FIG. 1. However, both Ti-6-2-4-2 and Ti-6-2-4-6 alloys cracked severely when processed in the manner in which Ti-6-4 alloy was processed in the '538 Application using temperatures that it was predicted would produce a similar volume fraction of the alpha phase. Much higher temperatures, resulting in lower equilibrium volume fractions of alpha, and/or significantly reduced strain per pass were required to successfully process the Ti-6-2-4-2 and Ti-6-2-4-6 alloys.

[0034] Variations to the high strain rate MAF process, including alpha/beta forging temperature(s), strain rate, strain per hit, hold time between hits, number and duration of reheats, and intermediate heat treatments can each affect the resultant microstructure and the presence and extent of cracking. Lower total strains were initially attempted in order to inhibit cracking, without any expectation that ultrafine grain structures would result. However, when examined, the samples processed using lower total strains showed significant promise for producing ultrafine grain structures. This result was entirely unanticipated.

[0035] The flow chart in FIG. 2 and the schematic representation in FIG. 3 illustrate aspects of a non-limiting embodiment according to the present disclosure of a method (16) of using a high strain rate multi-axis forging (MAF) to refine grain size of titanium alloys. Prior to multi-axis forging (26), a titanium alloy workpiece 24 is beta annealed (18) and cooled (20). Air cooling is possible with smaller workpieces, such as, for example, 4 inch cubes; however, water or liquid cooling also can be used. Faster cooling rates result in finer lath and alpha grain sizes. Beta annealing (18) comprises heating the workpiece 24 above the beta transus temperature of the titanium alloy of the workpiece 24 and holding for a time sufficient to form all beta phase in the workpiece 24. Beta annealing (18) is a process well-known to a person of ordinary skill and, therefore, is not described in detail herein. A non-limiting embodiment of beta annealing may include heating the workpiece 24 to a beta annealing temperature that is about 50°F (27.8°C) above the beta transus temperature of the titanium alloy and holding the workpiece 24 at the temperature for about 1 hour.

[0036] After beta annealing (18), the workpiece 24 is cooled (20) to a temperature below the beta transus temperature of the titanium alloy of the workpiece 24. In a non-limiting embodiment of the present disclosure, the workpiece is cooled to ambient temperature. As used herein, "ambient temperature" refers to the temperature of the surroundings. For example, in a non-limiting commercial production scenario, "ambient temperature" refers to the temperature of the factory surroundings. In a non-limiting embodiment, cooling (20) can include quenching. Quenching includes immersing the workpiece 24 in water, oil, or another suitable liquid and is a process understood by a person skilled in the metallurgical arts. In other non-limiting embodiments, particularly for smaller sized workpieces, cooling (20) may comprise air cooling. Any method of cooling a titanium alloy workpiece 24 known to a person skilled in the art now or hereafter is within the scope of the present disclosure. In addition, in a certain non-limiting embodiment, cooling (20) comprises cooling directly to a workpiece forging temperature in the workpiece forging temperature range for subsequent high strain rate multi-axis forging.

[0037] After cooling (20) the workpiece, the workpiece is subjected to high strain rate multi-axis forging (26). As is understood to those having ordinary skill in the art, multi-axis forging ("MAF"), which also may be referred to as "A-B-C" forging, is a form of severe plastic deformation. High strain rate multi-axis forging (26), according to a non-limiting embodiment of the present disclosure, includes heating (step 22 in FIG. 2) a workpiece 24 comprising a titanium alloy to a workpiece forging temperature in a workpiece forging temperature range that is within the alpha+beta phase field of the titanium alloy, followed by MAF (26) using a high strain rate. It is apparent that in an embodiment in which the cooling step (20) comprises cooling to a temperature in the workpiece forging temperature range, the heating step (22) is not necessary.

[0038] A high strain rate is used in the high strain rate MAF to adiabatically heat an internal region of the workpiece. However, in non-limiting embodiments according to the present disclosure, in at least the last cycle of A-B-C hits of high strain rate MAF in the cycle, the temperature of the internal region of the titanium alloy workpiece 24 should not exceed the beta transus temperature (T_β) of the titanium alloy workpiece. Therefore, in such non-limiting embodiments the workpiece forging temperature for at least the final cycle of A-B-C hits, or at least the last hit of the cycle, of high strain rate MAF should be chosen to ensure that during the high strain rate MAF the temperature of the internal region of the workpiece does not equal or exceed the beta transus temperature of the alloy. For example, in a non-limiting embodiment according to the present disclosure, the temperature of the internal region of the workpiece does not exceed 20°F (11.1°C) below the beta transus temperature of the alloy, i.e., $T_\beta - 20^\circ\text{F}$ ($T_\beta - 11.1^\circ\text{C}$), during at least the final high strain rate cycle of A-B-C hits in the MAF or during at least the last press forging hit when a total strain of at least 1.0, or in a range of at least 1.0 up to less than 3.5, is achieved in at least a region of the workpiece.

[0039] In a non-limiting embodiment of high strain rate MAF according to the present disclosure, a workpiece forging temperature comprises a temperature within a workpiece forging temperature range. In a non-limiting embodiment, the workpiece forging temperature range is 100°F (55.6°C) below the beta transus temperature (T_β) of the titanium alloy of the workpiece to 700°F (388.9°C) below the beta transus temperature of the titanium alloy. In still another non-limiting embodiment, the workpiece forging temperature range is 300°F (166.7°C) below the beta transus temperature of the titanium alloy to 625°F (347°C) below the beta transus temperature of the titanium alloy. In a non-limiting embodiment, the low end of a workpiece forging temperature range is a temperature in the alpha+beta phase field wherein damage, such as, for example, crack formation and gouging, does not occur to the surface of the workpiece during the forging hit.

[0040] In a non-limiting method embodiment shown in FIG. 2 applied to a Ti-6-2-4-2 alloy, which has a beta transus temperature (T_β) of about 1820°F (996°C), the workpiece forging temperature range may be from 1120°F (604.4°C) to 1720°F (937.8°C), or in another embodiment may be from 1195°F (646.1 °C) to 1520°F (826.7°C). In a non-limiting method embodiment shown in FIG. 2 applied to a Ti-6-2-4-6 alloy, which has a beta transus temperature (T_β) of about 1720°F (940°C), the workpiece forging temperature range may be from 1020°F (548.9°C) to 1620°F (882.2°C), or in another embodiment may be from 1095°F (590.6°C) to 1420°F (771.1°C). In still another non-limiting embodiment, when applying the embodiment shown in FIG. 2 to ATI 425® alloy (UNS R54250), which also may be referred to as "Ti-4Al-2.5V" alloy, and which has a beta transus temperature (T_β) of about 1780°F (971.1°C), the workpiece forging temperature range may be from 1080°F (582.2°C) to 1680°F (915.6°C), or in another embodiment may be from 1155°F (623.9°C) to 1480°F (804.4°C). In still another non-limiting embodiment, when applying the embodiment of the present disclosure of FIG. 2 to a Ti-6Al-6V-2Sn alloy (UNS 56620), which also may be referred to as "Ti-6-6-2" alloy, and which has a beta transus temperature (T_β) of about 1735°F (946.1°C), the workpiece forging temperature range may be from 1035°F (527.2°C) to 1635°F (890.6°C), or in another embodiment may be from 1115°F (601.7°C) to 1435°F (779.4°C). The present disclosure involves the application of high strain rate multi-axis forging and its derivatives, such as the MUD method disclosed in the '538 Application, to titanium alloys that possess slower effective alpha precipitation and growth kinetics than Ti-6-4 alloy.

[0041] Referring again to FIGS. 2 and 3, when the titanium alloy workpiece 24 is at the workpiece forging temperature, the workpiece 24 is subjected to high strain rate MAF (26). In a non-limiting embodiment according to the present disclosure, MAF (26) comprises press forging (step 28, shown in FIG. 3(a)) the workpiece 24 at the workpiece forging temperature in the direction (A) of a first orthogonal axis 30 of the workpiece using a strain rate that is sufficient to adiabatically heat the workpiece, or at least adiabatically heat an internal region of the workpiece, and plastically deform the workpiece 24.

[0042] High strain rates and fast ram speeds are used to adiabatically heat the internal region of the workpiece in non-limiting embodiments of high strain rate MAF according to the present disclosure. In a non-limiting embodiment according to the present disclosure, the term "high strain rate" refers to a strain rate in the range of about 0.2 s⁻¹ to about 0.8 s⁻¹. In another non-limiting embodiment according to the present disclosure, the term "high strain rate" refers to a strain rate in the range of about 0.2 s⁻¹ to about 0.4 s⁻¹.

[0043] In a non-limiting embodiment according to the present disclosure using a high strain rate as defined hereinabove, an internal region of the titanium alloy workpiece may be adiabatically heated to about 200°F (111.1°C) above the workpiece forging temperature. In another non-limiting embodiment, during press forging an internal region is adiabatically heated to a temperature in the range of about 100°F (55.6°C) to about 300°F (166.7°C) above the workpiece forging

temperature. In still another non-limiting embodiment, during press forging an internal region is adiabatically heated to a temperature in the range of about 150°F (83.3°C) to about 250°F (138.9°C) above the workpiece forging temperature. As noted above, in non-limiting embodiments, no portion of the workpiece should be heated above the beta transus temperature of the titanium alloy during the last cycle of high strain rate A-B-C MAF hits, or during the last hit on an orthogonal axis.

[0044] In a non-limiting embodiment, during press forging (28), the workpiece 24 is plastically deformed to a reduction in height or another dimension that is in the range of 20% to 50%, *i.e.*, the dimension is reduced by a percentage within that range. In another non-limiting embodiment, during press forging (28), the workpiece 24 is plastically deformed to a reduction in height or another dimension in the range of 30% to 40%.

[0045] A known ultra-slow strain rate (0.001 s⁻¹ or slower) multi-axis forging process is depicted schematically in FIG. 4. Generally, an aspect of multi-axis forging is that after every three-stroke, (*i.e.*, "three-hit") cycle by the forging apparatus (which may be, for example, an open die forge), the shape and size of the workpiece approaches that of the workpiece just prior to the first hit of that three-hit cycle. For example, after a 5-inch sided cube-shaped workpiece is initially forged with a first "hit" in the direction of the "a" axis, rotated 90° and forged with a second hit in the direction of the orthogonal "b" axis, and then rotated 90° and forged with a third hit in the direction of the orthogonal "c" axis, the workpiece will resemble the starting cube and include approximately 5-inch sides. In other words, although the three-hit cycle has deformed the cube in three steps along the cube's three orthogonal axes, as a result of the repositioning of the workpiece between individual hits and selection of the reduction during each hit, the overall result of the three forging deformations is to return the cube to approximately its original shape and size.

[0046] In another non-limiting embodiment according to the present disclosure, a first press forging step (28), shown in FIG. 2(a), also referred to herein as the "first hit", may include press forging the workpiece on a top face down to a predetermined spacer height while the workpiece is at a temperature in the workpiece forging temperature range. As used herein the term "spacer height" refers to the dimension of the workpiece on the completion of a particular press forging reduction. For example, for a spacer height of 12.7cm (5 inches), the workpiece is forged to a dimension of 12.7cm (5 inches). In a specific non-limiting embodiment of the method of the present disclosure, a spacer height is, for example, 12.7cm (5 inches). In another non-limiting embodiment, a spacer height is 8.3cm (3.25 inches). Other spacer heights, such as, for example, less than 12.7cm (5 inches), about 10.2cm (4 inches), about 7.6cm (3 inches), greater than 12.7cm (5 inches), or 12.7cm (5 inches) up to 76.2cm (30 inches) are within the scope of embodiments herein, but should not be considered as limiting the scope of the present disclosure. Spacer heights are only limited by the capabilities of the forge and optionally, as will be seen herein, the capabilities of the thermal management system according to non-limiting embodiments of the present disclosure to maintain the workpiece at the workpiece forging temperature. Spacer heights of less than 7.6cm (3 inches) are also within the scope of embodiments disclosed herein, and such relatively small spacer heights are only limited by the desired characteristics of a finished product. The use of spacer heights of about 76.2cm (30 inches), for example, in methods according to the present disclosure allows for the production of billet-sized (*e.g.*, 76.2cm (30-inch) sided) cube-shaped titanium alloy forms having fine grain size, very fine grain size, or ultrafine grain size. Billet-sized cube-shaped forms of conventional alloys have been employed as workpieces that are forged into disk, ring, and case parts for aeronautical or land-based turbines, for example.

[0047] The predetermined spacer heights that should be employed in various non-limiting embodiments of methods according to the present disclosure may be determined by a person having ordinary skill in the art without undue experimentation on considering the present disclosure. Specific spacer heights may be determined by a person having ordinary skill without undue experimentation. Specific spacer heights are dependent upon a specific alloy's susceptibility to cracking during forging. Alloys that have a higher susceptibility to cracking will require larger spacer heights, *i.e.*, less deformation per hit to prevent cracking. The adiabatic heating limit must also be considered when choosing a spacer height because, at least in the last cycle of hits, the workpiece temperature should not surpass the T_m of the alloy. In addition, the forging press capability limit needs to be considered when selecting a spacer height. For example, during the pressing of a 10.2cm (4-inch) sided cubic workpiece the cross-sectional area increases during the pressing step. As such, the total load that is required to keep the workpiece deforming at the required strain rate increases. The load cannot increase beyond the capabilities of the forging press. Also, the workpiece geometry needs to be considered when selecting spacer heights. Large deformations may result in bulging of the workpiece. Too great a reduction could result in a relative flattening of the workpiece, so that the next forging hit in the direction of a different orthogonal axis could result in bending of the workpiece.

[0048] In certain non-limiting embodiments, the spacer heights used for each orthogonal axis hit are equivalent. In certain other non-limiting embodiments, the spacer heights used for each orthogonal axis hits are not equivalent. Non-limiting embodiments of high strain rate MAF using non-equivalent spacer heights for each orthogonal axis are presented below.

[0049] After press forging (28) the workpiece 24 in the direction of the first orthogonal axis 30, *i.e.*, in the A-direction shown in FIG. 2(a), a non-limiting embodiment of a method according to the present disclosure optionally further comprises a step of allowing (step 32) the temperature of the adiabatically heated internal region (not shown) of the workpiece to

cool to a temperature at or near the workpiece forging temperature in the workpiece forging temperature range, which is shown in FIG. 3(b). In various non-limiting embodiments, internal region cooling times, or "waiting" times, may range, for example, from 5 seconds to 120 seconds, from 10 seconds to 60 seconds, or from 5 seconds to 5 minutes. In various non-limiting embodiments according to the present disclosure, an "adiabatically heated internal region" of a workpiece, as used herein, refers to a region extending outwardly from a center of the workpiece and having a volume of at least about 50%, or at least about 60%, or at least about 70%, or at least about 80% of the workpiece. It will be recognized by a person skilled in the art that the time required to cool the internal region of a workpiece to a temperature at or near the workpiece forging temperature will depend on the size, shape, and composition of the workpiece 24, as well as on conditions of the atmosphere surrounding the workpiece 24.

[0050] During the internal region cooling period, an aspect of a thermal management system 33 according to certain non-limiting embodiments disclosed herein optionally comprises heating (step 34) an outer surface region 36 of the workpiece 24 to a temperature at or near the workpiece forging temperature. In this manner, the temperature of the workpiece 24 is in a uniform or near uniform and substantially isothermal condition at or near the workpiece forging temperature prior to each high strain rate MAF hit. It is recognized that it is within the scope of the present disclosure to optionally heat (34) the outer surface region 36 of the workpiece 24 after each A-axis heat, after each B-axis hit, and/or after each C-axis hit. In non-limiting embodiments, the outer surface of the workpiece optionally is heated (34) after each cycle of A-B-C hits. In still other non-limiting embodiments, the outer surface region optionally is heated after any hit or cycle of hits, as long as the overall temperature of the workpiece is maintained within the workpiece forging temperature range during the forging process. The times that a workpiece should be heated to maintain a temperature of the workpiece 24 in a uniform or near uniform and substantially isothermal condition at or near the workpiece forging temperature prior to each high strain rate MAF hit may depend on the size of the workpiece, and this may be determined by a person having ordinary skill without undue experimentation. In various non-limiting embodiments according to the present disclosure, an "outer surface region" of a workpiece, as used herein, refers to a region extending inwardly from an outer surface of the workpiece and having a volume of at least about 50%, or at least about 60%, or at least about 70%, or at least about 80% of the workpiece.

[0051] In non-limiting embodiments, heating (34) an outer surface region 36 of the workpiece 24 may be accomplished using one or more surface heating mechanisms 38 of the thermal management system 33. Examples of possible surface heating mechanisms successive press forging steps, the entire workpiece may be placed in a furnace or otherwise heated to a temperature with the workpiece forging temperature range.

[0052] In certain non-limiting embodiments, as an optional feature, between each of the A, B, and C forging hits the thermal management system 33 is used to heat the outer surface region 36 of the workpiece, and the adiabatically heated internal region is allowed to cool for an internal region cooling time so as to return the temperature of the workpiece to a substantially uniform temperature at or near the selected workpiece forging temperature. In certain other non-limiting embodiments according to the present disclosure, as an optional feature, between each of the A, B, and C forging hits the thermal management system 33 is used to heat the outer surface region 36 of the workpiece, and the adiabatically heated internal region is allowed to cool for an internal region cooling time so that the temperature of the workpiece returns to a substantially uniform temperature within the workpiece forging temperature range. Non-limiting embodiments of a method according to the present disclosure utilizing both (1) a thermal management system 33 to heat the outer surface region of the workpiece to a temperature within the workpiece forging temperature range and (2) a period during which the adiabatically heated internal region cools to a temperature within the workpiece forging temperature range may be referred to herein as "thermally managed, high strain rate multi-axis forging". 38 include, but are not limited to, flame heaters adapted for flame heating; induction heaters adapted for induction heating; and radiant heaters adapted for radiant heating of the outer surface of the workpiece 24. Other mechanisms and techniques for heating an outer surface region of the workpiece will be apparent to those having ordinary skill upon considering the present disclosure, and such mechanisms and techniques are within the scope of the present disclosure. A non-limiting embodiment of an outer surface region heating mechanism 38 may comprise a box furnace (not shown). A box furnace may be configured with various heating mechanisms to heat the outer surface region of the workpiece using one or more of flame heating mechanisms, radiant heating mechanisms, induction heating mechanisms, and any other suitable heating mechanism known now or hereafter to a person having ordinary skill in the art.

[0053] In another non-limiting embodiment, the temperature of the outer surface region 36 of the workpiece 24 optionally is heated (34) and maintained at or near the workpiece forging temperature and within the workpiece forging temperature range using one or more die heaters 40 of a thermal management system 33. Die heaters 40 may be used to maintain the dies 42 or the die press forging surfaces 44 of the dies at or near the workpiece forging temperature or at temperatures within the workpiece forging temperature range. In a non-limiting embodiment, the dies 42 of the thermal management system are heated to a temperature within a range that includes the workpiece forging temperature down to 100°F (55.6°C) below the workpiece forging temperature. Die heaters 40 may heat the dies 42 or the die press forging surface 44 by any suitable heating mechanism known now or hereafter by a person skilled in the art, including, but not limited to, flame heating mechanisms, radiant heating mechanisms, conduction heating mechanisms, and/or induction heating

mechanisms. In a non-limiting embodiment, a die heater 40 may be a component of a box furnace (not shown). While the thermal management system 33 is shown in place and being used during the cooling steps (32),(52),(60) of the multi-axis forging process (26) shown in FIGS. 2(b), (d), and (f), it will be recognized that the thermal management system 33 may or may not be in place during the press forging steps (28),(46),(56) depicted in FIGS. 2(a), (c), and (e).

[0054] As shown in FIG. 3(c), an aspect of a non-limiting embodiment of a multi-axis forging method (26) according to the present disclosure comprises press forging (step 46) the workpiece 24 at a workpiece forging temperature in the workpiece forging temperature range in the direction (B) of a second orthogonal axis 48 of the workpiece 24 using a strain rate that is sufficient to adiabatically heat the workpiece 24, or at least an internal region of the workpiece 24, and plastically deform the workpiece 24. In a non-limiting embodiment, during press forging (46), the workpiece 24 is deformed to a plastic deformation of a 20% to 50% reduction in height or another dimension. In another non-limiting embodiment, during press forging (46), the workpiece 24 is plastically deformed to a plastic deformation of a 30% to 40% reduction in height or another dimension. In a non-limiting embodiment, the workpiece 24 may be press forged (46) in the direction of the second orthogonal axis 48 to the same spacer height used in the first press forging step (28). In another non-limiting embodiment, the workpiece 24 may be press forged in the direction of the second orthogonal axis 48 to a different spacer height than is used in the first press forging step (28). In another non-limiting embodiment, the internal region (not shown) of the workpiece 24 is adiabatically heated during the press forging step (46) to the same temperature as in the first press forging step (28). In other non-limiting embodiments, the high strain rates used for press forging (46) are in the same strain rate ranges as disclosed for the first press forging step (28).

[0055] In a non-limiting embodiment, as shown in FIGS. 2(b) and (d), the workpiece 24 may be rotated (50) between successive press forging steps (e.g., (28),(46),(56)) to present a different orthogonal axis to the forging surfaces. This rotation may be referred to as "A-B-C" rotation. It is understood that by using different forge configurations, it may be possible to rotate the ram on the forge instead of rotating the workpiece 24, or a forge may be equipped with multi-axis rams so that rotation of neither the workpiece nor the forge is required. Obviously, the important aspect is the relative change in position of the workpiece and the ram being used, and rotating (50) the workpiece 24 may be unnecessary or optional. In most current industrial equipment set-ups, however, rotating (50) the workpiece to a different orthogonal axis in between press forging steps will be required to complete the multi-axis forging process (26).

[0056] In non-limiting embodiments in which A-B-C rotation (50) is required, the workpiece 24 may be rotated manually by a forge operator or by an automatic rotation system (not shown) to provide A-B-C rotation (50). An automatic A-B-C rotation system may include, but is not limited to including, free-swinging clamp-style manipulator tooling or the like to enable a non-limiting thermally managed high strain rate multi-axis forging embodiment disclosed herein.

[0057] After press forging (46) the workpiece 24 in the direction of the second orthogonal axis 48, *i.e.*, in the B-direction, and as shown in FIG. 3(d), process (20) optionally further comprises allowing (step 52) an adiabatically heated internal region (not shown) of the workpiece to cool to a temperature at or near the workpiece forging temperature, which is shown in FIG. 3(d). In certain non-limiting embodiments, internal region cooling times, or waiting times, may range, for example, from 5 seconds to 120 seconds, or from 10 seconds to 60 seconds, or from 5 seconds up to 5 minutes. It will be recognized by an ordinarily skilled person that the minimum cooling times are dependent upon the size, shape, and composition of the workpiece 24, as well as the characteristics of the environment surrounding the workpiece.

[0058] During the optional internal region cooling period, an optional aspect of a thermal management system 33 according to certain non-limiting embodiments disclosed herein comprises heating (step 54) an outer surface region 36 of the workpiece 24 to a temperature in the workpiece forging temperature range at or near the workpiece forging temperature. In this manner, the temperature of the workpiece 24 is maintained in a uniform or near uniform and substantially isothermal condition at or near the workpiece forging temperature prior to each high strain rate MAF hit. In non-limiting embodiments, when using the thermal management system 33 to heat the outer surface region 36, together with allowing the adiabatically heated internal region to cool for a specified internal region cooling time, the temperature of the workpiece returns to a substantially uniform temperature at or near the workpiece forging temperature between each A-B-C forging hit. In another non-limiting embodiment according to the present disclosure, when using the thermal management system 33 to heat the outer surface region 36, together with allowing the adiabatically heated internal region to cool for a specified internal region cooling time, the temperature of the workpiece returns to a substantially uniform temperature within the workpiece forging temperature range prior to each high strain rate MAF hit.

[0059] In a non-limiting embodiment, heating (54) an outer surface region 36 of the workpiece 24 may be accomplished using one or more outer surface heating mechanisms 38 of the thermal management system 33. Examples of possible heating mechanisms 38 may include, but are not limited to, flame heaters adapted for flame heating; induction heaters adapted for induction heating; and/or radiant heaters adapted for radiant heating of the workpiece 24. A non-limiting embodiment of a surface heating mechanism 38 may comprise a box furnace (not shown). Other mechanisms and techniques for heating an outer surface of the workpiece will be apparent to those having ordinary skill upon considering the present disclosure, and such mechanisms and techniques are within the scope of the present disclosure. A box furnace may be configured with various heating mechanisms to heat the outer surface of the workpiece, and such heating mechanisms may comprise one or more of flame heating mechanisms, radiant heating mechanisms, induction heating

mechanisms, and/or any other heating mechanism known now or hereafter to a person having ordinary skill in the art.

[0060] In another non-limiting embodiment, the temperature of the outer surface region 36 of the workpiece 24 may be heated (54) and maintained at or near the workpiece forging temperature and within the workpiece forging temperature range using one or more die heaters 40 of a thermal management system 33. Die heaters 40 may be used to maintain the dies 42 or the die press forging surfaces 44 of the dies at or near the workpiece forging temperature or at temperatures within the workpiece forging temperature range. Die heaters 40 may heat the dies 42 or the die press forging surfaces 44 by any suitable heating mechanism known now or hereafter by a person skilled in the art, including, but not limited to, flame heating mechanisms, radiant heating mechanisms, conduction heating mechanisms, and/or induction heating mechanisms. In a non-limiting embodiment, a die heater 40 may be a component of a box furnace (not shown). While the thermal management system 33 is shown in place and being used during the equilibration and cooling steps (32),(52),(60) of the multi-axis forging process (26) shown in FIGS. 2(b), (d), and (f), it is recognized that the thermal management system 33 may or may not be in place during the press forging steps (28),(46),(56) depicted in FIGS. 2(a), (c), and (e).

[0061] As shown in FIG. 3(e), an aspect of an embodiment of multi-axis forging (26) according to the present disclosure comprises press forging (step 56) the workpiece 24 at a workpiece forging temperature in the workpiece forging temperature range in the direction (C) of a third orthogonal axis 58 of the workpiece 24 using a ram speed and strain rate that are sufficient to adiabatically heat the workpiece 24, or at least adiabatically heat an internal region of the workpiece, and plastically deform the workpiece 24. In a non-limiting embodiment, the workpiece 24 is deformed during press forging (56) to a plastic deformation of a 20% to 50% reduction in height or another dimension. In another non-limiting embodiment, during press forging (56) the workpiece is plastically deformed to a plastic deformation of a 30% to 40% reduction in height or another dimension. In a non-limiting embodiment, the workpiece 24 may be press forged (56) in the direction of the third orthogonal axis 58 to the same spacer height used in the first press forging step (28) and/or the second forging step (46). In another non-limiting embodiment, the workpiece 24 may be press forged in the direction of the third orthogonal axis 58 to a different spacer height than used in the first press forging step (28). In another non-limiting embodiment according to the disclosure, the internal region (not shown) of the workpiece 24 is adiabatically heated during the press forging step (56) to the same temperature as in the first press forging step (28). In other non-limiting embodiments, the high strain rates used for press forging (56) are in the same strain rate ranges as disclosed for the first press forging step (28).

[0062] In a non-limiting embodiment, as shown by arrow 50 in FIGS. 3(b), 3(d), and 3(e) the workpiece 24 may be rotated (50) to a different orthogonal axis between successive press forging steps (e.g., 46,56). As discussed above, this rotation may be referred to as A-B-C rotation. It is understood that by using different forge configurations, it may be possible to rotate the ram on the forge instead of rotating the workpiece 24, or a forge may be equipped with multi-axis rams so that rotation of neither the workpiece nor the forge is required. Therefore, rotating 50 the workpiece 24 may be unnecessary or an optional step. In most current industrial set-ups, however, rotating 50 the workpiece to a different orthogonal axis between press forging steps will be required to complete the multi-axis forging process (26).

[0063] After press forging 56 the workpiece 24 in the direction of the third orthogonal axis 58, *i.e.*, in the C-direction, and as shown in FIG. 3(e), process 20 optionally further comprises allowing (step 60) an adiabatically heated internal region (not shown) of the workpiece to cool to a temperature at or near the workpiece forging temperature, which is indicated in FIG. 3(f). Internal region cooling times may range, for example, from 5 seconds to 120 seconds, from 10 seconds to 60 seconds, or from 5 seconds up to 5 minutes, and it is recognized by a person skilled in the art that the cooling times are dependent upon the size, shape, and composition of the workpiece 24, as well as on the characteristics of the environment surrounding the workpiece.

[0064] During the optional cooling period, an optional aspect of a thermal management system 33 according to non-limiting embodiments disclosed herein comprises heating (step 62) an outer surface region 36 of the workpiece 24 to a temperature at or near the workpiece forging temperature. In this manner, the temperature of the workpiece 24 is maintained in a uniform or near uniform and substantially isothermal condition at or near the workpiece forging temperature prior to each high strain rate MAF hit. In non-limiting embodiments, by using the thermal management system 33 to heat the outer surface region 36, together with allowing the adiabatically heated internal region to cool for a specified internal region cooling time, the temperature of the workpiece returns to a substantially uniform temperature at or near the workpiece forging temperature between each A-B-C forging hit. In another non-limiting embodiment according to the present disclosure, by using the thermal management system 33 to heat the outer surface region 36, together with allowing the adiabatically heated internal region to cool for a specified internal region cooling time, the temperature of the workpiece returns to a substantially isothermal condition within the workpiece forging temperature range between successive A-B-C forging hits.

[0065] In a non-limiting embodiment, heating (62) an outer surface region 36 of the workpiece 24 may be accomplished using one or more outer surface heating mechanisms 38 of the thermal management system 33. Examples of possible heating mechanisms 38 may include, but are not limited to, flame heaters for flame heating; induction heaters for induction heating; and/or radiant heaters for radiant heating of the workpiece 24. Other mechanisms and techniques for heating

an outer surface of the workpiece will be apparent to those having ordinary skill upon considering the present disclosure, and such mechanisms and techniques are within the scope of the present disclosure. A non-limiting embodiment of a surface heating mechanism 38 may comprise a box furnace (not shown). A box furnace may be configured with various heating mechanisms to heat the outer surface of the workpiece using one or more of flame heating mechanisms, radiant heating mechanisms, induction heating mechanisms, and/or any other suitable heating mechanism known now or hereafter to a person having ordinary skill in the art.

[0066] In another non-limiting embodiment, the temperature of the outer surface region 36 of the workpiece 24 may be heated (62) and maintained at or near the workpiece forging temperature and within the workpiece forging temperature range using one or more die heaters 40 of a thermal management system 33. Die heaters 40 may be used to maintain the dies 42 or the die press forging surfaces 44 of the dies at or near the workpiece forging temperature or at temperatures within the temperature forging range. In a non-limiting embodiment, the dies 42 of the thermal management system are heated to a temperature within a range that includes the workpiece forging temperature to 100°F (55.6°C) below the workpiece forging temperature. Die heaters 40 may heat the dies 42 or the die press forging surface 44 by any suitable heating mechanism known now or hereafter by a person skilled in the art, including, but not limited to, flame heating mechanisms, radiant heating mechanisms, conduction heating mechanisms, and/or induction heating mechanisms. In a non-limiting embodiment, a die heater 40 may be a component of a box furnace (not shown). While the thermal management system 33 is shown in place and being used during the equilibration steps (32),(52),(60) of the multi-axis forging process shown in FIGS. 2(b), (d), and (f), it will be recognized that the thermal management system 33 may or may not be in place during the press forging steps 28,46,56 depicted in FIGS. 2(a), (c), and (e).

[0067] An aspect of the present disclosure includes a non-limiting embodiment wherein one or more of the press forging steps along the three orthogonal axes of a workpiece are repeated until a total strain of at least 1.0 is achieved in the workpiece. The total strain is the total true strain. The phrase "true strain" is also known to a person skilled in the art as "logarithmic strain" or "effective strain". Referring to FIG. 2, this is exemplified by step (g), *i.e.*, repeating (step 64) one or more of press forging steps (28),(46),(56) until a total strain in the range of at least 1.0 up to less than 3.5 is achieved in the workpiece. It is further recognized that after the desired strain is achieved in any of the press forging steps (28) or (46) or (56) and further press forging is unnecessary, and the optional equilibration steps (*i.e.*, allowing the internal region of the workpiece to cool to a temperature at or near the workpiece forging temperature (32) or (52) or (60) and heating the outer surface of the workpiece (34) or (54) or (62) to a temperature at or near the workpiece forging temperature) are not needed, the workpiece can simply be cooled to ambient temperature, in a non-limiting embodiment, by quenching in a liquid, or in another non-limiting embodiment, by air cooling or any faster rate of cooling.

[0068] It will be understood that in a non-limiting embodiment, the total strain is the total strain in the entire workpiece after multi-axis forging, as disclosed herein. In non-limiting embodiments according to the present disclosure, the total strain may comprise equal strains on each orthogonal axis, or the total strain may comprise different strains on one or more orthogonal axes.

[0069] According to a non-limiting embodiment, after beta annealing, a workpiece may be multi-axis forged at two different temperatures in the alpha-beta phase field. For example, referring to FIG. 3, repeating step (64) of FIG. 2 may include repeating one or more of steps (a)-(optional b), (c)-(optional d), and (e)-(optional f) at a first temperature in the alpha-beta phase field until a certain strain is achieved, and then repeating one or more of steps (a)-(optional b), (c)-(optional d), and (e)-(optional f) at a second temperature in the alpha-beta phase field until after a final press forging step (a), (b), or (c) (*i.e.*, (28),(46), (56)) a total strain of at least 1.0, or in the range of at least 1.0 up to less than 3.5, is achieved in the workpiece. In a non-limiting embodiment, the second temperature in the alpha-beta phase field is lower than first temperature in the alpha-beta phase field. It is recognized that conducting the method so as to repeat one or more of steps (a)-(optional b), (c)-(optional d), and (e)-(optional f) at more than two MAF press forging temperatures is within the scope of the present disclosure as long as the temperatures are within the forging temperature range. It is also recognized that, in a non-limiting embodiment, the second temperature in the alpha-beta phase field is higher than the first temperature in the alpha-beta phase field.

[0070] In another non-limiting embodiment according to the present disclosure, different reductions are used for the A-axis hit, B-axis hit, and C-axis hit to provide equalized strain in all directions. Applying high strain rate MAF to introduce equalized strain in all directions results in less cracking of, and a more equiaxed alpha grain structure for, the workpiece. For example, non-equalized strain may be introduced into a cubic workpiece by starting with a 10.2 cm (4-inch) cube that is high strain rate forged on the A-axis to a height of 7.6 cm (3.0 inches). This reduction on the A-axis causes the workpiece to swell along the B-axis and the C-axis. If a second reduction in the B-axis direction reduces the B-axis dimension to 7.6 cm (3.0 inches), more strain is introduced in the workpiece on the B-axis than on the A-axis. Likewise, a subsequent hit in the C-axis direction to reduce the C-axis dimension to 7.6 cm (3.0 inches) would introduce more strain into the workpiece on the C-axis than on the A-axis or B-axis. As another example, to introduce equalized strain in all orthogonal directions, a 10.2 cm (4-inch) cubic workpiece is forged ("hit") on the A-axis to a height of 7.6 cm (3.0 inches), rotated 90 degrees and hit on the B-axis to a height of 8.9 cm (3.5 inches), and then rotated 90 degrees and hit on the C-axis to a height of 10.2 cm (4.0 inches). This latter sequence will result in a cube having approximately 10.2

cm (4 inch) sides and including equalized strain in each orthogonal direction of the cube. A general equation for calculating reduction on each orthogonal axis of a cubic workpiece during high strain rate MAF is provided in Equation 1.

$$\text{Equation 1: strain} = -\ln(\text{spacer height}/\text{starting height})$$

A general equation for calculating the total strain is provided by Equation 2:

$$\text{Equation 2: total strain} = \sum_{n=1}^l -\ln(\text{spacer height}/\text{starting height})$$

Different reductions can be performed by using spacers in the forging apparatus that provide different spacer heights, or by any alternate manner known to a person having ordinary skill in the art.

[0071] In a non-limiting embodiment according to the present disclosure, referring now to FIG. 5, and considering FIG. 3, a process (70) for the production of ultra-fine grain titanium alloy includes: beta annealing (71) a titanium alloy workpiece; cooling (72) the beta annealed workpiece 24 to a temperature below the beta transus temperature of the titanium alloy of the workpiece; heating (73) the workpiece 24 to a workpiece forging temperature within a workpiece forging temperature range that is within an alpha+beta phase field of the titanium alloy of the workpiece; and high strain rate MAF (74) the workpiece, wherein high strain rate MAF (74) includes press forging reductions to the orthogonal axes of the workpiece to different spacer heights. In a non-limiting embodiment of multi-axis forging (74) according to the present disclosure, the workpiece 24 is press forged (75) on the first orthogonal axis (A-axis) to a major reduction spacer height. The phrase "press forged ... to major reduction spacer height", as used herein, refers to press forging the workpiece along an orthogonal axis to the desired final dimension of the workpiece along the specific orthogonal axis. Therefore, the term "major reduction spacer height" is defined as the spacer height used to attain the final dimension of the workpiece along each orthogonal axis. All press forging steps to major reduction spacer heights should occur using a strain rate sufficient to adiabatically heat an internal region of the workpiece.

[0072] After press forging (75) the workpiece 24 in the direction of the first orthogonal A-axis to a major reduction spacer height as shown in FIG. 3(a), the process (70) optionally further comprises allowing (step 76, indicated in FIG. 3(b)) an adiabatically heated internal region (not shown) of the workpiece to cool to a temperature at or near the workpiece forging temperature. Internal region cooling times may range, for example, from 5 seconds to 120 seconds, from 10 seconds to 60 seconds, or from 5 seconds up to 5 minutes, and a person having ordinary skill will recognize that required cooling times will be dependent upon the size, shape, and composition of the workpiece, as well as the characteristics of the environment surrounding the workpiece.

[0073] During the optional internal region cooling time period, an aspect of a thermal management system 33 according to non-limiting embodiments disclosed herein may comprise heating (step 77) an outer surface region 36 of the workpiece 24 to a temperature at or near the workpiece forging temperature. In this manner, the temperature of the workpiece 24 is maintained in a uniform or near uniform and substantially isothermal condition at or near the workpiece forging temperature prior to each high strain rate MAF hit. In certain non-limiting embodiments using the thermal management system 33 to heat the outer surface region 36, together with allowing the adiabatically heated internal region to cool for a specified internal region cooling time, the temperature of the workpiece returns to a substantially uniform temperature at or near the workpiece forging temperature intermediate each of the A, B, and C forging hits. In other non-limiting embodiments according to the present disclosure using the thermal management system 33 to heat the outer surface region 36, together with allowing the adiabatically heated internal region to cool for a specified internal region cooling time, the temperature of the workpiece returns to a substantially uniform temperature within the workpiece forging temperature range intermediate each of the A, B, and C forging hits.

[0074] In a non-limiting embodiment, heating (77) an outer surface region 36 of the workpiece 24 may be accomplished using one or more outer surface heating mechanisms 38 of the thermal management system 33. Examples of possible outer surface heating mechanisms 38 include, but are not limited to, flame heaters adapted for flame heating; induction heaters adapted for induction heating; and radiant heaters adapted for radiant heating of the workpiece 24. Other mechanisms and techniques for heating an outer surface region of the workpiece will be apparent to those having ordinary skill upon considering the present disclosure, and such mechanisms and techniques are within the scope of the present disclosure. A non-limiting embodiment of an outer surface region heating mechanism 38 may comprise a box furnace (not shown). A box furnace may be configured with various heating mechanisms to heat the outer surface region of the workpiece using, for example, one or more of flame heating mechanisms, radiant heating mechanisms, induction heating mechanisms, and/or any other suitable heating mechanism known now or hereafter to a person having ordinary skill in the art.

[0075] In another non-limiting embodiment, the temperature of the outer surface region 36 of the workpiece 24 may be heated (34) and maintained at or near the workpiece forging temperature and within the workpiece forging temperature range using one or more die heaters 40 of a thermal management system 33. Die heaters 40 may be used to maintain the dies 42 or the die press forging surfaces 44 of the dies at or near the workpiece forging temperature or at temperatures within the workpiece forging temperature range. In a non-limiting embodiment, the dies 42 of the thermal management system are heated to a temperature within a range that includes the workpiece forging temperature down to 100°F (55.6°C) below the workpiece forging temperature. Die heaters 40 may heat the dies 42 or the die press forging surface 44 by any suitable heating mechanism known now or hereafter by a person skilled in the art, including, but not limited to, flame heating mechanisms, radiant heating mechanisms, conduction heating mechanisms, and/or induction heating mechanisms. In a non-limiting embodiment, a die heater 40 may be a component of a box furnace (not shown). While the thermal management system 33 is shown in place and being used during the cooling steps of the multi-axis forging process, it is recognized that the thermal management system 33 may or may not be in place during the press forging steps.

[0076] In a non-limiting embodiment, after the press forging to a major reduction spacer height (75) on the A-axis (see FIG.3), which is also referred to herein as reduction "**A**", and after the optional allowing (76) and heating (77) steps, if applied, subsequent press forgings to blocking reduction spacer heights, which may include optional heating and cooling steps, are applied on the B and C axes to "square-up" the workpiece. The phrase "press forging to a ... blocking reduction spacer height", otherwise referred to herein as press forging to a first blocking reduction spacer height ((78),(87),(96)) and press forging to a second blocking reduction spacer ((81),(90),(99)), is defined as a press forging step that is used to reduce or "square-up" the bulging that occurs near the center of any face after press forging to major reduction spacer height. Bulging at or near the center of any face results in a triaxial stress state being introduced into the faces, which could result in cracking of the workpiece. The steps of press forging to a first reduction spacer height and press forging to a second blocking reduction spacer height, also referred to herein as first blocking reduction, second blocking reduction, or simply blocking reductions are employed to deform the bulged faces, so that the faces of the workpiece are flat or substantially flat before the next press forging to a major reduction spacer height along an orthogonal axis. The blocking reductions involve press forging to a spacer height that is greater than the spacer height used in each step of press forging to a major reduction spacer height. While the strain rate of all of the first and second blocking reductions disclosed herein may be sufficient to adiabatically heat an internal region of the workpiece, in a non-limiting embodiment, adiabatic heating during the first blocking and second blocking reductions may not occur because the total strain incurred in the first and second blocking reductions may not be sufficient to significantly adiabatically heat the workpiece. Because the blocking reductions are performed to spacer heights that are greater than those used in press forging to a major reduction spacer height, the strain added to the workpiece in a blocking reduction may not be enough to adiabatically heat an internal region of the workpiece. As will be seen, incorporation of the first and second blocking reductions in a high strain rate MAF process, in a non-limiting embodiment results in a forging sequence of at least one cycle consisting of: **A-B-C-B-C-A-C**, wherein **A**, **B**, and **C** comprise press forging to the major reduction spacer height, and wherein B, C, C, and A comprise press forging to first or second blocking reduction spacer heights; or in another non-limiting embodiment at least one cycle consisting of: **A-B-C-B-C-A-C-A-B**, wherein **A**, **B**, and **C** comprise press forging to the major reduction spacer height, and wherein B, C, C, A, A, and B comprise press forging to first or second blocking reduction spacer heights.

[0077] Referring again to FIGS. 3 and 5, in a non-limiting embodiment, after the step of press forging to a major reduction spacer height (75) on the first orthogonal axis (an **A** reduction), and, if applied, after the optional allowing (76) and heating (77) steps, as described above, the workpiece is press forged (78) on the B-axis to a first blocking reduction spacer height. While the strain rate of the first blocking reduction may be sufficient to adiabatically heat an internal region of the workpiece, in a non-limiting embodiment, adiabatic heating during the first blocking reduction may not occur because the strain incurred in the first blocking reduction may not be sufficient to significantly adiabatically heat the workpiece. Optionally, the adiabatically heated internal region of the workpiece is allowed (79) to cool to a temperature at or near the workpiece forging temperature, while the outer surface region of the workpiece is heated (80) to a temperature at or near the workpiece forging temperature. All cooling times and heating methods for the **A** reduction (75) disclosed hereinabove and in other embodiments of the present disclosure are applicable for steps (79) and (80) and to all optional subsequent steps of allowing the internal region of the workpiece to cool and heating the outer surface region of the workpiece.

[0078] The workpiece is next press forged (81) on the C-axis to a second blocking reduction spacer height that is greater than the major reduction spacer height. The first and second blocking reductions are applied to bring the workpiece back to substantially the pre-forging shape of the workpiece. While the strain rate of the second blocking reduction may be sufficient to adiabatically heat an internal region of the workpiece, in a non-limiting embodiment, adiabatic heating during the second blocking reduction may not occur because the strain incurred in the second blocking reduction may not be sufficient to significantly adiabatically heat the workpiece. Optionally, the adiabatically heated internal region of the workpiece is allowed (82) to cool to a temperature at or near the workpiece forging temperature, while the outer surface region of the workpiece is heated (83) to a temperature at or near the workpiece forging temperature.

[0079] The workpiece is next pressed forged to a major reduction spacer height (84) in the direction of the second

orthogonal axis, or B-axis. Press forging to a major reduction spacer height on the B-axis (84) is referred to herein as a **B** reduction. After the **B** reduction (84), optionally, the adiabatically heated internal region of the workpiece is allowed (85) to cool to a temperature at or near the workpiece forging temperature, while the outer surface region of the workpiece is heated (86) to a temperature at or near the workpiece forging temperature.

[0080] The workpiece is next press forged (87) on the C-axis to a first blocking reduction spacer height that is greater than the major reduction spacer height. While the strain rate of the first blocking reduction may be sufficient to adiabatically heat an internal region of the workpiece, in a non-limiting embodiment, adiabatic heating during the first blocking reduction may not occur because the strain incurred in the first blocking reduction may not be sufficient to significantly adiabatically heat the workpiece. Optionally, the adiabatically heated internal region of the workpiece is allowed (88) to cool to a temperature at or near the workpiece forging temperature, while the outer surface region of the workpiece is heated (89) to a temperature at or near the workpiece forging temperature.

[0081] The workpiece is next press forged (90) on the A-axis to a second blocking reduction spacer height that is greater than the major reduction spacer height. The first and second blocking reductions are applied to bring the workpiece back to substantially the pre-forging shape of the workpiece. While the strain rate of the second blocking reduction may be sufficient to adiabatically heat an internal region of the workpiece, in a non-limiting embodiment, adiabatic heating during the second blocking reduction may not occur because the strain incurred in the second blocking reduction may not be sufficient to significantly adiabatically heat the workpiece. Optionally, the adiabatically heated internal region of the workpiece is allowed (91) to cool to a temperature at or near the workpiece forging temperature, while the outer surface region of the workpiece is heated (92) to a temperature at or near the workpiece forging temperature.

[0082] The workpiece is next press forged to a major reduction spacer height (93) in the direction of the third orthogonal axis, or C-axis. Press forging to the major reduction spacer height on the C-axis (93) is referred to herein as a **C** reduction. After the **C** reduction (93), optionally, the adiabatically heated internal region of the workpiece is allowed (94) to cool to a temperature at or near the workpiece forging temperature, while the outer surface region of the workpiece is heated (95) to a temperature at or near the workpiece forging temperature.

[0083] The workpiece is next press forged (96) on the A-axis to a first blocking reduction spacer height that is greater than the major reduction spacer height. While the strain rate of the first blocking reduction may be sufficient to adiabatically heat an internal region of the workpiece, in a non-limiting embodiment, adiabatic heating during the first blocking reduction may not occur because the strain incurred in the first blocking reduction may not be sufficient to significantly adiabatically heat the workpiece. Optionally, the adiabatically heated internal region of the workpiece is allowed (97) to cool to a temperature at or near the workpiece forging temperature, while the outer surface region of the workpiece is heated (98) to a temperature at or near the workpiece forging temperature.

[0084] The workpiece is next press forged (99) on the B-axis to a second blocking reduction spacer height that is greater than the major reduction spacer height. The first and second blocking reductions are applied to bring the workpiece back to substantially the pre-forging shape of the workpiece. While the strain rate of the second blocking reduction may be sufficient to adiabatically heat an internal region of the workpiece, in a non-limiting embodiment, adiabatic heating during the second blocking reduction may not occur because the strain incurred in the second blocking reduction may not be sufficient to significantly adiabatically heat the workpiece. Optionally, the adiabatically heated internal region of the workpiece is allowed (100) to cool to a temperature at or near the workpiece forging temperature, while the outer surface region of the workpiece is heated (101) to a temperature at or near the workpiece forging temperature.

[0085] Referring to FIG. 5, in non-limiting embodiments, one or more of press forging steps (75), (78), (81), (84), (87), (90), (93), (96), and (99) are repeated (102) until a total strain of at least 1.0 is achieved in the titanium alloy workpiece. In another non-limiting embodiment, one or more of press forging steps (75), (78), (81), (84), (87), (90), (93), (96), and (99) are repeated (102) until a total strain in a range of at least 1.0 up to less than 3.5 is achieved in the titanium alloy workpiece. It will be recognized that after achieving the desired strain of at least 1.0, or alternatively the desired strain in a range of at least 1.0 up to less than 3.5, in any of the press forging steps (75), (78), (81), (84), (87), (90), (93), (96), and (99), the optional intermediate equilibration steps (*i.e.*, allowing the internal region of the workpiece to cool (76), (79), (82), (85), (88), (91), (94), (97), or (100), and heating the outer surface of the workpiece (77), (80), (83), (86), (89), (92), (95), (98), or (101)) are not needed, and the workpiece can be cooled to ambient temperature. In a non-limiting embodiment, cooling comprise liquid quenching, such as, for example, water quenching. In another non-limiting embodiment, cooling comprises cooling with a cooling rate of air cooling or faster.

[0086] The process described above includes a repeated sequence of press forging to a major reduction spacer height followed by press forging to first and second blocking reduction spacer heights. A forging sequence that represents one total MAF cycle as disclosed in the above-described non-limiting embodiment may be represented as **A**-**B**-**C**-**B**-**C**-**A**-**C**-**A**-**B**, wherein the reductions (hits) that are in bold and underlined are press forgings to a major reduction spacer height, and the reductions that are not in bold or underlined are first or second blocking reductions. It will be understood that all press forging reductions, including press forging to major reduction spacer heights and the first and second blocking reductions, of the MAF process according to the present disclosure are conducted with a high strain rate that is sufficient to adiabatically heat the internal region of the workpiece, *e.g.*, and without limitation, a strain rate in the range of 0.2 s⁻¹

to 0.8 s^{-1} , or in the range of 0.2 s^{-1} to 0.4 s^{-1} . It will also be understood that adiabatic heating may not substantially occur during the first and second blocking reductions due to the lower degree of deformation in these reductions, as compared to the major reductions. It also will be understood that, as optional steps, intermediate successive press forging reductions the adiabatically heated internal region of the workpiece is allowed to cool to a temperature at or near the workpiece forging temperature, and the outer surface of the workpiece is heated to a temperature at or near the workpiece forging temperature utilizing the thermal management system disclosed herein. It is believed that these optional steps may be more beneficial when the method is used to process larger sized workpieces. It is further understood that the **A-B-C-B-C-A-C-A-B** forging sequence embodiment described herein may be repeated in whole or in part until a total strain in the range of at least 1.0 up to less than 3.5, is achieved in the workpiece.

[0087] Bulging in the workpiece results from a combination of surface die lock and the presence of hotter material near the center of the workpiece. As bulging increases, each face center is subjected to increasingly triaxial loads that can initiate cracking. In the **A-B-C-B-C-A-C-A-B** sequence, the use of blocking reductions intermediate each press forging to a major reduction spacer height reduces the tendency for crack formation in the workpiece. In a non-limiting embodiment, when the workpiece is in the shape of a cube, the first blocking reduction spacer height for a first blocking reduction may be to a spacer height that is 40-60% larger than the major reduction spacer height. In a non-limiting embodiment, when the workpiece is in the shape of a cube, the second blocking reduction spacer height for the second blocking reduction may be to a spacer height that is 15-30% larger than the major reduction spacer height. In another non-limiting embodiment, the first blocking reduction spacer height may be substantially equivalent to the second blocking reduction spacer height.

[0088] In non-limiting embodiments of thermally managed, high strain rate multi-axis forging according to the present disclosure, after a total strain in the range of at least 1.0 up to less than 3.5, the workpiece comprises an average alpha particle grain size of $4 \text{ }\mu\text{m}$ or less, which is considered to be an ultra-fine grain (UFG) size. In a non-limiting embodiment according to the present disclosure, applying a total strain in the range of at least 1.0 up to less than 3.5, produces grains that are equiaxed.

[0089] In a non-limiting embodiment of a process according to the present disclosure comprising multi-axis forging and use of the optional thermal management system, the workpiece-press die interface is lubricated with lubricants known to those of ordinary skill, such as, but not limited to, graphite, glasses, and/or other known solid lubricants.

[0090] A titanium alloy processed by the method according to the present disclosure comprises effective alpha phase precipitation and growth kinetics that are slower than those of Ti-6-4 alloy (UNS R56400), and such kinetics may be referred to herein as "slower alpha kinetics". In a non-limiting embodiment, slower alpha kinetics is achieved when the diffusivity of the slowest diffusing alloying species in the titanium alloy is slower than the diffusivity of aluminum in Ti-6-4 alloy at the beta transus temperature (T_β). For example, Ti-6-2-4-2 alloy exhibits slower alpha kinetics than Ti-6-4 alloy as a result of the presence of additional grain pinning elements, such as silicon, in the Ti-6-2-4-2 alloy. Also, Ti-6-2-4-6 alloy has slower alpha kinetics than Ti-6-4 alloy as a result of the presence of additional beta stabilizing alloy additions, such as higher molybdenum content than Ti-6-4 alloy. The result of slower alpha kinetics in these alloys is that beta annealing the Ti-6-2-4-6 and Ti-6-2-4-2 alloys prior to high strain rate MAF produces a relatively fine and stable alpha lath size and a fine beta-phase structure as compared with Ti-6-4 alloy and certain other titanium alloys exhibiting faster alpha phase precipitation and growth kinetics than Ti-6-2-4-6 and Ti-6-2-4-2 alloys. The phrase "slower alpha kinetics" is discussed in further detail earlier in the present disclosure. Titanium alloys that may be processed according to the present disclosure are selected from Ti-6-2-4-2 alloy, Ti-6-2-4-6 alloy, ATI 425 alloy (Ti-4Al-2.5V alloy), Ti-6-6-2 alloy, and Ti-6Al-7Nb alloy.

[0091] In a non-limiting embodiment of the method according to the present disclosure, beta annealing comprises: heating the workpiece to a beta annealing temperature; holding the workpiece at the beta annealing temperature for an annealing time sufficient to form a 100% titanium beta phase microstructure in the workpiece; and cooling the workpiece directly to a temperature at or near the workpiece forging temperature. In certain non-limiting embodiments, the beta annealing temperature is in a temperature range of the beta transus temperature of the titanium alloy up to 300°F (166.7°C) above the beta transus temperature of the titanium alloy. Non-limiting embodiments include a beta annealing time from 5 minutes to 24 hours. A person skilled in the art, upon reading the present description, will understand that other beta annealing temperatures and beta annealing times are within the scope of embodiments of the present disclosure and that, for example, relatively large workpieces may require relatively higher beta annealing temperatures and/or longer beta annealing times to form a 100% beta phase titanium microstructure.

[0092] In certain non-limiting embodiments in which the workpiece is held at a beta annealing temperature to form a 100% beta phase microstructure, the workpiece may also be plastically deformed at a plastic deformation temperature in the beta phase field of the titanium alloy prior to cooling the workpiece to a temperature at or near the workpiece forging temperature or to ambient temperature. Plastic deformation of the workpiece may comprise at least one of drawing, upset forging, and high strain rate multi-axis forging the workpiece. In a non-limiting embodiment, plastic deformation in the beta phase region comprises upset forging the workpiece to a beta-upset strain in the range of 0.1 to 0.5. In certain non-limiting embodiments, the plastic deformation temperature is in a temperature range including the

beta transus temperature of the titanium alloy up to 300°F (166.7°C) above the beta transus temperature of the titanium alloy.

[0093] FIG. 6 is a temperature-time thermomechanical process chart for a non-limiting method of plastically deforming the workpiece above the beta transus temperature and directly cooling to the workpiece forging temperature. In FIG. 6, a non-limiting method 200 comprises heating 202 a workpiece comprising a titanium alloy having alpha precipitation and growth kinetics that are slower than those of Ti-6-4 alloy, for example, to a beta annealing temperature 204 above the beta transus temperature 206 of the titanium alloy, and holding or "soaking" 208 the workpiece at the beta annealing temperature 204 to form an all beta titanium phase microstructure in the workpiece. In a non-limiting embodiment according to the present disclosure, after soaking 208, the workpiece may be plastically deformed 210. In a non-limiting embodiment, plastic deformation 210 comprises upset forging. In a non-limiting embodiment, plastic deformation 210 comprises upset forging to a true strain of 0.3. In a non-limiting embodiment, plastically deforming 210 comprises thermally managed high strain rate multi-axis forging (not shown in FIG. 6) at a beta annealing temperature.

[0094] Still referring to FIG. 6, after plastic deformation 210 in the beta phase field, in a non-limiting embodiment the workpiece is cooled 212 to a workpiece forging temperature 214 in the alpha+beta phase field of the titanium alloy. In a non-limiting embodiment, cooling 212 comprises air cooling or cooling at a rate faster than achieved through air cooling. In another non-limiting embodiment, cooling comprises liquid quenching, such as, but not limited to, water quenching. After cooling 212, the workpiece is high strain rate multi-axis forged 214 according to certain non-limiting embodiments of the present disclosure. In the non-limiting embodiment of FIG. 6, the workpiece is hit or press forged 12 times, *i.e.*, the three orthogonal axes of the workpiece are non-sequentially press forged a total of 4 times each. In other words, referring to FIGS. 2 and 6, the cycle including steps (a)-(optional b), (c)-(optional d), and (e)-(optional f) is performed 4 times. In the non-limiting embodiment of FIG. 6, after a multi-axis forging sequence involving 12 hits, the total strain is in the range of at least 1.0 up to less than 3.5. After multi-axis forging 214, the workpiece is cooled 216 to ambient temperature. In a non-limiting embodiment, cooling 216 comprises air cooling or cooling at a rate faster than achieved through air cooling, but other forms of cooling, such as, but not limited to, fluid or liquid quenching are within the scope of embodiments disclosed herein.

[0095] A non-limiting aspect of the present disclosure includes high strain rate multi-axis forging at two temperatures in the alpha+beta phase field. FIG. 7 is a temperature-time thermomechanical process chart for a non-limiting method according to the present disclosure that comprises multi-axis forging the titanium alloy workpiece at a first workpiece forging temperature; optionally utilizing a non-limiting embodiment of the thermal management feature disclosed herein; cooling to a second workpiece forging temperature in the alpha+beta phase; multi-axis forging the titanium alloy workpiece at the second workpiece forging temperature; and optionally utilizing a non-limiting embodiment of the thermal management feature disclosed herein.

[0096] In FIG. 7, a non-limiting method 230 according to the present disclosure comprises heating 232 the workpiece to a beta annealing temperature 234 above the beta transus temperature 236 of the alloy and holding or soaking 238 the workpiece at the beta annealing temperature 234 to form an all beta phase microstructure in the titanium alloy workpiece. After soaking 238, the workpiece may be plastically deformed 240. In a non-limiting embodiment, plastic deformation 240 comprises upset forging. In another non-limiting embodiment, plastic deformation 240 comprises upset forging to a strain of 0.3. In yet another non-limiting embodiment, plastically deforming 240 the workpiece comprises high strain multi-axis forging (not shown in FIG. 7) at a beta annealing temperature.

[0097] Still referring to FIG. 7, after plastic deformation 240 in the beta phase field, the workpiece is cooled 242 to a first workpiece forging temperature 244 in the alpha+beta phase field of the titanium alloy. In non-limiting embodiments, cooling 242 comprises one of air cooling and liquid quenching. After cooling 242, the workpiece is high strain rate multi-axis forged 246 at the first workpiece forging temperature, and optionally a thermal management system according to non-limiting embodiments disclosed herein is employed. In the non-limiting embodiment of FIG. 7, the workpiece is hit or press forged at the first workpiece forging temperature 12 times with 90° rotation between each hit, *i.e.*, the three orthogonal axes of the workpiece are press forged 4 times each. In other words, referring to FIG. 2, the cycle including steps (a)-(optional b), (c)-(optional d), and (e)-(optional f) is performed 4 times. In the non-limiting embodiment of FIG. 7, after high strain rate multi-axis forging 246 the workpiece at the first workpiece forging temperature, the titanium alloy workpiece is cooled 248 to a second workpiece forging temperature 250 in the alpha+beta phase field. After cooling 248, the workpiece is high strain rate multi-axis forged 250 at the second workpiece forging temperature, and optionally a thermal management system according to non-limiting embodiments disclosed herein is employed. In the non-limiting embodiment of FIG. 7, the workpiece is hit or press forged at the second workpiece forging temperature a total of 12 times. It is recognized that the number of hits applied to the titanium alloy workpiece at the first and second workpiece forging temperatures can vary depending upon the desired true strain and desired final grain size, and that the number of hits that is appropriate can be determined without undue experimentation upon considering the present disclosure. After multi-axis forging 250 at the second workpiece forging temperature, the workpiece is cooled 252 to ambient temperature. In non-limiting embodiments, cooling 252 comprises one of air cooling and liquid quenching to ambient temperature.

[0098] In a non-limiting embodiment, the first workpiece forging temperature is in a first workpiece forging temperature range of more than 100°F (55.6°C) below the beta transus temperature of the titanium alloy to 500°F (277.8°C) below the beta transus temperature of the titanium alloy, *i.e.*, the first workpiece forging temperature T_1 is in the range of $T_\beta - 100^\circ\text{F} > T_1 \geq T_\beta - 500^\circ\text{F}$. In a non-limiting embodiment, the second workpiece forging temperature is in a second workpiece forging temperature range of more than 200°F (277.8°C) below the beta transus temperature of the titanium alloy to 700°F (388.9°C) below the beta transus temperature, *i.e.*, the second workpiece forging temperature T_2 is in the range of $T_\beta - 200^\circ\text{F} > T_2 \geq T_\beta - 700^\circ\text{F}$. In a non-limiting embodiment, the titanium alloy workpiece comprises Ti-6-2-4-2 alloy; the first workpiece temperature is 1650°F (898.9°C); and the second workpiece forging temperature is 1500°F (815.6°C).

[0099] FIG. 8 is a temperature-time thermomechanical process chart of a non-limiting method embodiment according to the present disclosure for plastically deforming a workpiece comprising a titanium alloy above the beta transus temperature and cooling the workpiece to the workpiece forging temperature, while simultaneously employing thermally managed high strain rate multi-axis forging on the workpiece according to non-limiting embodiments herein. In FIG. 8, a non-limiting method 260 of using thermally managed high strain rate multi-axis forging for grain refining of a titanium alloy comprises heating 262 the workpiece to a beta annealing temperature 264 above the beta transus temperature 266 of the titanium alloy and holding or soaking 268 the workpiece at the beta annealing temperature 264 to form an all beta phase microstructure in the workpiece. After soaking 268 the workpiece at the beta annealing temperature, the workpiece is plastically deformed 270. In a non-limiting embodiment, plastic deformation 270 may comprise thermally managed high strain rate multi-axis forging. In a non-limiting embodiment, the workpiece is repetitively high strain rate multi-axis forged 272 using the optional thermal management system as disclosed herein as the workpiece cools through the beta transus temperature. FIG. 8 shows three intermediate high strain rate multi-axis forging 272 steps, but it will be understood that there can be more or fewer intermediate high strain rate multi-axis forging 272 steps, as desired. The intermediate high strain rate multi-axis forging 272 steps are intermediate to the initial high strain rate multi-axis forging step 270 at the soaking temperature and the final high strain rate multi-axis forging step in the alpha+beta phase field 274 of the titanium alloy. While FIG. 8 shows one final high strain rate multi-axis forging step wherein the temperature of the workpiece remains entirely in the alpha+beta phase field, it will be understood on reading the present description that more than one multi-axis forging step could be performed in the alpha+beta phase field for further grain refinement. According to non-limiting embodiments of the present disclosure, at least one final high strain rate multi-axis forging step takes place entirely at temperatures in the alpha+beta phase field of the titanium alloy workpiece.

[0100] Because the multi-axis forging steps 270, 272, 274 take place as the temperature of the workpiece cools through the beta transus temperature of the titanium alloy, a method embodiment such as is shown in FIG. 8 is referred to herein as "through beta transus high strain rate multi-axis forging". In a non-limiting embodiment, the thermal management system (33 of FIG. 3) is used in through beta transus multi-axis forging to maintain the temperature of the workpiece at a uniform or substantially uniform temperature prior to each hit at each through beta transus forging temperature and, optionally, to slow the cooling rate. After final multi-axis forging 274 the workpiece forging temperature in the alpha+beta phase field, the workpiece is cooled 276 to ambient temperature. In a non-limiting embodiment, cooling 276 comprises air cooling.

[0101] Non-limiting embodiments of multi-axis forging using a thermal management system, as disclosed hereinabove, can be used to process titanium alloy workpieces having cross-sections greater than 25.8 sq. cm (4 square inches) using conventional forging press equipment, and the size of cube-shaped workpieces can be scaled to match the capabilities of an individual press. It has been determined that alpha lamellae or laths from the β -annealed structure break down easily to fine uniform alpha grains at workpiece forging temperatures disclosed in non-limiting embodiments herein. It has also been determined that decreasing the workpiece forging temperature decreases the alpha particle size (grain size).

[0102] While not wanting to be held to any particular theory, it is believed that grain refinement that occurs in non-limiting embodiments of thermally managed, high strain rate multi-axis forging according to the present disclosure occurs via meta-dynamic recrystallization. In the prior art slow strain rate multi-axis forging process, dynamic recrystallization occurs instantaneously during the application of strain to the material. It is believed that in high strain rate multi-axis forging according to the present disclosure, meta-dynamic recrystallization occurs at the end of each deformation or forging hit, while at least the internal region of the workpiece is hot from adiabatic heating. Residual adiabatic heat, internal region cooling times, and external surface region heating influence the extent of grain refinement in non-limiting methods of thermally managed, high strain rate multi-axis forging according to the present disclosure.

[0103] The present inventors have further developed alternate methods according to the present disclosure providing certain advantages relative to a process as described above including multi-axis forging and using a thermal management system and a cube-shaped workpiece comprising a titanium alloy. It is believed that one or more of (1) the cubical workpiece geometry used in certain embodiments of thermally managed multi-axis forging disclosed herein, (2) die chill (*i.e.*, allowing the temperature of the dies to dip significantly below the workpiece forging temperature), and (3) use of high strain rates may disadvantageously concentrate strain within a core region of the workpiece.

[0104] The alternate methods according to the present disclosure can achieve generally uniform fine grain, very fine

grain, or ultrafine grain size throughout a billet size titanium alloy workpiece. In other words, a workpiece processed by such alternate methods may include the desired grain size, such as an ultrafine grain microstructure, throughout the workpiece, and not only in a central region of the workpiece. Non-limiting embodiments of such alternate methods comprise "multiple upset and draw" steps performed on billets having cross-sections greater than 25.8 sq. cm (4 square inches). The multiple upset and draw steps are intended to impart uniform fine grain, very fine grain, or ultrafine grain microstructure throughout the workpiece, while preserving substantially the original dimensions of the workpiece. Because these alternate methods include Multiple Upset and Draw steps, they are referred to herein as embodiments of the "MUD" method. The MUD method includes severe plastic deformation and can produce uniform ultrafine grains in billet-size (e.g., 30 inch (76.2 cm) in length) titanium alloy workpieces. In non-limiting embodiments of the MUD method according to the present disclosure, strain rates used for the upset forging and draw forging steps are in the range of 0.001 s^{-1} to 0.002 s^{-1} . In contrast, strain rates typically used for conventional open die upset and draw forging are in the range of 0.001 s^{-1} to 0.002 s^{-1} . The strain rate for MUD is slow enough to prevent adiabatic heating in the workpiece in order to keep the forging temperature in control, yet the strain rate is acceptable for commercial practices.

[0105] A schematic representation of non-limiting embodiments of the MUD method is provided in FIG. 9, and a flow chart of certain embodiments of the MUD method is provided in FIG. 10. Referring to FIGS. 9 and 10, a non-limiting method 300 for refining grains in a workpiece comprising a titanium alloy using multiple upset and draw forging steps comprises heating an elongate titanium alloy workpiece 302 to a workpiece forging temperature in the $\alpha+\beta$ phase field of the titanium alloy. In a non-limiting embodiment, the shape of the elongate workpiece is a cylinder or a cylinder-like shape. In another non-limiting embodiment the shape of the workpiece is an octagonal cylinder or a right octagon.

[0106] The elongate workpiece has a starting cross-sectional dimension. For example, in a non-limiting embodiment of the MUD method according to the present disclosure in which the starting workpiece is a cylinder, the starting cross-sectional dimension is the diameter of the cylinder. In a non-limiting embodiment of the MUD method according to the present disclosure in which the starting workpiece is an octagonal cylinder, the starting cross-sectional dimension is the diameter of the circumscribed circle of the octagonal cross-section, i.e., the diameter of the circle that passes through all the vertices of the octagonal cross-section.

[0107] When the elongate workpiece is at the workpiece forging temperature, the workpiece is upset forged 304. After upset forging 304, in a non-limiting embodiment, the workpiece is rotated 90 degrees to the orientation 306 and then is subjected to multiple pass draw forging 312. Actual rotation of the workpiece is optional, and the objective of the step is to dispose the workpiece into the correct orientation (refer to FIG. 9) relative to a forging device for subsequent multiple pass draw forging 312 steps.

[0108] Multiple pass draw forging comprises incrementally rotating (depicted by arrow 310) the workpiece in a rotational direction (indicated by the direction of arrow 310), followed by draw forging 312 the workpiece after each increment of rotation. In non-limiting embodiments, incrementally rotating 310 and draw forging 312 is repeated until the workpiece comprises the starting cross-sectional dimension. Heating, upset forging, and multiple pass draw forging steps is repeated until a total strain in the range of at least 1.0 up to less than 3.5 is achieved in the workpiece.

[0109] An aspect of the present disclosure is to employ a strain rate during the upset and multiple pass drawing steps that is sufficient to result in severe plastic deformation of the titanium alloy workpiece, which, in non-limiting embodiments, further results in ultrafine grain size. In a non-limiting embodiment, a strain rate used in upset forging is in the range of 0.001 s^{-1} to 0.003 s^{-1} . In another non-limiting embodiment, a strain rate used in the multiple pass draw forging steps is the range of 0.01 s^{-1} to 0.02 s^{-1} . It was disclosed in the '538 Application that strain rates in these ranges do not result in adiabatic heating of the workpiece, which enables workpiece temperature control, and were found sufficient for an economically acceptable commercial practice.

[0110] In a non-limiting embodiment, after completion of the MUD method, the workpiece has substantially the original dimensions of the starting elongate article, such as, for example, cylinder 314 or octagonal cylinder 316. In another non-limiting embodiment, after completion of the MUD method, the workpiece has substantially the same cross-section as the starting workpiece. In a non-limiting embodiment, a single upset requires numerous draw hits and intermediate rotations to return the workpiece to a shape including the starting cross-section of the workpiece.

[0111] In a non-limiting embodiment of the MUD method wherein the workpiece is in the shape of a cylinder, for example, incrementally rotating and draw forging further comprises multiple steps of rotating the cylindrical workpiece in 15° increments and subsequently draw forging, until the cylindrical workpiece is rotated through 360° and is draw forged at each increment. In a non-limiting embodiment of the MUD method wherein the workpiece is in the shape of a cylinder, after each upset forge, twenty-four draw forging steps with intermediate incremental rotation between successive draw forging steps are employed to bring the workpiece to substantially its starting cross-sectional dimension. In another non-limiting embodiment, wherein the workpiece is in the shape of an octagonal cylinder, incrementally rotating and draw forging further comprises multiple steps of rotating the cylindrical workpiece in 45° increments and subsequently draw forging, until the cylindrical workpiece is rotated through 360° and is draw forged at each increment. In a non-limiting embodiment of the MUD method wherein the workpiece is in the shape of an octagonal cylinder, after each upset forge, eight forging steps separated by incremental rotation of the workpiece are employed to bring the workpiece

substantially to its starting cross-sectional dimension. It was observed in non-limiting embodiments of the MUD method that manipulation of an octagonal cylinder by handling equipment was more precise than manipulation of a cylinder by handling equipment. It also was observed that manipulation of an octagonal cylinder by handling equipment in a non-limiting embodiment of a MUD method was more precise than manipulation of a cube-shaped workpiece using hand tongs in non-limiting embodiments of the thermally managed high strain rate MAF process disclosed herein. It will be recognized on considering the present description that other draw forging sequences, each including a number of draw forging steps and intermediate incremental rotations of a particular number of degrees, may be used for other cross-sectional billet shapes so that the final shape of the workpiece after draw forging is substantially the same as the starting shape of the workpiece prior to upset forging. Such other possible sequences may be determined by a person skilled in the art without undue experimentation and are included within the scope of the present disclosure.

[0112] In a non-limiting embodiment of the MUD method according to the present disclosure, a workpiece forging temperature comprises a temperature within a workpiece forging temperature range. In a non-limiting embodiment, the workpiece forging temperature is in a workpiece forging temperature range of 100°F (55.6°C) below the beta transus temperature (T_{β}) of the titanium alloy to 700°F (388.9°C) below the beta transus temperature of the titanium alloy. In still another non-limiting embodiment, the workpiece forging temperature is in a temperature range of 300°F (166.7°C) below the beta transus temperature of the titanium alloy to 625°F (347°C) below the beta transus temperature of the titanium alloy. In a non-limiting embodiment, the low end of a workpiece forging temperature range is a temperature in the alpha+beta phase field at which substantial damage does not occur to the surface of the workpiece during the forging hit, as may be determined without undue experimentation by a person having ordinary skill in the art.

[0113] In a non-limiting embodiment of the MUD method according to the present disclosure, the workpiece forging temperature range for a Ti-6-2-4-2 alloy, which has a beta transus temperature (T_{β}) of about 1820°F (993.3°C), may be, for example, from 1120°F (604.4°C) to 1720°F (937.8°C), or in another embodiment may be from 1195°F (646.1°C) to 1520°F (826.7°C).

[0114] Non-limiting embodiments of the MUD method comprise multiple reheating steps. In a non-limiting embodiment, the titanium alloy workpiece is heated to the workpiece forging temperature after upset forging the titanium alloy workpiece. In another non-limiting embodiment, the titanium alloy workpiece is heated to the workpiece forging temperature prior to a draw forging step of the multiple pass draw forging. In another non-limiting embodiment, the workpiece is heated as needed to bring the actual workpiece temperature back to or near the workpiece forging temperature after an upset or draw forging step.

[0115] It was determined that embodiments of the MUD method impart redundant work or extreme deformation, also referred to as severe plastic deformation, which is aimed at creating ultrafine grains in a workpiece comprising a titanium alloy. Without intending to be bound to any particular theory of operation, it is believed that the round or octagonal cross sectional shape of cylindrical and octagonal cylindrical workpieces, respectively, distribute strain more evenly than workpieces of square or rectangular cross sectional shape across the cross-sectional area of the workpiece during a MUD method. The deleterious effect of friction between the workpiece and the forging die is also reduced by reducing the area of the workpiece in contact with the die.

[0116] In addition, it was also determined that decreasing the temperature during the MUD method reduces the final grain size to a size that is characteristic of the specific temperature being used. Referring to FIG. 10, in a non-limiting embodiment of a method 400 for refining the grain size of a workpiece, after processing the workpiece by the MUD method at the workpiece forging temperature, the temperature of the workpiece may be cooled 416 to a second workpiece forging temperature. In a non-limiting embodiment, after cooling the workpiece to the second workpiece forging temperature, the workpiece is upset forged at the second workpiece forging temperature 418. The workpiece is rotated 420 or otherwise oriented relative to the forging press for subsequent draw forging steps. The workpiece is multiple-step draw forged at the second workpiece forging temperature 422. Multiple-step draw forging at the second workpiece forging temperature 422 comprises incrementally rotating 424 the workpiece in a rotational direction (refer to FIG. 9) and draw forging at the second workpiece forging temperature 426 after each increment of rotation. In a non-limiting embodiment, the steps of upset, incrementally rotating 424, and draw forging are repeated 426 until the workpiece comprises the starting cross-sectional dimension. In another non-limiting embodiment, the steps of upset forging at the second workpiece temperature 418, rotating 420, and multiple step draw forging 422 are repeated until a total strain in the range of 1.0 up to less than 3.5 is achieved in the workpiece. It is recognized that the MUD method can be continued until any desired total strain is imparted to the titanium alloy workpiece.

[0117] In a non-limiting embodiment comprising a multi-temperature MUD method embodiment, the workpiece forging temperature, or a first workpiece forging temperature, is about 1600°F (871.1°C), and the second workpiece forging temperature is about 1500°F (815.6°C). Subsequent workpiece forging temperatures that are lower than the first and second workpiece forging temperatures, such as a third workpiece forging temperature, a fourth workpiece forging temperature, and so forth, are within the scope of non-limiting embodiments of the present disclosure.

[0118] As forging proceeds, grain refinement results in decreasing flow stress at a fixed temperature. It was determined that decreasing the forging temperature for sequential upset and draw steps keeps the flow stress constant and increases

the rate of microstructural refinement. It is anticipated that in non-limiting embodiments of MUD according to the present disclosure, a total strain in a range of at least 1.0 up to less than 3.5 results in a uniform equiaxed alpha ultrafine grain microstructure in titanium alloy workpieces.

[0119] An aspect of the present disclosure includes the possibility that after processing a workpiece by the MUD method, subsequent deformation steps are performed without coarsening the refined grain size, as long as the temperature of the workpiece is not subsequently heated above the beta transus temperature of the titanium alloy. For example, in a non-limiting embodiment, a subsequent deformation practice after the MUD method may include draw forging, multiple draw forging, upset forging, or any combination of two or more of these forging techniques at temperatures in the alpha+beta phase field of the titanium alloy. In a non-limiting embodiment, subsequent deformation or forging steps include a combination of multiple pass draw forging, upset forging, and draw forging to reduce the starting cross-sectional dimension of the cylinder-like or other elongate workpiece to a fraction of the cross-sectional dimension, such as, for example, but not limited to, one-half of the cross-sectional dimension, one-quarter of the cross-sectional dimension, and so forth, while still maintaining a uniform fine grain, very fine grain, or ultrafine grain structure in the titanium alloy workpiece.

[0120] The workpiece is a titanium alloy selected from a Ti-6-2-4-2 alloy, a Ti-6-2-4-6 alloy, ATI 425 titanium alloy (Ti-4Al-2.5V), and a Ti-6-6-2 alloy.

[0121] Prior to heating the workpiece to the workpiece forging temperature in the alpha+beta phase field according to MUD embodiments of the present disclosure, in a non-limiting embodiment the workpiece may be heated to a beta annealing temperature, held at the beta annealing temperature for a beta annealing time sufficient to form a 100% beta phase titanium microstructure in the workpiece, and cooled to ambient temperature. In a non-limiting embodiment, the beta annealing temperature is in a beta annealing temperature range that includes the beta transus temperature of the titanium alloy up to 300°F (166.7°C) above the beta transus temperature of the titanium alloy. In a non-limiting embodiment, the beta annealing time is from 5 minutes to 24 hours.

[0122] In a non-limiting embodiment, the workpiece is a billet that is coated on all or certain surfaces with a lubricating coating that reduces friction between the workpiece and the forging dies. In a non-limiting embodiment, the lubricating coating is a solid lubricant such as, but not limited to, one of graphite and a glass lubricant. Other lubricating coatings known now or hereafter to a person having ordinary skill in the art are within the scope of the present disclosure. In addition, in a non-limiting embodiment of the MUD method using cylinder-like or other elongate-shaped workpieces, the contact area between the workpiece and the forging dies is small relative to the contact area in multi-axis forging of a cube-shaped workpiece. For example, with a 10.2 cm (4 inch) cube, two of the entire 10.2 cm x 10.2 cm (4 inch by 4 inch) faces of the cube is in contact with the die. With a 1.52 m (5 foot) long billet, the billet length is larger than a typical 35.6 cm (14 inch) long die, and the reduced contact area results in reduced die friction and a more uniform titanium alloy workpiece microstructure and macrostructure.

[0123] Prior to heating the workpiece comprising a titanium alloy to the workpiece forging temperature in the alpha+beta phase field according to MUD embodiments of the present disclosure, in a non-limiting embodiment the workpiece is plastically deformed at a plastic deformation temperature in the beta phase field of the titanium alloy after being held at a beta annealing time sufficient to form 100% beta phase in the titanium alloy and prior to cooling the alloy to ambient temperature. In a non-limiting embodiment, the plastic deformation temperature is equivalent to the beta annealing temperature. In another non-limiting embodiment, the plastic deformation temperature is in a plastic deformation temperature range that includes the beta transus temperature of the titanium alloy up to 300°F (166.7°C) above the beta transus temperature of the titanium alloy.

[0124] In a non-limiting embodiment of the MUD method, plastically deforming the workpiece in the beta phase field of the titanium alloy comprises at least one of drawing, upset forging, and high strain rate multi-axis forging the titanium alloy workpiece. In another non-limiting embodiment, plastically deforming the workpiece in the beta phase field of the titanium alloy comprises multiple upset and draw forging according to non-limiting embodiments of the present disclosure, and wherein cooling the workpiece to a temperature at or near the workpiece forging temperature comprises air cooling. In still another non-limiting embodiment, plastically deforming the workpiece in the beta phase field of the titanium alloy comprises upset forging the workpiece to a 30-35% reduction in height or another dimension, such as length.

[0125] Another aspect of the MUD method of the present disclosure may include heating the forging dies during forging. A non-limiting embodiment comprises heating dies of a forge used to forge the workpiece to temperature in a temperature range bounded by the workpiece forging temperature down to 100°F (55.6°C) below the workpiece forging temperature.

[0126] The examples that follow are intended to further describe certain non-limiting embodiments, without restricting the scope of the present invention. Persons having ordinary skill in the art will appreciate that variations of the following examples are possible within the scope of the invention, which is defined solely by the claims.

EXAMPLE 1

[0127] A bar of Ti-6-2-4-2 alloy was processed according to a commercial forging process, identified in the industry by specification number AMS 4976, which is typically used to process Ti-6-2-4-2 alloy. By reference to the AMS 4976

specification, those having ordinary skill understand the specifics of the process to achieve the mechanical properties and microstructure set out in that the specification. After processing, the alloy was metallographically prepared and the microstructure was evaluated microscopically. As shown in the micrograph of the prepared alloy included as FIG. 11 (a), the microstructure includes alpha grains (the lighter colored regions in the image) that are on the order of 20 μm or larger.

[0128] According to a non-limiting embodiment within the present disclosure, a 10.2 cm (4.0 inch) cube-shaped workpiece of Ti-6-2-4-2 alloy was beta annealed at 1950°F (1066°C) for 1 hour and then air cooled to ambient temperature. After cooling, the beta annealed cube-shaped workpiece was heated to a workpiece forging temperature of 1600°F (871.1 °C) and forged using four hits of high strain rate MAF. The hits were to the following orthogonal axes, in the following sequence: A-B-C-A. The hits were to a spacer height of 8.3 cm (3.25 inches), and the ram speed was 2.5 cm (1 inch) per second. There was no strain rate control on the press, but for the 10.2 cm (4.0 inch) cubes, this ram speed results in a minimum strain rate during pressing of 0.25 s⁻¹. The time between successive orthogonal hits was about 15 seconds. The total strain applied to the workpiece was 1.37. The microstructure of the Ti-6-2-4-2 alloy processed in this manner is depicted in the micrograph of FIG. 11(b). The majority of alpha particles (lighter colored areas) are on the order of 4 μm or less, which is substantially finer than the alpha grains produced by the commercial forging process discussed above and represented by the micrograph of FIG. 11 (a).

EXAMPLE 2

[0129] A bar of Ti-6-2-4-6 alloy was processed according to a commercial forging process typically used for T-6-2-4-6 alloy, *i.e.*, according to specification AMS 4981. By reference to the AMS 4981 specification, those having ordinary skill understand the specifics of the process to achieve the mechanical properties and microstructure set out in that the specification. After processing, the alloy was metallographically prepared and the microstructure was evaluated microscopically. As shown in the micrograph of the prepared alloy shown in FIG. 12(a), the microstructure exhibits alpha grains (the lighter colored regions) that are on the order of 10 μm or larger.

[0130] In a non-limiting embodiment according to the present disclosure, a 10.2 cm (4.0 inch) cube-shaped workpiece of Ti-6-2-4-6 alloy was beta annealed at 1870°F (1066°C) for 1 hour and then air cooled. After cooling, the beta annealed cube-shaped workpiece was heated to a workpiece forging temperature of 1500°F (815.6°C) and forged using four hits of high strain rate MAF. The hits were to the following orthogonal axes and followed the following sequence: A-B-C-A. The hits were to a spacer height of 8.3 cm (3.25 inches), and the ram speed was 2.5 cm (1 inch) per second. There was no strain rate control on the press, but for the 10.2 cm (4.0 inch) cubes, this ram speed results in a minimum strain rate during pressing of 0.24 s⁻¹. The time between successive orthogonal hits was about 15 seconds. The total strain applied to the workpiece was 1.37. The microstructure of the alloy processed in this manner is depicted in the micrograph of FIG. 12(b). It is seen that the majority of alpha particles (lighter colored areas) are on the order of 4 μm or less, and in any case are much finer than the alpha grains produced by the commercial forging process discussed above and represented by the micrograph of FIG. 12(a).

EXAMPLE 3

[0131] In a non-limiting embodiment according to the present disclosure, a 10.2 cm (4.0 inch) cube-shaped workpiece of Ti-6-2-4-6 alloy was beta annealed at 1870°F (1066°C) for 1 hour and then air cooled. After cooling, the beta annealed cube-shaped workpiece was heated to a workpiece forging temperature of 1500°F (815.6°C) and forged using three hits of high strain rate MAF, one each on the A, the B, and the C axes (*i.e.*, the hits were to the following orthogonal axes and in the following sequence: A-B-C). The hits were to a spacer height of 8.3 cm (3.25 inches), and the ram speed was 2.5 cm (1 inch) per second. There was no strain rate control on the press, but for the 10.2 cm (4.0 inch) cubes, this ram speed results in a minimum strain rate during pressing of 0.25 s⁻¹. The time between successive hits was about 15 seconds. After the A-B-C cycle of hits, the workpiece was reheated to 1500°F (815.6°C) for 30 minutes. The cube was then high strain rate MAF with one hit each on the A, the B, and the C axes, *i.e.*, the hits were to the following orthogonal axes and in the following sequence: A-B-C. The hits were to the same spacer height and used the same ram speed and time in between hits as used in the first A-B-C sequence of hits. After the second sequence of A-B-C hits, the workpiece was reheated to 1500°F (815.6°C) for 30 minutes. The cube was then high strain rate MAF with one hit at each of the A, the B, and the C axes, *i.e.*, an A-B-C sequence. The hits were to the same spacer heights and used the same ram speed and time in between hits as in the first sequence of A-B-C hits. This embodiment of a high strain rate multi-axis forging process imparted a strain of 3.46. The microstructure of the alloy processed in this manner is depicted in the micrograph of FIG. 13. It is seen that the majority of alpha particles (lighter colored areas) are on the order of 4 μm or less. It is believed likely that the alpha particles are comprised of individual alpha grains and that each of the alpha grains has a grain size of 4 μm or less and is equiaxed in shape.

EXAMPLE 4

[0132] In a non-limiting embodiment according to the present disclosure, a 10.2 cm (4.0 inch) cube-shaped workpiece of Ti-6-2-4-2 alloy was beta annealed at 1950°F (1066°C) for 1 hour and then air cooled. After cooling, the beta annealed cube-shaped workpiece was heated to a workpiece forging temperature of 1700°F (926.7°C) and held for 1 hour. Two high strain rate MAF cycles (2 sequences of three A-B-C hits, for a total of 6 hits) were employed at 1700°F (926.7°C). The time between successive hits was about 15 seconds. The forging sequence was: an A hit to a 7.6 cm (3 inch) stop; a B hit to an 8.9 cm (3.5 inch) stop; and a C hit to a 10.2 cm (4.0 inch) stop. This forging sequence provides an equal strain to all three orthogonal axes every three-hit MAF sequence. The ram speed was 2.5 cm (1 inch) per second. There was no strain rate control on the press, but for the 10.2 cm (4.0 inch) cubes, this ram speed results in a minimum strain rate during pressing of 0.25 s⁻¹. The total strain per cycle is less than forging to an 8.3 cm (3.25 inch) reduction in each direction as in previous examples.

[0133] The workpiece was heated to 1650°F (898.9°C) and subjected to high strength MAF for three additional hits (i.e., one additional A-B-C high strain rate MAF cycle). The forging sequence was: an A hit to a 7.6 cm (3 inch) stop; a B hit to an 8.9 cm (3.5 inch) stop; and a C hit to a 10.2 cm (4.0 inch) stop. After forging, the total strain imparted to the workpiece was 2.59.

[0134] The microstructure of the forged workpiece of Example 4 is depicted in the micrograph of FIG. 14. It is seen that the majority of alpha particles (lighter colored regions) are in a networked structure. It is believed likely that the alpha particles are comprised of individual alpha grains and that each of the alpha grains has a grain size of 4 μm or less and is equiaxed in shape.

EXAMPLE 5

[0135] In a non-limiting embodiment according to the present disclosure, a 10.2 cm (4.0 inch) cube-shaped workpiece of Ti-6-2-4-2 alloy was beta annealed at 1950°F (1066°C) for 1 hour and then air cooled. After cooling, the beta annealed, cube-shaped workpiece was heated to a workpiece forging temperature of 1700°F (926.7°C) and held for 1 hour. MAF according to the present disclosure was employed to apply 6 press forgings to a major reduction spacer height (**A, B, C, A, B, C**) to the cube-shaped workpiece. In addition, between each press forging to an 8.3 cm (3.25 inch) major reduction spacer height, first and second blocking reductions were conducted on the other axes to "square up" the workpiece. The overall forging sequence used is as follows, wherein the bold and underlined hits are press forgings to the major reduction spacer height: **A-B-C-B-C-A-C-A-B-A-B-C-B-C-A-C**.

[0136] The forging sequence, including major, first blocking, and second blocking spacer heights (in cm and inches) that were utilized are outlined in the table below. The ram speed was 2.5 cm (1 inch) per second. There was no strain rate control on the press, but for the 10.2 cm (4.0 inch) cubes this ram speed results in a minimum strain rate during pressing of 0.25 s⁻¹. The time elapsed between hits was about 15 seconds. The total strain after thermally managed MAF according to this non-limiting embodiment was 2.37.

	Axes and Spacer Heights cm (inches)		
HIT	A	B	C
1	<u>8.3 (3.25)</u>		
2		10.8 (4.25)	
3			10.8 (4.25)
4		<u>8.3 (3.25)</u>	
5			12.1 (4.75)
6	10.2 (4)		
7			<u>8.3 (3.25)</u>
8	12.1 (4.75)		
9		10.2 (4)	
10	<u>8.3 (3.25)</u>		
11		12.1 (4.75)	
12			10.2 (4)

(continued)

	Axes and Spacer Heights cm (inches)		
HIT	A	B	C
13		8.3 (3.25)	
14			12.1 (4.75)
15	10.2 (4)		
16			8.3 (3.25)
Total strain	2.37		

[0137] The microstructure of the workpiece forged by the process described in this Example 5 is depicted in the micrograph of FIG. 15. It is seen that the majority of alpha particles (lighter colored regions) are elongated. It is believed likely that the alpha particles are comprised of individual alpha grains and that each of the alpha grains has a grain size of 4 μm or less and is equiaxed in shape.

EXAMPLE 6

[0138] In a non-limiting embodiment according to the present disclosure, a 10.2 cm (4.0 inch) cube-shaped workpiece of Ti-6-2-4-2 alloy was beta annealed at 1950°F (1066°C) for 1 hour and then air cooled. Thermally managed high strain rate MAF, according to embodiments of the present disclosure, was performed on the workpiece, including 6 hits (2 A-B-C MAF cycles) at 1900°C, with 30 second holds between each hit. The ram speed was 2.5 cm (1 inch) per second. There was no strain rate control on the press, but for the 10.2 cm (4.0 inch) cubes, this ram speed results in a minimum strain rate during pressing of 0.25 s⁻¹. The sequence of 6 hits with intermediate holds was designed to heat the surface of the piece through the beta transus temperature during MAF, and this may therefore be referred to as a through transus high strain rate MAF. The process results in refining the surface structures and minimizing cracking during subsequent forging. The workpiece was then heated at 1650°F (898.9°C), *i.e.*, below the beta transus temperature for 1 hour. MAF according to embodiments of the present disclosure was applied to the workpiece, including 6 hits (two A-B-C MAF cycles) with about 15 seconds between hits. The first three hits (the hits in the first A-B-C MAF cycle) were performed with an 8.9 cm (3.5 inch) spacer height, and the second 3 hits (the hits in the second A-B-C MAF cycle) were performed with an 8.3 cm (3.25 inch) spacer height. The workpiece was heated to 1650°F (898.9°C) and held for 30 minutes between the hits with the 8.9 cm (3.5 inch) spacer and the hits with the 8.3 cm (3.25 inch) spacer. The smaller reduction (*i.e.*, larger spacer height) used for the first 3 hits was designed to inhibit cracking as the smaller reduction breaks up boundary structures that may lead to cracking. The workpiece was reheated to 1500°F (815.6°C) for 1 hour. MAF according to embodiments of the present disclosure was then applied using 3 A-B-C hits (one MAF cycle) to 8.3 cm (3.25 inch) reductions with 15 seconds in between each hit. This sequence of heavier reductions is designed to put additional work into the non-boundary structures. The ram speed for all hits described in Example 6 was 2.5 cm (1 inch) per second.

[0139] A total strain of 3.01 was imparted to the workpiece of Example 6. A representative micrograph from the center of the thermally managed MAF workpiece of Example 6 is shown in FIG. 16(a). A representative micrograph of the surface of the thermally managed MAF workpiece of Example 6 is presented in FIG. 16(b). The surface microstructure (FIG. 16(b)) is substantially refined and the majority of the particles and/or grains have a size of about 4 μm or less, which is an ultrafine grain microstructure. The center microstructure shown in FIG. 16(a) shows highly refined grains, and it is believed likely that the alpha particles are comprised of individual alpha grains and each of the alpha grains has a grain size of 4 μm or less and is equiaxed in shape.

[0140] It will be understood that the present description illustrates those aspects of the invention relevant to a clear understanding of the invention. Although only a limited number of embodiments of the present invention are necessarily described herein, one of ordinary skill in the art will, upon considering the foregoing description, recognize that many modifications and variations of the invention may be employed. All such variations and modifications of the invention are intended to be covered by the following claims

Claims

1. A method of refining the grain size of a workpiece comprising a titanium alloy selected from Ti-6Al-2Sn-4Zr-6Mo alloy (UNS R56260), Ti-6Al-2Sn-4Zr-2Mo-0.08Si alloy (UNS R54620), Ti-4Al-2.5V alloy (UNS R54250), Ti-6Al-7Nb

alloy (UNS R56700), and Ti-6Al-6V-2Sn alloy (UNS R56620), the method comprising:

beta annealing the workpiece;
cooling the beta annealed workpiece to a temperature below the beta transus temperature of the titanium alloy;
and
multi-axis forging the workpiece, wherein the multi-axis forging comprises

press forging the workpiece at a workpiece forging temperature in a workpiece forging temperature range in the direction of a first orthogonal axis of the workpiece with a strain rate sufficient to adiabatically heat an internal region of the workpiece,
press forging the workpiece at a workpiece forging temperature in the workpiece forging temperature range in the direction of a second orthogonal axis of the workpiece with a strain rate that is sufficient to adiabatically heat the internal region of the workpiece,
press forging the workpiece at a workpiece forging temperature in the workpiece forging temperature range in the direction of a third orthogonal axis of the workpiece with a strain rate that is sufficient to adiabatically heat the internal region of the workpiece, and
repeating at least one of the press forging steps until a total true strain of at least 1.0 up to less than 3.5 is achieved in the workpiece.

2. A method of refining the grain size of a workpiece comprising a titanium alloy selected from Ti-6Al-2Sn-4Zr-6Mo alloy (UNS R56260), Ti-6Al-2Sn-4Zr-2Mo-0.08Si alloy (UNS R54620), Ti-4Al-2.5V alloy (UNS R54250), Ti-6Al-7Nb alloy (UNS R56700), and Ti-6Al-6V-2Sn alloy (UNS R56620), the method comprising:

beta annealing the workpiece;
cooling the beta annealed workpiece to a temperature below the beta transus temperature of the titanium alloy;
and
multi-axis forging the workpiece, wherein the multi-axis forging comprises

press forging the workpiece at a workpiece forging temperature in a workpiece forging temperature range in the direction of a first orthogonal A-axis of the workpiece to a major reduction spacer height with a strain rate sufficient to adiabatically heat an internal region of the workpiece,
press forging the workpiece at the workpiece forging temperature in the direction of a second orthogonal B-axis of the workpiece to a first blocking reduction spacer height,
press forging the workpiece at the workpiece forging temperature in the direction of a third orthogonal C-axis of the workpiece to a second blocking reduction spacer height,
press forging the workpiece at the workpiece forging temperature in the direction of the second orthogonal B-axis of the workpiece to the major reduction spacer height with a strain rate sufficient to adiabatically heat an internal region of the workpiece,
press forging the workpiece at the workpiece forging temperature in the direction of the third orthogonal C-axis of the workpiece to the first blocking reduction spacer height,
press forging the workpiece at the workpiece forging temperature in the direction of the first orthogonal A-axis of the workpiece to the second blocking reduction spacer height,
press forging the workpiece at the workpiece forging temperature in the direction of the third orthogonal C-axis of the workpiece to the major reduction spacer height with a strain rate sufficient to adiabatically heat an internal region of the workpiece,
press forging the workpiece at the workpiece forging temperature in the direction of the first orthogonal A-axis of the workpiece to the first blocking reduction spacer height,
press forging the workpiece at the workpiece forging temperature in the direction of the second orthogonal B-axis of the workpiece to the second blocking reduction spacer height, and
repeating at least one of the preceding press forging steps until a total true strain of at least 1.0 up to less than 3.5 is achieved in the workpiece.

3. The method of claim 1 or claim 2, wherein a strain rate used during press forging is in the range of 0.2 s^{-1} to 0.8 s^{-1} .

4. The method of claim 1 or claim 2, wherein cooling the beta annealed workpiece comprises cooling the workpiece to ambient temperature.

5. The method of claim 1 or claim 2, wherein cooling the beta annealed workpiece comprises cooling the workpiece

to a temperature at or near the workpiece forging temperature.

6. The method of claim 1 or claim 2, wherein beta annealing the workpiece comprises heating the workpiece at a beta annealing temperature in a range of the beta transus temperature of the titanium alloy up to 166.7°C (300°F) above the beta transus temperature of the titanium alloy.
7. The method of claim 1 or claim 2, wherein beta annealing the workpiece comprises heating the workpiece at a beta annealing temperature for a time within the range of 5 minutes to 24 hours.
8. The method of claim 1 or claim 2, further comprising plastically deforming the workpiece at a plastic deformation temperature in the beta phase field of the titanium alloy prior to cooling the beta-annealed workpiece.
9. The method of claim 8, wherein plastically deforming the workpiece at a plastic deformation temperature in the beta phase field of the titanium alloy comprises at least one of drawing, upset forging, and high strain rate multi-axis forging the workpiece.
10. The method of claim 8, wherein the plastic deformation temperature is in a range of the beta transus temperature of the titanium alloy up to 166.7°C (300°F) above the beta transus temperature of the titanium alloy.
11. The method of claim 8, wherein plastically deforming the workpiece comprises high strain rate multi-axis forging, and wherein cooling the workpiece comprises high strain rate multi-axis forging the workpiece as the workpiece cools to the workpiece forging temperature in the alpha+beta phase field of the titanium alloy.
12. The method of claim 8, wherein plastically deforming the workpiece comprises upset forging the workpiece to a beta-upset strain in the range of 0.1 to 0.5.
13. The method of claim 1 or claim 2, wherein the workpiece forging temperature is in a range of 55.6°C (100°F) below the beta transus temperature of the titanium alloy to 388.9°C (700°F) below the beta transus temperature of the titanium alloy.
14. The method of claim 1 or claim 2, further comprising, intermediate successive press forging steps, allowing the adiabatically heated internal region of the workpiece to cool to a temperature at or near the workpiece forging temperature in the workpiece forging temperature range and heating the outer surface of the workpiece to a temperature at or near the workpiece forging temperature in the workpiece forging temperature range.
15. The method of claim 14, wherein the adiabatically heated internal region of the workpiece is allowed to cool for an internal region cooling time in the range of 5 seconds to 120 seconds.
16. The method of claim 14, wherein heating the outer surface of the workpiece comprises heating using one or more of flame heating, box furnace heating, induction heating, and radiant heating.
17. The method of claim 14, wherein the dies of a forge used to press forge the workpiece are heated to a temperature in a range of the workpiece forging temperature to 55.6°C (100°F) below the workpiece forging temperature.
18. The method of claim 1 or claim 2, wherein after a total true strain of at least 1.0 up to less than 3.5 is achieved, the workpiece comprises an average alpha particle grain size in the range of 4 μm or less.
19. The method of claim 1 or claim 2, wherein repeating at least one of the press forging steps until a total true strain of at least 1.0 up to less than 3.5 is achieved in the workpiece comprises press forging the workpiece at a second workpiece forging temperature, wherein the second workpiece forging temperature is within the alpha+beta phase field of the titanium alloy of the workpiece, and wherein the second workpiece forging temperature is lower than the workpiece forging temperature.

Patentansprüche

1. Verfahren zum Verfeinern der Korngröße eines Werkstücks, das eine Titanlegierung umfasst, ausgewählt aus der Legierung Ti-6Al-2Sn-4Zr-6Mo (UNS R56260), der Legierung Ti-6Al-2Sn-4Zr-2Mo-0,08Si (UNS R54620), der Le-

gierung Ti-4Al,-2,5V (UNS R54250), der Legierung Ti-6Al-7Nb (UNS R56700) und der Legierung Ti-6Al-6V-2Sn (UNS R56620), wobei das Verfahren Folgendes umfasst:

Beta-Glühen des Werkstücks;

Abkühlen des beta-geglühten Werkstücks auf eine Temperatur unterhalb der Beta-Übergangstemperatur der Titanlegierung; und

Mehrachsschmieden des Werkstücks, wobei das Mehrachsschmieden Folgendes umfasst:

Druckschmieden des Werkstücks bei einer Werkstückschmiedetemperatur in einem Werkstückschmiedetemperaturbereich in der Richtung einer ersten senkrechten Achse des Werkstücks mit einer Dehngeschwindigkeit, ausreichend, um einen Innenbereich des Werkstücks adiabatisch zu erwärmen,

Druckschmieden des Werkstücks bei einer Werkstückschmiedetemperatur im Werkstückschmiedetemperaturbereich in der Richtung einer zweiten senkrechten Achse des Werkstücks mit einer Dehngeschwindigkeit, die ausreicht, um den Innenbereich des Werkstücks adiabatisch zu erwärmen,

Druckschmieden des Werkstücks bei einer Werkstückschmiedetemperatur im Werkstückschmiedetemperaturbereich in der Richtung einer dritten senkrechten Achse des Werkstücks mit einer Dehngeschwindigkeit, die ausreicht, um den Innenbereich des Werkstücks adiabatisch zu erwärmen, und

Wiederholen wenigstens eines der Druckschmiedeschritte bis eine gesamte wahre Dehnung von wenigstens 1,0 bis zu weniger als 3,5 im Werkstück erzielt wird.

2. Verfahren zum Verfeinern der Korngröße eines Werkstücks, das eine Titanlegierung umfasst, ausgewählt aus der Legierung Ti-6Al-2Sn-4Zr-6Mo (UNS R56260), der Legierung Ti-6Al-2Sn-4Zr-2Mo-0,08Si (UNS R54620), der Legierung Ti-4Al,-2,5V (UNS R54250), der Legierung Ti-6Al-7Nb (UNS R56700) und der Legierung Ti-6Al-6V-2Sn (UNS R56620), wobei das Verfahren Folgendes umfasst:

Beta-Glühen des Werkstücks;

Abkühlen des beta-geglühten Werkstücks auf eine Temperatur unterhalb der Beta-Übergangstemperatur der Titanlegierung; und

Mehrachsschmieden des Werkstücks, wobei das Mehrachsschmieden Folgendes umfasst:

Druckschmieden des Werkstücks bei einer Werkstückschmiedetemperatur in einem Werkstückschmiedetemperaturbereich in der Richtung einer ersten senkrechten A-Achse des Werkstücks auf eine große Reduzierungsabstandhalterhöhe mit einer Dehngeschwindigkeit, ausreichend, um einen Innenbereich des Werkstücks adiabatisch zu erwärmen,

Druckschmieden des Werkstücks bei der Werkstückschmiedetemperatur in der Richtung einer zweiten senkrechten B-Achse des Werkstücks auf eine erste Vorschmiedereduzierungsabstandhalterhöhe,

Druckschmieden des Werkstücks bei der Werkstückschmiedetemperatur in der Richtung einer dritten senkrechten C-Achse des Werkstücks auf eine zweite Vorschmiedereduzierungsabstandhalterhöhe,

Druckschmieden des Werkstücks bei der Werkstückschmiedetemperatur in der Richtung der zweiten senkrechten B-Achse des Werkstücks auf die große Reduzierungsabstandhalterhöhe mit einer Dehngeschwindigkeit, ausreichend, um einen Innenbereich des Werkstücks adiabatisch zu erwärmen,

Druckschmieden des Werkstücks bei der Werkstückschmiedetemperatur in der Richtung der dritten senkrechten C-Achse des Werkstücks auf die erste Vorschmiedereduzierungsabstandhalterhöhe,

Druckschmieden des Werkstücks bei der Werkstückschmiedetemperatur in der Richtung der ersten senkrechten A-Achse des Werkstücks auf die zweite Vorschmiedereduzierungsabstandhalterhöhe,

Druckschmieden des Werkstücks bei der Werkstückschmiedetemperatur in der Richtung der dritten senkrechten C-Achse des Werkstücks auf die große Reduzierungsabstandhalterhöhe mit einer Dehngeschwindigkeit, ausreichend, um einen Innenbereich des Werkstücks adiabatisch zu erwärmen,

Druckschmieden des Werkstücks bei der Werkstückschmiedetemperatur in der Richtung der ersten senkrechten A-Achse des Werkstücks auf die erste Vorschmiedereduzierungsabstandhalterhöhe,

Druckschmieden des Werkstücks bei der Werkstückschmiedetemperatur in der Richtung der zweiten senkrechten B-Achse des Werkstücks auf die zweite Vorschmiedereduzierungsabstandhalterhöhe, und

Wiederholen wenigstens eines der vorhergehenden Druckschmiedeschritte bis eine gesamte wahre Dehnung von wenigstens 1,0 bis zu weniger als 3,5 im Werkstück erzielt wird.

3. Verfahren nach Anspruch 1 oder 2, wobei eine während des Druckschmiedens verwendete Dehngeschwindigkeit im Bereich von $0,2 \text{ s}^{-1}$ bis $0,8 \text{ s}^{-1}$ liegt.

4. Verfahren nach Anspruch 1 oder 2, wobei das Abkühlen des beta-geglühten Werkstücks das Abkühlen des Werkstücks auf Umgebungstemperatur umfasst.
5. Verfahren nach Anspruch 1 oder 2, wobei das Abkühlen des beta-geglühten Werkstücks das Abkühlen des Werkstücks auf eine Temperatur bei oder nahe der Werkstückschmiedetemperatur umfasst.
6. Verfahren nach Anspruch 1 oder 2, wobei das Beta-Glühen des Werkstücks das Erwärmen des Werkstücks bei einer Beta-Glühtemperatur in einem Bereich der Beta-Übergangstemperatur der Titanlegierung bis zu 166,7 °C (300 °F) über der Beta-Übergangstemperatur der Titanlegierung umfasst.
7. Verfahren nach Anspruch 1 oder 2, wobei das Beta-Glühen des Werkstücks das Erwärmen des Werkstücks bei einer Beta-Glühtemperatur eine Zeit im Bereich von 5 Minuten bis 24 Stunden lang umfasst.
8. Verfahren nach Anspruch 1 oder 2, ferner umfassend das plastische Verformen des Werkstücks bei einer Temperatur für plastisches Verformen im Beta-Phasenfeld der Titanlegierung vor dem Abkühlen des beta-geglühten Werkstücks.
9. Verfahren nach Anspruch 8, wobei das plastische Verformen des Werkstücks bei einer Temperatur für plastisches Verformen im Beta-Phasenfeld der Titanlegierung Ziehen, Stauchschmieden und/oder Mehrachsschmieden des Werkstücks umfasst.
10. Verfahren nach Anspruch 8, wobei die Temperatur für plastisches Verformen in einem Bereich der Beta-Übergangstemperatur der Titanlegierung bis zu 166,7 °C (300 °F) über der Beta-Übergangstemperatur der Titanlegierung liegt.
11. Verfahren nach Anspruch 8, wobei plastisches Verformen des Werkstücks Mehrachsschmieden mit hoher Dehnungsrate umfasst und wobei das Abkühlen des Werkstücks Mehrachsschmieden des Werkstücks mit hoher Dehnungsrate umfasst, während das Werkstück sich auf die Werkstückschmiedetemperatur in dem Alpha+Beta-Phasenfeld der Titanlegierung abkühlt.
12. Verfahren nach Anspruch 8, wobei das plastische Verformen des Werkstücks Stauchschmieden des Werkstücks auf eine Beta-Stauchdehnung im Bereich von 0,1 bis 0,5 umfasst.
13. Verfahren nach Anspruch 1 oder 2, wobei die Werkstückschmiedetemperatur in einem Bereich von 55,6 °C (100 °F) unterhalb der Beta-Übergangstemperatur der Titanlegierung bis 388,9 °C (700 °F) unterhalb der Beta-Übergangstemperatur der Titanlegierung liegt.
14. Verfahren nach Anspruch 1 oder 2, ferner umfassend aufeinanderfolgende Druckschmiedezwischenschritte, Zulassen, dass sich der adiabatisch erwärmte Innenbereich des Werkstücks auf eine Temperatur bei oder nahe der Werkstückschmiedetemperatur im Werkstückschmiedetemperaturbereich abkühlt, und das Erwärmen der Außenoberfläche des Werkstücks auf eine Temperatur auf oder nahe der Werkstückschmiedetemperatur im Werkstückschmiedetemperaturbereich.
15. Verfahren nach Anspruch 14, wobei es dem adiabatisch erwärmten Innenbereich des Werkstücks ermöglicht wird, sich über einen Innenbereichs-Abkühlzeitraum im Bereich von 5 Sekunden bis einschließlich 120 Sekunden abzukühlen.
16. Verfahren nach Anspruch 14, wobei das Erwärmen der Außenoberfläche des Werkstücks das Erwärmen unter Einsatz von Flammwärmen, Kammerofenerwärmen, Induktionserwärmen und/oder Strahlungserwärmen umfasst.
17. Verfahren nach Anspruch 14, wobei die Gesenke einer Schmiede, die zum Druckschmieden des Werkstücks eingesetzt werden, auf eine Temperatur in einem Bereich von der Werkstückschmiedetemperatur bis 55,6 °C (100 °F) unterhalb der Werkstückschmiedetemperatur erwärmt werden.
18. Verfahren nach Anspruch 1 oder 2, wobei, nachdem eine gesamte wahre Dehnung von wenigstens 1,0 bis zu weniger als 3,5 erreicht ist, das Werkstück eine durchschnittliche Alpha-Partikelkorngröße im Bereich von höchstens 4 µm umfasst.
19. Verfahren nach Anspruch 1 oder 2, wobei das Wiederholen wenigstens eines der Druckschmiedeschritte, bis eine gesamte wahre Dehnung von wenigstens 1,0 bis zu weniger als 3,5 im Werkstück erzielt wird, Folgendes umfasst:

Druckschmieden des Werkstücks bei einer zweiten Werkstückschmiedetemperatur, wobei die zweite Werkstückschmiedetemperatur innerhalb des Alpha+Beta-Phasenfelds der Titanlegierung des Werkstücks liegt, und wobei die zweite Werkstückschmiedetemperatur geringer als die Werkstückschmiedetemperatur ist.

5

Revendications

1. Procédé d'affinage de la taille de grain d'une pièce à travailler comprenant un alliage de titane choisi parmi l'alliage Ti-6Al-2Sn-4Zr-6Mo (UNS R56260), l'alliage Ti-6Al-2Sn-4Zr-2Mo-0,08Si (UNS R54620), l'alliage Ti-4Al-2,5V (UNS R54250), l'alliage Ti-6Al-7Nb (UNS R56700), et l'alliage Ti-6Al-6V-2Sn (UNS R56620), le procédé comprenant :

10

le recuit bêta de la pièce à travailler ;

le refroidissement de la pièce à travailler recuite bêta à une température en dessous de la température de transition bêta de l'alliage de titane ; et

15

le forgeage multiaxial de la pièce à travailler, le forgeage multiaxial comprenant

le forgeage à la presse de la pièce à travailler à une température de forgeage de pièce à travailler dans une plage de températures de forgeage de pièce à travailler dans la direction d'un premier axe orthogonal de la pièce à travailler avec une vitesse d'allongement suffisante pour chauffer adiabatiquement une région interne de la pièce à travailler,

20

le forgeage à la presse de la pièce à travailler à une température de forgeage de pièce à travailler dans la plage de températures de forgeage de pièce à travailler dans la direction d'un deuxième axe orthogonal de la pièce à travailler avec une vitesse d'allongement qui est suffisante pour chauffer adiabatiquement la région interne de la pièce à travailler,

25

le forgeage à la presse de la pièce à travailler à une température de forgeage de pièce à travailler dans la plage de températures de forgeage de pièce à travailler dans la direction d'un troisième axe orthogonal de la pièce à travailler avec une vitesse d'allongement qui est suffisante pour chauffer adiabatiquement la région interne de la pièce à travailler, et

la répétition d'au moins l'une des étapes de forgeage à la presse jusqu'à ce qu'un allongement réel total d'au moins 1,0 jusqu'à moins de 3,5 soit obtenu dans la pièce à travailler.

30

2. Procédé d'affinage de la taille de grain d'une pièce à travailler comprenant un alliage de titane choisi parmi l'alliage Ti-6Al-2Sn-4Zr-6Mo (UNS R56260), l'alliage Ti-6Al-2Sn-4Zr-2Mo-0,08Si (UNS R54620), l'alliage Ti-4Al-2,5V (UNS R54250), l'alliage Ti-6Al-7Nb (UNS R56700), et l'alliage Ti-6Al-6V-2Sn (UNS R56620), le procédé comprenant :

35

le recuit bêta de la pièce à travailler ;

le refroidissement de la pièce à travailler recuite bêta à une température en dessous de la température de transition bêta de l'alliage de titane ; et

le forgeage multiaxial de la pièce à travailler, le forgeage multiaxial comprenant

40

le forgeage à la presse de la pièce à travailler à une température de forgeage de pièce à travailler dans une plage de températures de forgeage de pièce à travailler dans la direction d'un premier axe A orthogonal de la pièce à travailler jusqu'à une hauteur d'entretoise de réduction principale avec une vitesse d'allongement suffisante pour chauffer adiabatiquement une région interne de la pièce à travailler,

le forgeage à la presse de la pièce à travailler à la température de forgeage de pièce à travailler dans la direction d'un deuxième axe B orthogonal de la pièce à travailler jusqu'à une première hauteur d'entretoise de réduction de blocage,

45

le forgeage à la presse de la pièce à travailler à la température de forgeage de pièce à travailler dans la direction d'un troisième axe C orthogonal de la pièce à travailler jusqu'à une seconde hauteur d'entretoise de réduction de blocage,

50

le forgeage à la presse de la pièce à travailler à la température de forgeage de pièce à travailler dans la direction du deuxième axe B orthogonal de la pièce à travailler jusqu'à la hauteur d'entretoise de réduction principale avec une vitesse d'allongement suffisante pour chauffer adiabatiquement une région interne de la pièce à travailler,

le forgeage à la presse de la pièce à travailler à la température de forgeage de pièce à travailler dans la direction du troisième axe C orthogonal de la pièce à travailler jusqu'à la première hauteur d'entretoise de réduction de blocage,

55

le forgeage à la presse de la pièce à travailler à la température de forgeage de pièce à travailler dans la direction du premier axe A orthogonal de la pièce à travailler jusqu'à la seconde hauteur d'entretoise de réduction de blocage,

le forgeage à la presse de la pièce à travailler à la température de forgeage de pièce à travailler dans la direction du troisième axe C orthogonal de la pièce à travailler jusqu'à la hauteur d'entretoise de réduction principale avec une vitesse d'allongement suffisante pour chauffer adiabatiquement une région interne de la pièce à travailler,

le forgeage à la presse de la pièce à travailler à la température de forgeage de pièce à travailler dans la direction du premier axe A orthogonal de la pièce à travailler jusqu'à la première hauteur d'entretoise de réduction de blocage,

le forgeage à la presse de la pièce à travailler à la température de forgeage de pièce à travailler dans la direction du deuxième axe B orthogonal de la pièce à travailler jusqu'à la seconde hauteur d'entretoise de réduction de blocage, et

la répétition d'au moins l'une des étapes de forgeage à la presse précédentes jusqu'à ce qu'un allongement réel total d'au moins 1,0 jusqu'à moins de 3,5 soit obtenu dans la pièce à travailler.

3. Procédé selon la revendication 1 ou la revendication 2, dans lequel une vitesse d'allongement utilisée pendant le forgeage à la presse est dans la plage de $0,2 \text{ s}^{-1}$ à $0,8 \text{ s}^{-1}$.

4. Procédé selon la revendication 1 ou la revendication 2, dans lequel le refroidissement de la pièce à travailler recuite bêta comprend le refroidissement de la pièce à travailler à température ambiante.

5. Procédé selon la revendication 1 ou la revendication 2, dans lequel le refroidissement de la pièce à travailler recuite bêta comprend le refroidissement de la pièce à travailler à une température à ou près de la température de forgeage de pièce à travailler.

6. Procédé selon la revendication 1 ou la revendication 2, dans lequel le recuit bêta de la pièce à travailler comprend le chauffage de la pièce à travailler à une température de recuit bêta dans une plage de la température de transition bêta de l'alliage de titane jusqu'à $166,7 \text{ }^{\circ}\text{C}$ ($300 \text{ }^{\circ}\text{F}$) au-dessus de la température de transition bêta de l'alliage de titane.

7. Procédé selon la revendication 1 ou la revendication 2, dans lequel le recuit bêta de la pièce à travailler comprend le chauffage de la pièce à travailler à une température de recuit bêta pendant une durée dans la plage de 5 minutes à 24 heures.

8. Procédé selon la revendication 1 ou la revendication 2, comprenant en outre la déformation plastique de la pièce à travailler à une température de déformation plastique dans le champ de phase bêta de l'alliage de titane avant le refroidissement de la pièce à travailler recuite bêta.

9. Procédé selon la revendication 8, dans lequel la déformation plastique de la pièce à travailler à une température de déformation plastique dans le champ de phase bêta de l'alliage de titane comprend au moins l'un parmi l'étirage, le refoulement et le forgeage multiaxial à vitesse d'allongement élevée de la pièce à travailler.

10. Procédé selon la revendication 8, dans lequel la température de déformation plastique est dans une plage de la température de transition bêta de l'alliage de titane jusqu'à $166,7 \text{ }^{\circ}\text{C}$ ($300 \text{ }^{\circ}\text{F}$) au-dessus de la température de transition bêta de l'alliage de titane.

11. Procédé selon la revendication 8, dans lequel la déformation plastique de la pièce à travailler comprend le forgeage multiaxial à vitesse d'allongement élevée, et dans lequel le refroidissement de la pièce à travailler comprend le forgeage multiaxial à vitesse d'allongement élevée de la pièce à travailler lorsque la pièce à travailler se refroidit à la température de forgeage de pièce à travailler dans le champ de phase alpha+bêta de l'alliage de titane.

12. Procédé selon la revendication 8, dans lequel la déformation plastique de la pièce à travailler comprend le refoulement de la pièce à travailler à un allongement de refoulement bêta dans la plage de 0,1 à 0,5.

13. Procédé selon la revendication 1 ou la revendication 2, dans lequel la température de forgeage de pièce à travailler est dans une plage de $55,6 \text{ }^{\circ}\text{C}$ ($100 \text{ }^{\circ}\text{F}$) en dessous de la température de transition bêta de l'alliage de titane à $388,9 \text{ }^{\circ}\text{C}$ ($700 \text{ }^{\circ}\text{F}$) en dessous de la température de transition bêta de l'alliage de titane.

14. Procédé selon la revendication 1 ou la revendication 2, comprenant en outre, des étapes de forgeage à la presse successives intermédiaires, permettant à la région interne chauffée adiabatiquement de la pièce à travailler de

refroidir à une température à ou près de la température de forgeage de pièce à travailler dans la plage de températures de forgeage de pièce à travailler et le chauffage de la surface externe de la pièce à travailler à une température à ou près de la température de forgeage de pièce à travailler dans la plage de températures de forgeage de pièce à travailler.

5

15. Procédé selon la revendication 14, dans lequel la région interne chauffée adiabatiquement de la pièce à travailler est laissée à refroidir pendant une durée de refroidissement de région interne dans la plage de 5 secondes à 120 secondes.

10

16. Procédé selon la revendication 14, dans lequel le chauffage de la surface externe de la pièce à travailler comprend le chauffage à l'aide d'un ou de plusieurs parmi un chauffage à la flamme, un chauffage au four électrique, un chauffage par induction et un chauffage radiant.

15

17. Procédé selon la revendication 14, dans lequel les matrices d'une forge utilisée pour forger à la presse la pièce à travailler sont chauffées à une température dans une plage de la température de forgeage de pièce à travailler à 55,6 °C (100 °F) en dessous de la température de forgeage de pièce à travailler.

20

18. Procédé selon la revendication 1 ou la revendication 2, dans lequel après qu'un allongement réel total d'au moins 1,0 jusqu'à moins de 3,5 est obtenu, la pièce à travailler comprend une taille de grain de particule alpha moyenne dans la plage de 4 µm ou moins.

25

19. Procédé selon la revendication 1 ou la revendication 2, dans lequel la répétition d'au moins l'une des étapes de forgeage à la presse jusqu'à ce qu'un allongement réel total d'au moins 1,0 jusqu'à moins de 3,5 soit obtenu dans la pièce à travailler comprend le forgeage à la presse de la pièce à travailler à une seconde température de forgeage de pièce à travailler, dans lequel la seconde température de forgeage de pièce à travailler est dans le champ de phase alpha+bêta de l'alliage de titane de la pièce à travailler, et dans lequel la seconde température de forgeage de pièce à travailler est inférieure à la température de forgeage de pièce à travailler.

30

35

40

45

50

55

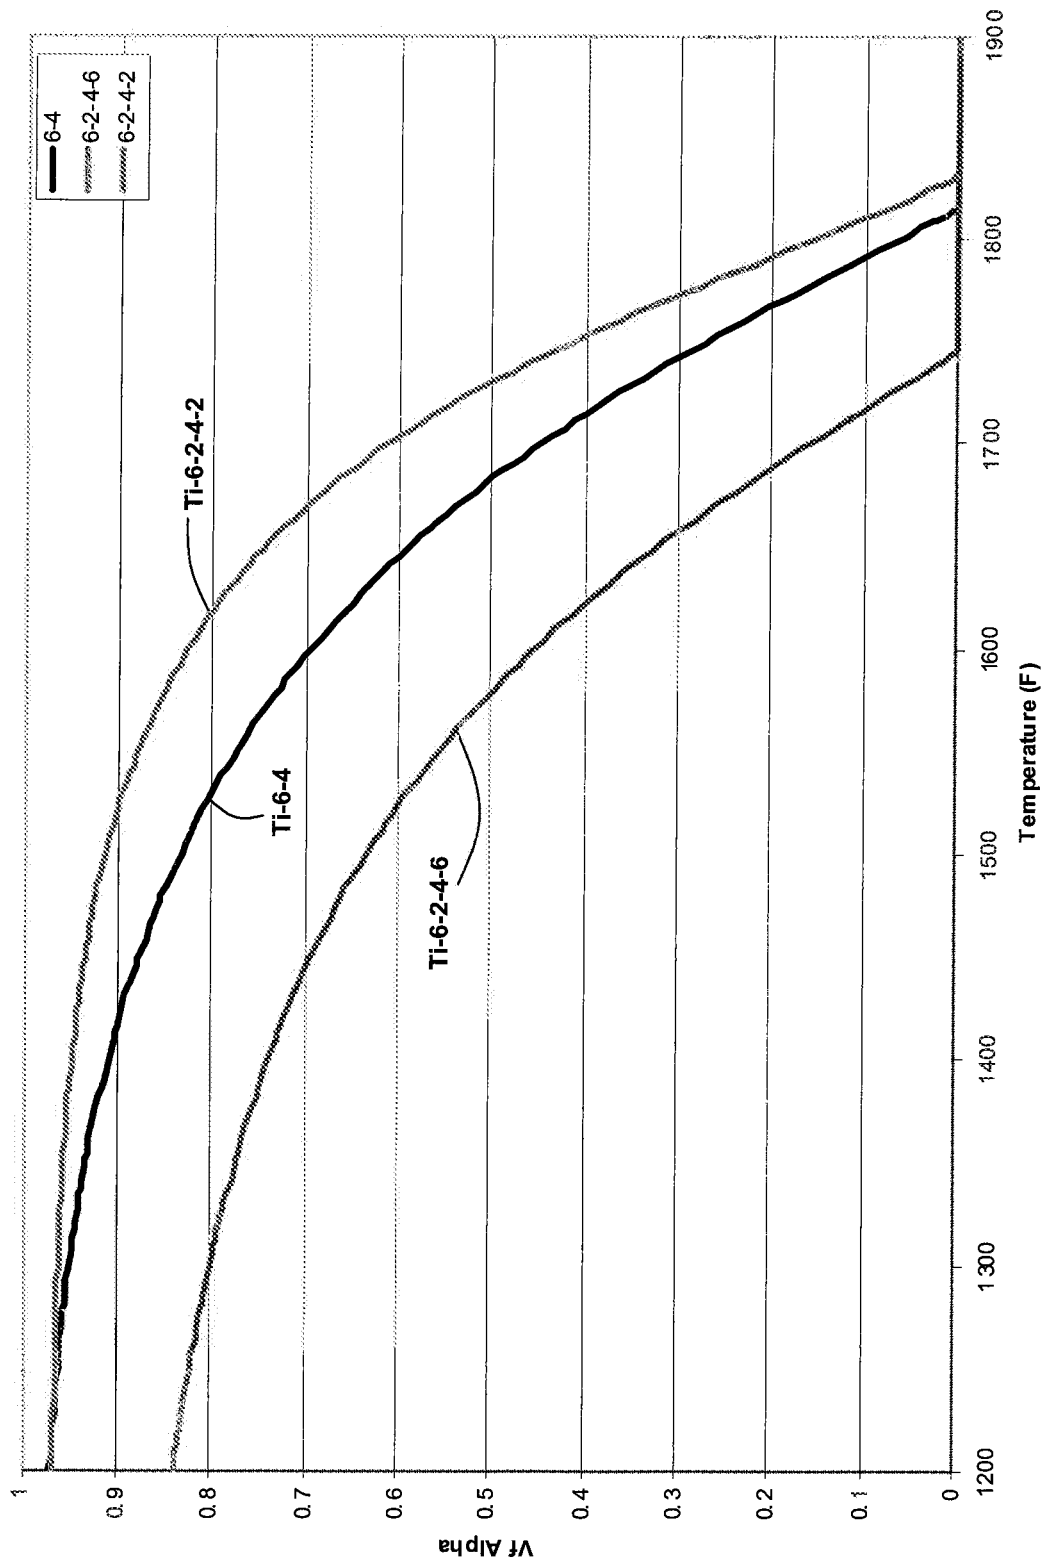


FIG. 1

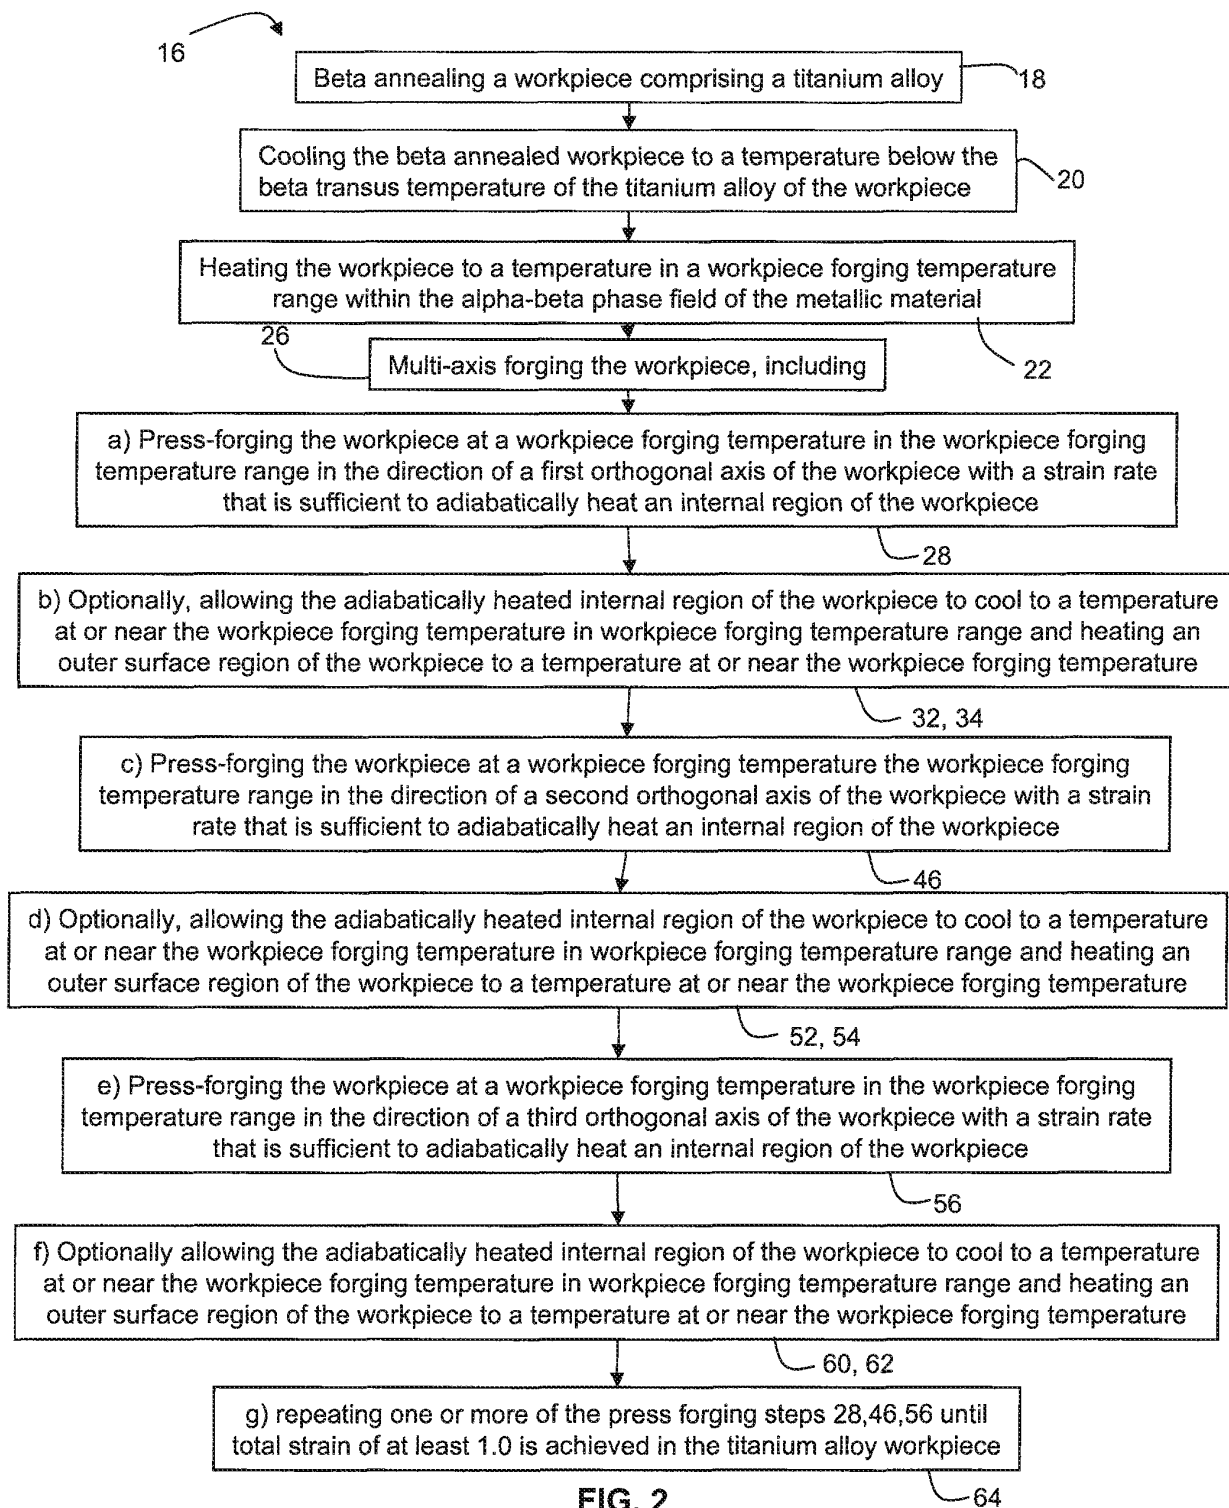


FIG. 2

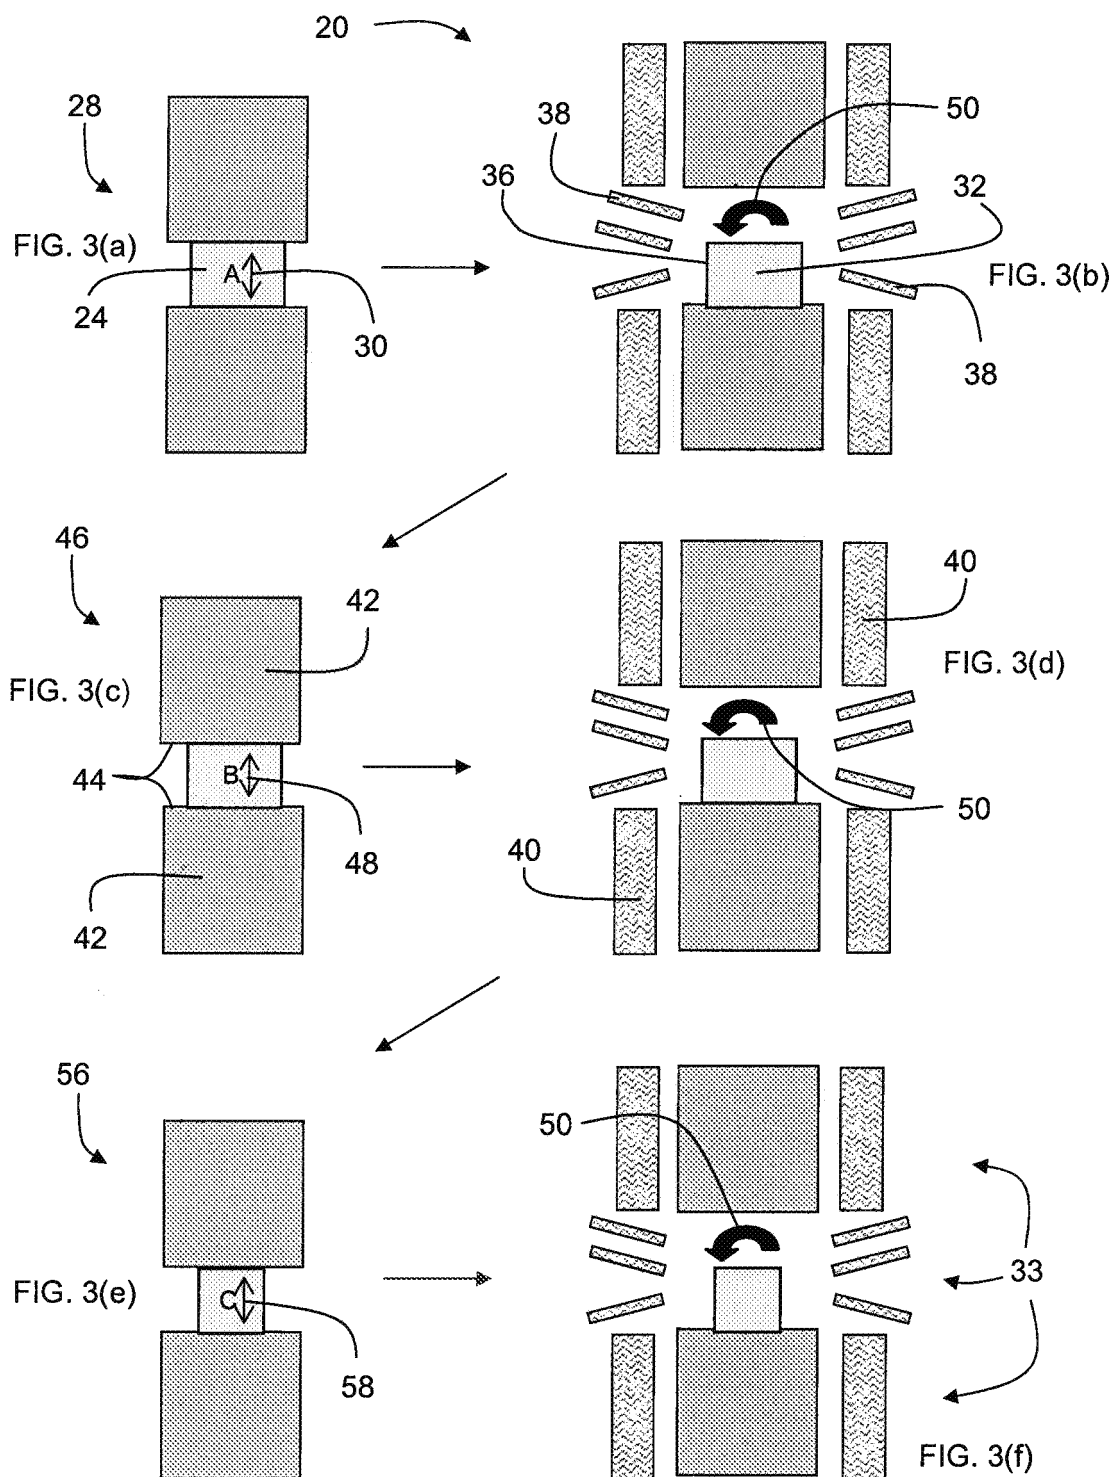


FIG. 3

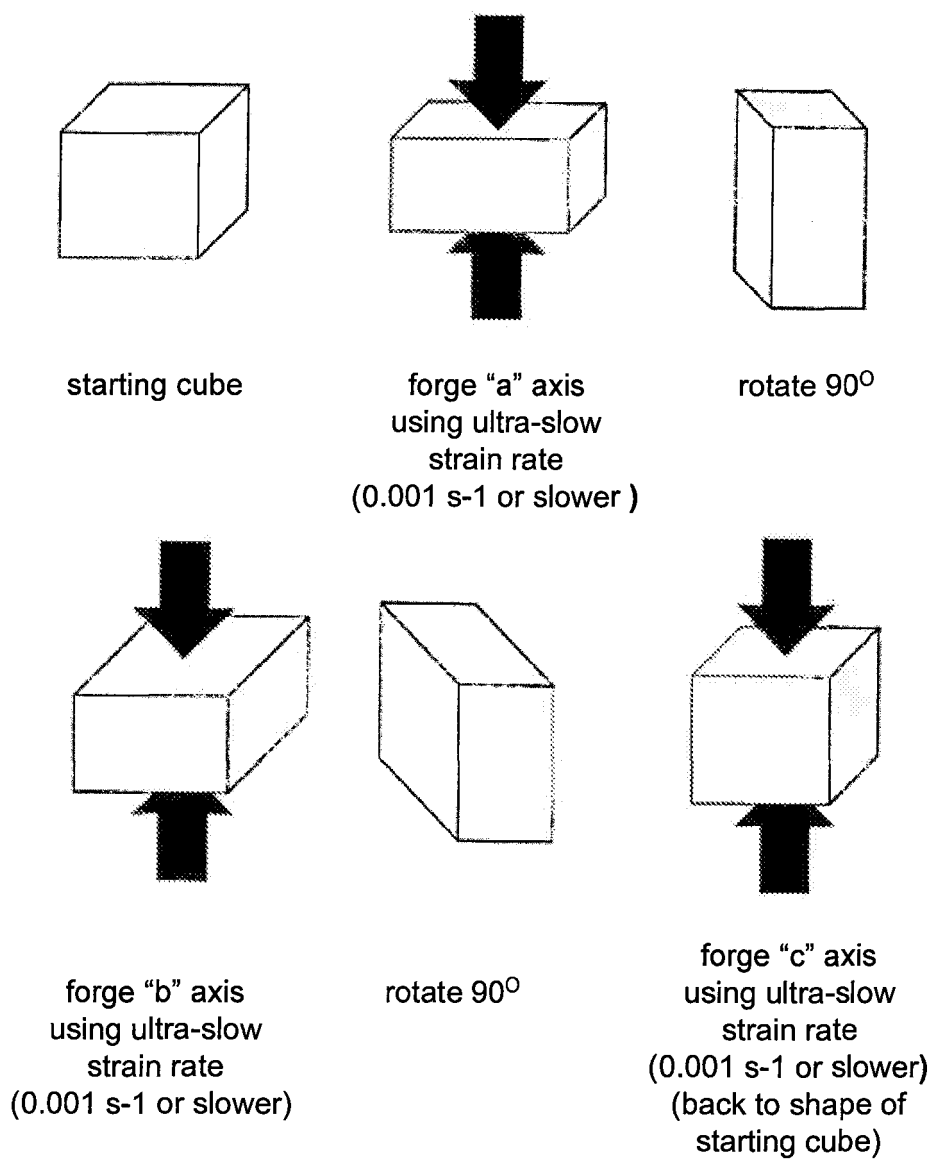


FIG. 4
PRIOR ART

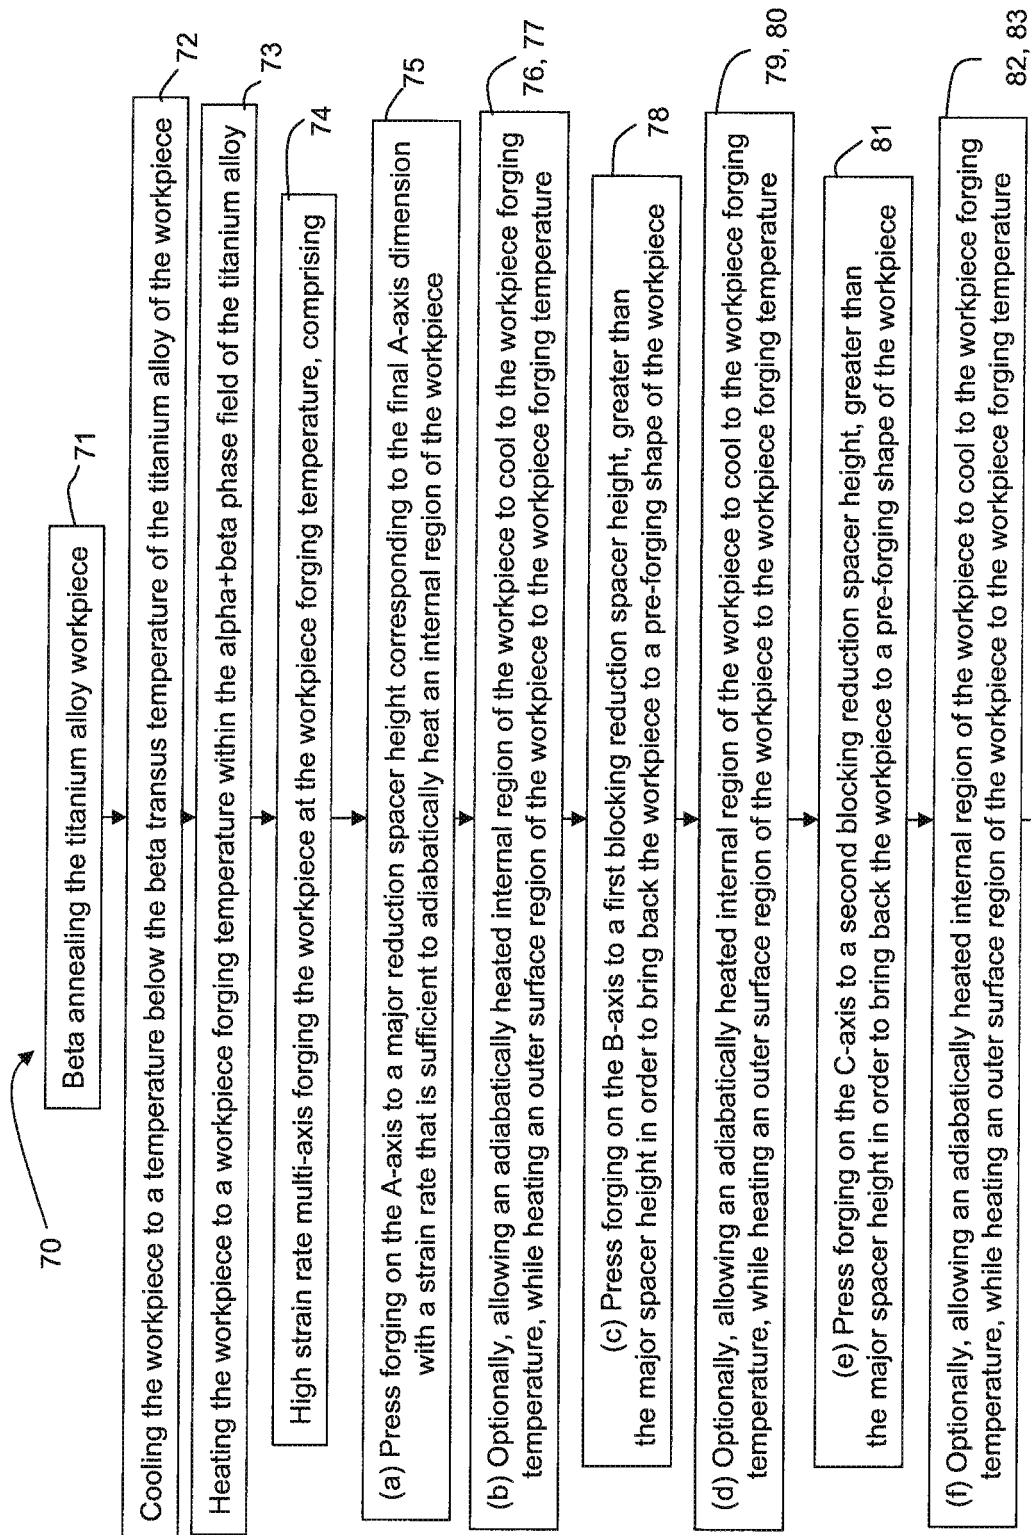


FIG. 5

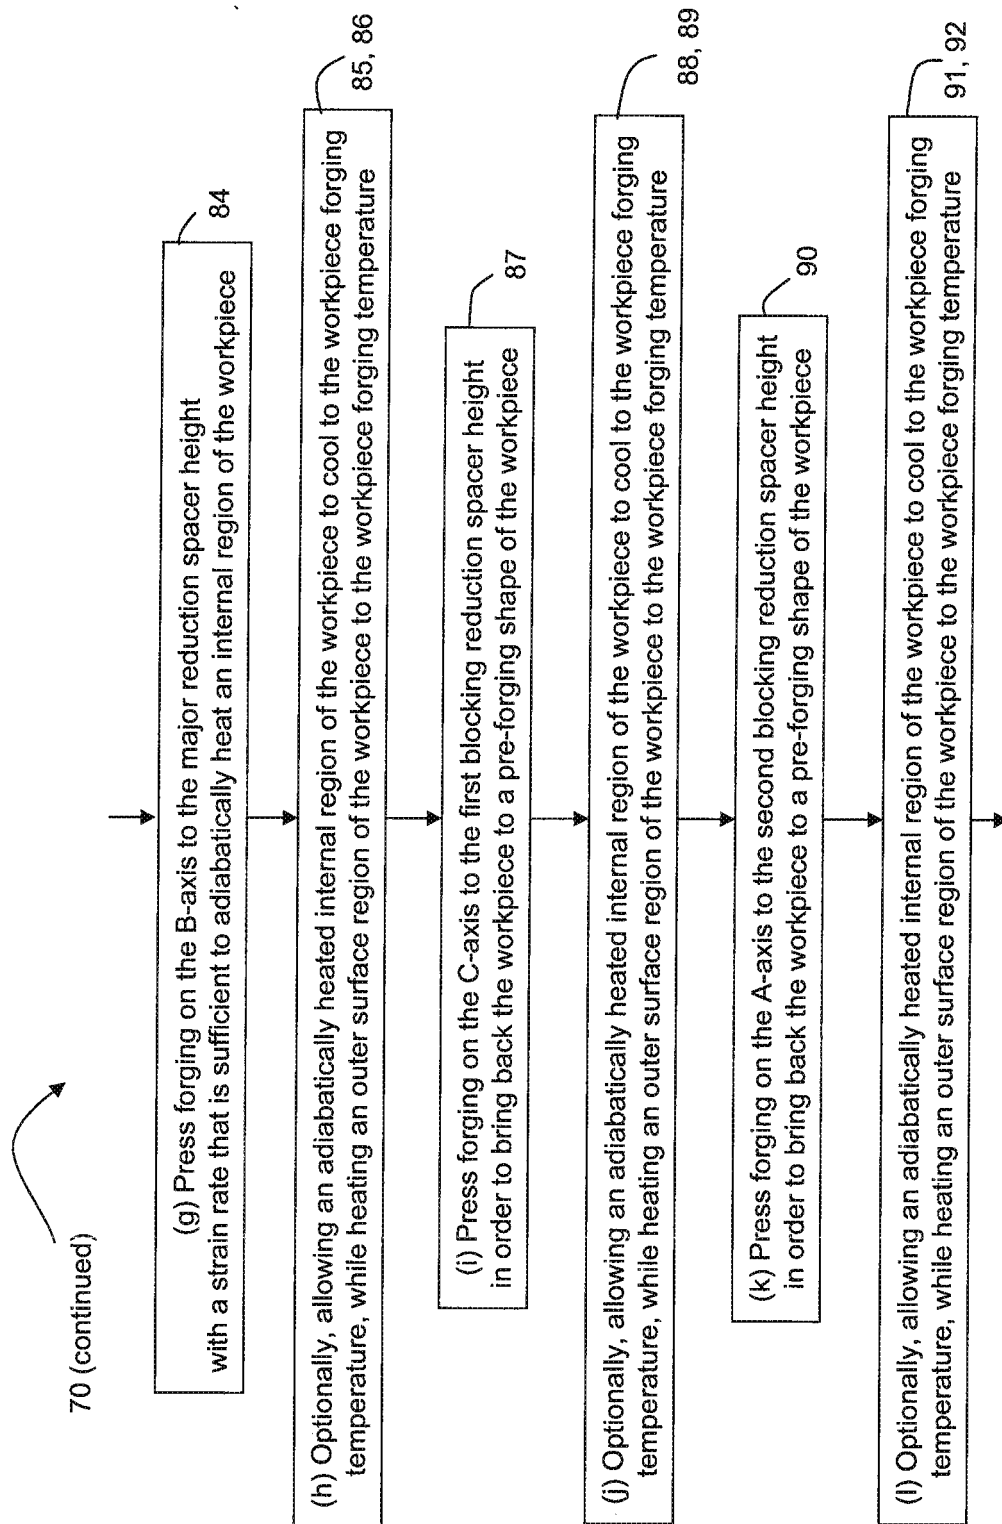


FIG. 5 (continued)

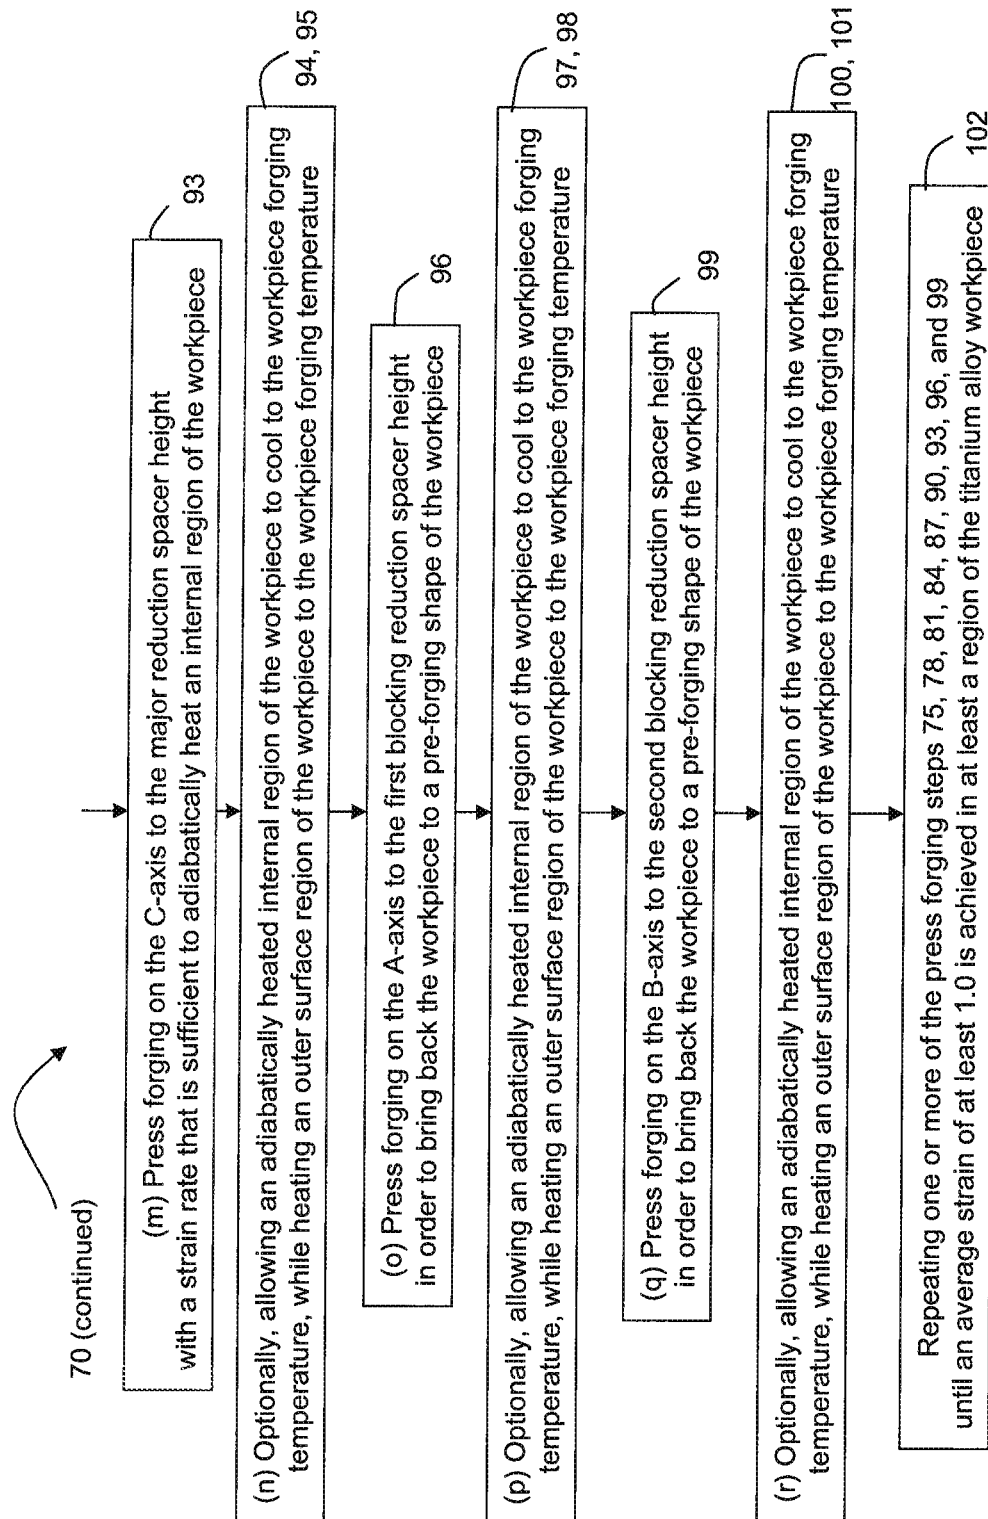


FIG. 5 (continued)

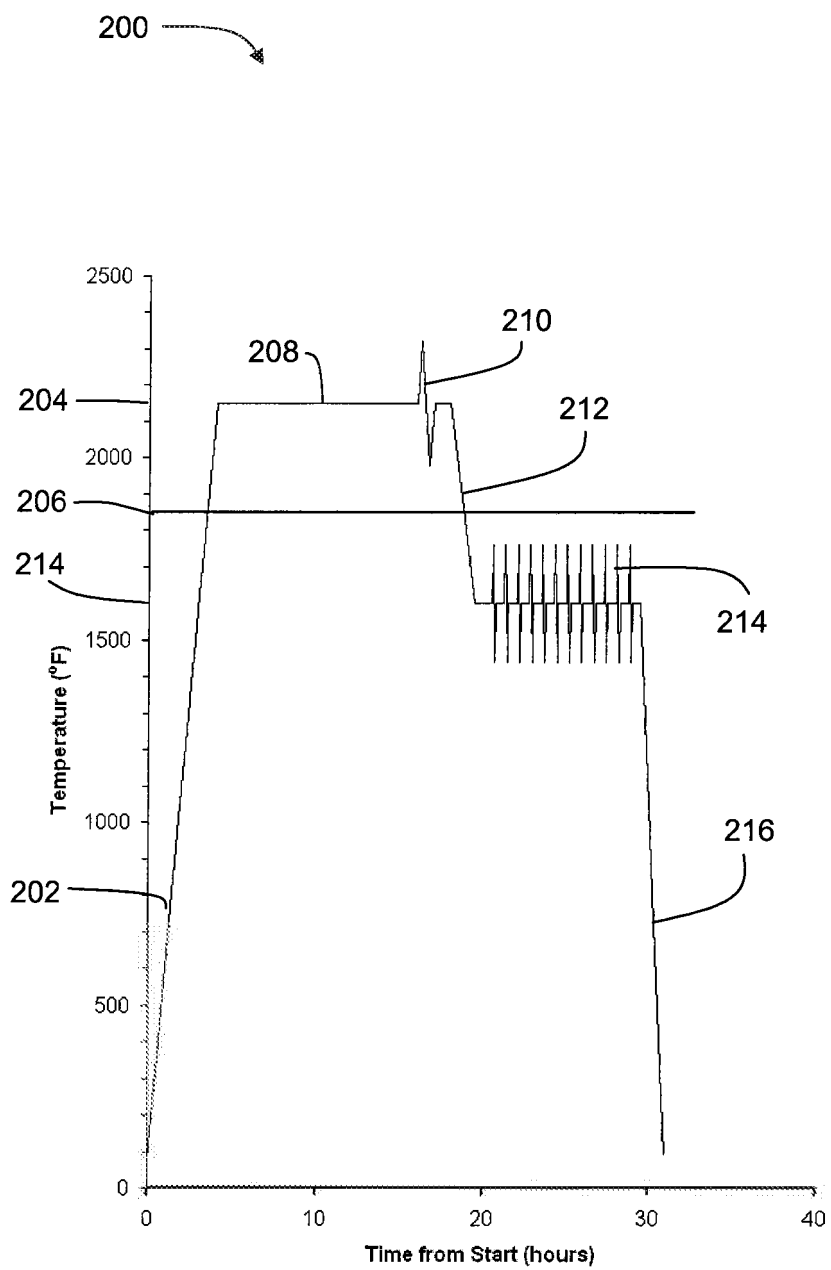


FIG. 6

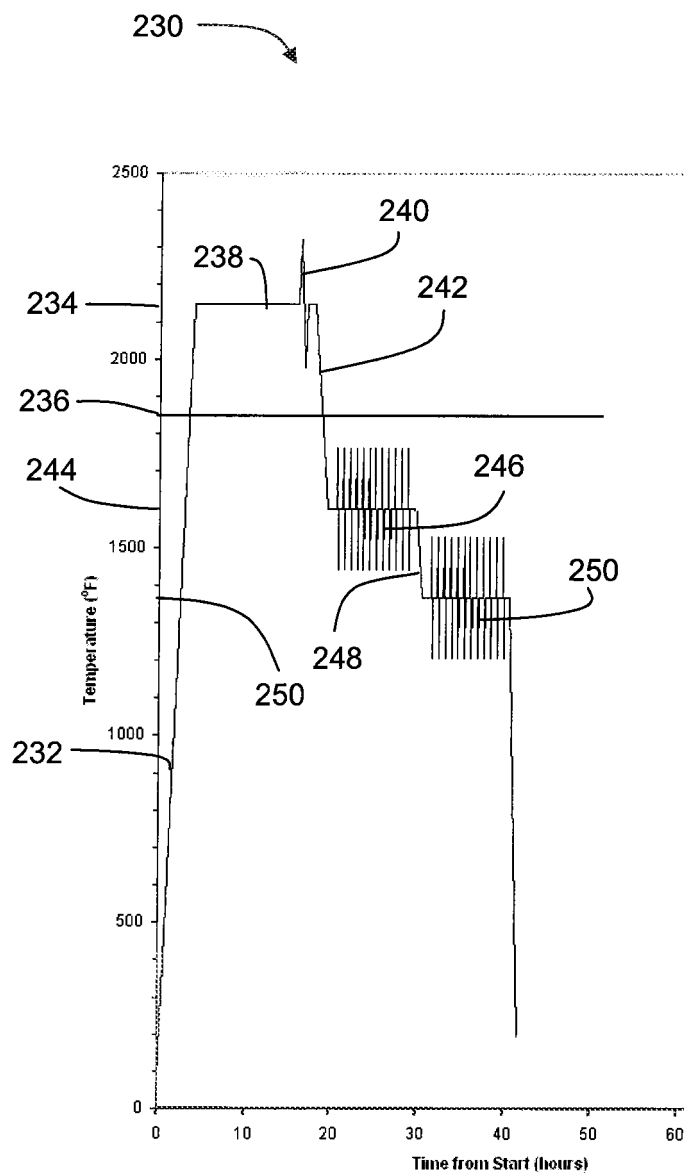


FIG. 7

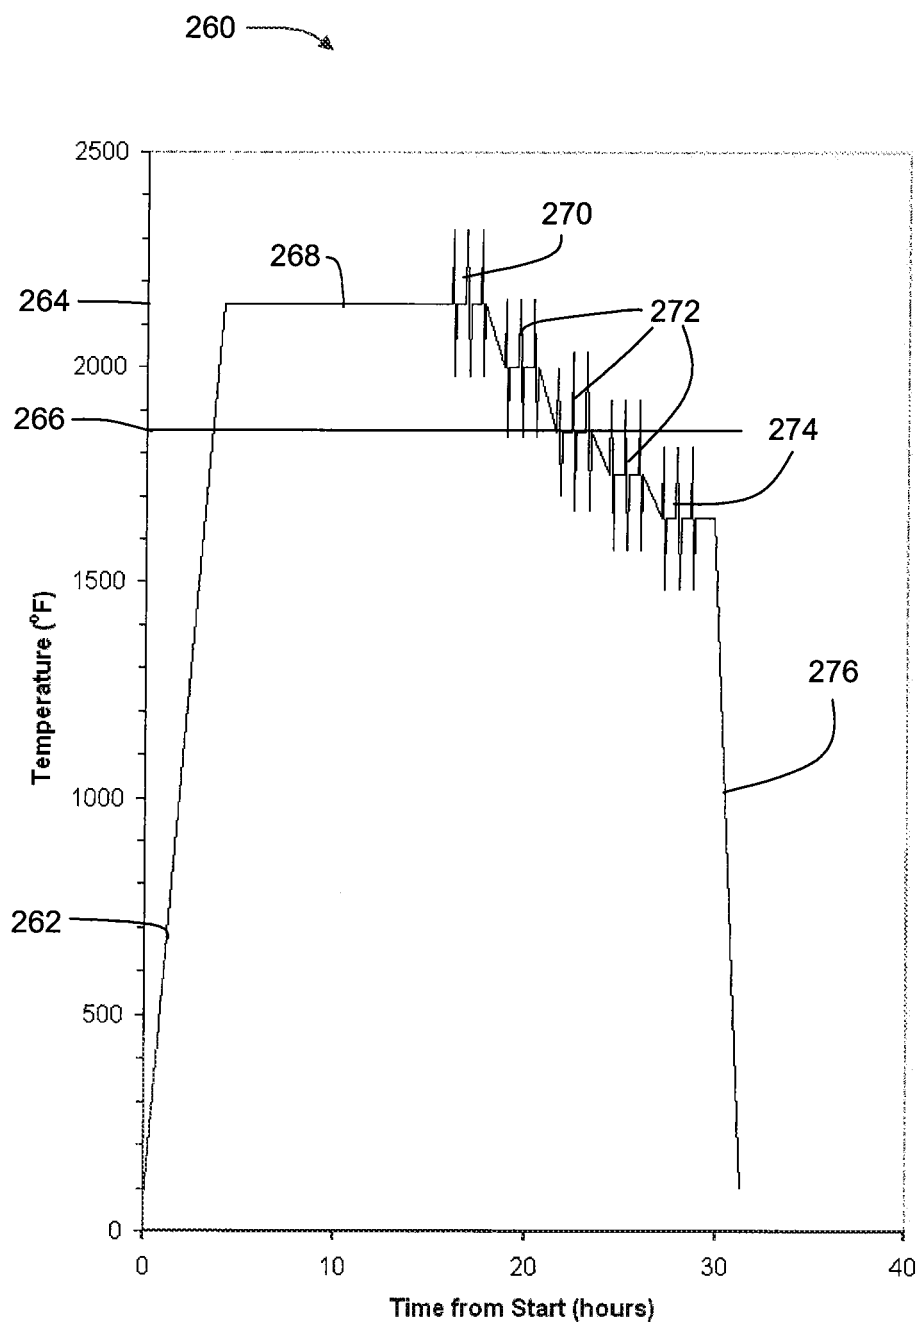


FIG. 8

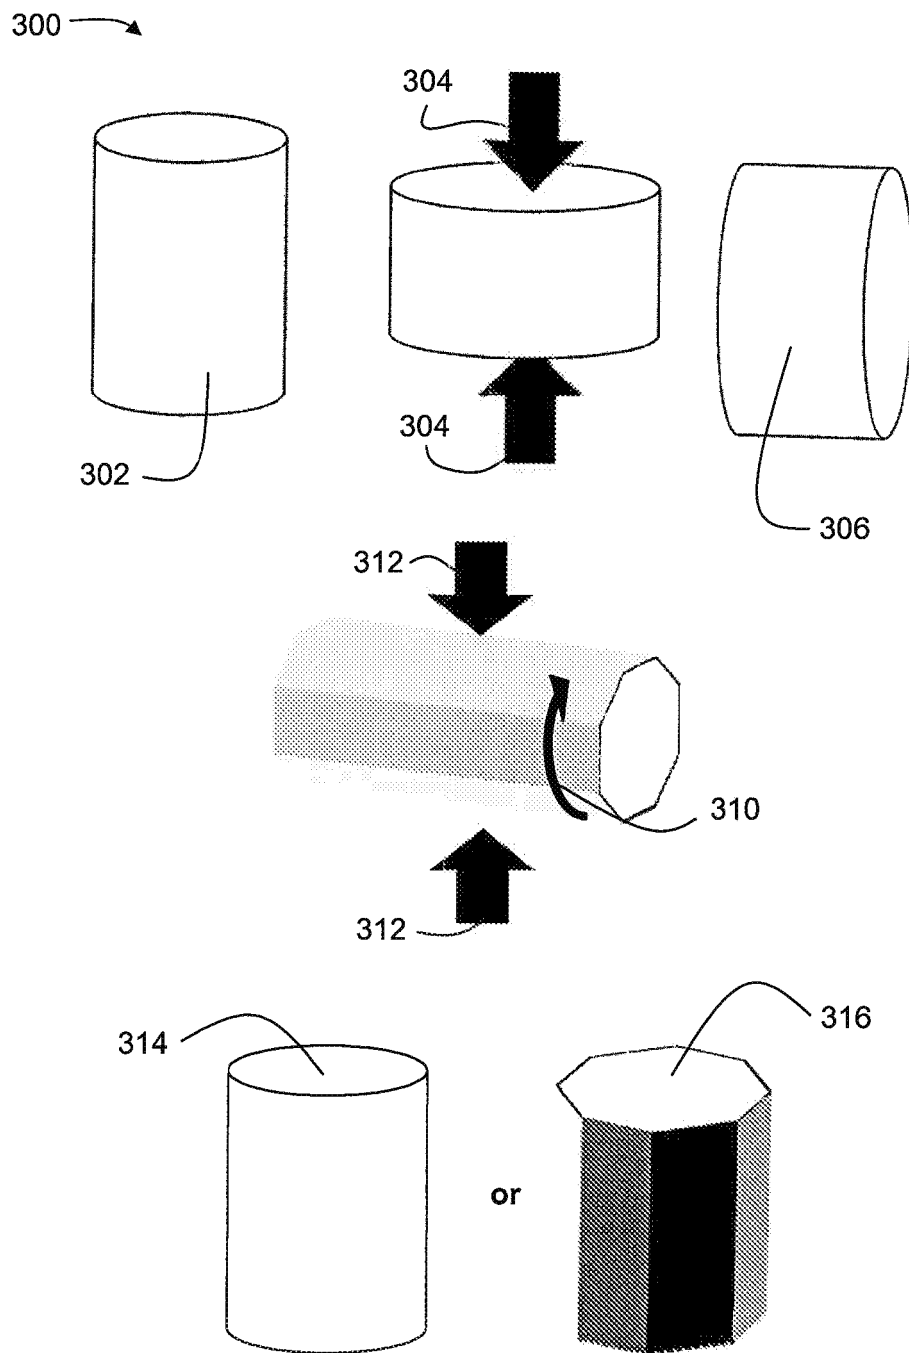


FIG. 9

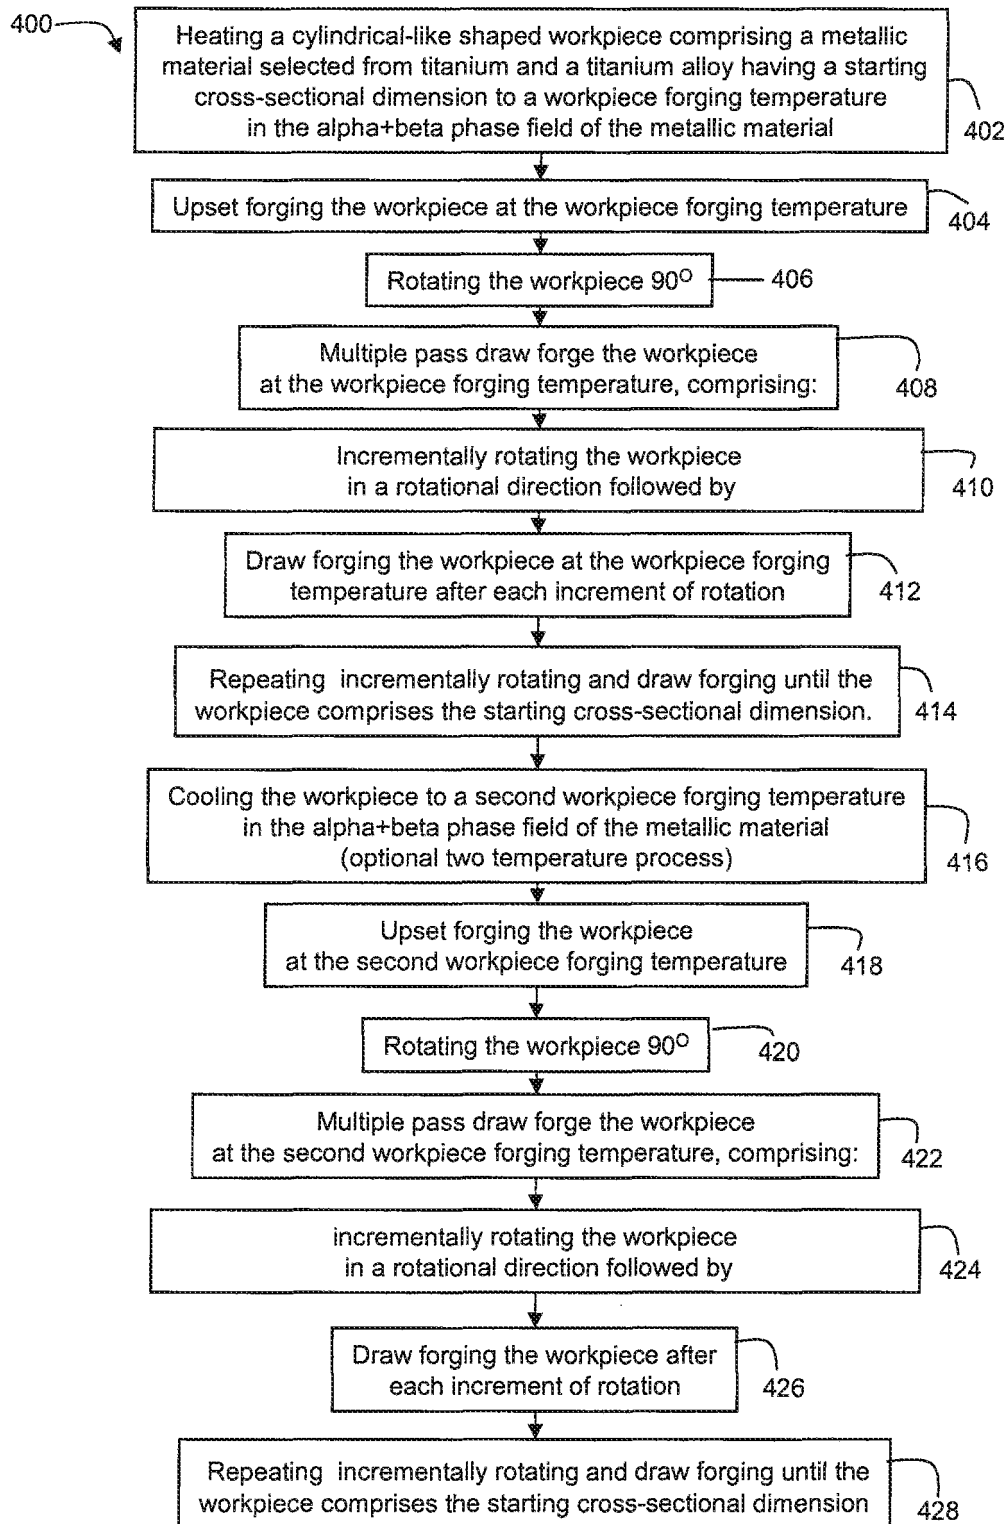


FIG. 10

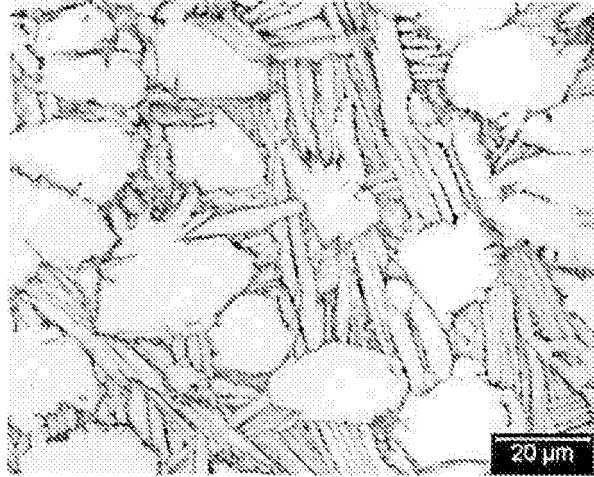


FIG. 11(a)

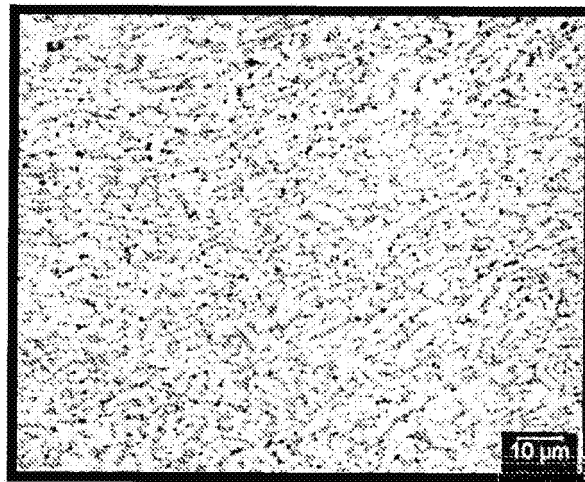


FIG. 11(b)

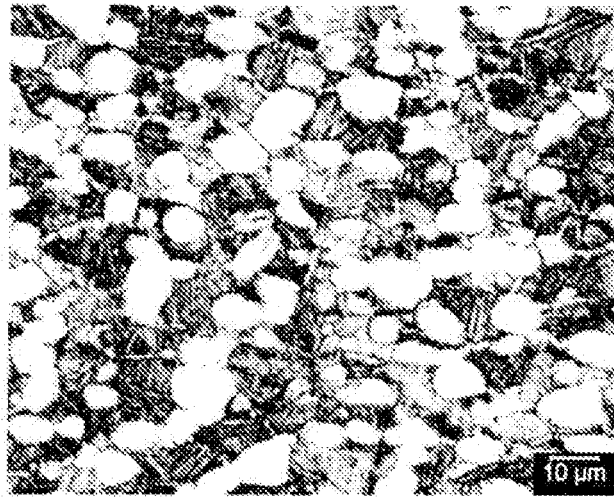


FIG. 12(a)

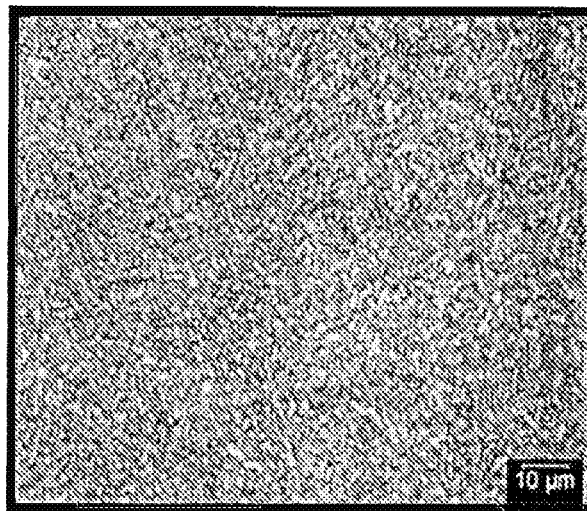


FIG. 12(b)

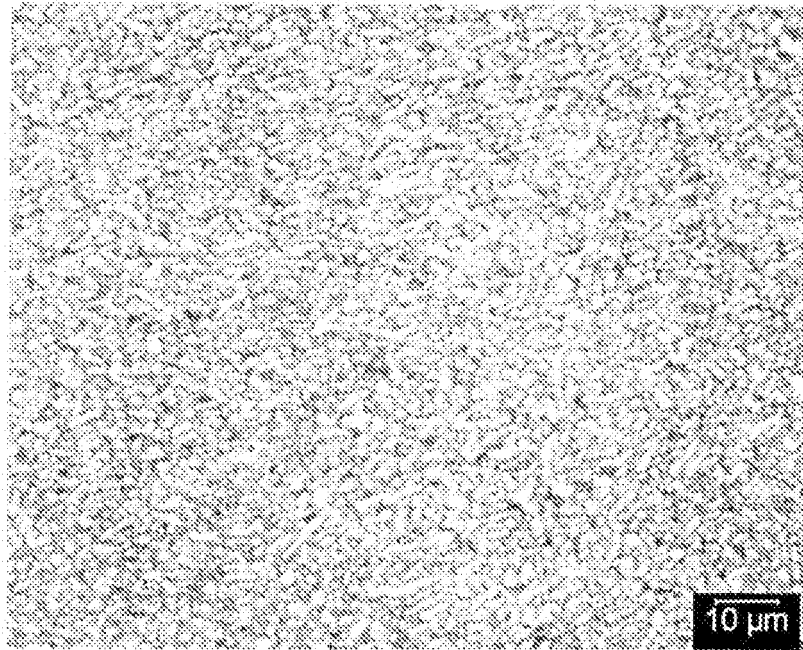


FIG. 13

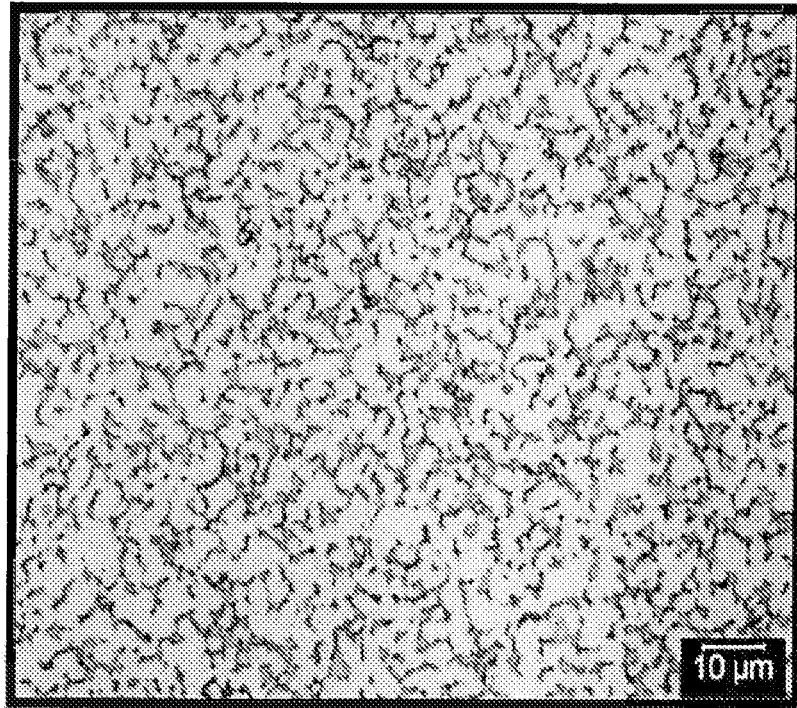


FIG. 14

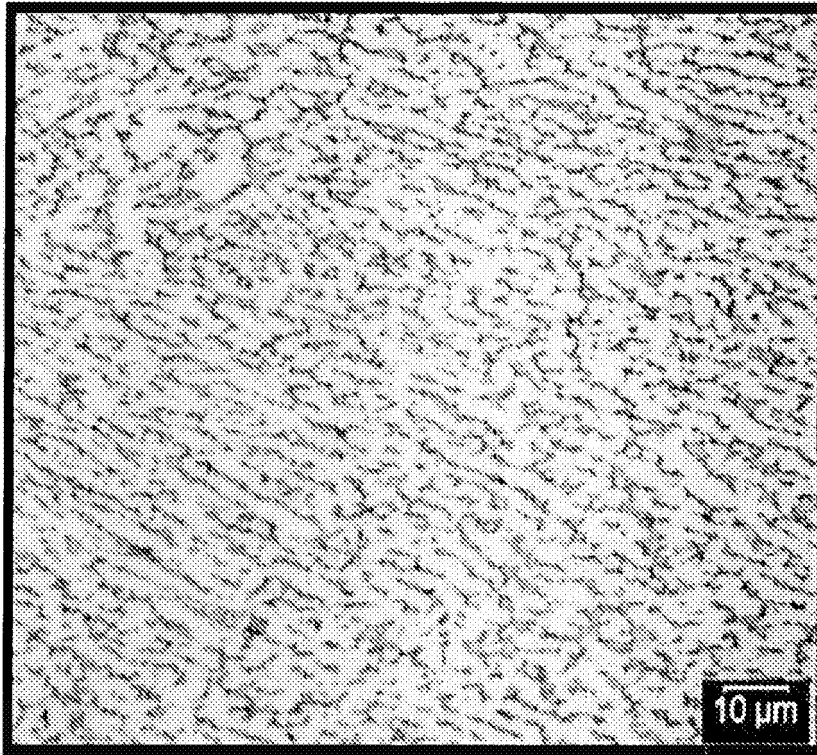


FIG. 15

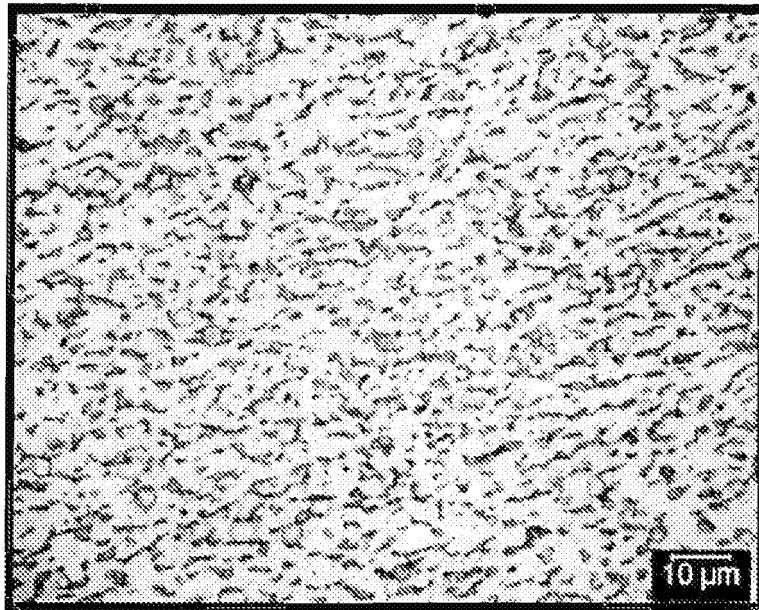


FIG. 16(a)

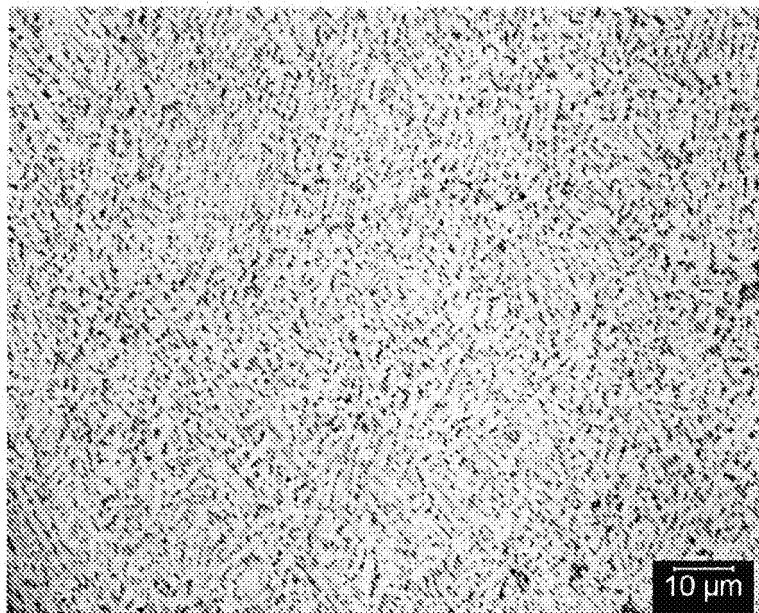


FIG. 16(b)

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 88253810 A [0028]

Non-patent literature cited in the description

- **G. SALISHCHEV.** *Materials Science Forum*, 2008, vol. 584, 783-788 [0005]
- **C. DESRAYAUD.** *Journal of Materials Processing Technology*, 2006, vol. 172, 152-156 [0005]
- **SEMIATIN et al.** *Metallurgical and Materials Transactions A: Physical Metallurgy and Materials Science*, 2007, vol. 38 (4), 910-921 [0030]
- **LUTJERING ; WILLIAMS.** *Titanium*. 2007 [0030]