

(19)



(11)

EP 2 942 979 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
12.09.2018 Bulletin 2018/37

(51) Int Cl.:
H04R 25/00 (2006.01)

(21) Application number: **15166855.5**

(22) Date of filing: **07.05.2015**

(54) **INCREASING ANTENNA PERFORMANCE FOR WIRELESS HEARING ASSISTANCE DEVICES**

ERHÖHUNG DER ANTENNENLEISTUNG FÜR DRAHTLOSE HÖRHILFEGERÄTE

AUGMENTATION DES PERFORMANCES D'ANTENNE POUR DISPOSITIFS D'ASSISTANCE
AUDITIVE SANS FIL

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **07.05.2014 US 201414272185**

(43) Date of publication of application:
11.11.2015 Bulletin 2015/46

(73) Proprietors:
• **Rabel, Jay**
Shorewood, MN 55331 (US)
• **Sanguino, Jorge F.**
Hopkins, MN 55343 (US)
• **Starkey Laboratories, Inc.**
Eden Prairie, MN 55344 (US)

(72) Inventors:
• **Rabel, Jay**
Shorewood, MN Minnesota 55331 (US)
• **Sanguino, Jorge F.**
Hopkins, MN Minnesota 55343 (US)

(74) Representative: **Dentons UK and Middle East LLP**
One Fleet Place
London EC4M 7WS (GB)

(56) References cited:
US-A1- 2009 169 038 US-A1- 2009 196 444

EP 2 942 979 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

TECHNICAL FIELD

[0001] This document relates generally to hearing assistance systems and more particularly to methods and apparatus for increasing antenna performance for wireless hearing assistance devices.

BACKGROUND

[0002] Modern hearing assistance devices, such as hearing aids, are electronic instruments worn in or around the ear that compensate for hearing losses by specially amplifying sound. Some hearing aids include an antenna for radio frequency (RF) communications. Antenna performance can be affected by coupling of the antenna system with conductors of an audio receiver, which creates a flow of high frequency current through the audio receiver wires, causing the wires to become an RF radiator. This coupling between the antenna and the audio receiver cables can cause a variance in RF gain which can create wireless link performance problems.

[0003] US2009/0196444 A1 shows a RIC type hearing aid, wherein the wires connecting the receiver in the ear tip act as antenna. A tuning circuit connected between a wireless communication module and the wires is used for matching the two connected components.

[0004] Accordingly, there is a need in the art for improved systems and methods for increasing antenna performance for hearing assistance devices.

SUMMARY

[0005] Disclosed herein, among other things, are methods and apparatus for increasing antenna performance for hearing assistance devices. One aspect of the present subject matter includes a receiver-in-canal (RIC) hearing assistance device for a wearer including an antenna within a device housing, an audio receiver configured to be worn in an ear canal of a wearer, and a cable assembly configured to connect the audio receiver to the device housing. A circuit component, such as a ferrite element (such as a bead) or an inductor, is connected to the cable assembly and configured to adjust coupling between the cable assembly and the antenna by modifying high frequency current through the wires of the cable assembly.

[0006] The circuit component is configured to enhance radiation from the cable assembly conductors to assist in wireless communications. In other embodiments, the circuit component is configured to limit and make more consistent the radiation from the cable assembly conductors that interfere with antenna transmissions.

[0007] This Summary is an overview of some of the teachings of the present application and not intended to be an exclusive or exhaustive treatment of the present subject matter. Further details about the present subject

matter are found in the detailed description and appended claims. The scope of the present invention is defined by the appended claims.

5 BRIEF DESCRIPTION OF THE DRAWINGS

[0008]

FIG. 1 illustrates a schematic diagram of a receiver-in-the-canal (RIC) hearing assistance device.

FIG. 2 illustrates a schematic diagram of a receiver-in-the-canal (RIC) hearing assistance device with a circuit component adjacent the device housing, according to various embodiments of the present subject matter.

FIG. 3 illustrates a schematic diagram of a receiver-in-the-canal (RIC) hearing assistance device with a circuit component adjacent the receiver assembly, according to various embodiments of the present subject matter.

FIG. 4 illustrates a schematic diagram of a receiver-in-the-canal (RIC) hearing assistance device with a circuit component within the device housing, according to various embodiments of the present subject matter.

FIG. 5 illustrates a schematic diagram of a receiver-in-the-canal (RIC) hearing assistance device with an adjustably located circuit component, according to various embodiments of the present subject matter.

FIG. 6 illustrates a schematic diagram of a receiver-in-the-canal (RIC) hearing assistance device with multiple circuit components, according to various embodiments of the present subject matter.

FIG. 7 illustrates a cross-sectional view of a receiver-in-the-canal (RIC) hearing assistance device, according to various embodiments of the present subject matter.

FIG. 8 illustrates a portion of a receiver cable for connecting to a device housing, according to various embodiments of the present subject matter.

FIG. 9 illustrates a portion of a receiver cable for connecting to a receiver assembly, according to various embodiments of the present subject matter.

45 DETAILED DESCRIPTION

[0009] The following detailed description of the present subject matter refers to subject matter in the accompanying drawings which show, by way of illustration, specific aspects and embodiments in which the present subject matter may be practiced. These embodiments are described in sufficient detail to enable those skilled in the art to practice the present subject matter. References to "an", "one", or "various" embodiments in this disclosure are not necessarily to the same embodiment, and such references contemplate more than one embodiment. The following detailed description is demonstrative and not to be taken in a limiting sense. The scope of the present

subject matter is defined by the appended claims, along with the full scope of legal equivalents to which such claims are entitled.

[0010] The present detailed description will discuss hearing assistance devices using the example of hearing aids. Hearing aids are only one type of hearing assistance device. Other hearing assistance devices include, but are not limited to, those in this document. It is understood that their use in the description is intended to demonstrate the present subject matter, but not in a limited or exclusive or exhaustive sense.

[0011] Some hearing aids include an antenna for radio frequency (RF) communications. Antenna performance can be affected by coupling of the antenna system with conductors of an audio receiver, which creates a flow of high frequency current through the audio receiver wires, causing the wires to become an RF radiator and causing transmission to be much different than reception for the antenna. For certain wire lengths (based on cable assembly length) and impedances (based on receiver type), the wires will become the primary radiator with higher radiation efficiency than the intended hearing aid antenna. The variance in RF gain can create wireless link performance problems. If the antenna gain is increased, the hearing aid RF receiver will be exposed to higher levels of undesirable signals that will degrade its sensitivity performance in some environments (examples: near a cell phone hub, tower or repeater). The hearing aid RF transmit power variation may be too high to meet regulatory requirements.

[0012] Disclosed herein, among other things, are methods and apparatus for increasing antenna performance for hearing assistance devices. One aspect of the present subject matter includes a receiver-in-canal (RIC) hearing assistance device for a wearer including an antenna within a device housing, an audio receiver configured to be worn in an ear canal of a wearer, and a cable assembly configured to connect the audio receiver to the device housing. A circuit component, such as a ferrite element, an inductor, a capacitor, or other component, is connected to the cable assembly and configured to adjust coupling between the cable assembly and the antenna by modifying high frequency current through the wires of the cable assembly. According to various embodiments, the circuit component is configured to enhance radiation from the cable assembly conductors to assist in wireless communications. In other embodiments, the circuit component is configured to limit and make more consistent the radiation from the cable assembly conductors that interfere with antenna transmissions.

[0013] The present subject matter improves wireless RIC hearing aids antenna performance. In addition, the present subject matter improves antenna system gain consistency with different length cables and different types of receivers, and when worn by different users. Thus, the present subject matter can be used to manage transmit and receive performance of the antenna system.

One prior solution to this problem was to use ferrites on the flex substrate that are located inside the antenna aperture. However, locating ferrites inside the antenna aperture provides less control of the induced current. This yields poorer improvement of gain consistency and less gain control. The present subject matter locates the ferrites or inductors outside the antenna aperture.

[0014] The present subject matter uses the audio wireless receiver, connecting cables, inductors and ferrites to adjust induced RF current flow on the receiver/cable assemblies to control hearing aid antenna system gain and make antenna performance more consistent (less uncontrolled) with different length cables and/ different types of receivers. This will also improve consistency when worn by different hearing aid wearers. Thus, the present subject matter employs the use and control of induced RF current flow on the receiver/cable assemblies to control hearing aid antenna system gain.

[0015] During hearing aid operation, current is induced on RIC cable/receiver assemblies that affects the wireless HA antenna system gain and gain sensitivity to different length cables, different types of receivers, and human tissue proximity. In various embodiments, the present subject matter provides series ferrites or inductors that are inserted in the receiver cable lines to reduce, control or enhance induced RF current flow on the receiver/cable assemblies to control hearing aid system gain and make antenna performance more consistent (less un-controlled) across users. When the device housing is directly coupled to the receiver cables, greater gain variation due to receiver/cable to tissue proximity, tissue density, etc. will be seen. In one embodiment, to increase control or minimize RF current flow on the cable assembly, the ferrite or inductor is located outside of the antenna aperture. The use of inductors or properly selected ferrites reduces hearing aid system antenna gain and gain sensitivity to different length cables and different types of receivers.

[0016] In various embodiments, the present subject matter can control the current distribution along the cable-receiver assembly to optimize antenna system gain consistency. Various embodiments include modifying conductor impedance through modifications of geometry, materials, number of conductors and their coupling. In various embodiments, distributed coupling components are added to better match the output impedance of the receiver and transmitter ports of the radio. Various embodiments can control induced RF current flow (current distribution) on the receiver/cable assemblies to control (adjust) hearing aid antenna system gain and to control (adjust) antenna system performance sensitivity to different length receiver cables, different receiver types and sizes, and different users (head size, shape and tissue density variations). Various embodiments use ferrites, inductors and other distributed matching components for this function, and use varying conductive materials and geometries of those conductors to control the impedance of the receiver cable to make it a more effective

tive radiator for RF communication.

[0017] During hearing aid operation, RF current can be coupled to RIC cable/receiver assemblies. This affects the wireless HA antenna system gain and gain sensitivity to different length cables, different types of receivers (acoustic transducers), and human tissue proximity. RF current is electromagnetically coupled to the cable assemblies due to the placement and orientation of the audio traces and cables relative to one or more radiating traces and antenna elements that are internal to the hearing aid. The present systems and methods shown to control cable-receiver RF current distribution and antenna system gain apply whether the RF current is electromagnetically coupled or directly connected from the RF radio circuit to the cable-receiver assembly.

[0018] Different cable lengths (to fit different users) and different receiver types (to meet their hearing loss needs) result in different RF electrical lengths and impedances, different current distributions, and have different radiation efficiencies. Consequently, the antenna system gain and impedance can vary significantly for each combination of cable and receiver used. When worn by a hearing aid user, portions of the radiating/receiving receiver-cable assembly are in close proximity to human tissue which can cause additional changes to the impedance, radiation efficiency and pattern directivity. Differences between individual users such as head and outer-pinna size-and-shape and tissue density further contribute to antenna system gain variations. If tightly coupled to the receiver cables, greater gain variation due to receiver-cable to tissue proximity, tissue density, etc. will be seen.

[0019] According to various embodiments, RF current flow (current distribution) can be controlled by selecting one-or-more component insertion location(s) (placement), and by selection of one-or-more component RF impedance value(s). In various embodiments, a component value is selected to present desired RF impedance to current flow. Higher impedances will reduce current flow through component more than lower impedances. Various embodiments can adjust location for desired electrical length (example: quarter wave). Additional embodiments can adjust location for desired balance between radiation efficiency and sensitivity to head tissue gap and density variations.

[0020] To control or adjust the RF current flow on the cable assembly, one location for the ferrite or inductor would be outside of the antenna aperture. In one example, inserting an impedance (circuit element) in a cable-receiver assembly in a location a small distance from the head/tissue of the wearer to reduce current flow that would be in very close proximity to human tissue to reduce the tissue loading effects. Further embodiments adjust the distance from head/tissue loading to maximize antenna system gain for the desired range of users. In another example, if multiple receiver cable lengths are required, one or more impedances could be inserted in a location(s) that create the same (or similar) electrical lengths in the different cable assemblies at the desired

operating frequencies. In various embodiments, conductor geometry and the number of conductors can be adjusted to improve induced current on the cable. Distributed matching elements can be added to the cable assemblies to improve matching for the purpose of making the conductor a more effective radiator for RF communication, in various embodiments. By adjusting the conductors, their lengths, diameter, and geometries, the receiver cables can be designed to be consistent and useful radiators for RF communication, in various embodiments. Conductors can be shielded over some of their length to improve their matching and consistency as effective radiators, in an embodiment. Matching components can be distributed over their length to improve their matching and consistency as effective radiators.

[0021] FIG. 1 illustrates a schematic diagram of a receiver-in-the-canal (RIC) hearing assistance device. The device includes a housing 100 including a microphone 154 connected to hearing assistance electronics 150, and a wireless communications module 152 connected to an antenna 156. A cable assembly 104 connects the hearing assistance electronics 150 to the receiver 102 to be worn in an ear of a wearer. RF current is electromagnetically coupled to the cable assembly 104 due to placement and orientation of the audio traces and cables relative to one or more radiating traces and antenna elements 156 that are internal to the hearing assistance device.

[0022] FIG. 2 illustrates a schematic diagram of a receiver-in-the-canal (RIC) hearing assistance device with a circuit component adjacent the device housing, according to various embodiments of the present subject matter. The depicted embodiment includes a series circuit component 210 in a cable near a connection to the hearing assistance device. FIG. 3 illustrates a schematic diagram of a receiver-in-the-canal (RIC) hearing assistance device with a circuit component adjacent the receiver assembly, according to various embodiments of the present subject matter. The depicted embodiment includes a series circuit component 310 in a cable near a connection to the receiver 102 or receiver assembly housing the receiver. FIG. 4 illustrates a schematic diagram of a receiver-in-the-canal (RIC) hearing assistance device with a circuit component within the device housing, according to various embodiments of the present subject matter. The depicted embodiment includes a series circuit component 410 inside the hearing assistance device housing.

[0023] FIG. 5 illustrates a schematic diagram of a receiver-in-the-canal (RIC) hearing assistance device with an adjustably located circuit component, according to various embodiments of the present subject matter. The depicted embodiment includes a series circuit component 510 having a location that can be adjusted for desired electrical length (quarter wavelength, for example) and balance between radiation efficiency and sensitivity to head gap and tissue density variations for wearers. In various embodiments, inserting a relatively high impedance in a cable-receiver assembly in a location a small

distance from the head/tissue to reduce current flow that would be in very close proximity to human tissue reduces the tissue loading effects. In various embodiments, adjusting the distance from head/tissue loading is used to maximize antenna system gain for the desired range of users. FIG. 6 illustrates a schematic diagram of a receiver-in-the-canal (RIC) hearing assistance device with multiple circuit components, according to various embodiments of the present subject matter. The depicted embodiment uses circuit components in multiple (distributed) locations to gradually reduce RF current flow.

[0024] FIG. 7 illustrates a cross-sectional view of a receiver-in-the-canal (RIC) hearing assistance device, according to various embodiments of the present subject matter. The RIC device includes an antenna within a device housing 700, an audio receiver 702 configured to be worn in an ear canal of a wearer, and a cable assembly 704 configured to connect the audio receiver 702 to the device housing 700. A ferrite bead or an inductor 710 is connected to the cable assembly (as shown in FIGS. 8 and 9) and configured to reduce unwanted coupling between the cable assembly and the antenna by reducing high frequency current through the wires of the cable assembly. The antenna can have a variety of configurations, including an antenna having an aperture, in various embodiments.

[0025] FIG. 8 illustrates a portion of a receiver cable 804 for connecting to a device housing 800, according to various embodiments of the present subject matter. In various embodiments, ferrites (such as ferrite beads) or inductors 810 are connected in series in the receiver cable lines to reduce or control induced RF current flow on the receiver/cable assemblies to control gain and make antenna performance more consistent for a variety of wearers. In the depicted embodiment, the ferrites or inductors 810 are connected directly adjacent to the device housing 800, thus close to but outside of the aperture of the antenna.

[0026] FIG. 9 illustrates a portion of a receiver cable 904 for connecting to a receiver assembly 902, according to various embodiments of the present subject matter. In various embodiments, ferrites (such as ferrite beads) or inductors 910 are connected in series in the receiver cable lines to reduce or control induced RF current flow on the receiver/cable assemblies to control gain and make antenna performance more consistent for a variety of wearers. In the depicted embodiment, the ferrites or inductors 910 are connected directly adjacent to the receiver assembly 902.

[0027] In various embodiments, using a ferrite bead or inductor that has impedance higher than 550 ohms at 900MHz reduces transmit and receive variance from 11 dB to less than 1 dB, a more than 10 dB improvement. In one embodiment, two ferrite beads are used to open the flow of current to the audio receiver wires. In various embodiments, the ferrite bead or inductor is located as close as possible to the silicon connector used to connect the cable assembly to the receiver or the device housing.

In various embodiments, a ferrite bead or inductor is placed at each end of the cable assembly (as shown in FIG. 7).

[0028] In various embodiments, the present subject matter can be applied with one or more RIC cable assembly conductors. The present subject matter can be applied with one or more combinations of one or more RIC cable assembly component types - receivers, microphones, giant magneto-resistive device (GMR), telecoil, etc., in various embodiments.

[0029] According to various embodiments, other components such as capacitors (instead of or in addition to ferrites or inductors) could be used to control antenna gain. In further embodiments, combinations of components can be used. In still further embodiments, components such as ferrite beads or inductors are mounted on a printed circuit board (PCB), mounted in the hearing aid assembly housing but outside of the hearing aid antenna aperture, mounted in the cable, and/or mounted in the receiver assembly. In various embodiments, a component such as a ferrite bead or inductor is connected in series to other assemblies outside of the hearing aid antenna aperture to control current induced on cables and various hearing aid electronics or components (i.e. external microphones, an external giant magnetoresistive (GMR) sensor, a head sensor, etc.). In various embodiments, cable and/or receiver assemblies are manufactured to include the inductors or ferrites. The present subject matter improves performance management of the antenna system, in various embodiments.

[0030] Various embodiments of the present subject matter support wireless communications with a hearing assistance device. In various embodiments the wireless communications can include standard or nonstandard communications. Some examples of standard wireless communications include link protocols including, but not limited to, Bluetooth™, IEEE 802.11 (wireless LANs), 802.15 (WPANs), 802.16 (WiMAX), cellular protocols including, but not limited to CDMA and GSM, ZigBee, and ultra-wideband (UWB) technologies. Such protocols support radio frequency communications and some support infrared communications. Although the present system is demonstrated as a radio system, it is possible that other forms of wireless communications can be used such as ultrasonic, optical, infrared, and others. It is understood that the standards which can be used include past and present standards. It is also contemplated that future versions of these standards and new future standards may be employed without departing from the scope of the present subject matter.

[0031] The wireless communications support a connection from other devices. Such connections include, but are not limited to, one or more mono or stereo connections or digital connections having link protocols including, but not limited to 802.3 (Ethernet), 802.4, 802.5, USB, SPI, PCM, ATM, Fibre-channel, Firewire or 1394, InfiniBand, or a native streaming interface. In various embodiments, such connections include all past and present

link protocols. It is also contemplated that future versions of these protocols and new future standards may be employed without departing from the scope of the present subject matter.

[0032] It is understood that variations in communications protocols, antenna configurations, and combinations of components may be employed without departing from the scope of the present subject matter. Hearing assistance devices typically include an enclosure or housing, a microphone, hearing assistance device electronics including processing electronics, and a speaker or receiver. It is understood that in various embodiments the microphone is optional. It is understood that in various embodiments the receiver is optional. Antenna configurations may vary and may be included within an enclosure for the electronics or be external to an enclosure for the electronics. Thus, the examples set forth herein are intended to be demonstrative and not a limiting or exhaustive depiction of variations.

[0033] It is further understood that any hearing assistance device may be used without departing from the scope and the devices depicted in the figures are intended to demonstrate the subject matter, but not in a limited, exhaustive, or exclusive sense. It is also understood that the present subject matter can be used with a device designed for use in the right ear or the left ear or both ears of the wearer.

[0034] It is understood that the hearing aids referenced in this patent application include a processor. The processor may be a digital signal processor (DSP), microprocessor, microcontroller, other digital logic, or combinations thereof. The processing of signals referenced in this application can be performed using the processor. Processing may be done in the digital domain, the analog domain, or combinations thereof. Processing may be done using subband processing techniques. Processing may be done with frequency domain or time domain approaches. Some processing may involve both frequency and time domain aspects. For brevity, in some examples drawings may omit certain blocks that perform frequency synthesis, frequency analysis, analog-to-digital conversion, digital-to-analog conversion, amplification, audio decoding, and certain types of filtering and processing. In various embodiments the processor is adapted to perform instructions stored in memory which may or may not be explicitly shown. Various types of memory may be used, including volatile and nonvolatile forms of memory. In various embodiments, instructions are performed by the processor to perform a number of signal processing tasks. In such embodiments, analog components are in communication with the processor to perform signal tasks, such as microphone reception, or receiver sound embodiments (i.e., in applications where such transducers are used). In various embodiments, different realizations of the block diagrams, circuits, and processes set forth herein may occur without departing from the scope of the present subject matter.

[0035] The present subject matter is demonstrated for

hearing assistance devices, including hearing aids, including but not limited to, behind-the-ear (BTE), in-the-ear (ITE), in-the-canal (ITC), receiver-in-canal (RIC), or completely-in-the-canal (CIC) type hearing aids. It is understood that behind-the-ear type hearing aids may include devices that reside substantially behind the ear or over the ear. Such devices may include hearing aids with receivers associated with the electronics portion of the behind-the-ear device, or hearing aids of the type having receivers in the ear canal of the user, including but not limited to receiver-in-canal (RIC) or receiver-in-the-ear (RITE) designs. The present subject matter can also be used in hearing assistance devices generally, such as cochlear implant type hearing devices and such as deep insertion devices having a transducer, such as a receiver or microphone, whether custom fitted, standard, open fitted or occlusive fitted. It is understood that other hearing assistance devices not expressly stated herein may be used in conjunction with the present subject matter.

[0036] This application is intended to cover adaptations or variations of the present subject matter. It is to be understood that the above description is intended to be illustrative, and not restrictive. The scope of the present subject matter should be determined with reference to the appended claims.

Claims

1. A receiver-in-canal (RIC) hearing assistance device for a wearer, comprising:
 - a device housing (100, 700, 800);
 - an antenna (156) within the device housing (100, 700, 800) ;
 - an audio receiver (102, 702, 902) configured to be worn in an ear canal of a wearer;
 - a cable assembly (104, 704, 804, 904) configured to connect the audio receiver (102, 702, 902) to the device housing (100, 700, 800); and
 - a circuit component (210, 310, 410, 510, 610, 710, 810, 910) connected to the cable assembly (104, 704, 804, 904) and configured to control coupling between the cable assembly (104, 704, 804, 904) and the antenna (156) by controlling high frequency current through wires of the cable assembly (104, 704, 804, 904), wherein the circuit component (210, 310, 410, 510, 610, 710, 810, 910) is configured to enhance radiation from the cable assembly conductors to assist in wireless communications.
2. The device of claim 1, wherein the circuit component includes at least one of a ferrite bead (710, 810, 910), an inductor (710, 810, 910), or a capacitor.
3. The device of claim 1 or claim 2, wherein the circuit component (210, 310, 410, 510, 610, 710, 810, 910)

is connected in series with the cable assembly (104, 704, 804, 904) .

4. The device of any of the preceding claims, wherein the circuit component (210, 810) is connected to the cable assembly (104, 804) adjacent to the device housing (100, 800) .
5. The device of any of the preceding claims, wherein the circuit component (210, 810) is located adjacent the device housing (100, 800) outside of an antenna aperture.
6. The device of any of claim 1 through claim 3, wherein the circuit component (310, 410, 710, 910) is located in the cable assembly (104, 704, 804, 904) adjacent the audio receiver (102, 702, 902).
7. The device of any of claim 1 through claim 3, wherein the circuit component (510) is adjustably located along the cable assembly (104).
8. The device of claim 7, wherein the circuit component (210, 310, 410, 510, 610, 710, 810, 910) is configured to be adjusted for a prescribed electrical length.
9. The device of claim 7, wherein the circuit component (210, 310, 410, 510, 610, 710, 810, 910) is configured to be adjusted for a prescribed radiation efficiency of the cable assembly (104, 704, 804, 904).
10. The device of claim 7, wherein the circuit component (210, 310, 410, 510, 610, 710, 810, 910) is configured to be adjusted for a prescribed sensitivity to head gap variation.
11. A method for increasing antenna performance of a wireless hearing assistance device, comprising: connecting a circuit component (210, 310, 410, 510, 610, 710, 810, 910) to a cable assembly (104, 704, 804, 904) configured to connect an audio receiver (102, 702, 902) configured to be worn in an ear canal to a hearing assistance device housing (100, 700, 800), the circuit component (210, 310, 410, 510, 610, 710, 810, 910) configured to control coupling between the cable assembly (104, 704, 804, 904) and an antenna (156) located within the device housing (100, 700, 800) by controlling high frequency current through wires of the cable assembly (104, 704, 804, 904), wherein the circuit component (210, 310, 410, 510, 610, 710, 810, 910) is configured to enhance radiation from the cable assembly conductors to assist in wireless communications.
12. The method of claim 11, wherein connecting a circuit component to a cable assembly (704, 804, 904) includes connecting a ferrite bead (710, 810, 910) to the cable assembly (704, 804, 904).

13. The method of claim 11, wherein connecting a circuit component to a cable assembly (704, 804, 904) includes connecting an inductor (710, 810, 910) to the cable assembly (704, 804, 904).

14. The method of claim 11, wherein connecting a circuit component (210, 310, 410, 510, 610, 710, 810, 910) to a cable assembly (104, 704, 804, 904) includes connecting a capacitor to the cable assembly (104, 704, 804, 904).

15. The method of any of claim 11 through claim 14, further comprising connecting multiple circuit components (610) along the cable assembly (104, 704, 804, 904).

Patentansprüche

1. Empfänger-im-Kanal-Hörhilfegerät (RIC) für einen Träger, umfassend:

ein Gerätegehäuse (100, 700, 800);
eine Antenne (156) innerhalb des Gerätegehäuses (100, 700, 800);
einen Audioempfänger (102, 702, 902), konfiguriert, um in einem Ohrkanal eines Trägers getragen zu werden;
eine Kabelanordnung (104, 704, 804, 904), welche konfiguriert ist, um den Audioempfänger (102, 702, 902) mit dem Gerätegehäuse (100, 700, 800) zu verbinden; und
eine Schaltungskomponente (210, 310, 410, 510, 610, 710, 810, 910), welche mit der Kabelanordnung (104, 704, 804, 904) verbunden und konfiguriert ist, um die Verbindung zwischen der Kabelanordnung (104, 704, 804, 904) und der Antenne (156) durch Steuern eines Hochfrequenzstroms durch Drähte der Kabelanordnung (104, 704, 804, 904) zu steuern, wobei die Schaltungskomponente (210, 310, 410, 510, 610, 710, 810, 910) konfiguriert ist, um die Strahlung von den Kabelanordnungsleitern zu verbessern, um drahtlose Kommunikationen zu unterstützen.

2. Gerät nach Anspruch 1, wobei die Schaltungskomponente zumindest eine von einer Ferrit-Hülse (710, 810, 910), einem Induktor (710, 810, 910) oder einem Kondensator umfasst.

3. Gerät nach Anspruch 1 oder Anspruch 2, wobei die Schaltungskomponente (210, 310, 410, 510, 610, 710, 810, 910) mit der Kabelanordnung (104, 704, 804, 904) in Reihe verbunden ist.

4. Gerät nach einem der vorhergehenden Ansprüche, wobei die Schaltungskomponente (210, 810) mit der

Kabelanordnung (104, 804) an dem Gerätgehäuse (100, 800) angrenzend verbunden ist.

5. Gerät nach einem der vorhergehenden Ansprüche, wobei die Schaltungskomponente (210, 810) am Gerätgehäuse (100, 800) außerhalb einer Antennenöffnung angrenzt. 5
6. Gerät nach einem der Ansprüche 1 bis 3, wobei die Schaltungskomponente (310, 410, 710, 910) in der Kabelanordnung (104, 704, 904) am Audioempfänger (102, 702, 902) angrenzt. 10
7. Gerät nach einem der Ansprüche 1 bis 3, wobei die Schaltungskomponente (510) entlang der Kabelanordnung (104) einstellbar angeordnet ist. 15
8. Gerät nach Anspruch 7, wobei die Schaltungskomponente (210, 310, 410, 510, 610, 710, 810, 910) konfiguriert ist, um für eine vorgeschriebene elektrische Länge einstellbar zu sein. 20
9. Gerät nach Anspruch 7, wobei die Schaltungskomponente (210, 310, 410, 510, 610, 710, 810, 910) konfiguriert ist, um für eine vorgeschriebene Strahlungseffizienz der Kabelanordnung (104, 704, 804, 904) einstellbar zu sein. 25
10. Gerät nach Anspruch 7, wobei die Schaltungskomponente (210, 310, 410, 510, 610, 710, 810, 910) konfiguriert ist, um für eine vorgeschriebene Empfindlichkeit gegenüber Magnetkopfspaltänderungen einstellbar zu sein. 30
11. Verfahren zur Erhöhung der Antennenleistung eines drahtlosen Hörhilfegerätes, umfassend:
Verbinden einer Schaltungskomponente (210, 310, 410, 510, 610, 710, 810, 910) mit einer Kabelanordnung (104, 704, 804, 904), welche konfiguriert ist, um einen Audioempfänger (102, 702, 902), welcher konfiguriert ist, um in einem Ohrkanal getragen zu werden, mit einem Hörhilfegerätgehäuse (100, 700, 800) zu verbinden, wobei die Schaltungskomponente (210, 310, 410, 510, 610, 710, 810, 910) konfiguriert ist, um die Verbindung zwischen der Kabelanordnung (104, 704, 804, 904) und einer Antenne (156), welche innerhalb des Gerätgehäuses (100, 700, 800) angeordnet ist, durch Steuern eines Hochfrequenzstroms durch Drähte der Kabelanordnung (104, 704, 804, 904) zu steuern, wobei die Schaltungskomponente (210, 310, 410, 510, 610, 710, 810, 910) konfiguriert ist, um die Strahlung von den Kabelanordnungsleitern zu verbessern, um drahtlose Kommunikationen zu unterstützen. 35
40
45
50
12. Verfahren nach Anspruch 11, wobei das Verbinden einer Schaltungskomponente mit einer Kabelanordnung (704, 804, 904) das Verbinden einer Ferrit-Hül-

se (710, 810, 910) mit der Kabelanordnung (704, 804, 904) umfasst.

13. Verfahren nach Anspruch 11, wobei das Verbinden einer Schaltungskomponente mit einer Kabelanordnung (704, 804, 904) das Verbinden eines Induktors (710, 810, 910) mit der Kabelanordnung (704, 804, 904) umfasst.
14. Verfahren nach Anspruch 11, wobei das Verbinden einer Schaltungskomponente (210, 310, 410, 510, 610, 710, 810, 910) mit einer Kabelanordnung (104, 704, 804, 904) das Verbinden eines Kondensators mit der Kabelanordnung (104, 704, 804, 904) umfasst.
15. Verfahren nach einem der Ansprüche 11 bis 14, ferner umfassend das Verbinden von mehreren Schaltungskomponenten (610) entlang der Kabelanordnung (104, 704, 804, 904).

Revendications

1. Dispositif d'aide auditive du type à récepteur dans conduit (RDC), destiné à un utilisateur, comprenant :

un boîtier de dispositif (100, 700, 800) ;
une antenne (156) placée à l'intérieur du boîtier de dispositif (100, 700, 800) ;
un récepteur audio (102, 702, 902) conçu pour être porté dans un conduit auditif d'un utilisateur ;
un ensemble de câble (104, 704, 804, 904) conçu pour connecter le récepteur audio (102, 702, 902) au boîtier de dispositif (100, 700, 800) ; et
un composant de circuit (210, 310, 410, 510, 610, 710, 810, 910) connecté à l'ensemble de câble (104, 704, 804, 904) et conçu pour commander le couplage entre l'ensemble de câble (104, 704, 804, 904) et l'antenne (156) en commandant le courant à haute fréquence circulant à travers les fils de l'ensemble de câble (104, 704, 804, 904), le composant de circuit (210, 310, 410, 510, 610, 710, 810, 910) étant conçu pour améliorer le rayonnement des conducteurs de l'ensemble de câble pour faciliter les communications sans fil.
2. Dispositif selon la revendication 1, dans lequel le composant de circuit comprend l'un au moins parmi une perle de ferrite (710, 810, 910), un inducteur (710, 810, 910) ou un condensateur.
3. Dispositif selon la revendication 1 ou la revendication 2, dans lequel le composant de circuit (210, 310, 410, 510, 610, 710, 810, 910) est connecté en série avec l'ensemble de câble (104, 704, 804, 904).

4. Dispositif selon l'une quelconque des revendications précédentes, dans lequel le composant de circuit (210, 810) est connecté à l'ensemble de câble (104, 804) de manière adjacente au boîtier de dispositif (100, 800). 5
5. Dispositif selon l'une quelconque des revendications précédentes, dans lequel le composant de circuit (210, 810) est situé de manière adjacente au boîtier de dispositif (100, 800) à l'extérieur d'une ouverture d'antenne. 10
6. Dispositif selon l'une quelconque des revendications 1 à 3, dans lequel le composant de circuit (310, 410, 710, 910) est situé dans l'ensemble de câble (104, 704, 904) de manière adjacente au récepteur audio (102, 702, 902). 15
7. Dispositif selon l'une quelconque des revendications 1 à 3, dans lequel le composant de circuit (510) est positionné de manière réglable le long de l'ensemble de câble (104). 20
8. Dispositif selon la revendication 7, dans lequel le composant de circuit (210, 310, 410, 510, 610, 710, 810, 910) est conçu pour être réglé à une longueur électrique prescrite. 25
9. Dispositif selon la revendication 7, dans lequel le composant de circuit (210, 310, 410, 510, 610, 710, 810, 910) est conçu pour être réglé à un rendement de rayonnement prescrit de l'ensemble de câble (104, 704, 804, 904). 30
10. Dispositif selon la revendication 7, dans lequel le composant de circuit (210, 310, 410, 510, 610, 710, 810, 910) est conçu pour être réglé à une sensibilité prescrite à la variation de l'espace de tête. 35
11. Procédé d'augmentation des performances d'antenne d'un dispositif d'aide auditive sans fil, le procédé comprenant : 40
 - la connexion d'un composant de circuit (210, 310, 410, 510, 610, 710, 810, 910) à un ensemble de câble (104, 704, 804, 904) conçu pour connecter un récepteur audio (102, 702, 902), conçu pour être porté dans un conduit auditif, à un boîtier de dispositif d'aide auditive (100, 700, 800), le composant de circuit (210, 310, 410, 510, 610, 710, 810, 910) étant conçu pour commander le couplage entre l'ensemble de câble (104, 704, 804, 904) et une antenne (156) située dans le boîtier de dispositif (100, 700, 800) en commandant le courant à haute fréquence circulant à travers les fils de l'ensemble de câble (104, 704, 804, 904), le composant de circuit (210, 310, 410, 510, 610, 710, 810, 910) étant conçu pour améliorer le rayonnement des conducteurs de l'ensemble de câbles pour faciliter les communications 45
12. Procédé selon la revendication 11, dans lequel la connexion d'un composant de circuit à un ensemble de câble (704, 804, 904) comprend la connexion d'une perle de ferrite (710, 810, 910) à l'ensemble de câble (704, 804, 904). 50
13. Procédé selon la revendication 11, dans lequel la connexion d'un composant de circuit à un ensemble de câble (704, 804, 904) comprend la connexion d'un inducteur (710, 810, 910) à l'ensemble de câble (704, 804, 904). 55
14. Procédé selon la revendication 11, dans lequel la connexion d'un composant de circuit (210, 310, 410, 510, 610, 710, 810, 910) à un ensemble de câble (104, 704, 804, 904) comprend la connexion d'un condensateur à l'ensemble de câble (104, 704, 804, 904).
15. Procédé selon l'une quelconque des revendications 11 à 14, comprenant en outre la connexion de plusieurs composants de circuit (610) le long de l'ensemble de câble (104, 704, 804, 904).

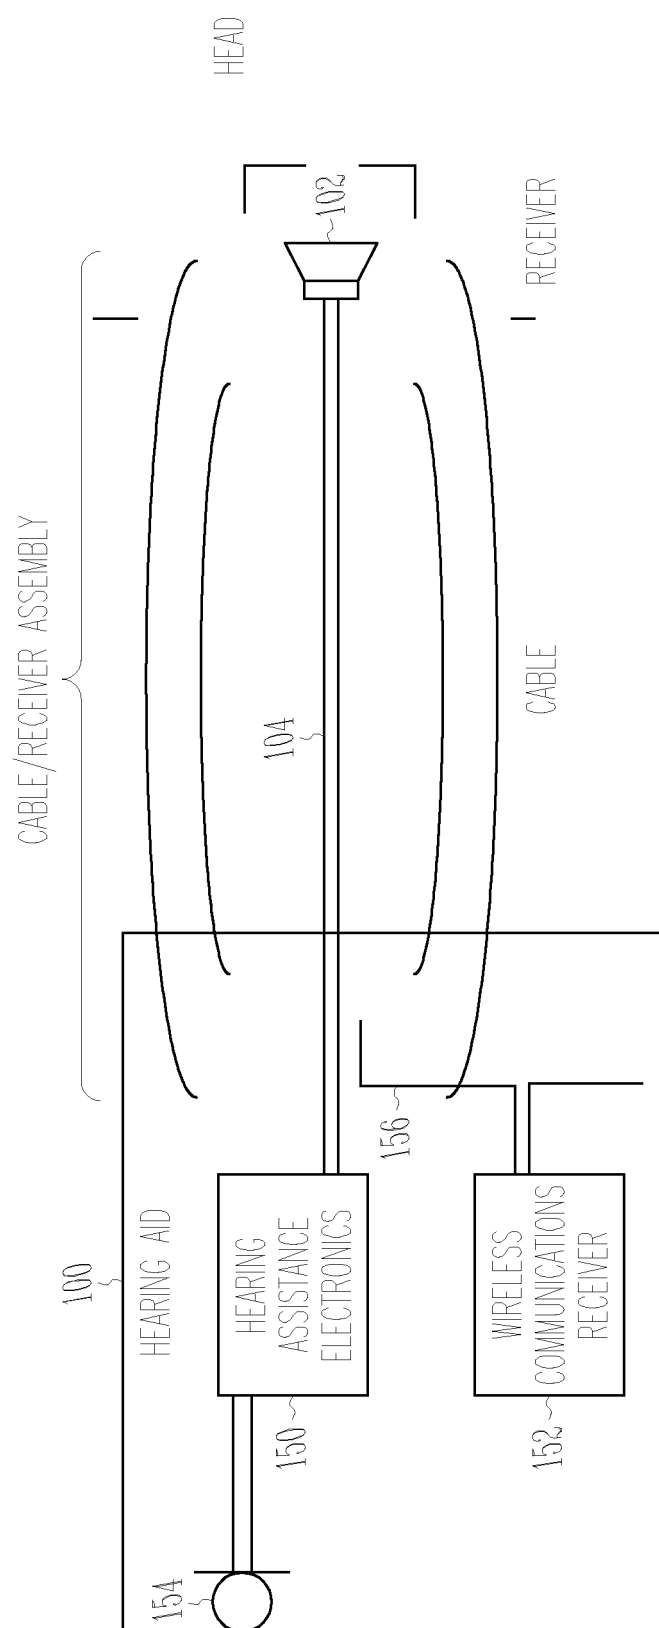


Fig. 1 (Prior Art)

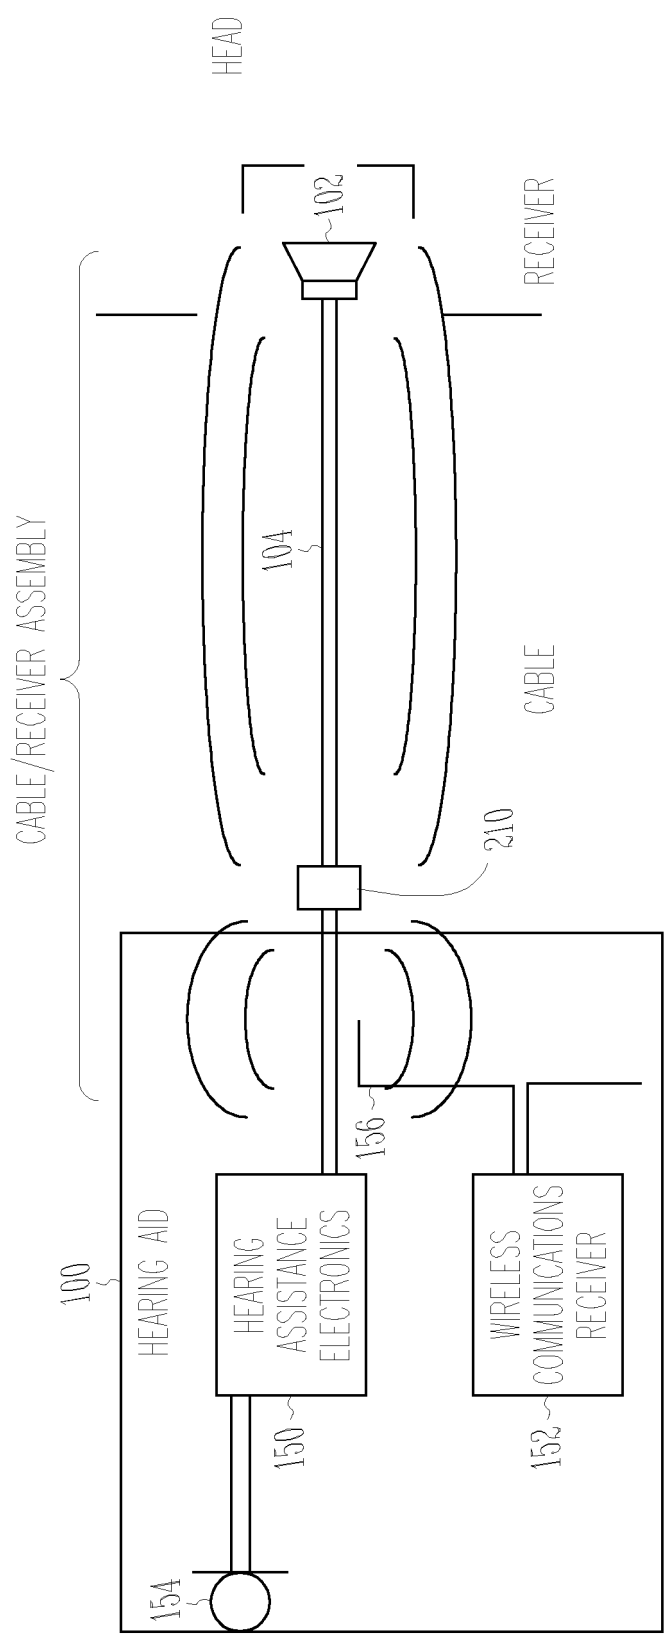


Fig. 2

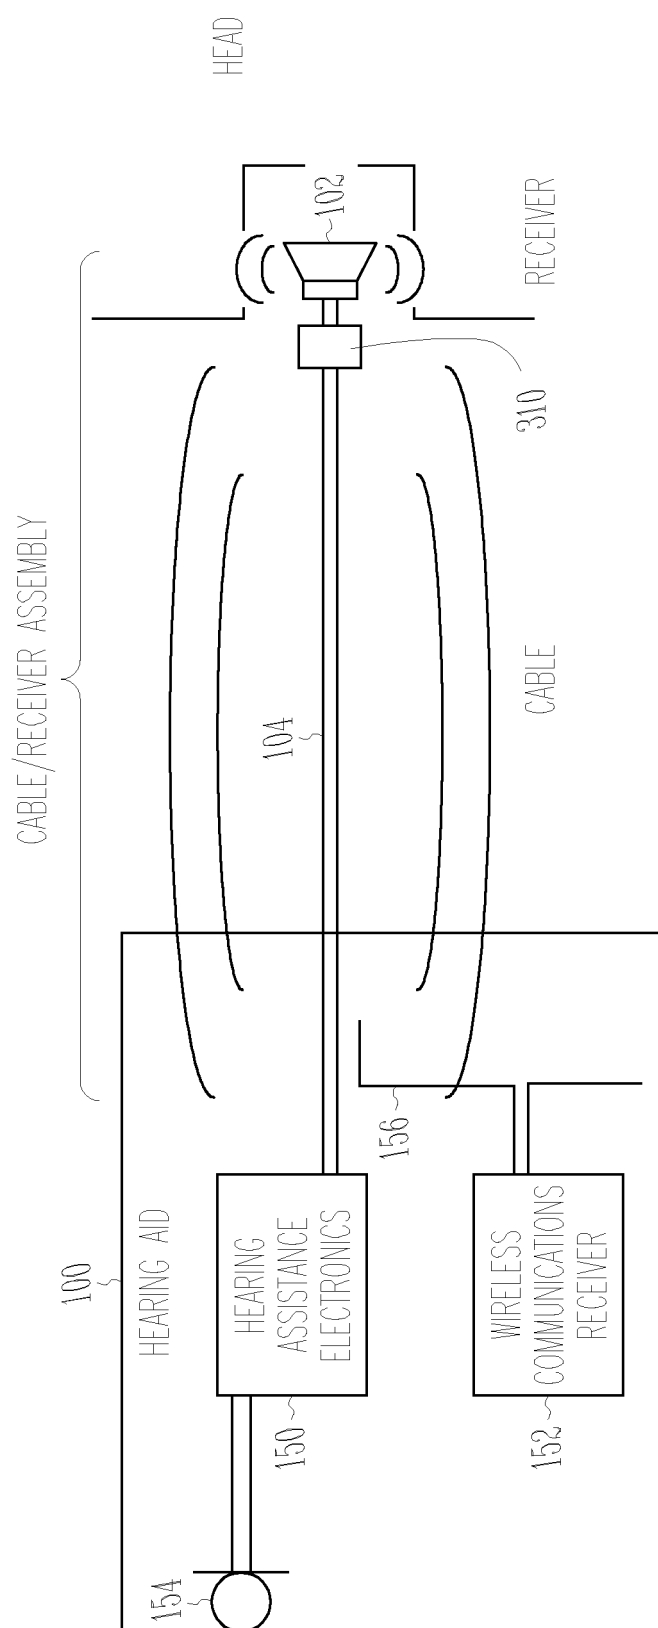


Fig. 3

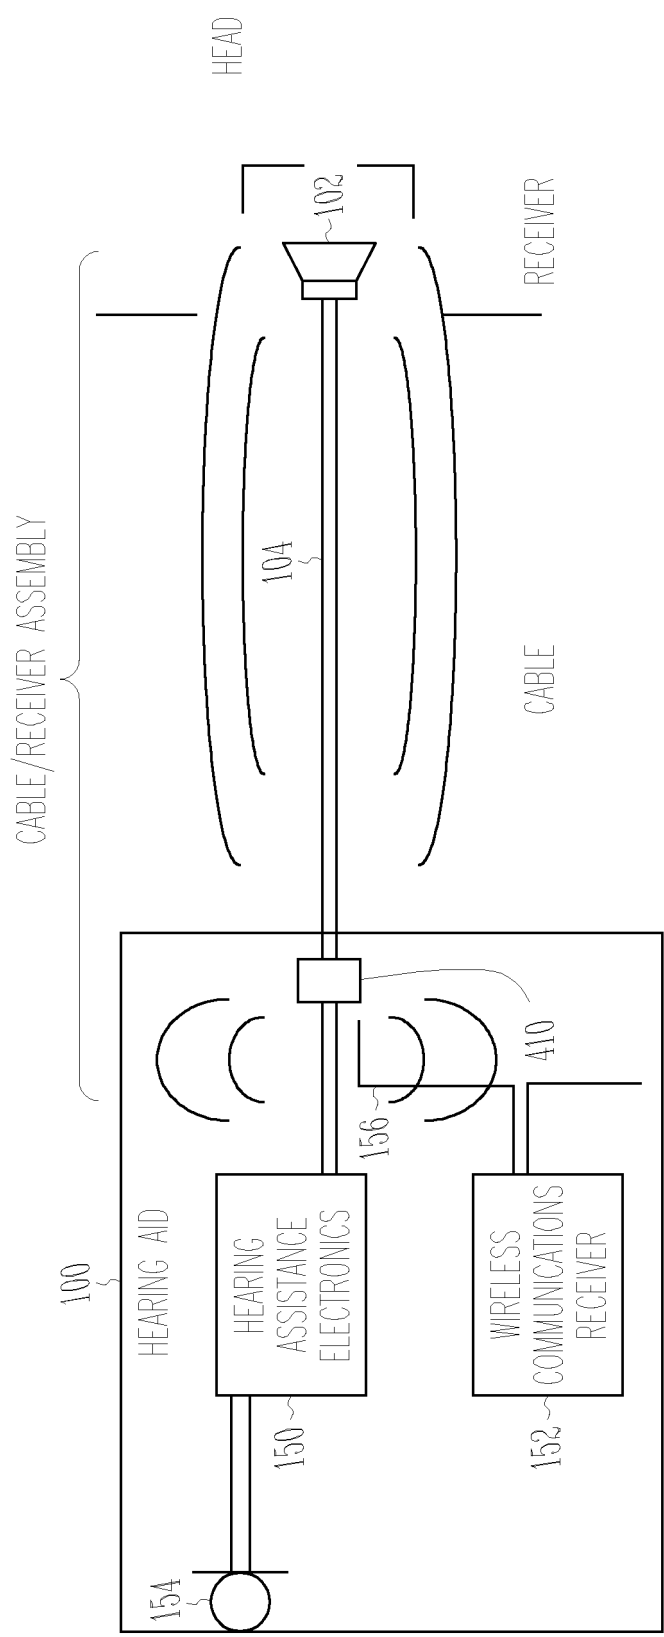


Fig. 4

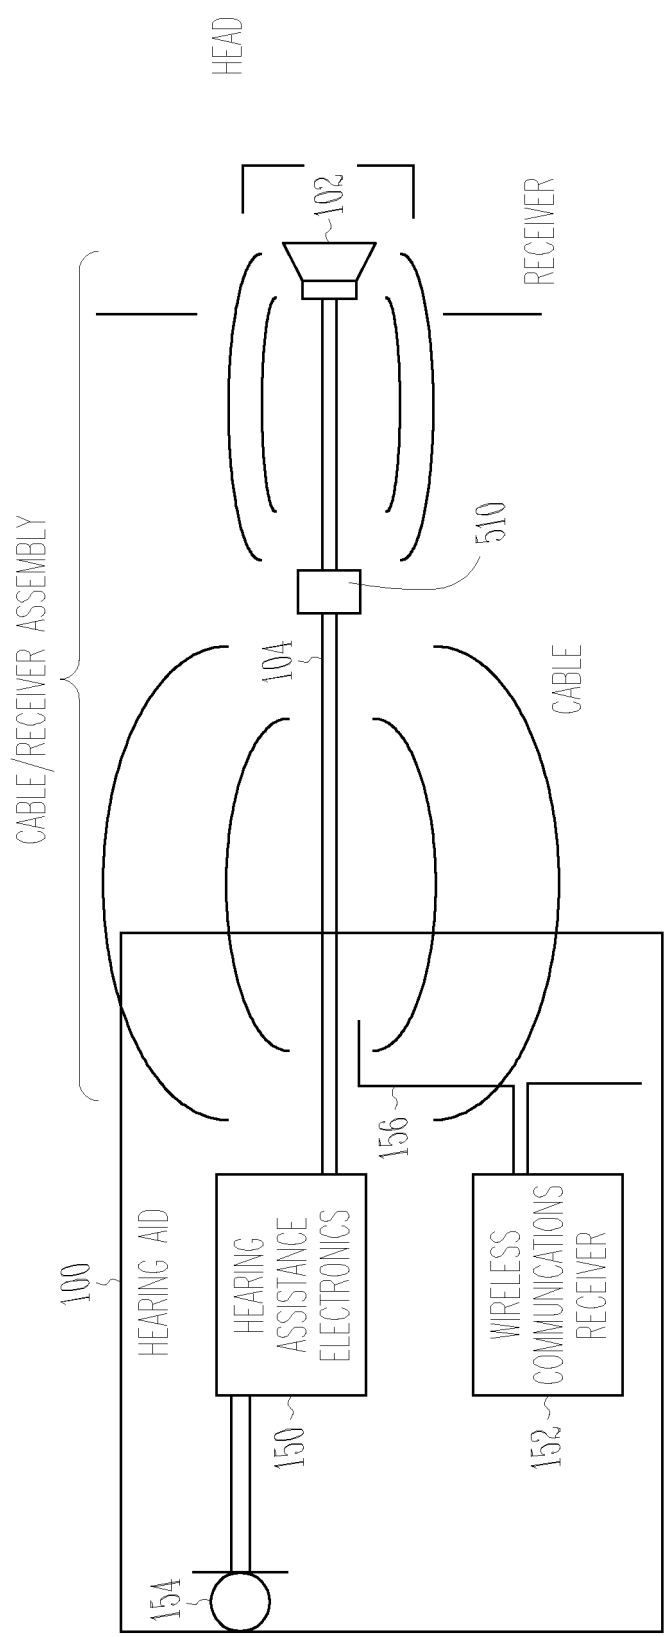


Fig. 5

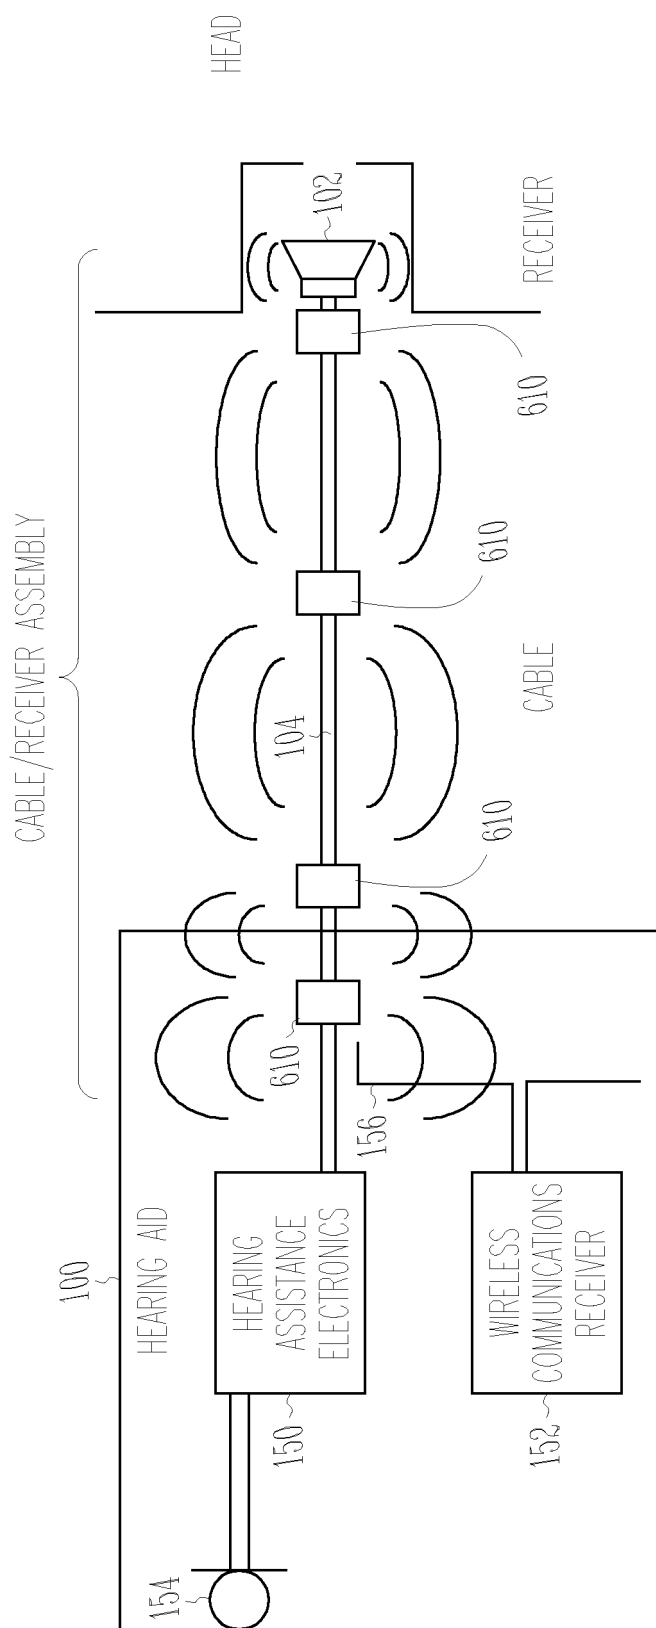


Fig. 6

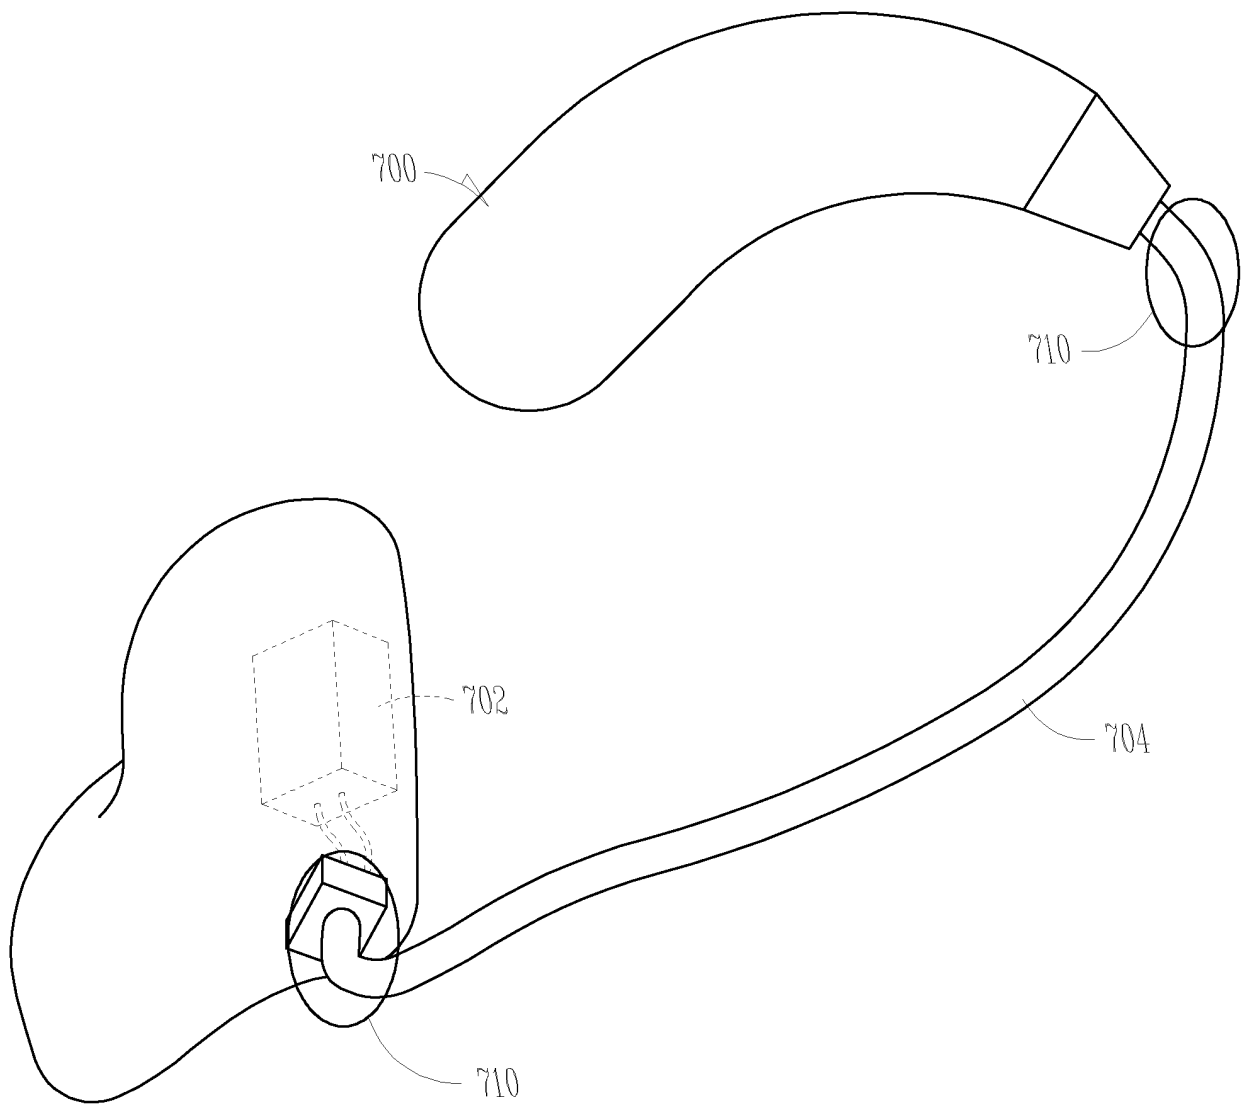


Fig. 7

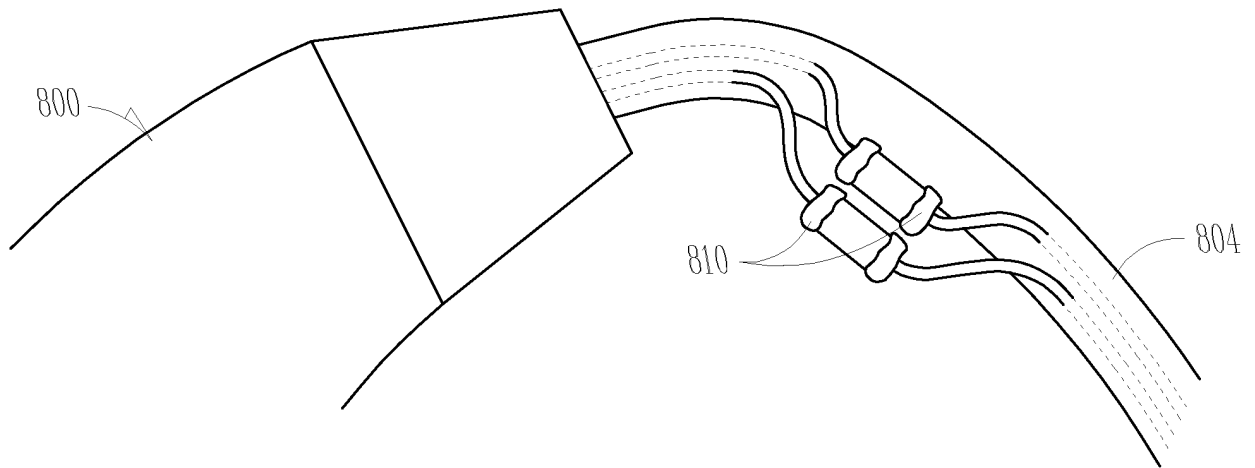


Fig. 8

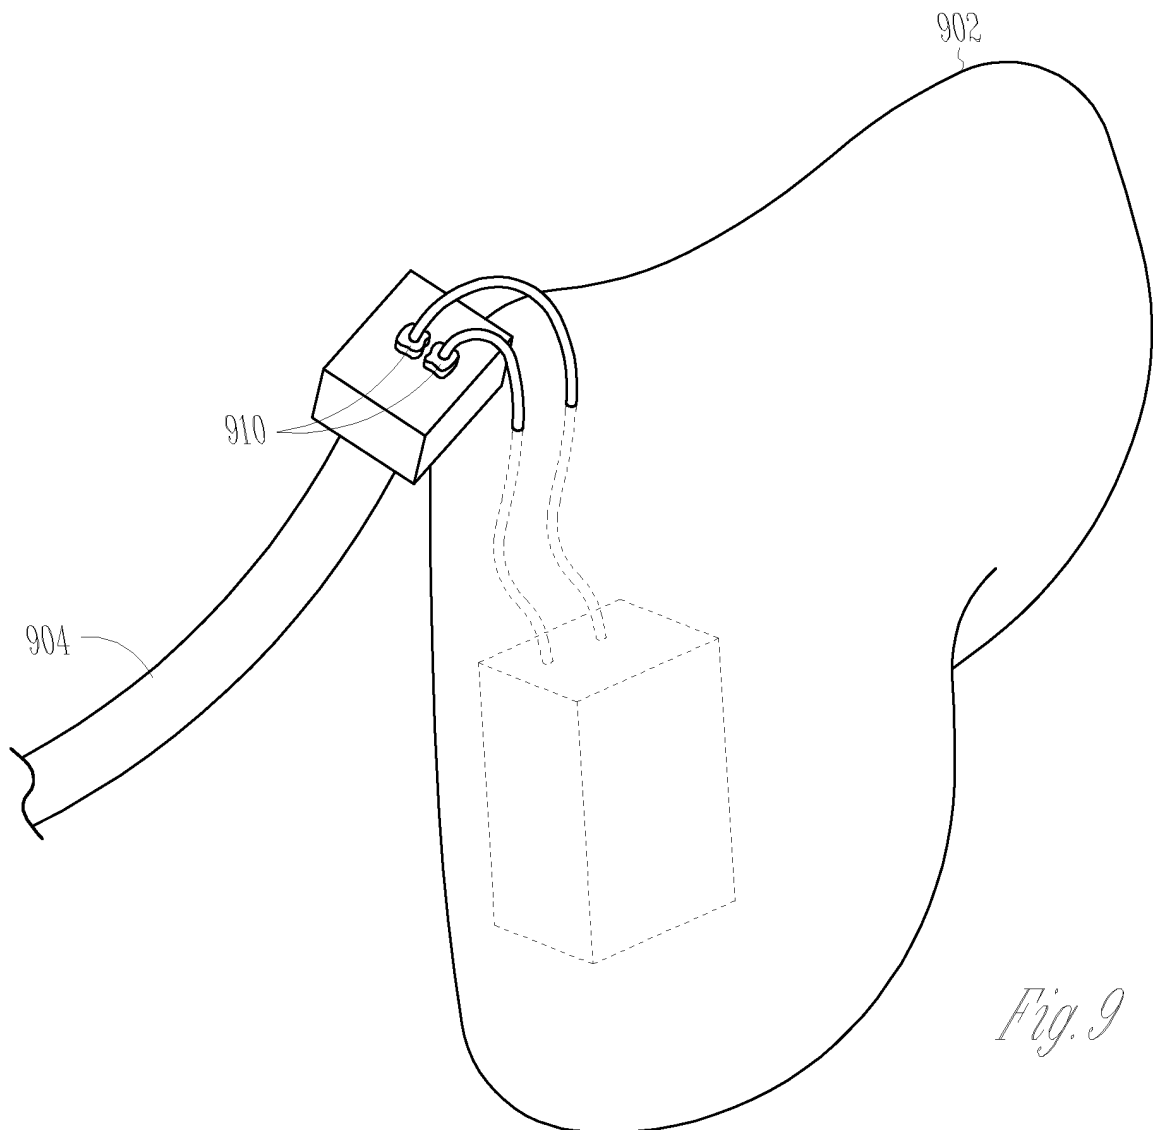


Fig. 9

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20090196444 A1 [0003]