(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) EP 2 944 435 B1

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
16.10.2019 Bulletin 2019/42

(51) Int Cl.:
B25G 3/24 *(2006.01)* ***B25G 3/30*** *(2006.01)*
B25G 3/18 *(2006.01)*

(21) Application number: **15166145.1**

(22) Date of filing: **01.05.2015**

(54) **QUICK FIT ADJUSTMENT MECHANISM FOR EXTENSION POLE SYSTEM FOR PAINT ROLLER**

SCHNELLBEFESTIGUNGSANPASSUNGSMECHANISMUS FÜR VERLÄNGERUNGSSTANGENSYSTEM FÜR FARBROLLER

MÉCANISME D'AJUSTEMENT RAPIDE DESTINÉ À UN SYSTÈME DE PÔLE D'EXTENSION POUR ROULEAU À PEINDRE

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(30) Priority: **02.05.2014 US 201414268572**

(43) Date of publication of application:
18.11.2015 Bulletin 2015/47

(73) Proprietor: **THE SHERWIN-WILLIAMS COMPANY**
Cleveland,
Ohio 44115-1075 (US)

(72) Inventors:
- **Lambertson, Jr., Michael C.**
  Aurora, OH Ohio 44202 (US)
- **Forman-House, Rita**
  Avon Lake, OH Ohio 44012 (US)
- **De Renzo, Jr., Dennis P.**
  Concord Township, OH Ohio 44077 (US)
- **O'Banion, Michael**
  West Minister, MD Maryland 21157 (US)
- **Goodwin, Jr., Edward Ray**
  Westlake, OH Ohio 44145 (US)

(74) Representative: **Pendered, Timothy George et al**
Maucher Jenkins
26 Caxton Street
London SW1H 0RJ (GB)

(56) References cited:
US-A- 5 288 161
US-A1- 2010 147 117
US-A1- 2014 000 065

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 944 435 B1

Printed by Jouve, 75001 PARIS (FR)

Description

I. Background

A. Field of the Invention

[0001] This invention is in the field of methods and apparatuses for connecting paint related accessories to poles and more specifically to methods and apparatuses for a quick fit adjustment mechanism that easily connects a pole to various types of paint related accessories.

B. Description of Related Art

[0002] It is well known in the paint industry to provide poles, which typically are used as a handle by a user, that are designed to connect to and disconnect from specific paint accessories. It is known, for example, to provide a pole that has a threaded distal end that engages threads formed within an opening on a paint roller handle/pole. It is also known, as another example, to provide a pole with an opening, having slots, that receives a paint roller pole/handle having extensions that match the shape and size of the slots. An example of a prior art device is seen in US-A-5288161.

[0003] While many known connect/disconnect mechanisms used in the paint industry work well for their intended purposes, they have a disadvantage. The disadvantage is that a given pole/handle will only connect to a limited number of paint accessories. If a user has a pole and a paint accessory that does not "match" the pole, the user has no option but to purchase a new pole to match the paint accessory or a new paint accessory to match the pole. This adds undesirable cost and undesirable time to painting projects.

[0004] What is needed is a quick fit adjustment mechanism that is designed to enable a pole to engage with many different types, sizes, and styles of paint accessories.

[0005] The present invention provides a quick fit adjustment mechanism for a paint assembly which connects paint related accessories to a pole and connection method having features set out in the appended claims.

II. Summary

[0006] According to one embodiment of this invention, a quick fit adjustment mechanism for a paint assembly which connects paint related accessories to a pole comprises the features of claim 1.

[0007] According to one embodiment of this invention, a paint assembly for connecting paint related accessories to a pole comprises the features of claim 9.

[0008] According to yet another embodiment of this invention, a method for connecting paint related accessories to a pole comprises the steps and features of claim 15.

[0009] Benefits and advantages of this invention will become apparent to those skilled in the art to which it pertains upon reading and understanding of the following detailed specification.

III. Brief Description of the Drawings

[0010] The invention may take physical form in certain parts and arrangement of parts, embodiments of which will be described in detail in this specification and illustrated in the accompanying drawings which form a part hereof and wherein:

FIGURE 1 is a side perspective view of a paint roller assembly that may use a quick fit adjustment mechanism.

FIGURE 2 is a perspective close-up view of a quick fit adjustment mechanism in a first position where actuator pins arc extended.

FIGURE 3 is a perspective close-up view similar to that shown in FIGURE 2 but with the actuator pins retracted.

FIGURE 4 is an assembly drawing of a quick fit adjustment mechanism.

FIGURE 5 is a perspective view of a housing.

FIGURE 6 is an end view of the first end of the housing.

FIGURE 7 is a first side view of the housing.

FIGURE 8 is a second side view of the housing.

FIGURE 9 is a perspective view of a lever.

FIGURE 10 is a first side view of the lever.

FIGURE 11 is a second side view of the lever.

FIGURE 12 is an end view of the lever.

FIGURE 13 is a perspective view of an actuator pin.

FIGURE 14 is a side view of the quick fit adjustment mechanism in a retracted position.

FIGURE 15 is a side view of the quick fit adjustment mechanism in an extended position.

FIGURE 16 is a side sectional view of the quick fit adjustment mechanism.

FIGURE 17 is perspective assembly view of the components used in a quick fit adjustment mechanism according to some embodiments of this invention.

FIGURE 18 is a side assembly view of the components shown in FIGURE 17 except with the insert removed.

FIGURE 19 is a top perspective view of a housing according so some embodiments of this invention.

FIGURE 20 is a top perspective view of a lever according to some embodiments of this invention.

FIGURE 21 is a side view showing the lever positioned within the housing.

FIGURE 22 is a side section view of the lever and housing of FIGURE 21 except with the spring removed for clarity.

FIGURE 23 is a view similar to that shown in FIGURE 22 but with the lever in the retracted position.

FIGURE 24 is a view similar to that shown in FIGURE 22 but with an insert included.

FIGURE 25 is a view similar to that shown in FIGURE 24 but with the lever in the retracted position.

FIGURE 26 is a top perspective view of the end of a pole that may be used with some embodiments of this invention.

IV. Detailed Description

[0011] Referring now to the drawings wherein the showings are for purposes of illustrating embodiments of the invention only and not for purposes of limiting the same, and wherein like reference numerals are understood to refer to like components, FIGURE 1 shows an assembly 10 that may use embodiments of a quick fit adjustment mechanism 30. The assembly 10 may include a pole 12 that is attached to an accessory 14. The accessory shown is a paint accessory; and more specifically a paint roller. The pole 12 may be used as a handle and thus may include a grip surface 18. The accessory 14 may have a portion 16 to which the pole 12 is connected. In one embodiment, shown, the paint accessory portion 16 is a pole. The quick fit adjustment mechanism 30 may be used to quickly and easily connect the pole 12 to the accessory 14 and to quickly and easily disconnect the pole 12 from the accessory 14. The quick fit adjustment mechanism 30 is ideally suited for use with paint accessories, including rollers and the like.

[0012] The pole 12 may have a distal end 20 and the accessory 14 may have an opening 32. The paint accessory portion 16 may have various designs within the opening 32 and the quick fit adjustment mechanism 30 is designed to accommodate numerous such designs, making the quick fit adjustment mechanism 30 a nearly universal attachment mechanism.

[0013] The quick fit adjustment mechanism 30 may include a housing 50, one or more actuator pins 40, and a lever 36. The housing 50 may have a first end 52 that is attachable to the distal end 20 of the pole 12 and a second end 54 having an outer surface with threads 34. The housing may have holes 56 through which the actuator pins 40 may be extended and retracted. A chamber 58 may be formed in each end of the housing 50 and they may communicate with each other. The chamber 58 in the second end 54 may communicate with the holes 56. The chamber 58 in the first end 52 may have a slot 60 that may extend through the outer surface of the housing 50, as shown. The chamber 58 in the first end 52 may also have at least one channel 62, two shown in FIGURE 6, that are formed on a side of the chamber 58. The first end 52 may also have an aperture 66. One or more connection sites 64 which may be used to attach the first end 52 to the pole 12, may be provided.

[0014] The lever 36 may be supported to the housing 50 and moveable with respect to the housing 50 as will be discussed further below. The lever 36 may have a main body 68 and a plate 70 that extends from the main body 68, as shown. The main body 68 may have at least one rib 72, two shown, that is received in the channel 62 formed in the housing 50 and by which the lever 36 is slidable within and with respect to the housing 50. When the lever 36 is positioned within the housing 50, the plate 70 may extend into the chamber 58 for in the second end 54 of the housing 50. The lever 36 may have a neck 74 that extends from the main body 68 and through the slot 60 in the housing 50. An operator button 38 may be attached to the distal end of the neck 74, as shown. A grip surface 48 may be positioned on the outer surface of the operator button 38 to improve the grip between the user and the operator button 38. The operator button 38 shown is adjustable longitudinally, in the directions indicated by arrow 42. In another embodiment, the button 38 may move laterally, and in yet another embodiment the button may be adjusted by rotational movement. The lever may have an aperture 76, shown in FIGURE 16, used as discussed below. The aperture 76 may be cone-shaped, as shown.

[0015] The lever 36 may have at least one contact surface 78, two shown, that contacts a corresponding actuator pin 40. In one embodiment, the contact surfaces 78 are on opposite sides of the plate 70. Each contact surface 78 may comprise a ridge 80 that may be angled with respect to a longitudinal center line of the lever when the quick fit adjustment mechanism is attached to the pole. The ridges 80 may be angled in opposite directions, as shown. Each actuator pin 40, see especially FIGURE 13 may have a groove 82 that receives the corresponding ridge 80. Each actuator pin 40 may be L-shaped, as shown, having a first leg 84 that may define the distal end, the first to extend out of the hole 56, and a second leg 86 that may have the groove 82. The groove 82 may be angled, as shown, and cooperate with the corresponding ridge 80 to cause the actuator pins 40 to move as will

be discussed below.

[0016] A biasing device 88 may be used to maintain position of the lever 36 with respect to the housing 50. The biasing device 88 may be a spring that extends through the aperture 66 in the first end of the housing 50 and into the aperture 76 in the lever 36, as shown. In one embodiment, the pole has a cavity into which the first end 52 of the housing 50 is inserted. In this case, the biasing device 88 has a first end that contacts an inner surface of the pole defining the cavity and a second end that is received within the aperture in the lever 36.

[0017] In one design, the paint accessory portion 16 may have threads formed on the surface of the opening 32. To accommodate this design, the pins 40 may be retracted, as discussed below. The threads 34 on the housing 50 may then engage the threads on the accessory 14 to secure the accessory 14 to the pole 12. More specifically, the pole 12 may be rotated with respect to the accessory 14 while allowing the threads 34 on pole 12 to engage the threads formed on the surface of the opening 32. The pole 12 can be easily disconnected from the accessory portion 16 by rotating the pole 12 with respect to the paint accessory portion 16 in the opposite direction.

[0018] In another design, the paint accessory portion 16 is not able to engage the threads 34. In this case, the quick fit adjustment mechanism 30 may be adjusted by moving the operator button 38, see arrow 42, to move the lever 36 with respect to the housing 50 between: (1) a first position, see FIGURES 3 and 14, where the first and second actuator pins are in a retracted position with respect to the first and second holes in the housing; and, the second end of the housing is insertable within an opening in a second associated accessory; and, (2) a second position, see FIGURES 2 and 15, where the first and second actuator pins extend out of the first and second holes and are contactable to an inner surface of the opening in the accessory to secure the accessory to the pole. To then remove the pole 12, it is only necessary to move the operator button, and thus the lever, in the opposite direction. This causes the actuator pins to retract and the pole can then be easily removed.

[0019] The actuator pins 40 shown are on opposite sides of the housing, top and bottom surfaces in a specific embodiment, but other positions may work equally well, depending on the shape of the opening 32. The pins 40 may extend from the outer surface of the pole 12 in locations where the threads 34 are not located, as shown. In another embodiment, the pins 40 may extend from the outer surface of the pole 12 in locations where the threads 34 are located. The quick fit adjustment mechanism 30 may include a sleeve 44 that covers a portion of the outer surface of the pole 12, as shown. The sleeve 44 may serve to provide a grip surface for the user and/or may serve to cover/protect the components that engage the operator button 38. In one embodiment, shown, the button 38 is positioned substantially outside of the sleeve 44.

[0020] Within the opening 32, the accessory 14 may have different non-thread designs. In one embodiment, there are apertures sized and positioned to receive the extended actuator pins 40 (as shown in FIGURE 2). In another embodiment, there are no such apertures and the actuator pins 40 create enough force to create a frictional connection with the surface that defines the opening 32. Other designs are possible and would work well. In one embodiment, undesirable wobbling/vibrating is minimized by controlling relative size tolerances. In one specific embodiment, the size tolerances are held to about plus or minus 0.002 inches.

[0021] With reference now to FIGURES 17-18, another embodiment quick fit adjustment mechanism 100 will now be described. The quick fit adjustment mechanism 100 may include a housing 102, a lever 160 and, in some embodiments, an insert 200. Embodiments of the quick fit adjustment mechanism 100 may be used with any pole chosen with the sound judgment of a person of skill in the art. As one non-limiting example, FIGURE 26 shows the end of a pole 240 that may be used with the quick fit adjustment mechanism 100. The pole 240 may have a pole opening 242, a pole hole 244 that communicates the pole opening 242 to the outer surface of the pole 240 and a pole cavity 246 that communicates the pole opening 242 to the outer surface of the pole 240.

[0022] With reference to FIGURES 17-18 and 26, the housing 102 may have a first end 104 that may be generally cylindrical in shape, as shown, and may have an attachment surface 106 that is suitable to be attached to a pole, such as pole 12 discussed above or pole 240. In one specific embodiment, the first end 104, and thus attachment surface 106, may be inserted within pole opening 242, shown in FIGURE 26. A connector may then be inserted through pole hole 244 and an opening 108 (referenced in FIGURE 22) in the housing 102 to secure the housing 102 to the pole. The housing 102 may have a second end 110 that may be generally cylindrical in shape, as shown, and may have an outer surface 112. The second end 110, and thus outer surface 112, may be inserted into an opening in an accessory, such as opening 32 described above, or into the insert 200 as is discussed further below. In one embodiment, shown, threads 114 may formed on the outer surface 112 and may be used to engage threads in the accessory opening. In one embodiment, shown, there are two areas of housing threads 114 that extend axially on the sides of the housing 102 and two areas of smooth surfaces 138 (and thus no threads), see also FIGURE 21, that extend axially on the top and bottom of the housing 102.

[0023] With reference now to FIGURES 17-19 and 22, a housing chamber 116 may be formed within the housing 102 and may extend from the first end 104 to the second end 110, as shown. In one embodiment, shown, the housing chamber 116 extends all the way through the first end 104 but does not extend through the second end 110 but instead is closed with end wall 122, as referenced in FIGURE 22. The housing 102 may have a housing hole 118 that communicates the housing chamber 116 to the outer

surface 112 of the second end 112 of the housing 102. The housing 102 may have a housing cavity 120 that communicates the housing chamber 116 to the outer surface of the first end 104 of the housing 102. The housing 102 may have a housing flange 124 that extends outward from the outer surface of the housing 102. For the embodiment shown, the housing flange 124 is positioned axially between the first and second ends 104, 110.

[0024] With reference now to FIGURES 17-18 and 20-22, the lever 160 may have first and second ends 162, 164. The first end 162 may define an actuator pin 166 to be used as will be discussed below. The lever 160 may be positioned at least partially within the housing chamber 116 and may be pivotal with respect to the housing 102. When positioned within the housing chamber 116, the actuator pin 166 may be positioned juxtaposed to the housing hole 118, as is shown, for example, in FIGURE 23. In one embodiment, shown, the lever 160 pivots with respect to the housing 102 about the second end 164 of the lever 160. While the lever 160 may have any pivotal connection with the housing 102 chosen with the sound judgment of a person of skill in the art, for the embodiment shown the lever 160 may pivot about a pivot pin 168. The pivot pin 168 may be received within a pivot pin opening 170 formed in the lever 160 and a pair of pivot pin openings 126, 126 formed on opposite sides of the housing 102 (see also FIGURE 19). The lever 160 may have an operator engagement surface 172 that extends upward (in the drawings shown) and that is used as will be discussed below. The operator engagement surface 172 may be accessed through the housing cavity 120 (see FIGURES 19 and 22) and through the pole cavity 246 which may be aligned with housing cavity 120. For the embodiment shown, the operator engagement surface 172 is positioned between the first and second ends 162, 164 of the lever 160.

[0025] With reference now to FIGURES 17-20, in one embodiment a biasing device 174 may be used to bias the actuator pin 166 toward a particular position, as will be discussed below. In one specific embodiment, shown, the biasing device 174 may be a spring. The spring 174 may have a pair of coils 176, 176 connected together by a mid-section 178. The mid-section 178 may extend away from the coils 176, 176 as shown. Opposite ends 180, 182 of the spring 174 may extend away from the coils 176, 176 as shown. To attach the spring 174 to the quick fit adjustment mechanism 100, the lever 160 may have a pair of spring reception surfaces 184, 184 on opposite sides of the lever 160. The reception surfaces 184, 184 may be cylindrically shaped, as shown, and may extend from opposite sides of the lever 160 and define opposite ends of the pivot pin opening 170. The spring coils 176, 176 may be received on the spring reception surfaces 184, 184 and the spring mid-section 178 may contact a spring contact surface 186, also labeled in FIGURE 22, of the lever 160. The ends 180, 182 of the spring may be received in respective spring slots 128, 128, referenced in FIGURE 19, formed in the first end 104 of the housing 102. When the quick fit adjustment mechanism 100 is attached to a pole, the spring ends 180, 182 are positioned against an inner surface of the pole, such as against the inner surface of pole 240, shown in FIGURE 26, which defines pole opening 242. This positioning causes the mid-section 178 of the spring to apply a force to the spring contact surface 186 of the lever 160. This force urges the first end 162 of the lever upward (direction 216 in FIGURE 22) and thus urges or biases the actuator pin 166 toward the housing hole 118.

[0026] With reference now to FIGURES 17-18 and 21-23, an operator button 130 may be used to simplify use of the quick fit adjustment mechanism 100. The operator button 130 may have a connection surface 132 that is connected to the operator engagement surface 172 of the lever 160. In a specific embodiment, the connection surface 132 forms a channel that receives the operator engagement surface 172, as shown. A connector 134 may then be inserted through a connector hole formed in the operator button 130 and received in a connector hole formed in the lever 160 to connect the operator button 130 to the lever 160. The connection surface 132 may extend through the housing cavity 120, as shown, and through the pole cavity 246, shown in FIGURE 26. The operator button 130 may have an operator contact surface 136 that is contacted by an operator to manually operate the quick fit adjustment mechanism 100, as will be discussed further below. For the embodiment shown, the operator contact surface 136 may be curved, as seen best in FIGURE 17.

[0027] With reference now to FIGURES 17-23, once the quick fit adjustment mechanism 100 is attached to the pole as described above, it may be used as will now be explained. The quick fit adjustment mechanism 100 is selectively manually adjustable. The quick fit adjustment mechanism 100 may be in a first condition where the actuator pin 166 is in a retracted position with respect to the housing hole 118. By "retracted position" it is meant that the actuator pin 166 does not extend fully through the housing hole 118. The retracted position is shown in FIGURE 23. If a biasing device 174 is used, it may bias the lever 160 and thus the actuator pin 166 into an extended position. The extended position is shown in FIGURE 22. Thus, the operator may, in one embodiment, simply apply a force to the operator engagement surface 172, such as, in one embodiment, by pressing on the operator contact surface 136 of the operator button 130, to overcome the biasing force of the biasing device 174 to adjust the actuator pin 166 into the retracted position. In another embodiment, the operator need only insert the housing 102 and during the insertion the actuator pin 166 may contact the accessory and be forced downward. In one specific embodiment, the actuator pin 166 may have an angled surface 188 that contacts the accessory during insertion to better apply the force necessary to move the actuator pin 166 into the retracted position. With the actuator pin 166 in the retracted position, the second end 110 of the housing 102 can easily be removed from any

accessory opening and easily inserted into any accessory opening. When in the retracted position, for example, the housing 102 can be removed from a first paint accessory opening and inserted into a second paint accessory opening. The housing flange 124, if used, may be used to contact the accessory as the housing 102 is inserted into the accessory opening to limit the distance the housing can be inserted. Once inserted into the desired accessory opening, the lever 160, and thus the quick fit adjustment mechanism 100, may be manually adjusted into a second condition where the actuator pin 166 is in an extended position where the actuator pin 166 extends from the housing chamber 116 out of the housing hole 118 (see FIGURE 22) and into engagement with the accessory. If a biasing device 174 is used, the operator only needs to release the operator engagement surface 172 of the lever 160, such as be releasing the operator button 130, so that the biasing device 174 applies a force to the lever 160 to cause the actuator pin 166 to move into the extended position. The adjustments just described can be repeated as necessary to secure the housing 102, and thus the pole, to numerous accessories as desired. All that is required is that the second end 110 of the housing 102 can be received within an opening in the accessory. As noted above, in embodiments where the accessory has threads, the threads 114 formed on the outer surface 112 may engage the accessory threads to secure the housing 102 and thus the pole to the accessory.

[0028] With reference now to FIGURES 17 and 24-25, in one embodiment the quick fit adjustment mechanism 100 may include an insert 200. The insert 200 may have an insert body 202 and an insert chamber 204 that extends into the insert body 202. The insert body 202 may be cylindrically shaped, as shown. The insert body 202 may have an insert hole 206 that communicates with the insert chamber 204. In one embodiment, shown, the insert hole 206 may communicate the insert chamber 204 to an outer surface of the insert body 202. In one embodiment, the insert 200 may have at least one insert rib 208 formed on an inner surface of the insert body 202. In one specific embodiment, there are two areas of multiple insert ribs 208 that extend axially on the top and bottom of the insert 200 and two areas of smooth surfaces 210 (and thus no ribs) that extend axially on the sides of the insert 200. The insert 200 may have a have an insert flange 212 that extends outward from the outer surface of the insert body 202. For the embodiment shown, the insert flange 212 is positioned at an axial end of the insert body 202.

[0029] With continuing reference to FIGURES 17 and 24-25, when the insert 200 is used, the insert body 202 is inserted within an accessory opening. The insert body 202 may form a press fit with the accessory to secure the insert body 202 to the accessory. In other embodiments, the insert body 202 may be secured to the accessory using an adhesive or other methods chosen with the sound judgment of a person of skill in the art. As the insert body 202 is being inserted into the accessory opening, the insert flange 212 may be used to contact the accessory to limit the distance the insert can be inserted.

[0030] Still referring to FIGURES 17 and 24-25, when the insert 200 has been attached to the accessory, the use of the quick fit adjustment mechanism 100 is similar to that discussed above. The actuator pin 166 may be in, or adjusted into, a retracted position as discussed above and shown in FIGURE 25. The second end 110 of the housing 102 can then be inserted into the insert chamber 204. The housing flange 124, if used, may be used to contact the insert flange 212, if used, as the housing 102 is inserted into the insert chamber 204.

[0031] With reference now to FIGURES 17-19, 21 and 24-25, in order to assure proper relative angular alignment between the housing 102 and the insert 200, the housing threads 114 and the insert rib(s) 208 may be arranged to interfere with each other to limit the relative angular positions that the second end 110 of the housing 102 can be inserted into the insert chamber 204. While this arrangement can be any chosen with the sound judgment of a person of skill in the art, for the embodiment shown, the housing threads 114 are formed on the sides of the housing 102 and the insert ribs 208 are formed on the top and bottom of the insert 200. With this alignment, there is no interference between the housing threads 114 and the insert ribs 208 so the housing 102 can be easily inserted into the insert 200 with proper relative angular alignment. If, however, the housing 102 is attempted to be inserted into the insert 200 without proper relative alignment, the housing threads 114 will contact the insert ribs 208 and this contact (an interference) will prevent continued insertion of the housing 102 until the proper relative angular alignment is achieved. Proper relative angular alignment can be easily obtained by rotating the housing 102 with respect to the insert 200 until the housing threads 114 are juxtaposed to the smooth surfaces 210 of the insert 200 and the insert ribs 208 are juxtaposed to the smooth surfaces 138 of the housing 102. At this point, the housing 102 can be easily inserted into the insert 200 as discussed above.

[0032] With reference now to FIGURES 17, 19, 21 and 24, in order to prevent relative rotation of the housing 102 and the insert 200 after the housing 102 has been inserted into the insert 200, a convex feature 140 in one component may be received in a concave feature 214 in the other. For the embodiment shown, four convex features 140 are positioned on opposite sides and on the top and bottom of the housing flange 124 and matching concave features 214 are positioned similarly on the insert flange 212. It is also contemplated to position one or more convex features on the insert 200 to be received in matching concave features on the housing 102.

[0033] With reference now to FIGURES 24-25, once the housing 102 is inserted into the insert 200, the lever 160, and thus the quick fit adjustment mechanism 100, may be manually adjusted into the extended position where the actuator pin 166 extends from the housing

chamber 116 out of the housing hole 118 and into engagement with the insert hole 206, as shown in FIGURE 24. If a biasing device 174 is used, see FIGURE 17, the operator only needs to release the operator engagement surface 172 of the lever 160, such as be releasing the operator button 130, so that the biasing device 174 applies a force to the lever 160 to cause the actuator pin 166 to move into the extended position. The adjustments just described can be repeated as necessary to secure the housing 102, and thus the pole, to accessories having an insert 200 as desired.

[0034] The components of the quick fit adjustment mechanisms 30, 100 can be made in sizes and of materials chosen with the sound judgment of a person of skill in the art. In one embodiment, the distal end of pole 12 is made with a Zinc die cast body. In another embodiment, the operator buttons 38, 130 and actuator pins 40, 166 are made from high impact nylon. In yet another embodiment, the sleeve 44 is made of a clear silicone rubber.

[0035] Numerous embodiments have been described herein. It will be apparent to those skilled in the art that the above methods and apparatuses may incorporate changes and modifications. It is intended to include all such modifications and alterations in so far as they come within the scope of the appended claims.

[0036] Having thus described the invention, it is now claimed:

Claims

1. A quick fit adjustment mechanism with a housing for an assembly which connects paint related accessories to a pole (12),
characterized in that the quick fit adjustment mechanism comprises:

a housing (102) comprising: a first end (104) that has a surface that is suitable to be attached to the associated pole (12), a second end (110) that has an outer surface (112) with threads (114) that are engageable with threads formed on a surface defining a first accessory opening in a first associated accessory to secure the first associated accessory to the associated pole (12), and a housing chamber (116) formed within the housing (102) and extending from the first end (104) to the second end (110). a housing hole (118) that communicates the housing chamber (116) to the outer surface (112) of the second end (110) of the housing.
a lever (160) that is positioned at least partially within the housing chamber (116), that has a first end (162) defining an actuator pin (166) that is positioned juxtaposed to the housing hole (118), that comprises an operator engagement surface (172) and that is pivotal with respect to the housing (102),
wherein the quick fit adjustment mechanism is adjustable by selective manual engagement with the operator engagement surface (172) to pivot the lever (160) with respect to the housing (102) between a first condition where the actuator pin (166) is in a retracted position with respect to the housing hole (118), with the second end (110) of the housing (102) being removable from the first accessory opening and being insertable within a second accessory opening in a second associated accessory, and a second condition where, while the second end (110) of the housing (102) is inserted within the second accessory opening, the actuator pin (166) is in an extended position where the actuator pin (166) extends from the housing chamber (116) out of the housing hole (118) and into engagement with the second associated accessory to secure the second associated accessory to the associated pole (12).

2. The quick fit adjustment mechanism of claim 1 further comprising an insert (200) comprising an insert body (202), wherein at least a portion of the insert body (202) is positioned within the second accessory opening, an insert chamber (204) that extends into the insert body (202), and an insert hole (206) that communicates with the insert chamber (204), wherein in the second condition the second end (110) of the housing (102) is inserted within the insert chamber (204) and the actuator pin (166) extends from the housing chamber (116) out of the housing hole (118) and into the insert hole (206).

3. The quick fit adjustment mechanism of claim 2 wherein the insert (200) comprises at least one insert rib (208) formed on an inner surface of the insert body (202) that interferes with the threads (114) on the outer surface of the second end (110) of the housing (102) to limit the relative angular positions that the second end (110) of the housing (102) can be inserted into the insert chamber (204).

4. The quick fit adjustment mechanism of claim 2 wherein one of the housing (102) and the insert body (202) comprises a convex feature (140), the other of the housing (102) and the insert body (202) comprises a concave feature (214), and when the convex feature (140) is received within the concave feature (214) the housing (102) cannot be rotated with respect to the insert body (202).

5. The quick fit adjustment mechanism of claim 4 wherein the insert body (202) comprises an insert flange (212), the housing (102) comprises a housing flange (124) that contacts the insert flange (212) to limit the distance the second end (102) of the housing

(102) can be inserted within the insert chamber (204), the convex feature (140) is formed on one of the insert flange (212) and the housing flange (124), and the concave feature (214) is formed on the other of the insert flange (212) and the housing flange (124).

6. The quick fit adjustment mechanism of claim 1 further comprising a biasing device (174) that biases the actuator pin (166) into the extended position.

7. The quick fit adjustment mechanism of claim 1 wherein the housing (102) comprises a housing cavity (120) that communicates the housing chamber (116) to an outer surface of the first end (103) of the housing (102), the lever (160) has a second end (164) that is pivotally attached to the housing (102), and the operator engagement surface (172) of the lever (160) is accessed through the housing cavity (120).

8. The quick fit adjustment mechanism of claim 7 further comprising an operator button (130) comprising a connection surface (132) that is connected to the operator engagement surface (172) of the lever (160), and an operator contact surface (136) that is contacted by an operator to manually engage the operator engagement surface (172).

9. A paint assembly for connecting paint related accessories to a pole (12) comprising a paint accessory comprising an accessory opening, a quick fit adjustment mechanism, **characterized in that** the quick fit adjustment mechanism comprises:

an insert (200) comprising an insert body (202), wherein at least a portion of the insert body (202) is positioned within the accessory opening to attach the insert (200) to the paint accessory, an insert chamber (204) that extends into the insert body (202), and (3) an insert hole (206) that communicates with the insert chamber (204),
a housing (102) comprising a first end (104) that has a surface that is attached to the pole (12), a second end (110), a housing chamber (116) formed within the housing (102) and extending from the first end (104) to the second end (110), and a housing hole (118) that communicates the housing chamber (116) to an outer surface of the second end (110) of the housing (102),
a lever (160) that is positioned at least partially within the housing chamber (116), that has a first end (104) defining an actuator pin (166) that is positioned juxtaposed to the housing hole (118), that comprises an operator engagement surface (172), and that is pivotal with respect to the housing (102),
wherein the lever is adjustable by selective manual engagement with the operator engagement surface (172) to pivot the lever (160) with respect to the housing (102) between a first condition where the actuator pin (166) is in a retracted position with respect to the housing hole (118) and the second end (110) of the housing (102) is insertable into the insert chamber (204) and thus into the accessory opening, and a second condition where, while the second end (110) of the housing (102) is inserted within the insert chamber (204), the actuator pin (166) extends from the chamber (204) out of the housing hole (118) and into the insert hole (206) to secure the paint accessory to the pole (12).

10. The paint assembly of claim [[10]] 9 wherein one of the housing (102) and the insert body (202) comprises a convex feature (140), the other of the housing (102) and the insert body (202) comprises a concave feature (214), and when the convex feature (140) is received within the concave feature (214) the housing (102) cannot be rotated with respect to the insert body (202).

11. The paint assembly of claim 10 wherein the insert body (202) comprises an insert flange (212), the housing (102) comprises a housing flange (124) that contacts the insert flange (212) to limit the distance the second end (110) of the housing (102) can be inserted within the insert chamber (204), the convex feature (140) is formed on one of the insert flange (212) and the housing flange (124), and the concave feature (214) is formed on the other of the insert flange (212) and the housing flange (124).

12. The paint assembly of claim 9 further comprising a biasing device (174) that biases the actuator pin (166) into an extended position.

13. The paint assembly of claim 12 wherein the housing (102) comprises a housing cavity (120) that communicates the housing chamber (116) to an outer surface of the first end (104) of the housing (102), the lever (160) has a second end (164) that is pivotally attached to the housing (102), and the operator engagement surface (172) of the lever (160) is accessed through the housing cavity (120).

14. The paint assembly of claim 13 further comprising an operator button (130) comprising a connection surface (132) that is connected to the operator engagement surface (172) of the lever (160), and an operator contact surface (136) that is contacted by an operator to manually engage the operator engagement surface (172).

15. A method for connecting paint related accessories to a pole (12) comprising the steps of

(A) providing a first paint accessory comprising: a first accessory opening,
(B) providing a quick fit adjustment mechanism, **characterized in that** the quick fit adjustment mechanism comprises:

a housing (102) comprising a first end (104) that is attached to an end of the pole (12), a second end (110) that is sized to be received in the first accessory opening, a housing chamber (116) formed within the housing (102) and extending from the first end (104) to the second end (110), and a housing hole (118) that communicates the housing chamber (116) to an outer surface of the second end (110) of the housing (102), and
a lever (160) that is positioned at least partially within the housing chamber (116), that has a first end (104) defining an actuator pin (166) that is positioned juxtaposed to the housing hole (118), that comprises an operator engagement surface (172), and that is pivotal with respect to the housing (102), and

(C) attaching the quick fit adjustment mechanism, and thus the pole (12), to the first paint accessory by manually engaging the operator engagement surface (172) of the lever (160) to pivot the lever (160) with respect to the housing (102) to cause the actuator pin (166) to move into a retracted position with respect to the housing hole (118), inserting the second end (110) of the housing (102) into the first accessory opening, and manually engaging the operator engagement surface (172) of the lever (160) to pivot the lever (160) with respect to the housing (102) to cause the actuator pin (166) to move into an extended position where the actuator pin (166) extends through the housing hole (118) and into engagement with the first accessory to secure the first paint accessory to the housing (102) and thus to the pole (12).

16. The method of claim 15 wherein step (B) comprises the step of providing the quick fit adjustment mechanism with a biasing device (174) that applies a biasing force to the lever (160) to cause the actuator pin (166) to move into the extended position, step (C) includes the step of applying a manual force to the operator engagement surface (172) of the lever (160) to overcome the biasing force, and step (C) further includes the step of removing the manual force from the operator engagement surface (172) of the lever (160).

17. The method of claim 15 wherein the method further comprises the step of providing a second paint accessory comprising: a second accessory opening formed by a surface having threads, step (B) comprises the step of providing the second end (110) of the housing (102) to be sized to be received in the second accessory opening, and to have an outer surface (112) with threads (114), the method further comprises the step of: (C) attaching the quick fit adjustment mechanism, and thus the pole (12), to the second paint accessory by manually engaging the operator engagement surface (172) of the lever (160) to pivot the lever (160) with respect to the housing (102) to cause the actuator pin (166) to move into a retracted position with respect to the housing hole (118), inserting the second end (110) of the housing (102) into the second accessory opening by rotating the housing (102) with respect to the second paint accessory with the threads (114) of the housing (102) engaging the threads of the second accessory, and manually engaging the operator engagement surface (172) of the lever (160) to pivot the lever (160) with respect to the housing (102) to cause the actuator pin (166) to move into an extended position where the actuator pin (166) extends through the housing hole (118) and into engagement with the second accessory.

18. The method of claim 15 wherein step (B) comprises the step of providing an insert (200) comprising an insert body (202), wherein at least a portion of the insert body (202) is positioned within the first accessory opening to attach the insert (200) to the first paint accessory, an insert chamber (204) that extends into the insert body (202), and an insert hole (206) that communicates with the insert chamber (204), step (C) includes the step of inserting the second end (110) of the housing (102) into the insert chamber (204), and step (C) further includes the step of extending the actuator pin (166) into the insert hole (206).

19. The method of claim 18 wherein step (B) comprises the steps of providing one of the housing (102) and the insert body (202) with a convex feature (140), and providing the other of the housing (102) and the insert body (202) with a concave (214) feature, and step (C) comprises the step of inserting the convex feature (140) into the concave feature (214) to prevent the housing (102) from being rotated with respect to the insert (200).

20. The method of claim 18 wherein step (B) comprises the steps of providing the insert (200) with a flange (212), and providing the housing (102) with a flange (124), and step (C) includes the step of inserting the second end of the housing (102) into the insert chamber (204) until the flange (124) of the housing (102) contacts the flange (212) of the insert (200) to limit

the distance the second end (110) of the housing (102) can be inserted within the insert chamber (204).

Patentansprüche

1. Schnellverstellmechanismus mit einem Gehäuse für eine Baugruppe, die anstreichbezogene Zubehörteile mit einer Stange (12) verbindet,
dadurch gekennzeichnet, dass der Schnellverstellmechanismus Folgendes umfasst:

ein Gehäuse (102), das Folgendes umfasst: ein erstes Ende (104) mit einer Oberfläche, die zum Anbringen an der assoziierten Stange (12) geeignet ist, ein zweites Ende (110) mit einer Außenfläche (112) mit einem Gewinde (114), das in ein Gewinde eingreifen kann, das auf einer Oberfläche ausgebildet ist, die eine erste Zubehöröffnung in einem ersten assoziierten Zubehörteil definiert, um das erste assoziierte Zubehörteil an der assoziierten Stange (12) zu befestigen, und eine Gehäusekammer (116), die in dem Gehäuse (102) ausgebildet ist und sich vom ersten Ende (104) zum zweiten Ende (110) erstreckt, ein Gehäuseloch (118), das die Gehäusekammer (116) mit der Außenfläche (112) des zweiten Endes (110) des Gehäuses in Verbindung bringt,
einen Hebel (160), der sich wenigstens teilweise in der Gehäusekammer (116) befindet und ein erstes Ende (162) hat, das einen Betätigungspin (166) definiert, der neben dem Gehäuseloch (118) positioniert ist, der eine Bedienereingriffsfläche (172) umfasst, die in Bezug auf das Gehäuse (102) geschwenkt werden kann,
wobei der Schnellverstellmechanismus durch selektives manuelles Eingreifen mit der Bedienereingriffsfläche (172) justiert werden kann, um den Hebel (160) mit Bezug auf das Gehäuse (102) zwischen einem ersten Zustand, in dem der Betätigungspin (166) in einer zurückgezogenen Position mit Bezug auf das Gehäuseloch (118) ist, wobei das zweite Ende (110) des Gehäuses (102) von der ersten Zubehöröffnung abnehmbar ist und in eine zweite Zubehöröffnung in einem zweiten assoziierten Zubehörteil eingesteckt werden kann, und einem zweiten Zustand zu schwenken, in dem, während das zweite Ende (110) des Gehäuses (102) in die zweite Zubehöröffnung eingesteckt wird, der Betätigungspin (166) in einer ausgefahrenen Position ist, in der sich der Betätigungspin (166) von der Gehäusekammer (116) aus dem Gehäuseloch (118) und in Eingriff mit dem zweiten assoziierten Zubehörteil erstreckt, um das zweite assoziierte Zubehörteil an der assoziierten Stange (12) zu befestigen.

2. Schnellverstellmechanismus nach Anspruch 1, der ferner einen Einsatz (200) umfasst mit: einem Einsatzkörper (202), wobei sich wenigstens ein Teil des Einsatzkörpers (202) in der zweiten Zubehöröffnung befindet, einer Einsatzkammer (204), die sich in den Einsatzkörper (202) erstreckt, und einem Einsatzloch (206), das mit der Einsatzkammer (204) in Verbindung ist, wobei im zweiten Zustand das zweite Ende (110) des Gehäuses (102) in die Einsatzkammer (204) eingesteckt ist und der Betätigungspin (166) sich von der Gehäusekammer (116) aus dem Gehäuseloch (118) und in das Einsatzloch (206) erstreckt.

3. Schnellverstellmechanismus nach Anspruch 2, wobei der Einsatz (200) wenigstens eine Einsatzrippe (208) aufweist, die an einer Innenfläche des Einsatzkörpers (202) ausgebildet ist und an dem Gewinde (114) auf der Außenfläche des zweiten Endes (110) des Gehäuses (102) angreift, um die relativen Winkelpositionen zu begrenzen, in denen das zweite Ende (110) des Gehäuses (102) in die Einsatzkammer (204) gesteckt werden kann.

4. Schnellverstellmechanismus nach Anspruch 2, wobei das Gehäuse (102) oder der Einsatzkörper (202) ein konvexes Merkmal (140) aufweist, das jeweils andere aus Gehäuse (102) und Einsatzkörper (202) ein konkaves Merkmal (214) aufweist, und wenn das konvexe Merkmal (140) in dem konkaven Merkmal (214) aufgenommen wird, das Gehäuse (102) nicht mit Bezug auf den Einsatzkörper (202) gedreht werden kann.

5. Schnellverstellmechanismus nach Anspruch 4, wobei der Einsatzkörper (202) einen Einsatzflansch (212) umfasst, das Gehäuse (102) einen Gehäuseflansch (124) umfasst, der den Einsatzflansch (212) kontaktiert, um die Distanz zu begrenzen, um die das zweite Ende (102) des Gehäuses (102) in die Einsatzkammer (204) gesteckt werden kann, das konvexe Merkmal (140) auf dem Einsatzflansch (212) oder dem Gehäuseflansch (124) ausgebildet ist und das konkave Merkmal (214) auf dem jeweils anderen aus Einsatzflansch (212) und Gehäuseflansch (124) ausgebildet ist.

6. Schnellverstellmechanismus nach Anspruch 1, der ferner eine Vorspannvorrichtung (174) umfasst, die den Betätigungspin (166) in die ausgefahrene Position vorspannt.

7. Schnellverstellmechanismus nach Anspruch 1, wobei das Gehäuse (102) einen Gehäusehohlraum (120) umfasst, der die Gehäusekammer (116) mit einer Außenfläche des ersten Endes (103) des Ge-

häuses (102) in Verbindung bringt, der Hebel (160) ein zweites Ende (164) hat, das schwenkbar am Gehäuse (102) angebracht ist, und die Bedienereingriffsfläche (172) des Hebels (160) durch den Gehäusehohlraum (120) zugänglich ist.

8. Schnellverstellmechanismus nach Anspruch 7, der ferner eine Bedientaste (130) mit einer Verbindungsfläche (132) aufweist, die mit der Bedienereingriffsfläche (172) des Hebels (160) verbunden ist, und eine Bedienerkontaktfläche (136), die von einem Bediener kontaktiert wird, um manuell in die Bedienereingriffsfläche (172) einzugreifen.

9. Anstreichbaugruppe zum Verbinden von anstreichbezogenen Zubehörteilen mit einer Stange (12), umfassend ein Anstreichzubehörteil, das eine Zubehöröffnung, einen Schnellverstellmechanismus umfasst, **dadurch gekennzeichnet, dass** der Schnellverstellmechanismus Folgendes umfasst:

einen Einsatz (200), der Folgendes umfasst: einen Einsatzkörper (202), wobei sich wenigstens ein Teil des Einsatzkörpers (202) in der Zubehöröffnung befindet, um den Einsatz (200) an dem Anstreichzubehörteil anzubringen, eine Einsatzkammer (204), die sich in den Einsatzkörper (202) erstreckt, und (3) ein Einsatzloch (206), das mit der Einsatzkammer (204) in Verbindung ist,
ein Gehäuse (102) mit einem ersten Ende (104) mit einer Oberfläche, die an der Stange (12) angebracht ist, einem zweiten Ende (110), einer Gehäusekammer (116), die in dem Gehäuse (102) ausgebildet ist und sich vom ersten Ende (104) zum zweiten Ende (110) erstreckt, und einem Gehäuseloch (118), das die Gehäusekammer (116) mit einer Außenfläche des zweiten Endes (110) des Gehäuses (102) in Verbindung bringt,
einen Hebel (160), der sich wenigstens teilweise in der Gehäusekammer (116) befindet und ein erstes Ende hat (104), das einen Betätigungspin (166) definiert, der neben dem Gehäuseloch (118) positioniert ist, der eine Bedienereingriffsfläche (172) aufweist und mit Bezug auf das Gehäuse (102) schwenken kann,
wobei der Hebel durch selektives manuelles Eingreifen mit der Bedienereingriffsfläche (172) verstellt werden kann, um den Hebel (160) mit Bezug auf das Gehäuse (102) zwischen einem ersten Zustand, in dem der Betätigungspin (166) in einer zurückgezogenen Position mit Bezug auf das Gehäuseloch (118) ist und das zweite Ende (110) des Gehäuses (102) in die Einsatzkammer (204) und somit in die Zubehöröffnung eingesteckt werden kann, und einem zweiten Zustand zu schwenken, in dem, während das zweite Ende (110) des Gehäuses (102) in der Einsatzkammer (204) eingesteckt ist, der Betätigungspin (166) sich von der Kammer (204) aus dem Gehäuseloch (118) und in das Einsatzloch (206) erstreckt, um das Anstreichzubehörteil an der Stange (12) zu befestigen.

10. Anstreichbaugruppe nach Anspruch [[10]] 9, wobei das Gehäuse (102) oder der Einsatzkörper (202) ein konvexes Merkmal (140) aufweist und das jeweils andere aus Gehäuse (102) und Einsatzkörper (202) ein konkaves Merkmal (214) aufweist, und wenn das konvexe Merkmal (140) in dem konkaven Merkmal (214) aufgenommen ist, das Gehäuse (102) nicht mit Bezug auf den Einsatzkörper (202) gedreht werden kann.

11. Anstreichbaugruppe nach Anspruch 10, wobei der Einsatzkörper (202) einen Einsatzflansch (212) umfasst, das Gehäuse (102) einen Gehäuseflansch (124) umfasst, der den Einsatzflansch (212) kontaktiert, um die Distanz zu begrenzen, um die das zweite Ende (110) des Gehäuses (102) in die Einsatzkammer (204) eingesteckt werden kann, das konvexe Merkmal (140) auf dem Einsatzflansch (212) oder dem Gehäuseflansch (124) ausgebildet ist und das konkave Merkmal (214) auf dem jeweils anderen aus Einsatzflansch (212) und Gehäuseflansch (124) ausgebildet ist.

12. Anstreichbaugruppe nach Anspruch 9, das ferner eine Vorspannvorrichtung (174) umfasst, die den Betätigungspin (166) in eine ausgefahrene Position vorspannt.

13. Anstreichbaugruppe nach Anspruch 12, wobei das Gehäuse (102) einen Gehäusehohlraum (120) umfasst, der die Gehäusekammer (116) mit einer Außenfläche des ersten Endes (104) des Gehäuses (102) in Verbindung bringt, der Hebel (160) ein zweites Ende (164) hat, das schwenkbar an dem Gehäuse (102) angebracht ist, und die Bedienereingriffsfläche (172) des Hebels (160) durch den Gehäusehohlraum (120) zugänglich ist.

14. Anstreichbaugruppe nach Anspruch 13, die ferner eine Bedientaste (130) mit einer Verbindungsfläche (132), die mit der Bedienereingriffsfläche (172) des Hebels (160) verbunden ist, und eine Bedienerkontaktfläche (136) aufweist, die von einem Bediener kontaktiert wird, um manuell in die Bedienereingriffsfläche (172) einzugreifen.

15. Verfahren zum Verbinden von anstreichbezogenen Zubehörteilen mit einer Stange (12), das die folgenden Schritte beinhaltet:

(A) Bereitstellen eines ersten Anstreichzube-

hörteils, das Folgendes umfasst: eine erste Zubehöröffnung,
(B) Bereitstellen eines Schnellverstellmechanismus, **dadurch gekennzeichnet, dass** der Schnellverstellmechanismus Folgendes umfasst:

ein Gehäuse (102), das Folgendes aufweist: ein erstes Ende (104), das an einem Ende der Stange (12) angebracht ist, ein zweites Ende (110), das zum Aufnehmen in der ersten Zubehöröffnung bemessen ist, eine Gehäusekammer (116), die in dem Gehäuse (102) ausgebildet ist und sich vom ersten Ende (104) zum zweiten Ende (110) erstreckt, und ein Gehäuseloch (118), das die Gehäusekammer (116) mit einer Außenfläche des zweiten Endes (110) des Gehäuses (102) in Verbindung bringt, und
einen Hebel (160), der sich wenigstens teilweise in der Gehäusekammer (116) befindet und ein erstes Ende (104) hat, das einen Betätigungspin (166) definiert, der neben dem Gehäuseloch (118) positioniert ist, der eine Bedienereingriffsfläche (172) umfasst, und der mit Bezug auf das Gehäuse (102) geschwenkt werden kann,

(C) Anbringen des Schnellverstellmechanismus und somit der Stange (12) an dem ersten Anstreichzubehörteil durch manuelles Eingreifen in die Bedienereingriffsfläche (72) des Hebels (160), um den Hebel (160) mit Bezug auf das Gehäuse (102) zu schwenken, um eine Bewegung des Betätigungspins (166) in eine zurückgezogene Position mit Bezug auf das Gehäuseloch (118) zu bewirken, Einstecken des zweiten Endes (110) des Gehäuses (102) in die erste Zubehöröffnung und manuelles Eingreifen in die Bedienereingriffsfläche (172) des Hebels (160), um den Hebel (160) mit Bezug auf das Gehäuse (102) zu schwenken, um eine Bewegung des Betätigungspins (166) in eine ausgefahrene Position zu bewirken, in der sich der Betätigungspin (166) durch das Gehäuseloch (118) und in Eingriff mit dem ersten Zubehörteil erstreckt, um das Anstreichzubehörteil am Gehäuse (102) und somit an der Stange (12) zu befestigen.

16. Verfahren nach Anspruch 15, wobei Schritt (B) den Schritt des Versehens des Schnellverstellmechanismus mit einer Vorspannvorrichtung (174) beinhaltet, die eine Vorspannkraft auf den Hebel (160) aufbringt, um eine Bewegung des Betätigungspins (166) in die ausgefahrene Position zu bewirken, Schritt (C) den Schritt des Aufbringens einer manuellen Kraft auf die Bedienereingriffsfläche (172) des Hebels (160) beinhaltet, um die Vorspannkraft zu überwinden, und Schritt (C) ferner den Schritt des Wegnehmens der manuellen Kraft von der Bedienereingriffsfläche (172) des Hebels (160) beinhaltet.

17. Verfahren nach Anspruch 15, wobei das Verfahren ferner den Schritt des Bereitstellens einer zweiten Anstreichbaugruppe beinhaltet, die eine zweite Zubehöröffnung aufweist, die von einer Oberfläche mit einem Gewinde ausgebildet wird, Schritt (B) beinhaltet den Schritt des Versehens des zweiten Endes (110) des Gehäuses (102) mit einer Größe zur Aufnahme in der zweiten Zubehöröffnung und mit einer Außenfläche (112) mit einem Gewinde (114), wobei das Verfahren den folgenden Schritt beinhaltet: (C) Anbringen des Schnellverstellmechanismus und somit der Stange (12) am zweiten Anstreichzubehörteil durch manuelles Eingreifen in die Bedienereingriffsfläche (172) des Hebels (160), um den Hebel (160) mit Bezug auf das Gehäuse (102) zu schwenken, um eine Bewegung des Betätigungspins (166) mit Bezug auf das Gehäuseloch (118) zu bewirken, Einstecken des zweiten Endes (110) des Gehäuses (102) in die zweite Zubehöröffnung durch Drehen des Gehäuses (102) mit Bezug auf das zweite Anstreichzubehörteil, wobei das Gewinde (114) des Gehäuses (102) in das Gewinde des zweiten Zubehörteils eingreift, und manuelles Eingreifen in die Bedienereingriffsfläche (172) des Hebels (160), um den Hebel (160) mit Bezug auf das Gehäuse (102) zu schwenken, um eine Bewegung des Betätigungspins (166) in eine ausgefahrene Position zu bewirken, in der sich der Betätigungspin (166) durch das Gehäuseloch (118) und in Eingriff mit dem zweiten Zubehörteil erstreckt.

18. Verfahren nach Anspruch 15, wobei Schritt (B) den Schritt des Bereitstellens eines Einsatzes (200) mit Folgendem beinhaltet: einem Einsatzkörper (202), wobei sich wenigstens ein Teil des Einsatzkörpers (202) in der ersten Zubehöröffnung befindet, um den Einsatz (200) am ersten Anstreichzubehörteil anzubringen, einer Einsatzkammer (204), die sich in den Einsatzkörper (202) erstreckt, und einem Einsatzloch (206), das mit der Einsatzkammer (204) in Verbindung ist, Schritt (C) den Schritt des Einsteckens des zweiten Endes (110) des Gehäuses (102) in die Einsatzkammer (204) beinhaltet und Schritt (C) ferner den Schritt des Ausfahrens des Betätigungspins (166) in das Einsatzloch (206) beinhaltet.

19. Verfahren nach Anspruch 18, wobei Schritt (B) die Schritte des Versehens des Gehäuses (102) oder des Einsatzkörpers (202) mit einem konvexen Merkmal (140) und des Versehens des anderen aus Gehäuse (102) und Einsatzkörper (202) mit einem konkaven Merkmal (214) beinhaltet, und Schritt (C) den Schritt des Einsteckens des konvexen Merkmals (140) in das konkave Merkmal (214) beinhaltet, um

zu verhindern, dass das Gehäuse (102) mit Bezug auf den Einsatz (200) gedreht wird.

20. Verfahren nach Anspruch 18, wobei Schritt (B) die Schritte des Versehens des Einsatzes (200) mit einem Flansch (212) und des Versehens des Gehäuses (102) mit einem Flansch (124) beinhaltet, und Schritt (C) den Schritt des Einsteckens des zweiten Endes des Gehäuses (102) in die Einsatzkammer (204) beinhaltet, bis der Flansch (124) des Gehäuses (102) den Flansch (212) des Einsatzes (200) kontaktiert, um die Distanz zu begrenzen, um die das zweite Ende (110) des Gehäuses (102) in die Einsatzkammer (204) eingesteckt werden kann.

Revendications

1. Mécanisme d'ajustement à montage rapide avec un logement pour un ensemble qui raccorde des accessoires se rapportant au domaine de la peinture à une perche (12), **caractérisé en ce que** le mécanisme d'ajustement à montage rapide comporte :

un logement (102) comportant : une première extrémité (104) qui a une surface qui est appropriée pour être attachée à la perche associée (12), une deuxième extrémité (110) qui a une surface extérieure (112) avec des filets (114) qui sont en mesure de se mettre en prise avec des filets formés sur une surface définissant une première ouverture d'accessoire dans un premier accessoire associé pour assujettir le premier accessoire associé à la perche associée (12), et une chambre de logement (116) formée à l'intérieur du logement (102) et s'étendant depuis la première extrémité (104) jusqu'à la deuxième extrémité (110), un trou de logement (118) qui permet de mettre la chambre de logement (116) en communication avec la surface extérieure (112) de la deuxième extrémité (110) du logement,
un levier (160) qui est positionné au moins partiellement à l'intérieur de la chambre de logement (116), qui a une première extrémité (162) définissant une tige d'actionneur (166) qui est positionnée de manière juxtaposée par rapport au trou de logement (118), qui comporte une surface de mise en prise avec l'opérateur (172) et qui pivote par rapport au logement (102),
dans lequel le mécanisme d'ajustement à montage rapide est en mesure d'être ajusté par mise en prise manuelle sélective avec la surface de mise en prise avec l'opérateur (172) pour faire pivoter le levier (160) par rapport au logement (102) entre un premier état dans lequel la tige d'actionneur (166) est dans une position rétractée par rapport au trou de logement (118), la deuxième extrémité (110) du logement (102) étant en mesure d'être retirée en provenance de la première ouverture d'accessoire et étant en mesure d'être insérée à l'intérieur d'une deuxième ouverture d'accessoire dans un deuxième accessoire associé, et un deuxième état dans lequel, alors que la deuxième extrémité (110) du logement (102) est insérée à l'intérieur de la deuxième ouverture d'accessoire, la tige d'actionneur (166) est dans une position étendue dans laquelle la tige d'actionneur (166) s'étend en provenance de la chambre de logement (116) hors du trou de logement (118) et jusqu'à sa mise en prise avec le deuxième accessoire associé pour assujettir le deuxième accessoire associé à la perche associée (12).

2. Mécanisme d'ajustement à montage rapide selon la revendication 1, comportant par ailleurs une pièce rapportée (200) comportant un corps de pièce rapportée (202), dans lequel au moins une partie du corps de pièce rapportée (202) est positionnée à l'intérieur de la deuxième ouverture d'accessoire, une chambre de pièce rapportée (204) qui s'étend jusque dans le corps de pièce rapportée (202), et un trou de pièce rapportée (206) qui est en communication avec la chambre de pièce rapportée (204), dans lequel dans le deuxième état la deuxième extrémité (110) du logement (102) est insérée à l'intérieur de la chambre de pièce rapportée (204) et la tige d'actionneur (166) s'étend en provenance de la chambre de logement (116) hors du trou de logement (118) et jusque dans le trou de pièce rapportée (206).

3. Mécanisme d'ajustement à montage rapide selon la revendication 2, dans lequel la pièce rapportée (200) comporte au moins une nervure de pièce rapportée (208) formée sur une surface intérieure du corps de pièce rapportée (202) qui vient obstruer les filets (114) sur la surface extérieure de la deuxième extrémité (110) du logement (102) pour limiter les positions angulaires relatives dans lesquelles la deuxième extrémité (110) du logement (102) peut être insérée jusque dans la chambre de pièce rapportée (204).

4. Mécanisme d'ajustement à montage rapide selon la revendication 2, dans lequel l'un parmi le logement (102) et le corps de pièce rapportée (202) comporte une caractéristique convexe (140), l'autre parmi le logement (102) et le corps de pièce rapportée (202) comporte une caractéristique concave (214), et quand la caractéristique convexe (140) est reçue à l'intérieur de la caractéristique concave (214) le logement (102) ne peut pas tourner par rapport au corps de pièce rapportée (202).

5. Mécanisme d'ajustement à montage rapide selon la

revendication 4, dans lequel le corps de pièce rapportée (202) comporte une bride de pièce rapportée (212), le logement (102) comporte une bride de logement (124) qui entre en contact avec la bride de pièce rapportée (212) pour limiter la distance selon laquelle la deuxième extrémité (102) du logement (102) peut être insérée à l'intérieur de la chambre de pièce rapportée (204), la caractéristique convexe (140) est formée sur l'une parmi la bride de pièce rapportée (212) et la bride de logement (124), et la caractéristique concave (214) est formée sur l'autre parmi la bride de pièce rapportée (212) et la bride de logement (124).

6. Mécanisme d'ajustement à montage rapide selon la revendication 1, comportant par ailleurs un dispositif de sollicitation (174) qui sollicite la tige d'actionneur (166) jusque dans la position étendue.

7. Mécanisme d'ajustement à montage rapide selon la revendication 1, dans lequel le logement (102) comporte une cavité de logement (120) qui met la chambre de logement (116) en communication avec une surface extérieure de la première extrémité (103) du logement (102), le levier (160) a une deuxième extrémité (164) qui est attachée de manière pivotante au logement (102), et la surface de mise en prise avec l'opérateur (172) du levier (160) est accessible au travers de la cavité de logement (120).

8. Mécanisme d'ajustement à montage rapide selon la revendication 7, comportant par ailleurs un bouton d'opérateur (130) comportant une surface de raccordement (132) qui est raccordée à la surface de mise en prise avec l'opérateur (172) du levier (160), et une surface de contact d'opérateur (136) avec laquelle un opérateur entre en contact à des fins de mise en prise manuelle de la surface de mise en prise avec l'opérateur (172).

9. Ensemble de peinture servant à raccorder des accessoires se rapportant au domaine de la peinture à une perche (12) comportant un accessoire de peinture comportant une ouverture d'accessoire, un mécanisme d'ajustement à montage rapide, **caractérisé en ce que** le mécanisme d'ajustement à montage rapide comporte :

une pièce rapportée (200) comportant un corps de pièce rapportée (202), dans lequel au moins une partie du corps de pièce rapportée (202) est positionnée à l'intérieur de l'ouverture d'accessoire pour attacher la pièce rapportée (200) à l'accessoire de peinture, une chambre de pièce rapportée (204) qui s'étend jusque dans le corps de pièce rapportée (202), et (3) un trou de pièce rapportée (206) qui est en communication avec la chambre de pièce rapportée (204),

un logement (102) comportant une première extrémité (104) qui a une surface qui est attachée à la perche (12), une deuxième extrémité (110), une chambre de logement (116) formée à l'intérieur du logement (102) et s'étendant depuis la première extrémité (104) jusqu'à la deuxième extrémité (110), et un trou de logement (118) qui met la chambre de logement (116) en communication avec une surface extérieure de la deuxième extrémité (110) du logement (102),

un levier (160) qui est positionné au moins partiellement à l'intérieur de la chambre de logement (116), qui a une première extrémité (104) définissant une tige d'actionneur (166) qui est positionnée de manière juxtaposée par rapport au trou de logement (118), qui comporte une surface de mise en prise avec l'opérateur (172), et qui pivote par rapport au logement (102),

dans lequel le levier est en mesure d'être ajusté par mise en prise manuelle sélective avec la surface de mise en prise avec l'opérateur (172) pour faire pivoter le levier (160) par rapport au logement (102) entre un premier état dans lequel la tige d'actionneur (166) est dans une position rétractée par rapport au trou de logement (118) et la deuxième extrémité (110) du logement (102) est en mesure d'être insérée jusque dans la chambre de pièce rapportée (204) et ainsi jusque dans l'ouverture d'accessoire, et un deuxième état dans lequel, alors que la deuxième extrémité (110) du logement (102) est insérée à l'intérieur de la chambre de pièce rapportée (204), la tige d'actionneur (166) s'étend depuis la chambre (204) hors du trou de logement (118) et jusque dans le trou de pièce rapportée (206) pour assujettir l'accessoire de peinture à la perche (12).

10. Ensemble de peinture selon la revendication [[10]] 9, dans lequel l'un parmi le logement (102) et le corps de pièce rapportée (202) comporte une caractéristique convexe (140), l'autre parmi le logement (102) et le corps de pièce rapportée (202) comporte une caractéristique concave (214), et quand la caractéristique convexe (140) est reçue à l'intérieur de la caractéristique concave (214) le logement (102) ne peut pas tourner par rapport au corps de pièce rapportée (202).

11. Ensemble de peinture selon la revendication 10, dans lequel le corps de pièce rapportée (202) comporte une bride de pièce rapportée (212), le logement (102) comporte une bride de logement (124) qui entre en contact avec la bride de pièce rapportée (212) pour limiter la distance selon laquelle la deuxième extrémité (110) du logement (102) peut être insérée à l'intérieur de la chambre de pièce rapportée (204), la caractéristique convexe (140) est formée

sur l'une parmi la bride de pièce rapportée (212) et la bride de logement (124), et la caractéristique concave (214) est formée sur l'autre parmi la bride de pièce rapportée (212) et la bride de logement (124).

12. Ensemble de peinture selon la revendication 9, comportant par ailleurs un dispositif de sollicitation (174) qui sollicite la tige d'actionneur (166) dans une position étendue.

13. Ensemble de peinture selon la revendication 12, dans lequel le logement (102) comporte une cavité de logement (120) qui met la chambre de logement (116) en communication avec une surface extérieure de la première extrémité (104) du logement (102), le levier (160) a une deuxième extrémité (164) qui est attachée de manière pivotante au logement (102), et la surface de mise en prise avec l'opérateur (172) du levier (160) est accessible au travers de la cavité de logement (120).

14. Ensemble de peinture selon la revendication 13, comportant par ailleurs un bouton d'opérateur (130) comportant une surface de raccordement (132) qui est raccordée à la surface de mise en prise avec l'opérateur (172) du levier (160), et une surface de contact d'opérateur (136) avec laquelle un opérateur entre en contact à des fins de mise en prise manuelle de la surface de mise en prise avec l'opérateur (172).

15. Procédé servant à raccorder des accessoires se rapportant au domaine de la peinture à une perche (12) comportant les étapes consistant à

(A) mettre en oeuvre un premier accessoire de peinture comportant : une première ouverture d'accessoire,
(B) mettre en oeuvre un mécanisme d'ajustement à montage rapide, **caractérisé en ce que** le mécanisme d'ajustement à montage rapide comporte :

un logement (102) comportant une première extrémité (104) qui est attachée à une extrémité de la perche (12), une deuxième extrémité (110) qui est dimensionnée pour être reçue dans la première ouverture d'accessoire, une chambre de logement (116) formée à l'intérieur du logement (102) et s'étendant depuis la première extrémité (104) jusqu'à la deuxième extrémité (110), et un trou de logement (118) qui met la chambre de logement (116) en communication avec une surface extérieure de la deuxième extrémité (110) du logement (102), et
un levier (160) qui est positionné au moins partiellement à l'intérieur de la chambre de logement (116), qui a une première extrémité (104) définissant une tige d'actionneur (166) qui est positionnée de manière juxtaposée par rapport au trou de logement (118), qui comporte une surface de mise en prise avec l'opérateur (172), et qui pivote par rapport au logement (102), et

(C) attacher le mécanisme d'ajustement à montage rapide, et ainsi la perche (12), sur le premier accessoire de peinture en effectuant une mise en prise manuelle de la surface de mise en prise avec l'opérateur (172) du levier (160) pour faire pivoter le levier (160) par rapport au logement (102) pour amener la tige d'actionneur (166) à se déplacer jusque dans une position rétractée par rapport au trou de logement (118), insérer la deuxième extrémité (110) du logement (102) dans la première ouverture d'accessoire, et se mettre manuellement en prise avec la surface de mise en prise avec l'opérateur (172) du levier (160) pour faire pivoter le levier (160) par rapport au logement (102) pour amener la tige d'actionneur (166) à se déplacer jusque dans une position étendue dans laquelle la tige d'actionneur (166) s'étend au travers du trou de logement (118) et jusqu'à sa mise en prise avec le premier accessoire pour assujettir le premier accessoire de peinture au logement (102) et ainsi à la perche (12).

16. Procédé selon la revendication 15, dans lequel l'étape (B) comporte l'étape consistant à mettre en oeuvre le mécanisme d'ajustement à montage rapide avec un dispositif de sollicitation (174) qui applique une force de sollicitation sur le levier (160) pour amener la tige d'actionneur (166) à se déplacer jusque dans la position étendue, l'étape (C) comprend l'étape consistant à appliquer une force manuelle sur la surface de mise en prise avec l'opérateur (172) du levier (160) pour surmonter la force de sollicitation, et l'étape (C) comprend par ailleurs l'étape consistant à retirer la force manuelle de la surface de mise en prise avec l'opérateur (172) du levier (160).

17. Procédé selon la revendication 15, dans lequel le procédé comporte par ailleurs l'étape consistant à mettre en oeuvre un deuxième accessoire de peinture, comportant : une deuxième ouverture d'accessoire formée par une surface ayant des filets, l'étape (B) comporte l'étape consistant à mettre en oeuvre la deuxième extrémité (110) du logement (102) destinée à être dimensionnée pour être reçue dans la deuxième ouverture d'accessoire, et à avoir une surface extérieure (112) avec des filets (114), le procédé comporte par ailleurs l'étape consistant à : (C) attacher le mécanisme d'ajustement à montage rapide, et ainsi la perche (12), au deuxième accessoire

de peinture en effectuant une mise en prise manuelle de la surface de mise en prise avec l'opérateur (172) du levier (160) pour faire pivoter le levier (160) par rapport au logement (102) pour amener la tige d'actionneur (166) à se déplacer jusque dans une position rétractée par rapport au trou de logement (118), insérer la deuxième extrémité (110) du logement (102) dans la deuxième ouverture d'accessoire en faisant tourner le logement (102) par rapport au deuxième accessoire de peinture avec les filets (114) du logement (102) qui se mettent en prise avec les filets du deuxième accessoire, et se mettre manuellement en prise avec la surface de mise en prise avec l'opérateur (172) du levier (160) pour faire pivoter le levier (160) par rapport au logement (102) pour amener la tige d'actionneur (166) à se déplacer jusque dans une position étendue dans laquelle la tige d'actionneur (166) s'étend au travers du trou de logement (118) et jusqu'à sa mise en prise avec le deuxième accessoire.

18. Procédé selon la revendication 15, dans lequel l'étape (B) comporte l'étape consistant à mettre en oeuvre un pièce rapportée (200) comportant un corps de pièce rapportée (202), dans lequel au moins une partie du corps de pièce rapportée (202) est positionnée à l'intérieur de la première ouverture d'accessoire pour attacher la pièce rapportée (200) au premier accessoire de peinture, une chambre de pièce rapportée (204) qui s'étend jusque dans le corps de pièce rapportée (202), et un trou de pièce rapportée (206) qui est en communication avec la chambre de pièce rapportée (204), l'étape (C) comprend l'étape consistant à insérer la deuxième extrémité (110) du logement (102) jusque dans la chambre de pièce rapportée (204), et l'étape (C) comprend par ailleurs l'étape consistant à étendre la tige d'actionneur (166) jusque dans le trou de pièce rapportée (206).

19. Procédé selon la revendication 18, dans lequel l'étape (B) comporte les étapes consistant à mettre en oeuvre l'un parmi le logement (102) et le corps de pièce rapportée (202) avec une caractéristique convexe (140), et à mettre en oeuvre l'autre parmi le logement (102) et le corps de pièce rapportée (202) avec une caractéristique concave (214), et l'étape (C) comporte l'étape consistant à insérer la caractéristique convexe (140) dans la caractéristique concave (214) pour empêcher le logement (102) de tourner par rapport à la pièce rapportée (200).

20. Procédé selon la revendication 18, dans lequel l'étape (B) comporte les étapes consistant à équiper la pièce rapportée (200) d'une bride (212), et à équiper le logement (102) d'une bride (124), et l'étape (C) comprend l'étape consistant à insérer la deuxième extrémité du logement (102) jusque dans la chambre de pièce rapportée (204) jusqu'à ce que la bride (124) du logement (102) entre en contact avec la bride (212) de la pièce rapportée (200) pour limiter la distance selon laquelle la deuxième extrémité (110) du logement (102) peut être insérée à l'intérieur de la chambre de pièce rapportée (204).

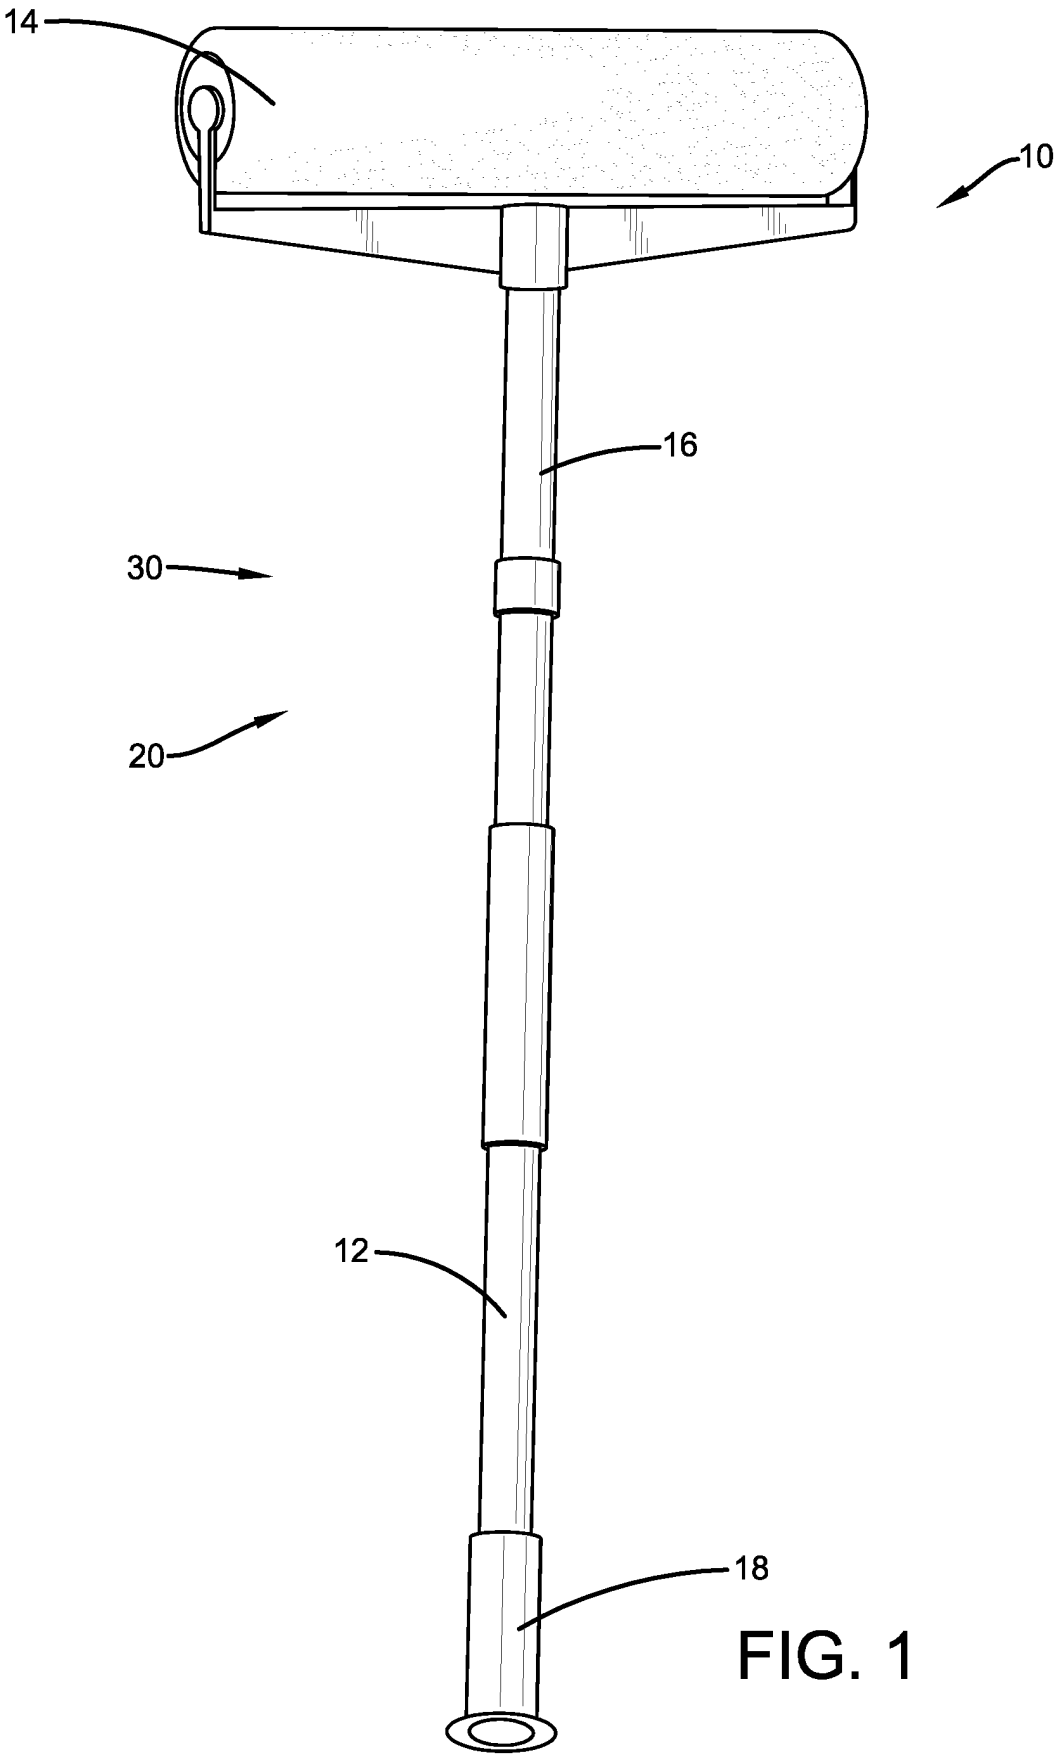


FIG. 1

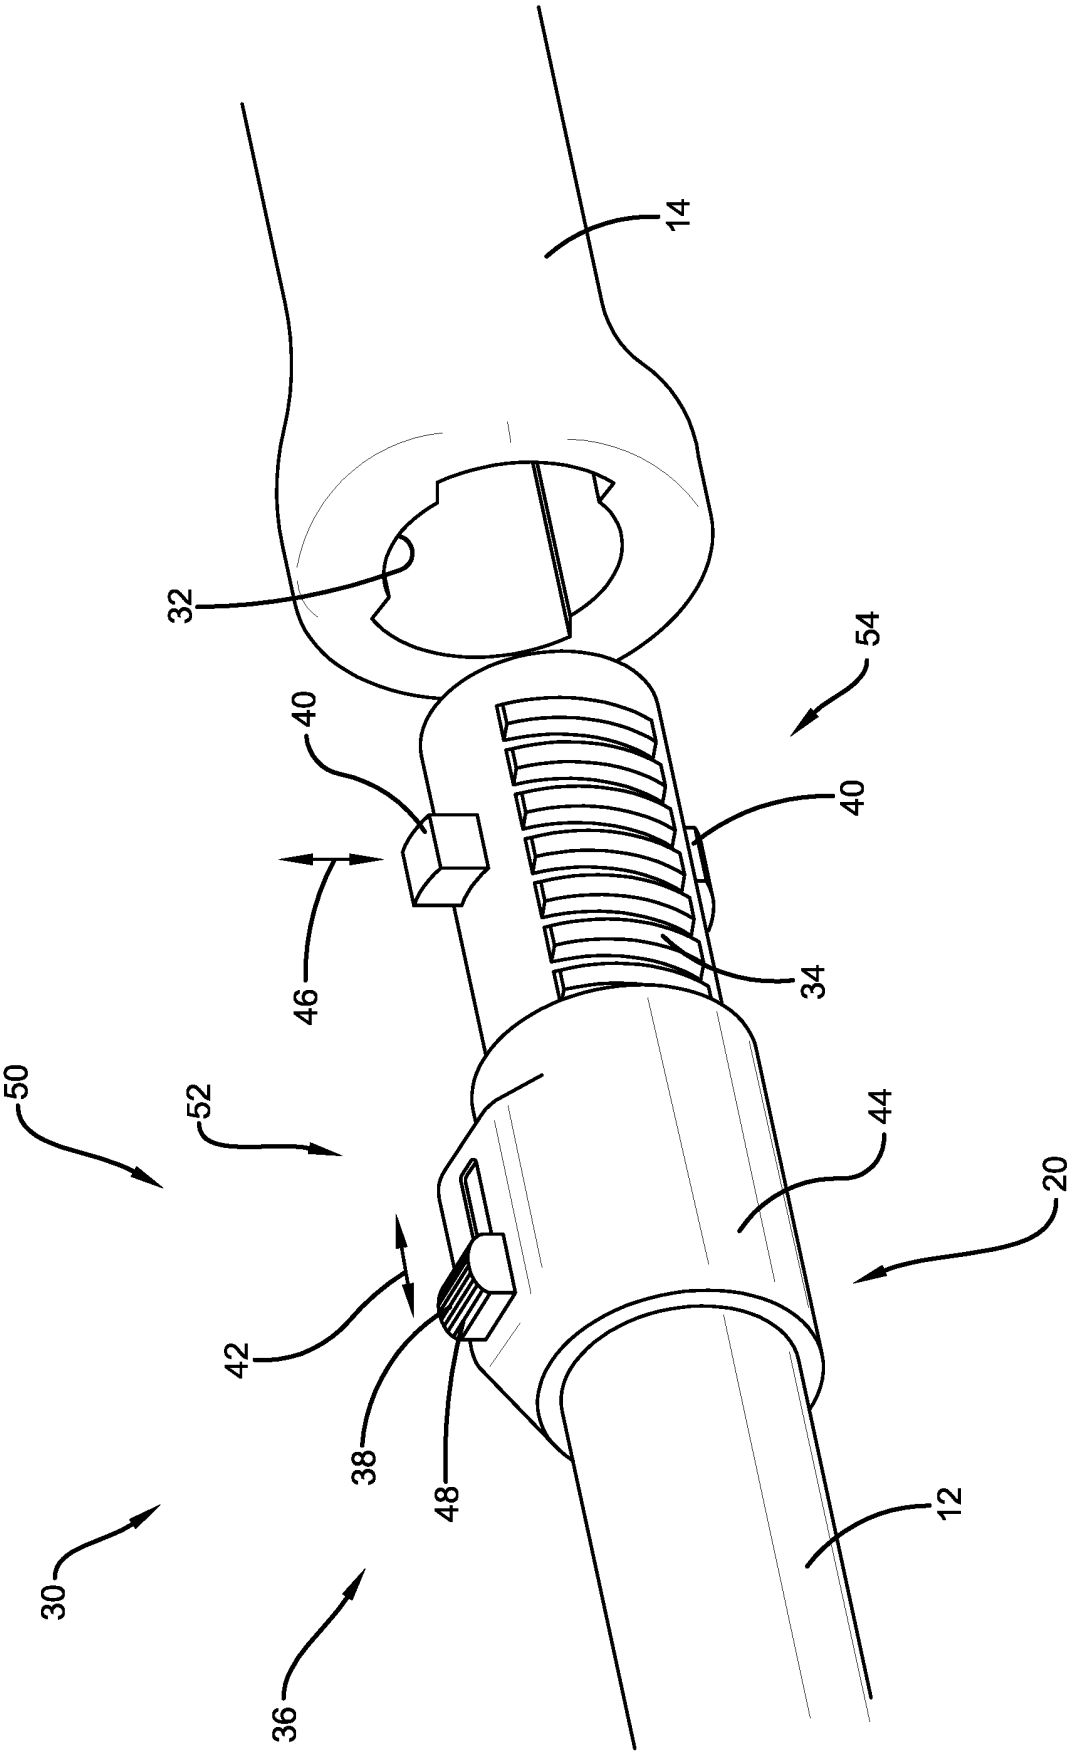


FIG. 2

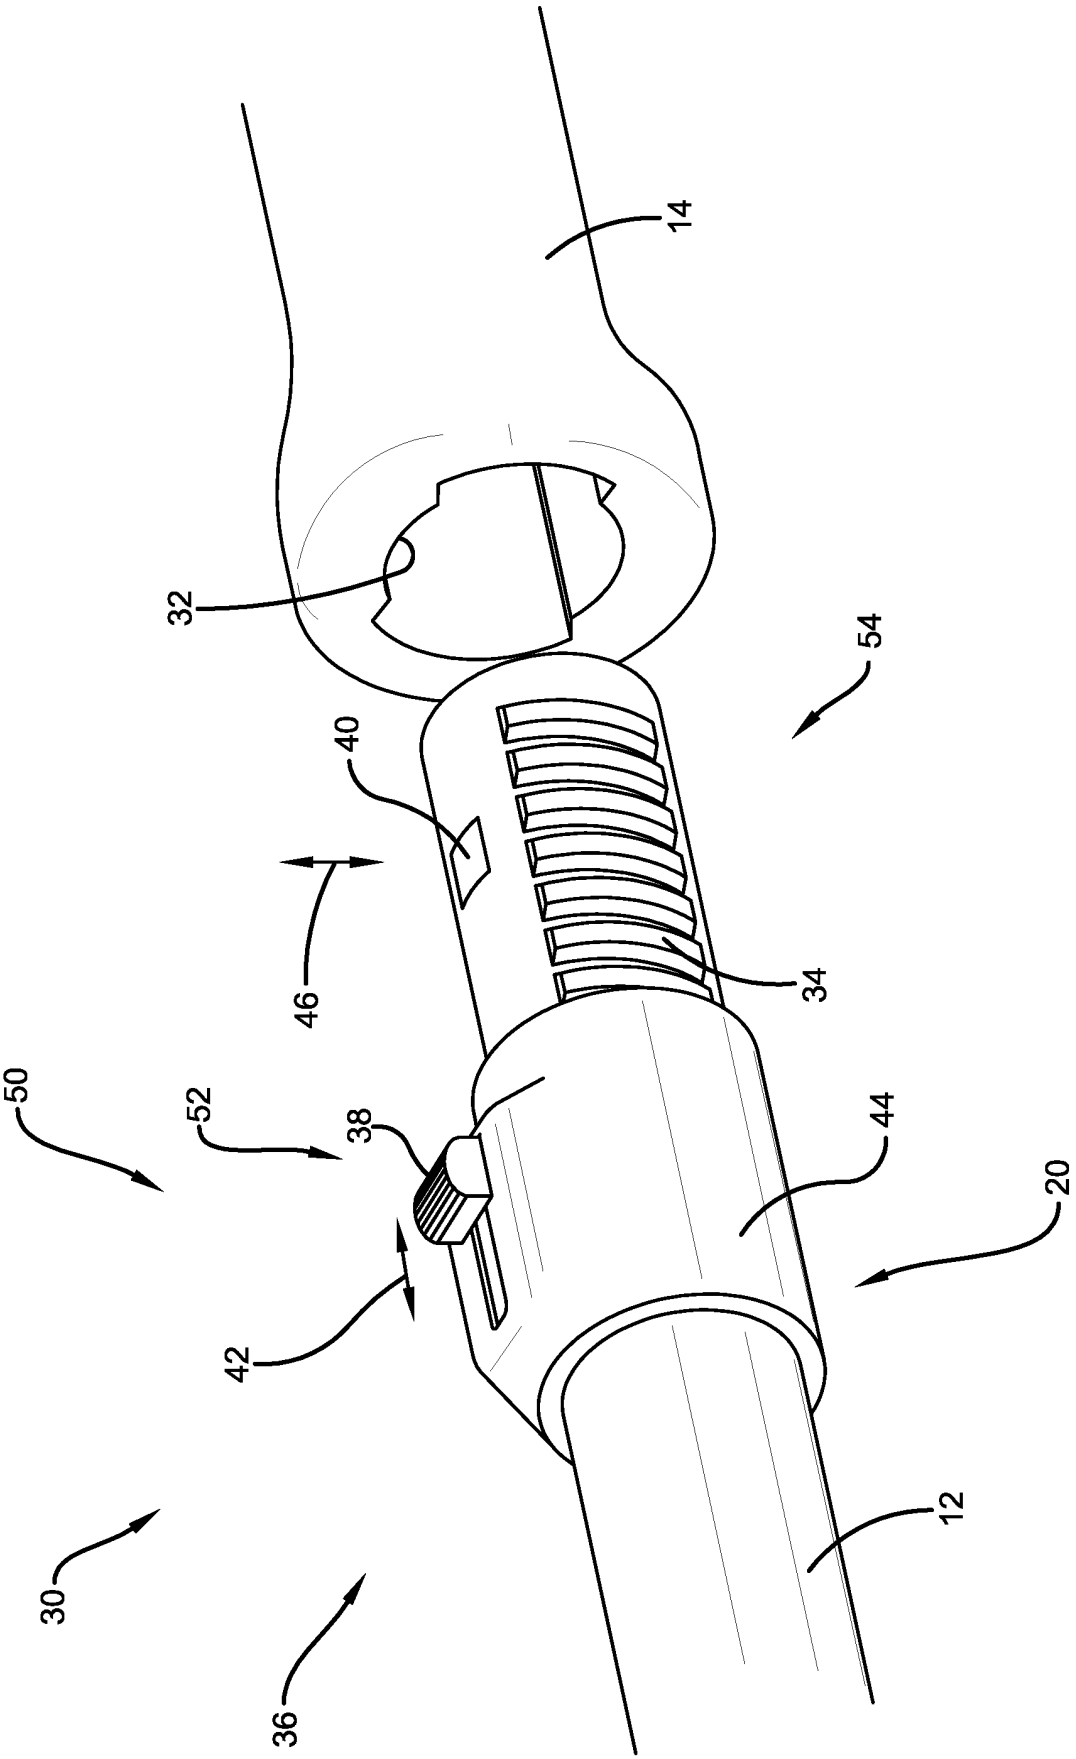


FIG. 3

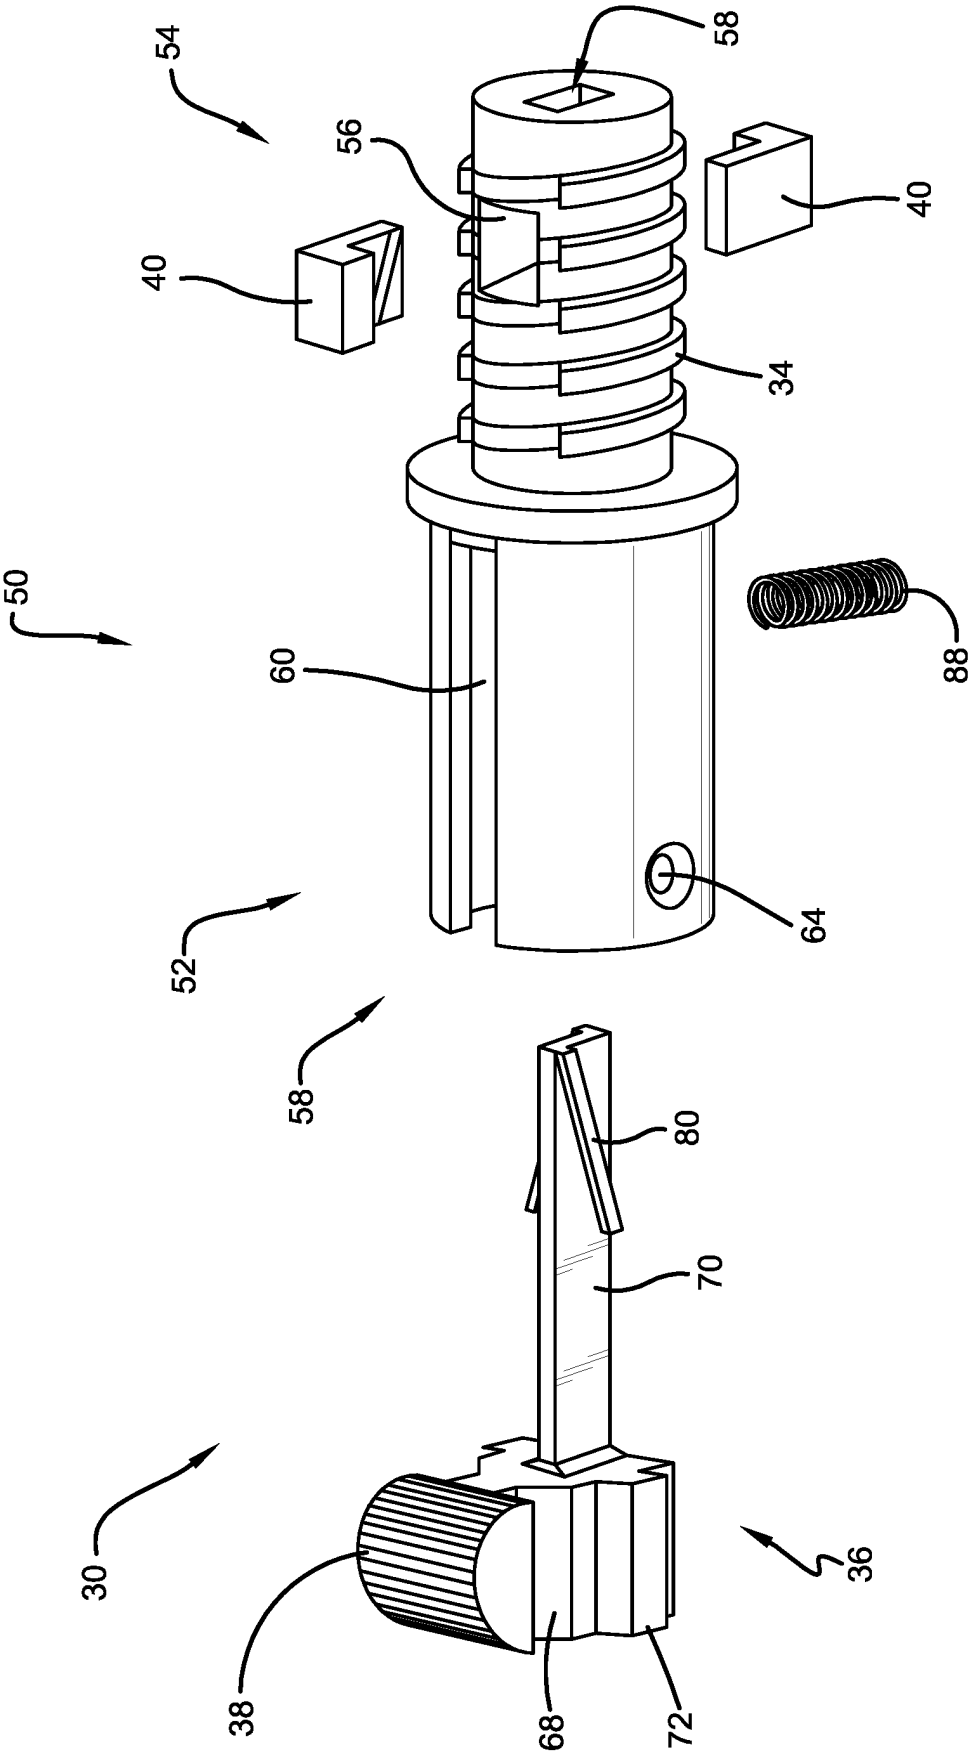


FIG. 4

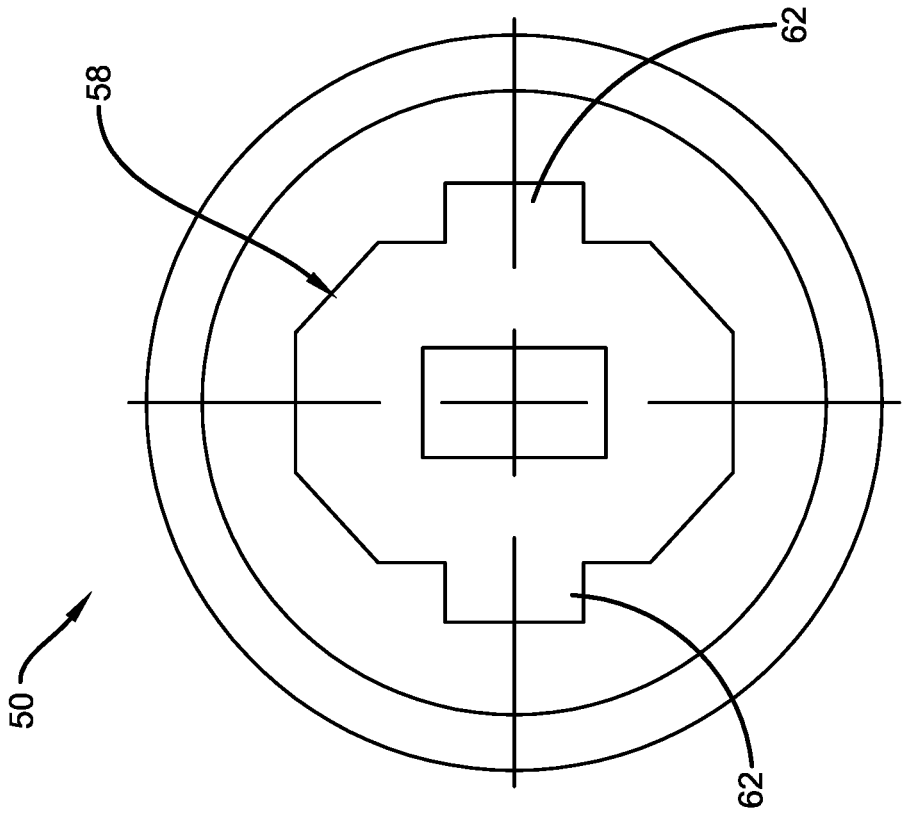


FIG. 6

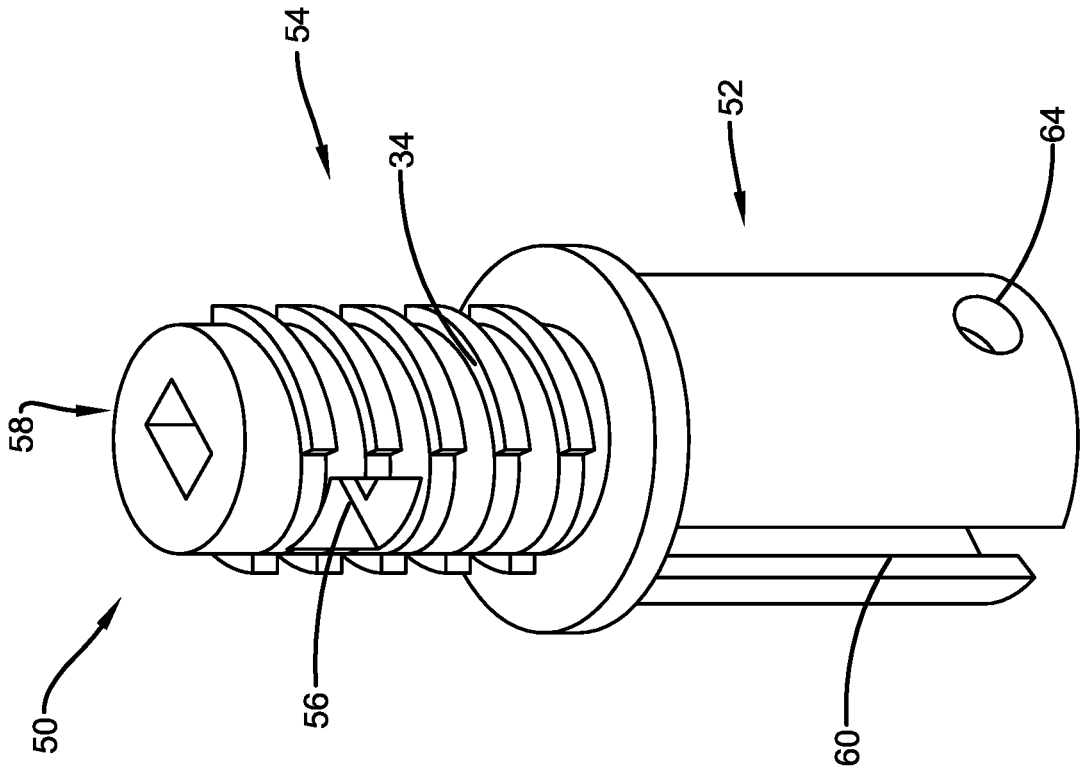


FIG. 5

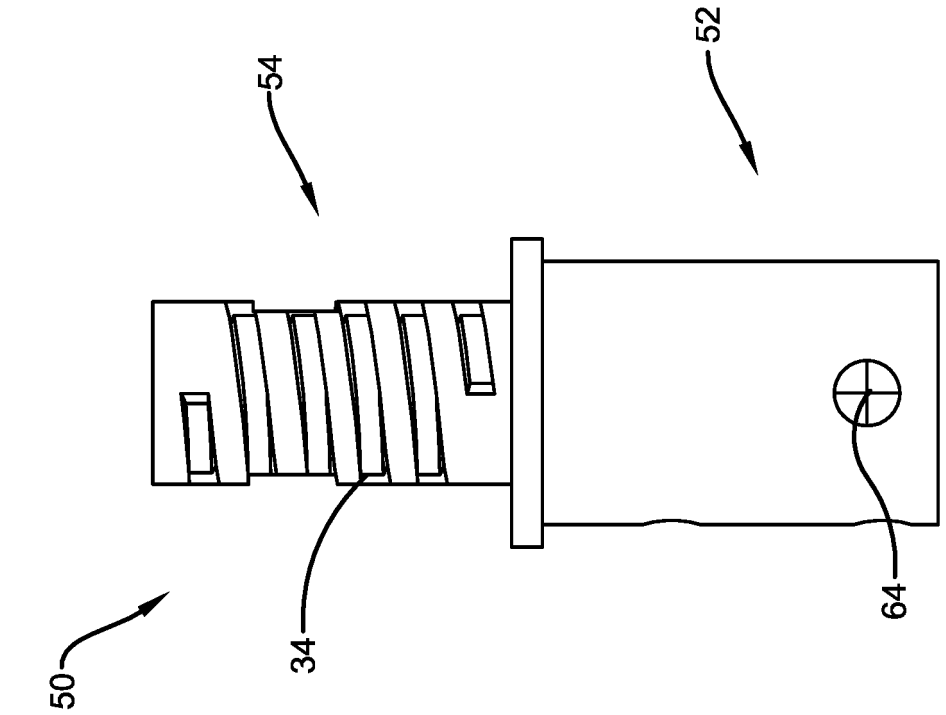


FIG. 8

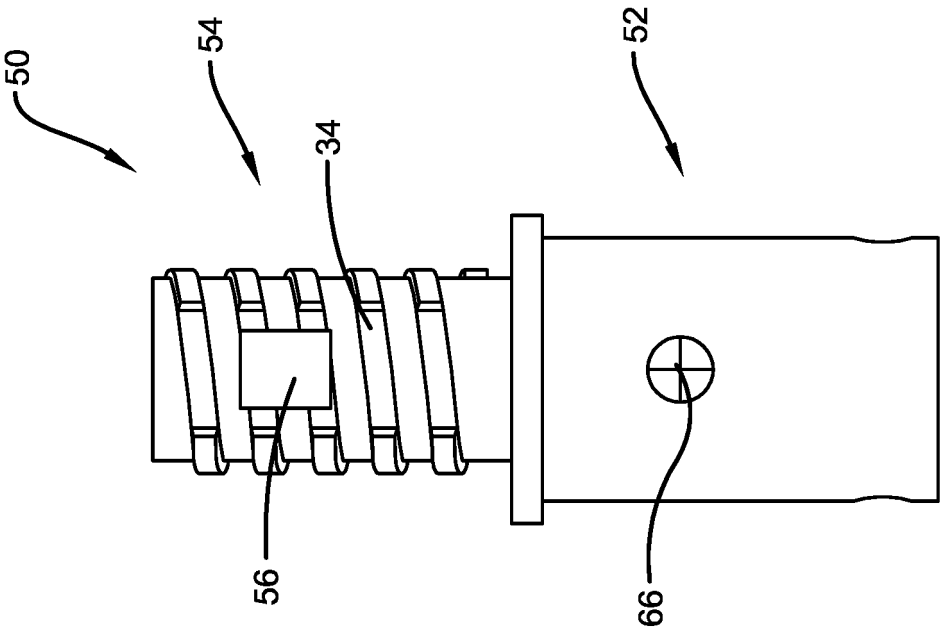


FIG. 7

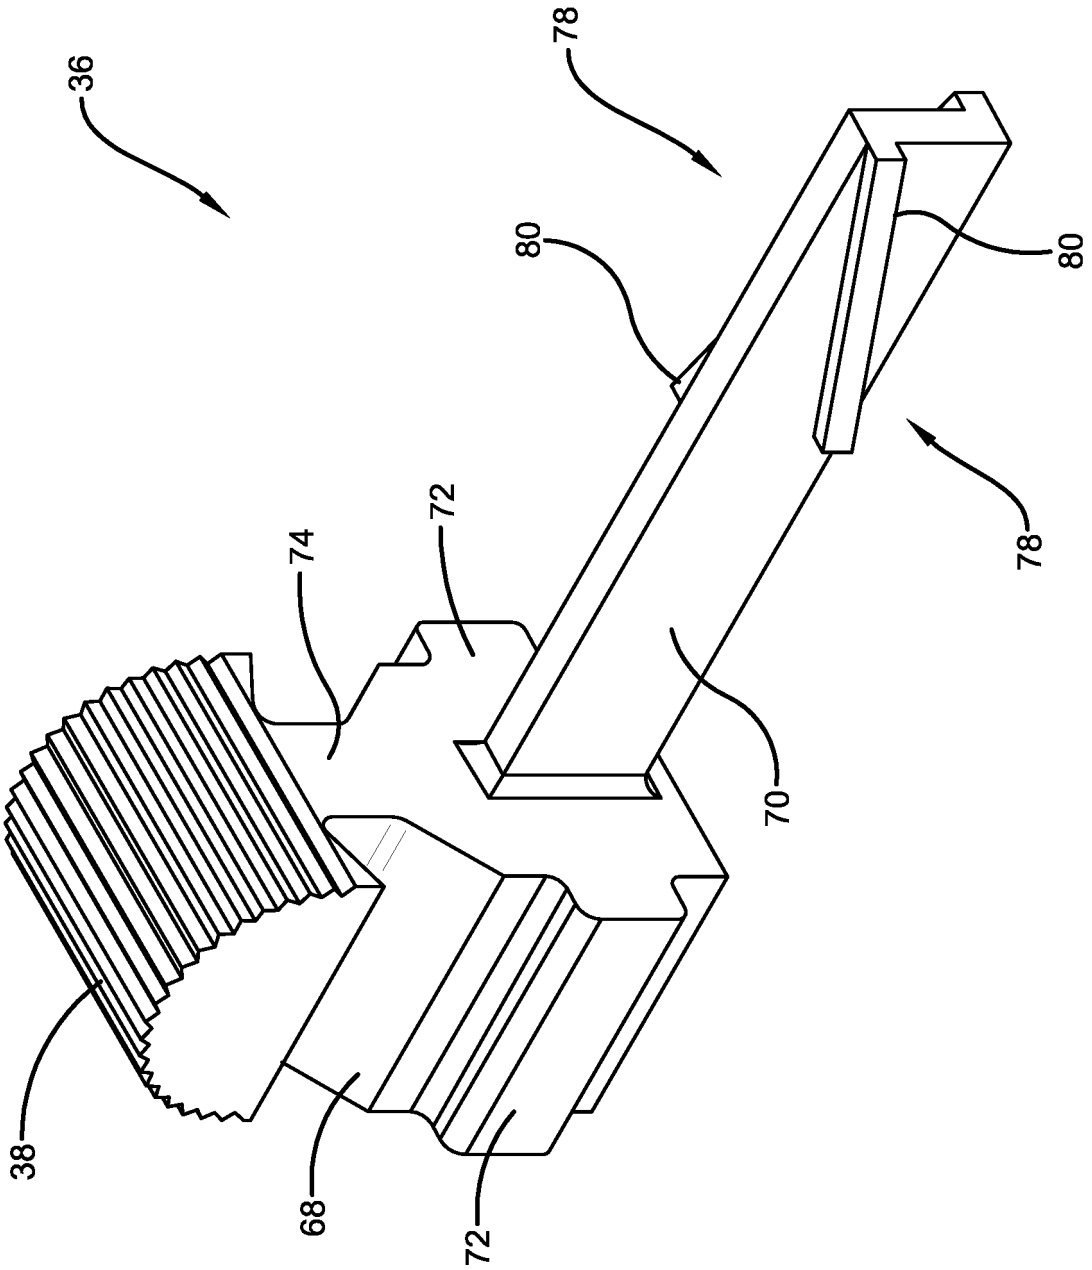


FIG. 9

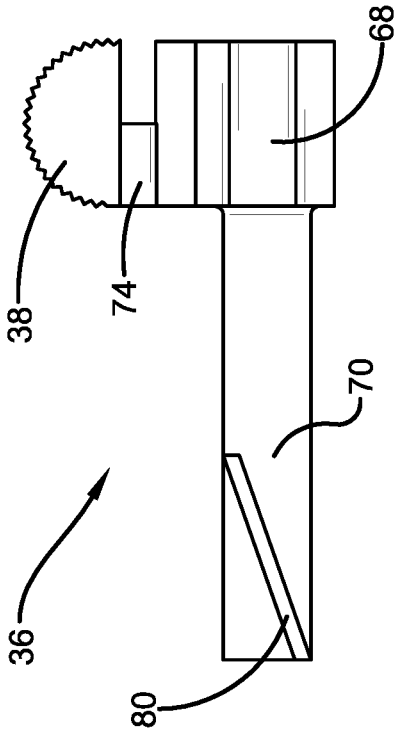


FIG. 11

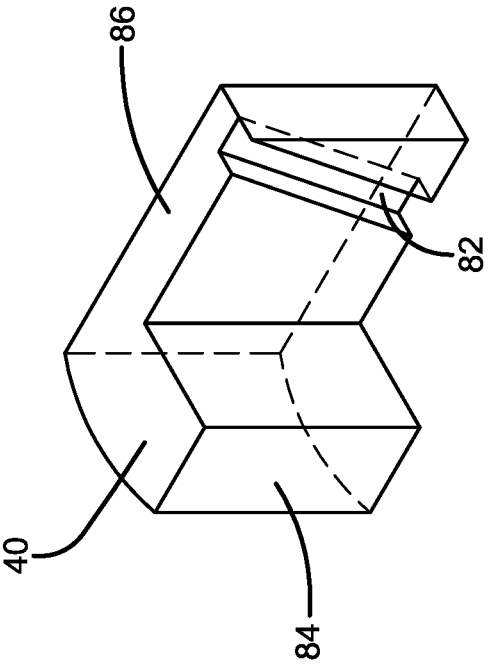


FIG. 13

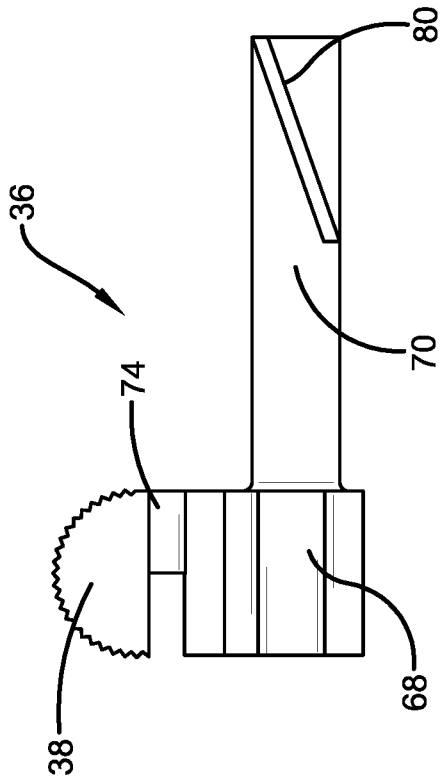


FIG. 10

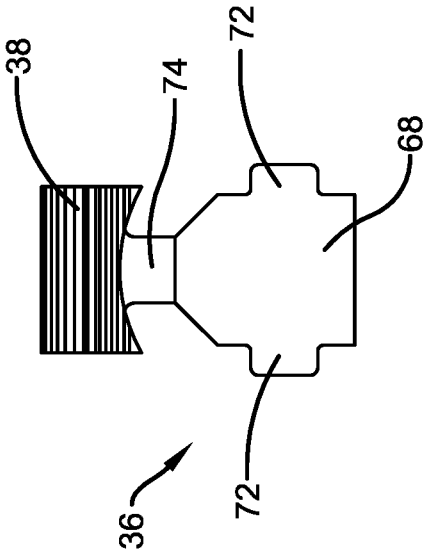


FIG. 12

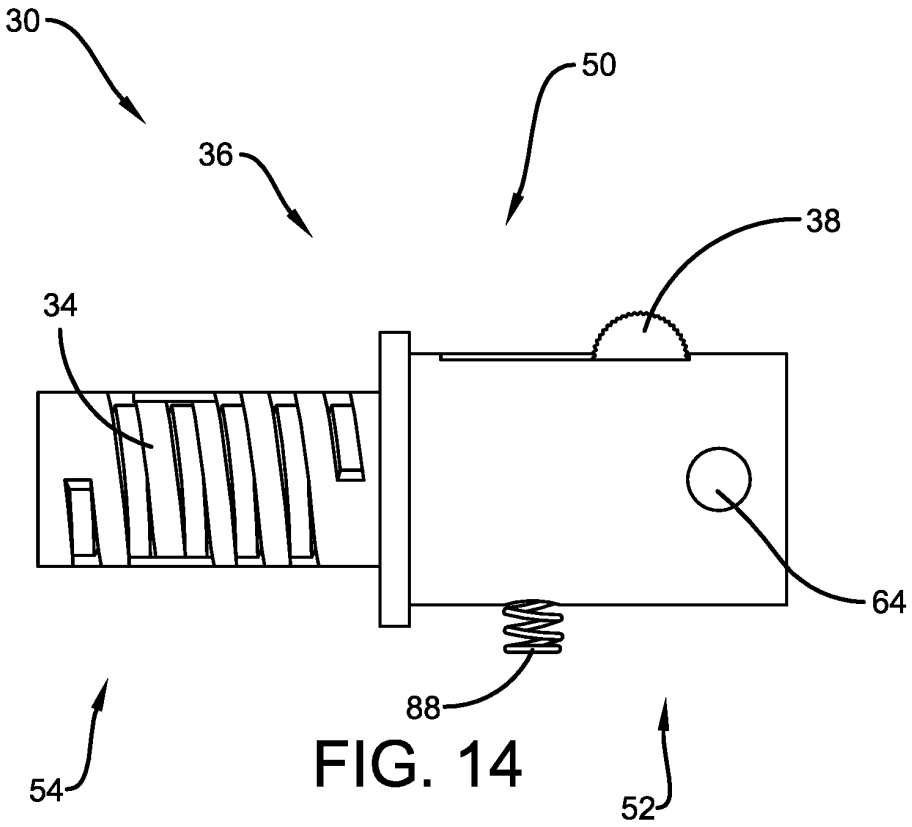


FIG. 14

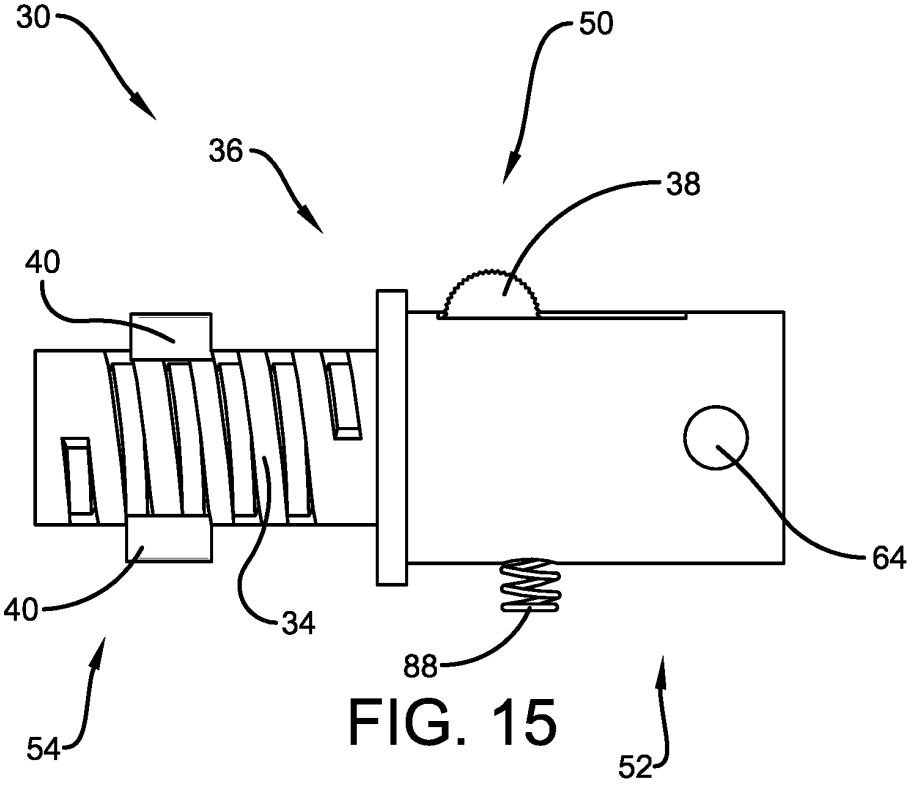


FIG. 15

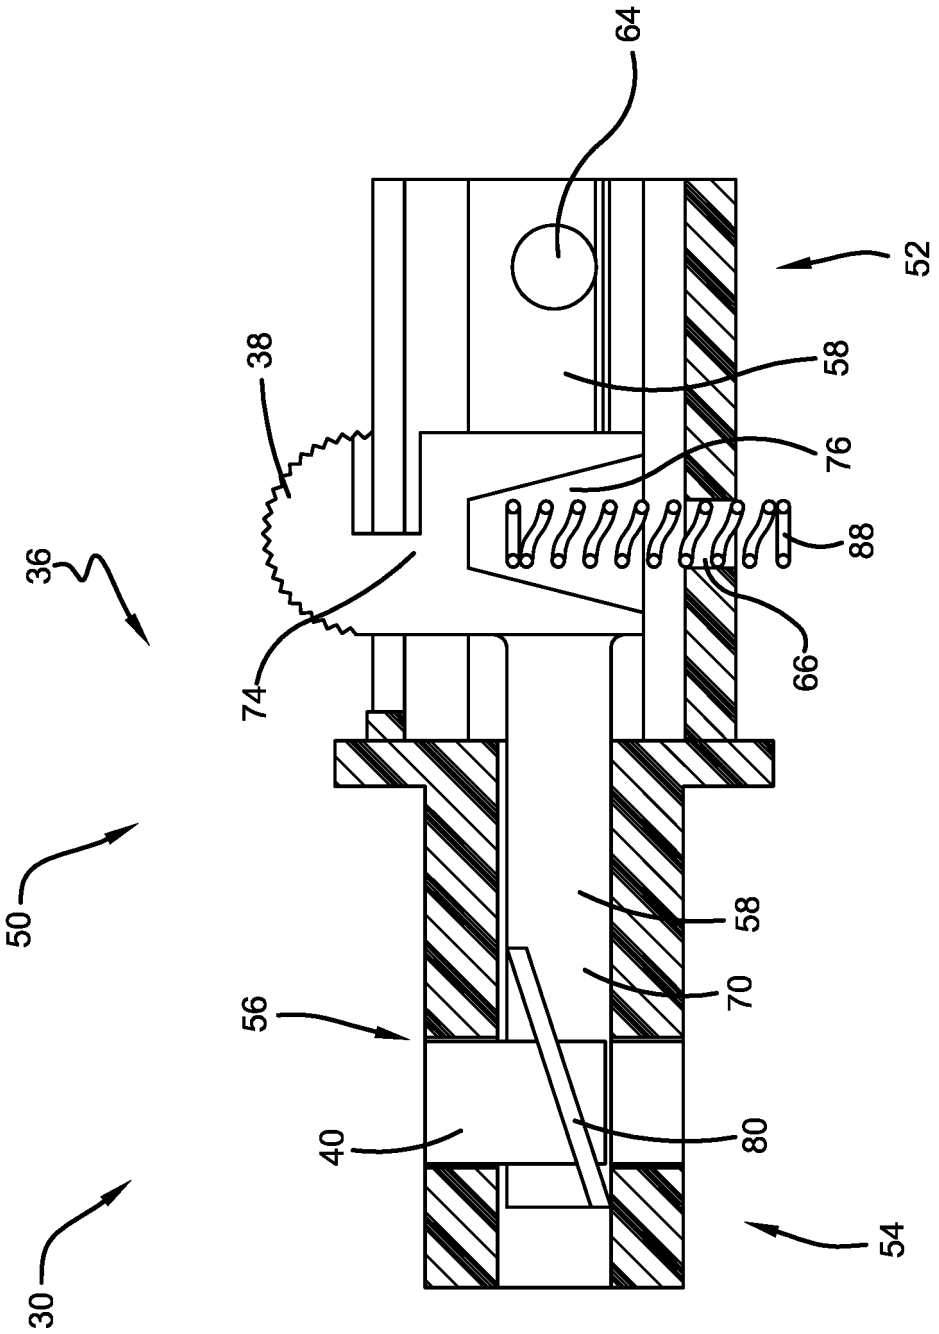


FIG. 16

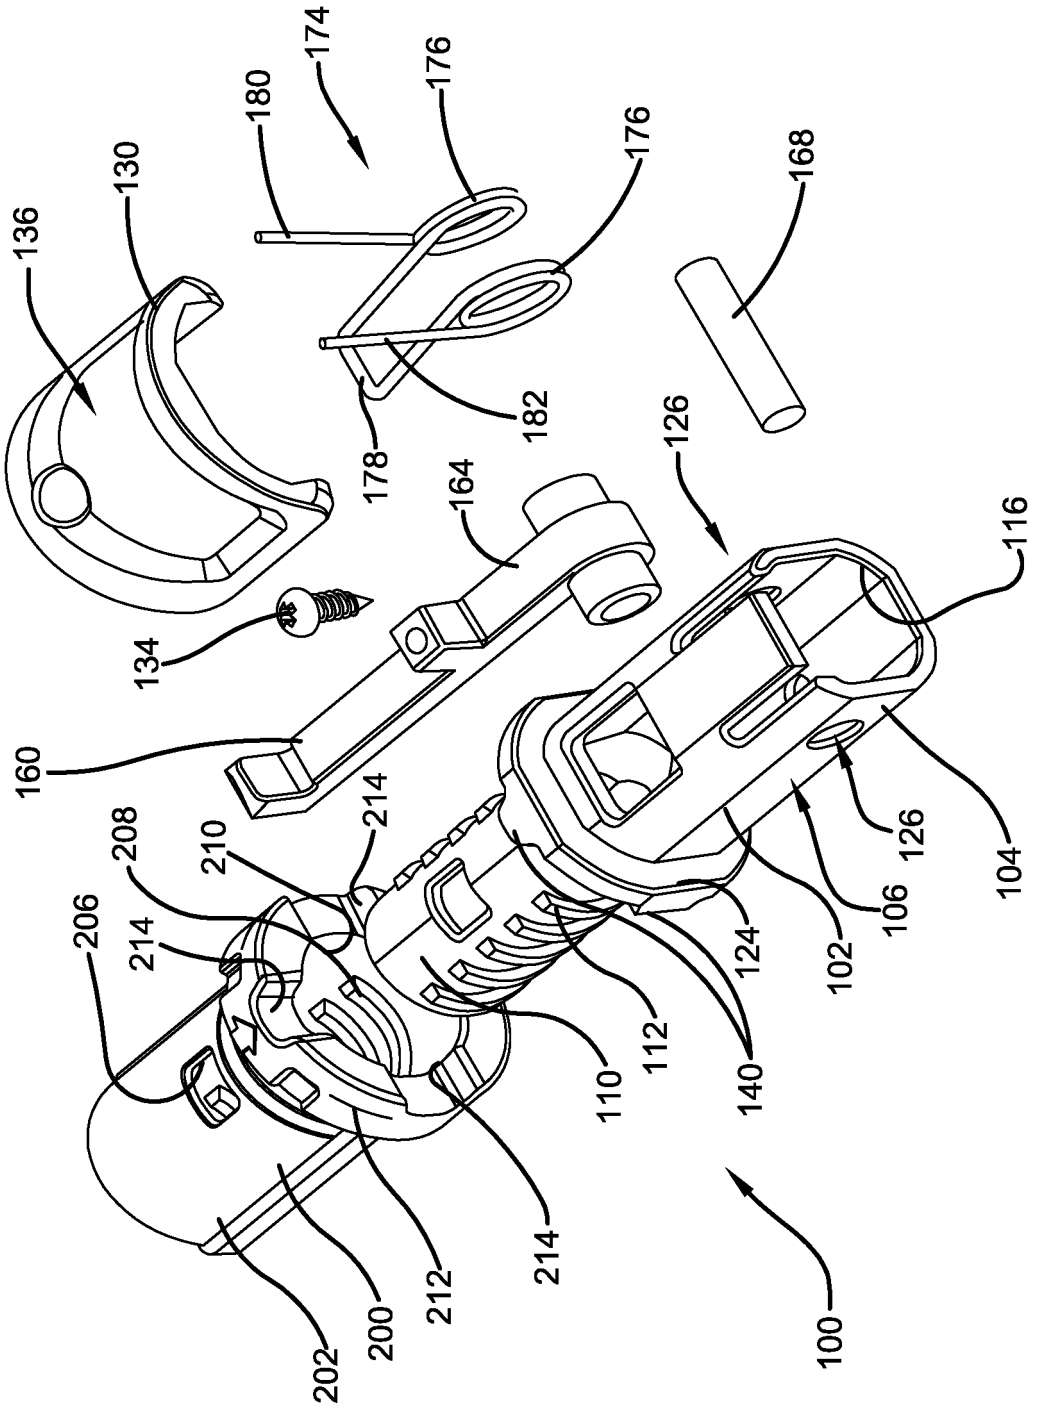

136
130
180
174
176
176
168
134
178
182
164
126
116
160
214
208
210
206
214
126
106
104
102
124
112
110
140
214
212
200
202
100

FIG. 17

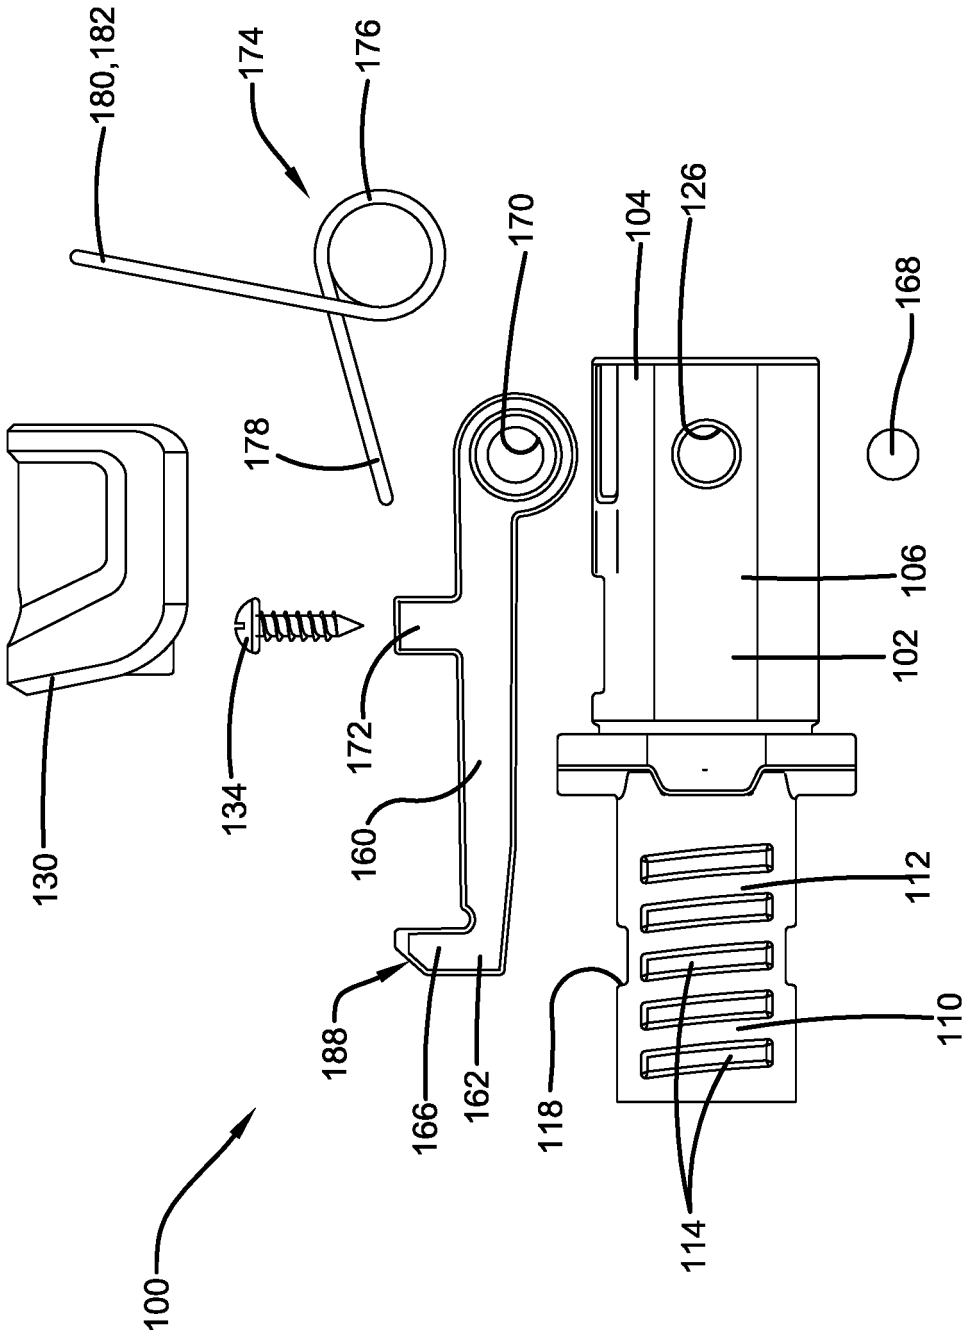

180,182
174
176
170
104
126
168
178
106
102
172
134
160
130
112
188
166
162
118
110
114
100

FIG. 18

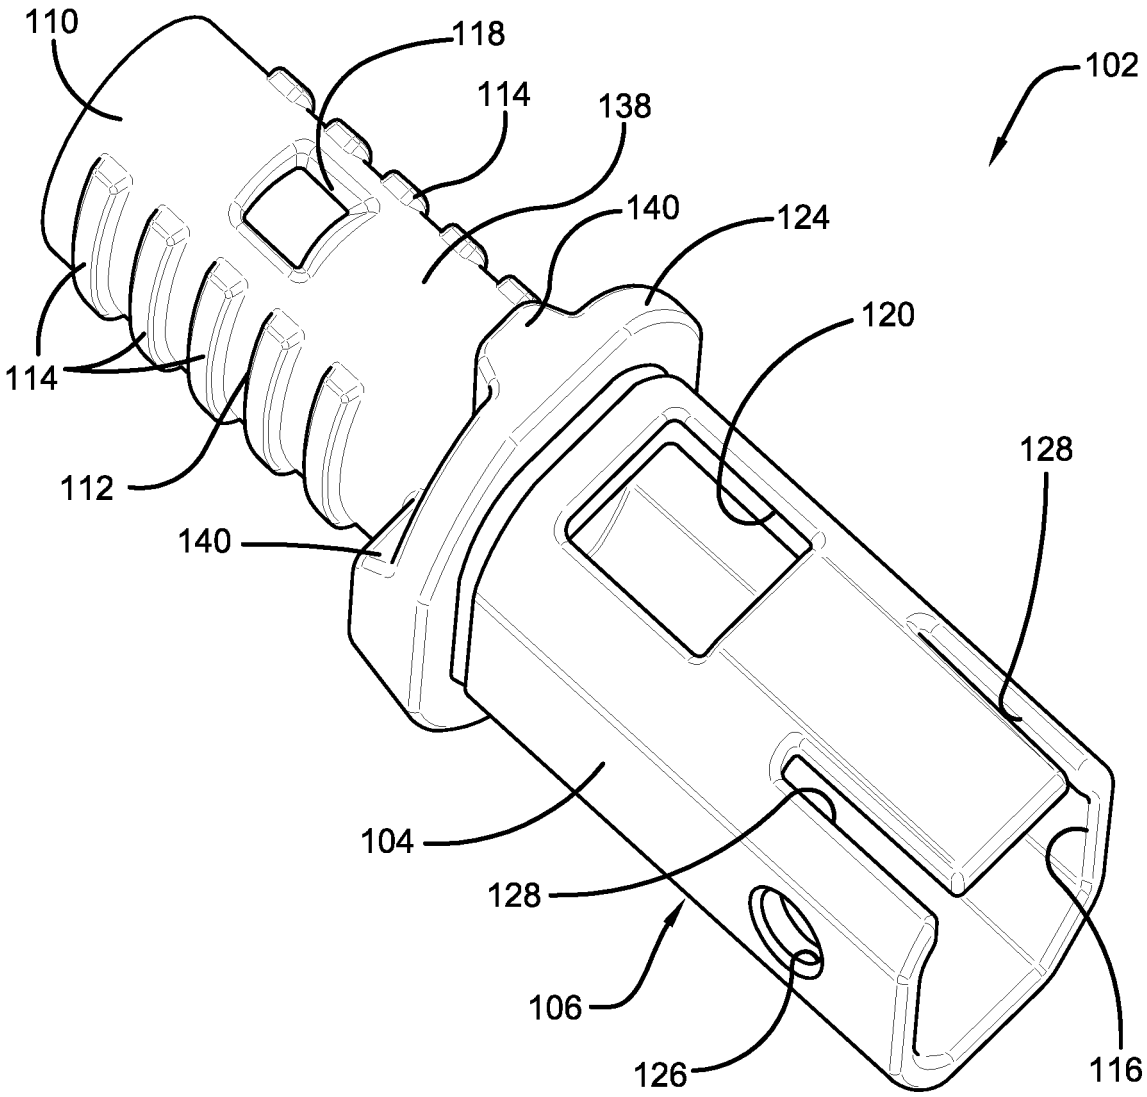

110
118
102
114
138
140
124
120
114
128
112
140
104
128
106
126
116

FIG. 19

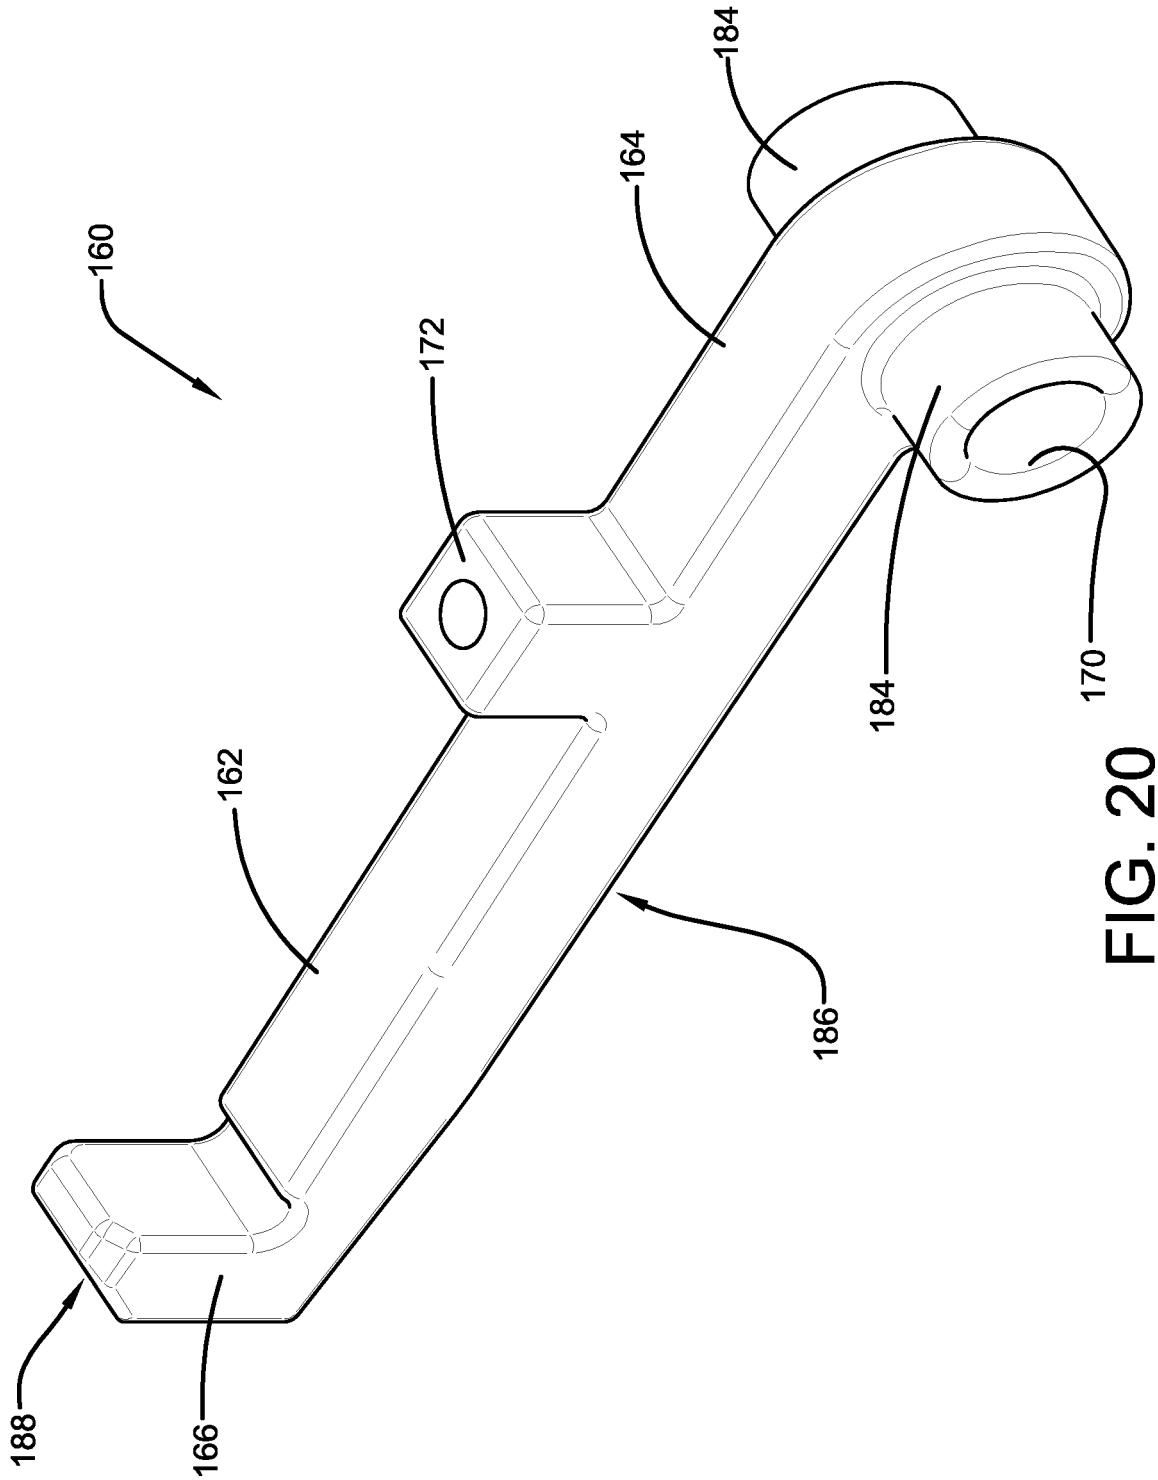


FIG. 20

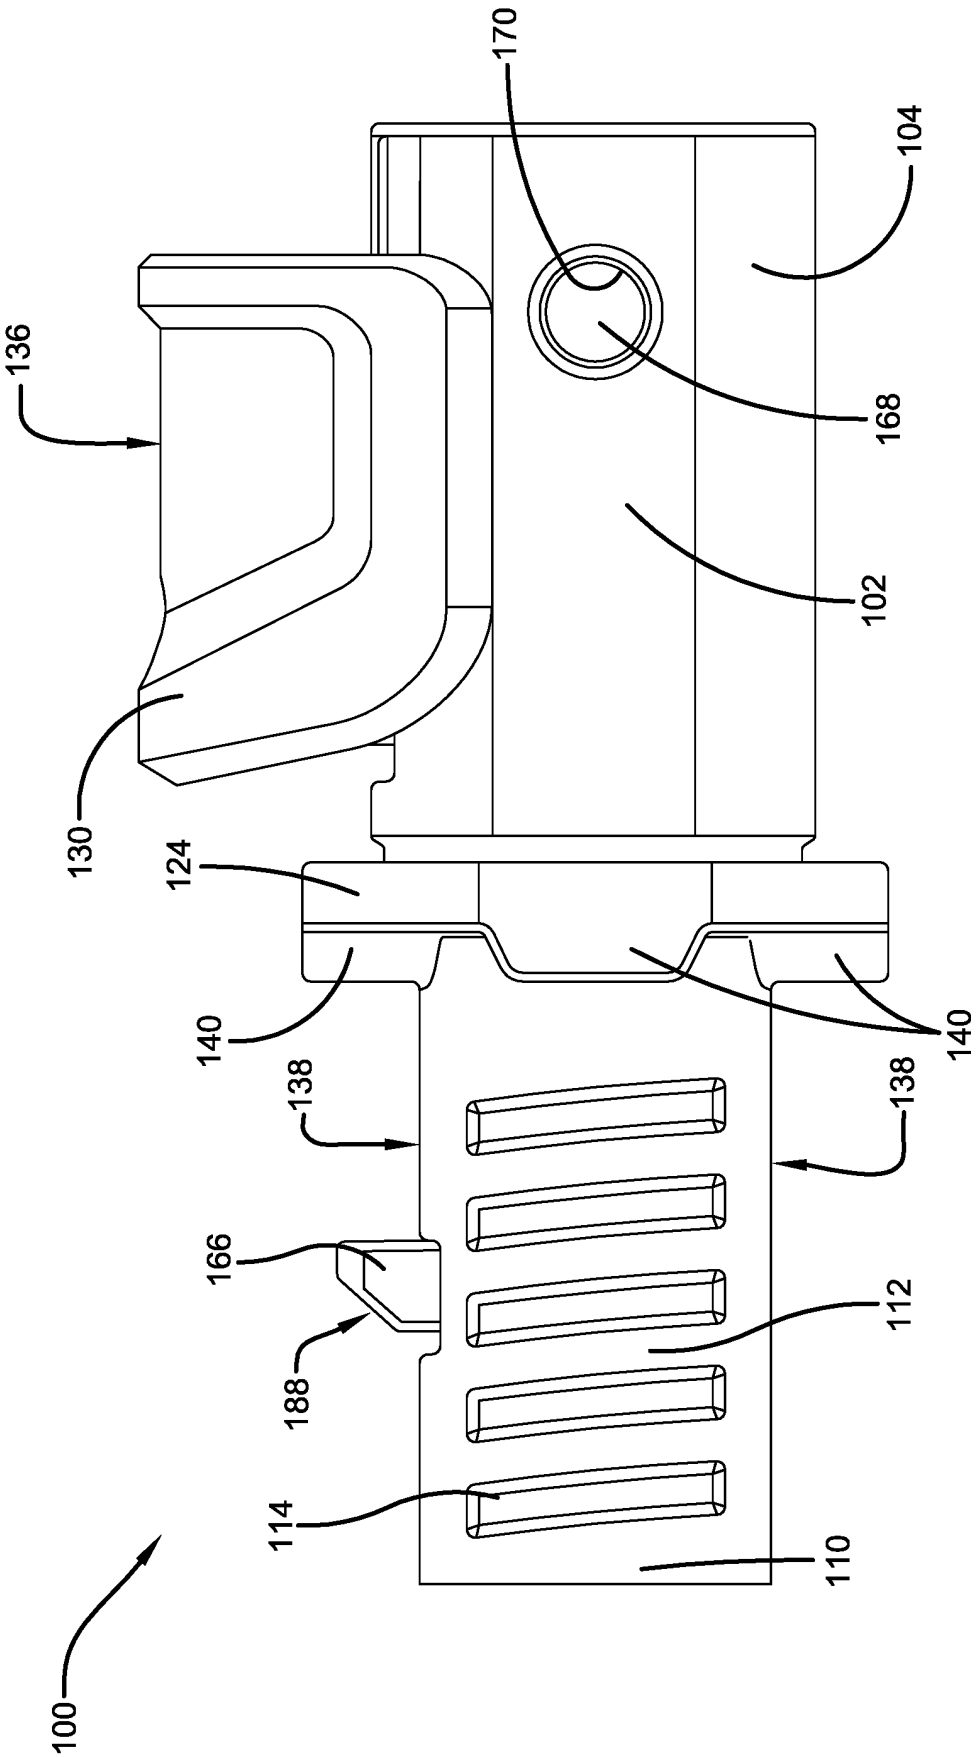

170
104
136
168
102
130
124
140
140
138
138
166
112
188
114
110
100

FIG. 21

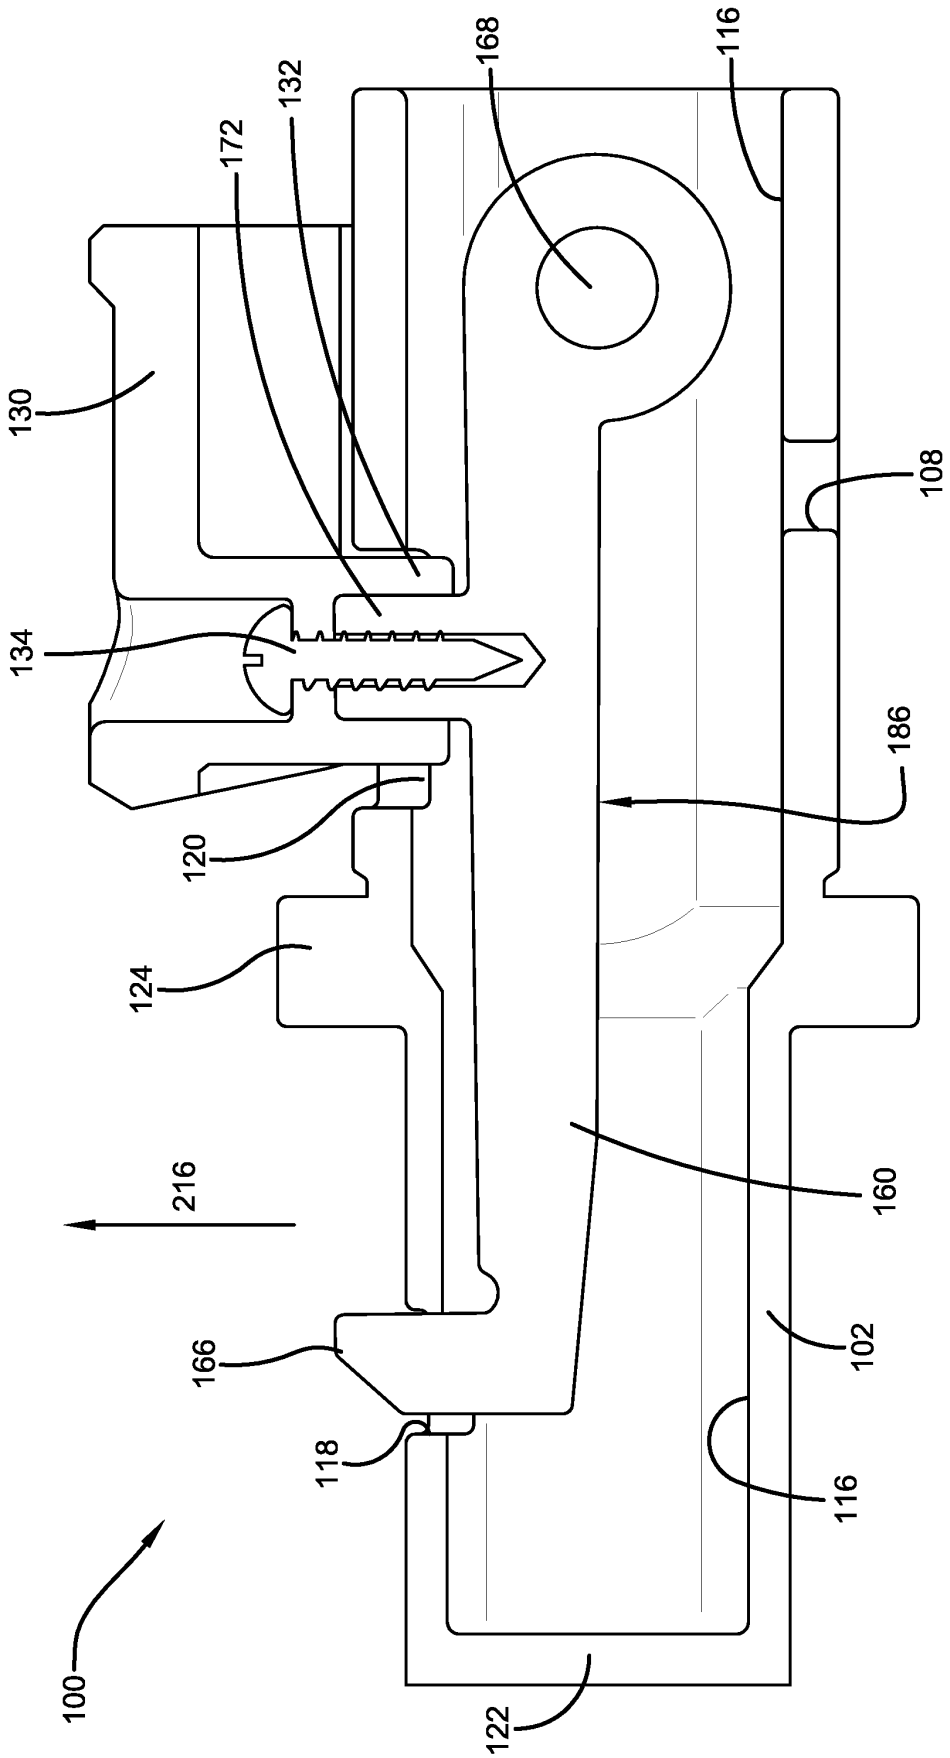

168
116
132
172
130
108
134
186
120
124
216
160
166
102
118
116
100
122

FIG. 22

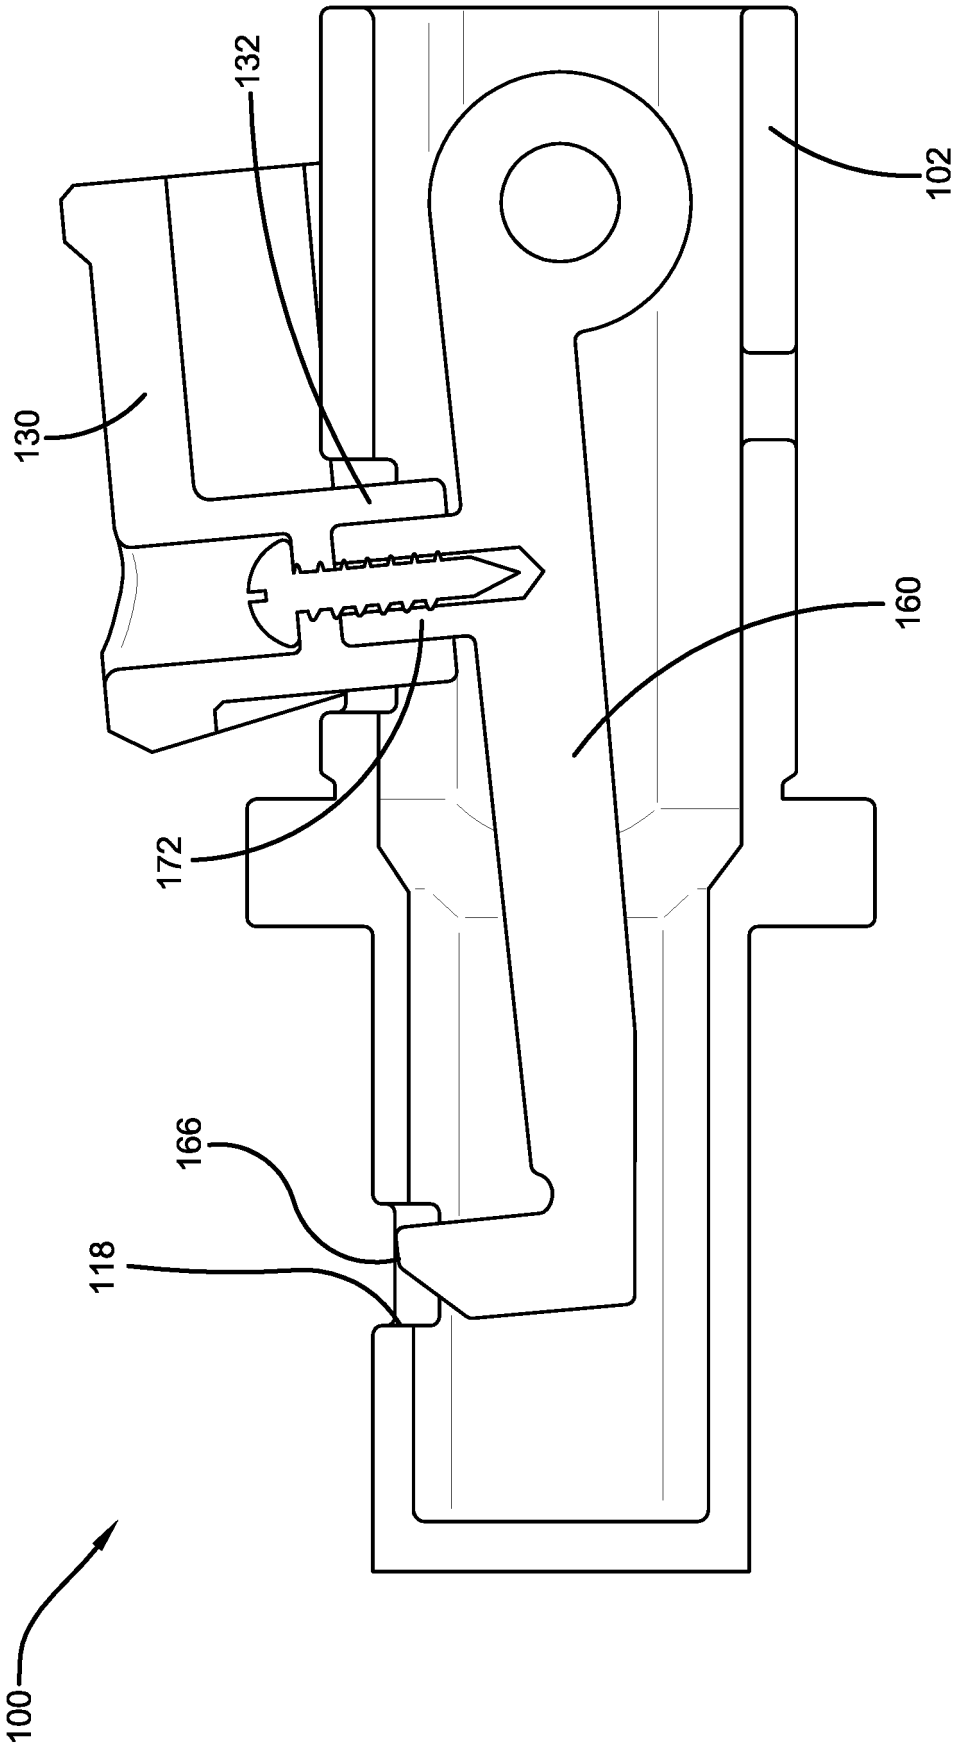


FIG. 23

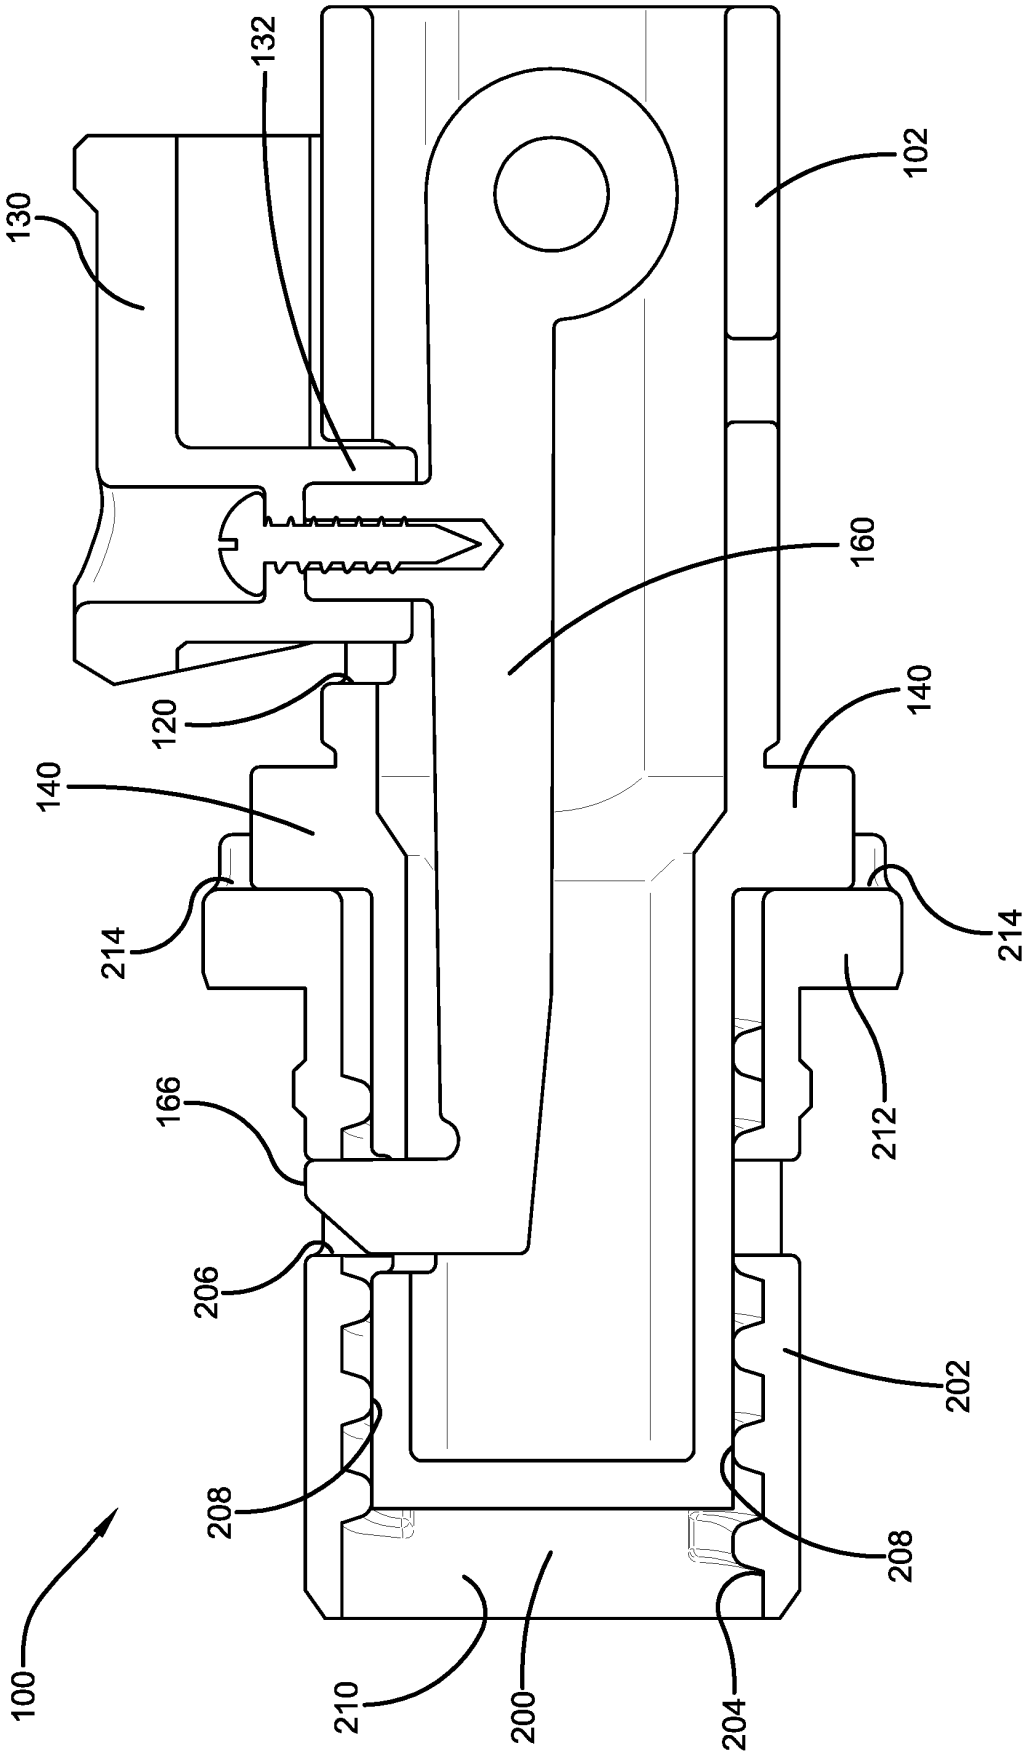

132
130
102
160
120
140
140
214
214
166
212
206
202
208
208
100
210
200
204

FIG. 24

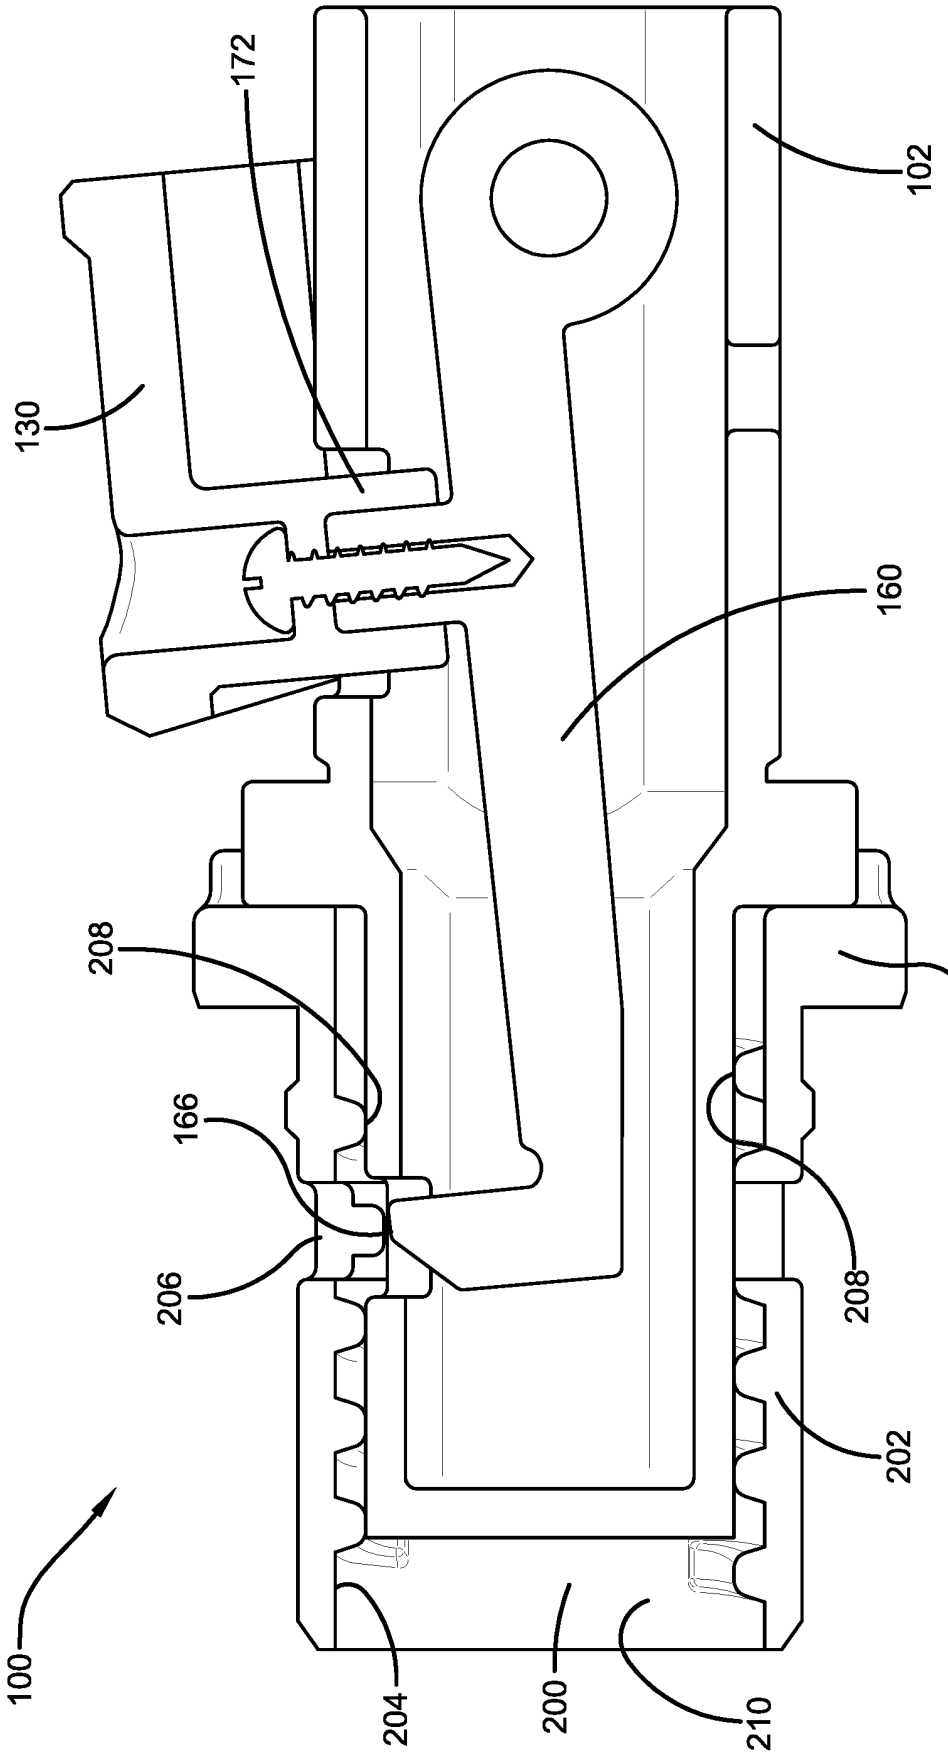


FIG. 25

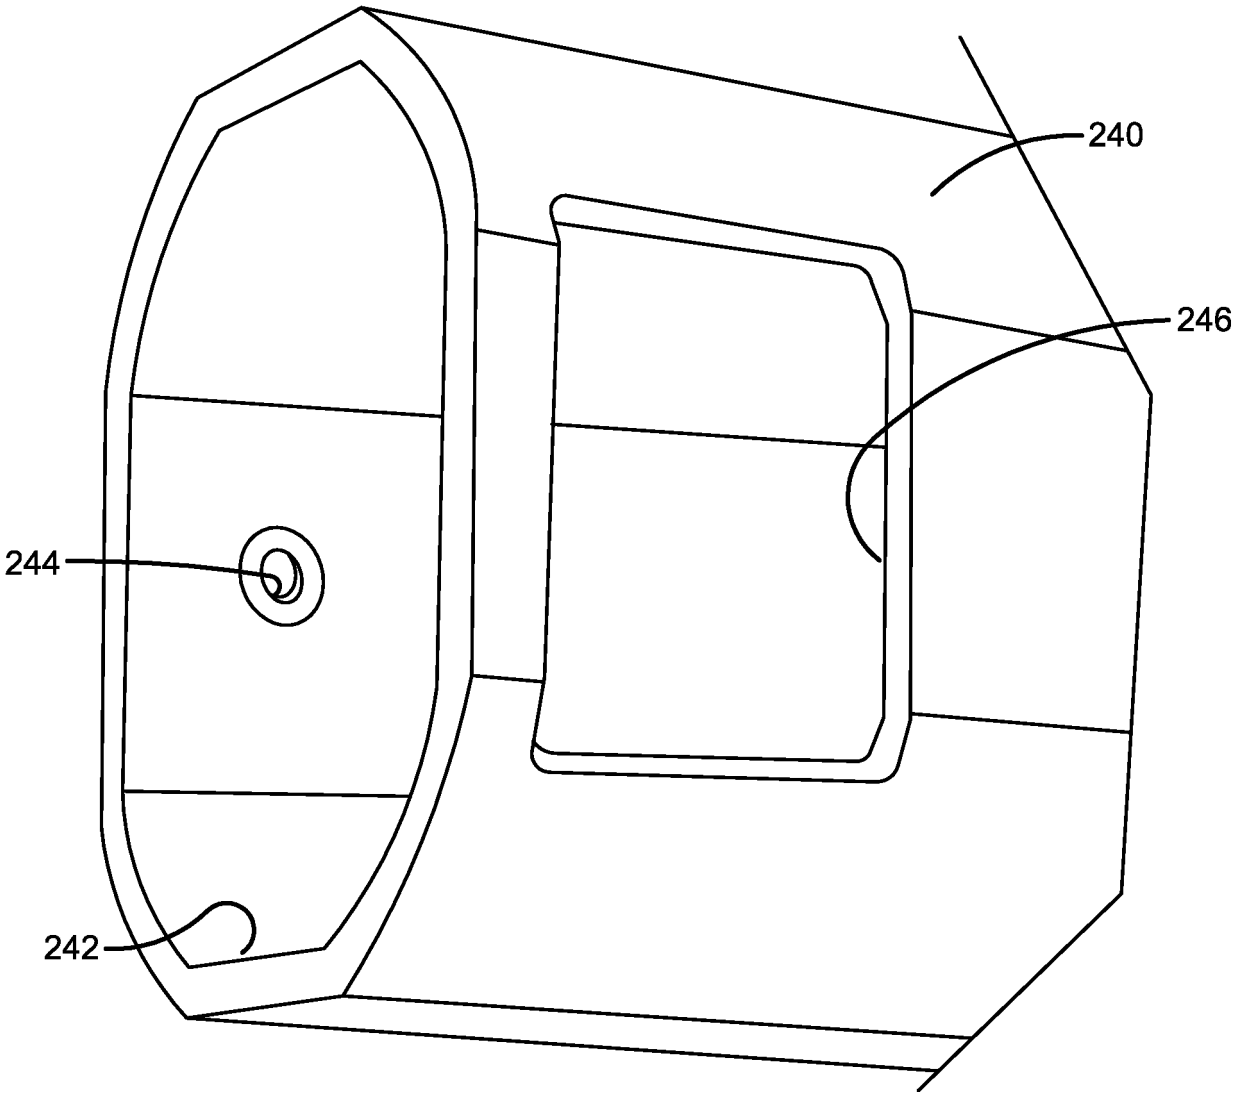


FIG. 26

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5288161 A **[0002]**