



(11)

**EP 2 963 944 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**31.03.2021 Bulletin 2021/13**

(51) Int Cl.:  
**H04R 1/28 (2006.01)**

(21) Application number: **15157053.8**

(22) Date of filing: **27.02.2015**

**(54) Acoustic insert for a loudspeaker bass reflex system**

Akustischer Einsatz für ein Lautsprecherbassreflexsystem

Insert acoustique pour un système de haut-parleur en bass-reflex

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GR  
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL  
PT RO RS SE SI SK SM TR**

(43) Date of publication of application:  
**06.01.2016 Bulletin 2016/01**

(73) Proprietor: **GP Acoustics (UK) Limited  
Maidstone, Kent ME15 6QP (GB)**

(72) Inventor: **Oclee-Brown, Jack  
Tonbridge, Kent TN12 6AE (GB)**

(74) Representative: **MacLean, Martin David et al  
Downing IP Limited  
Grosvenor House  
7 Horseshoe Crescent  
Beaconsfield, Bucks. HP9 1LJ (GB)**

(56) References cited:  
**US-A- 4 997 057**

- **Martin Colloms ET AL: "Reflex or Vented Enclosures", HIGH PERFORMANCE LOUDSPEAKERS., 1 January 2005 (2005-01-01), pages 155-169, XP055429255, GB ISBN: 978-0-470-09430-3 Retrieved from the Internet: URL:none**
- **John Eargle: "Port turbulence under high drive conditions", Loudspeaker handbook, 1 January 2003 (2003-01-01), XP055429247, Boston ISBN: 978-1-4020-7584-1 Retrieved from the Internet: URL:none**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**EP 2 963 944 B1**

## Description

### FIELD OF THE INVENTION

**[0001]** This invention relates to reflex-type loudspeakers, and to liners or inserts for the vented port(s) of such loudspeakers.

### BACKGROUND ART

**[0002]** A significant proportion of loudspeakers which are currently commercially available are of the type commonly known as bass reflex loudspeakers. A bass reflex system (also known as a ported, vented box or reflex port) is a type of loudspeaker enclosure that uses the sound from the rear side of the diaphragm to increase the efficiency of the system at low frequencies as compared to a typical closed box loudspeaker or an infinite baffle mounting. A bass reflex loudspeaker typically has one or more openings in the loudspeaker enclosure (called reflex ports or vents), each of which usually consists of a rigid pipe, duct or tube (typically circular or rectangular in cross-section) mounted in the front or rear face of the loudspeaker enclosure, leading from the air volume behind the driver to the external air. The air in this opening behaves as an acoustic mass whereas the air contained within the enclosure behaves as an acoustic compliance; together these form an acoustic resonator known as a Helmholtz resonator. The frequency at which this acoustic resonance occurs is determined by the length and cross sectional area of air in the opening, the volume of air within the enclosure, and the speed of sound. Acoustic radiation from the rear of the loudspeaker passes through this acoustic resonator, the acoustic resonator providing in a band-pass response. At the frequency of this acoustic resonance the high pressure in the enclosure reduces the cone motion and acoustic radiation from the front of the loudspeaker diaphragm. The combined output from the opening and front of the diaphragm is in the form of a 4<sup>th</sup> order high-pass filter. With suitable choice of driver parameters, enclosure volume and port dimensions a desired response can be achieved. For example a maximally flat 4<sup>th</sup> order butterworth high-pass response is the most obvious choice but, depending on the design constraints, there are numerous other choices.

**[0003]** Reflex systems are widely used since they provide a better combination of efficiency and low frequency extension compared to closed box systems. They also have the benefit of reducing the diaphragm excursion at frequencies around the enclosure tuning frequency where the duct provides the main acoustic output.

**[0004]** In use, the low frequency response of a loudspeaker is strongly dependant on room dimensions, construction materials and the relative positions of listener and loudspeaker. Furthermore, what is an acoustically desirable performance is often a subjective choice, with different listeners preferring enhancement or attenuation

of different sound frequencies; however, any single size and configuration of reflex port will have a predetermined and largely fixed effect on the overall acoustic performance of a loudspeaker. One practical method of adjusting the low frequency response of a loudspeaker system is to vary the Helmholtz resonance by altering the properties of the port.

**[0005]** For example, to vary the acoustic performance of a reflex-type loudspeaker, cylindrical plugs (bungs) of foamed polyurethane or felt have been inserted into the opening of the reflex port, and these adjust the resonance in the port by partially blocking it; such an approach is rather crude, such "bungs" introduce turbulence and resistive losses with only a minor change in tuning frequency. The resistive losses introduced by air flowing through the porous bung reduce the bass output of the port with no improvement to low frequency extension. The small decrease in tuning frequency does produce a small improvement in low frequency extension. The turbulence occurs where high air velocity gradients occur in the air flow due to small port area, abrupt changes in port area or discontinuities such as those introduced by the bung. The effect of turbulence is to introduce spurious noise and distortion, and also results in a loss of low frequency energy; consequently turbulence may limit undistorted bass output.

**[0006]** A better approach to adjusting the Helmholtz frequency is to provide the user with some means to adjust the port length and/or area. To avoid turbulence the ports should preferably be flared at both ends avoiding discontinuities of the wall surface along the length of the port.

**[0007]** For example interchangeable ports of different dimensions have been suggested in GB2352924. In such arrangements, a range of ducts, each of different length and/or cross-sectional area, is provided, so that a listener can change the acoustic performance simply by removing and replacing one duct with another of different dimensions. Such arrangements necessitate the storage of a number of alternative ducts which, because reflex ports are usually substantially rigid, takes up an undesirable amount of space. In addition, such replaceable ports need to be firmly fixed in position relative to the loudspeaker enclosure, so a user needs to have tools available to be able to undo a duct for removal and to secure a duct in place. Accordingly such systems are not attractive to users.

**[0008]** Another performance limitation of ports is the response peak due to longitudinal acoustic resonance occurring within the duct. This resonance is highly undesirable since it can cause audible colouration. A method of reducing such resonances is described in GB2488758. Providing the user with interchangeable ports constructed in this way would be highly beneficial, but extremely costly.

**[0009]** US4997057 discloses an acoustic reproduction range expanding apparatus which includes a closed or bass-reflex speaker system which has a low-frequency

drive speaker and can reproduce a sound to a predetermined lowest frequency. A port portion adapter consists of a mounting portion attached to an opening formed in a closed cabinet or a bass-reflex port of a bass-reflex cabinet, and a port portion. The port portion constitutes a Helmholtz's resonator together with the cabinet when the port portion is attached to the cabinet, and has a port shape so that a resonance frequency becomes lower than the lowest frequency. A drive portion adapter consists of an amplifier for driving the low-frequency drive speaker, and eliminates or invalidates an internal impedance inherent to the low-frequency drive speaker. The amplifier generates a negative impedance component in an output impedance.

#### SUMMARY OF THE INVENTION

**[0010]** The present invention provides an acoustic insert for lining an outer tube fitted to a loudspeaker enclosure to form a loudspeaker reflex port, the insert being an elongate hollow tube formed of flexible, low density foamed polymer material, having an outer wall, sized and configured to seat removably within the outer tube, and an inner wall extending in the elongate direction, the inner wall having a circumference (in the plane transverse to the elongate direction) which varies along the length of the insert, wherein the foam polymer material is formed with closed cells.

**[0011]** Such inserts are inexpensive to manufacture, easy to use and can be configured to allow a large range of tuning frequency adjustment since both area and length may readily be varied. For example, one form of tuning will give a flat response with more upper bass (such as is suitable for rooms with excessive low frequency absorption) whereas a different (lower) tuning will give a sloping bass response with more very low bass and less upper bass. Because the tubes are easily insertable and removable (partly as a result of their being made of flexible material), it is a simple matter to remove an insert of one size/configuration/material from the outer tube and replace it with a different one, thus changing the acoustic effect provided by the reflex port, enabling a user easily to change the frequency response of the loudspeaker as desired. Accordingly, the present invention has the potential for loudspeakers to be made with acoustic performance which can be varied so as to be equally as acceptable in the home as in applications requiring high accuracy and neutrality. In addition, the inserts can be used in different lengths on different models in a range of products. Forming the insert of low density foam material is important to provide the ability to absorb unwanted sound frequencies, and enables the insert to be flexible. In particular sound is absorbed at the frequency of longitudinal acoustic resonances in the port, reducing output above the band-pass region. The foam is closed cell rather than open or reticulated, so as to form an airtight seal with the outer supporting tube and so avoid the air leaks and resistive losses which are known to be high-

ly detrimental to reflex enclosures and result in decreased bass and distortion.

**[0012]** In addition the inserts can be used with the reflex ports of existing reflex loudspeakers, provided the existing reflex port (equating to the "outer tube") and the inserts are of matching size and configuration. The circumference (in the plane transverse to the elongate direction) of the inner wall of the insert may be substantially symmetric at any point along the length of the insert. This makes for ease of use (in that a user does not have to worry about the orientation of the insert when it is inserted into the reflex port), ease of calculation of acoustic effect, and ease of manufacture. For essentially the same reasons, the inner wall of the tube may be substantially symmetric in the elongate direction. The insert (as tubes generally do) has two open ends, and the inner wall of the insert may be narrower at at least one point between the ends than it is towards the ends of the tube; such an arrangement means that the insert acts as a kind of "throttle", the calculations to determine the acoustic effect of which are reasonably easy to calculate. Similarly, one or both ends of the insert may be flared outwardly, so as to blend in smoothly with the inner wall of the outer tube and avoid turbulence.

**[0013]** Reflex ports are commonly substantially circular, square, elliptical, racetrack or rectangular shaped along their inner wall; the outer wall of the insert may be similarly shaped, and the inner wall of the insert may be any one of these shapes (though for ease of manufacture the shapes of the inner and outer walls of the tube will typically match, but this need not necessarily be the case). The outer wall of the insert may be the same size (radially from the elongate axis) as the inner surface of the outer tube, so as to fit snugly therein, or it may be slightly oversized so as to have a slight interference fit. This is advantageous, as it helps ensure that the insert in use remains in the correct longitudinal position within the outer tube, and does not become dislodged except when a user wishes to remove it. Also, the foam insert does not rattle or vibrate within the outer tube which could detract from the audible performance of the loudspeaker. Other ways of retaining the insert in the correct longitudinal position within the outer tube (apart from when a user wishes to remove it) will be apparent to the skilled person, such as by providing a releasable adhesive, or forming the outer wall of the insert with lugs, ribs or recesses which mate with matching formation on the inner wall of the outer tube. Where cost allows it is also possible to use the resilience of a flange on the foam insert to provide the retaining force for a bayonet style fixing. It is also possible to mount the port in the terminal panel or other convenient part of the loudspeaker.

**[0014]** The insert may be the same length as the outer tube, or it may be longer or shorter. The insert may be provided with a lip of greater size than the inner circumference of the outer tube at one end of the tube, so that it is easy for a user to place the insert inside the outer tube at the correct longitudinal position, and not insert it

"too far"; also, such a lip makes it easier for a user to extract the insert when desired.

**[0015]** We have made inserts out of closed cell foamed polymer material, as this is flexible yet robust and relatively inexpensive and easy to manufacture. The inner surface of the insert may be slightly rough, so as to introduce a small amount of turbulence in the adjacent boundary layer of air.

**[0016]** The invention extends to a kit comprising a number of such inserts, each of different dimensions, configuration and/or material, so that a user can easily tailor the frequency response as required. Such a range of insert lengths may be used with a set of interchangeable outer tubes of different lengths so as to provide further scope for tuning the loudspeaker performance. A loudspeaker comprising one or more such inserts is also within the ambit of this invention.

#### BRIEF DESCRIPTION OF THE DRAWINGS

**[0017]** The invention will now be described by way of example, and with reference to the accompanying drawings, in which;

Figure 1 is a schematic cut away view of an acoustic insert in accordance with the invention in position inside an outer tube forming a reflex port.

#### DETAILED DESCRIPTION OF THE EMBODIMENTS

**[0018]** Figure 1 is an isometric, cross-sectional schematic of an arrangement 2 comprising an acoustic insert 6 seated within an outer tube 4 which is fitted to the enclosure of a loudspeaker (not shown). The acoustic insert 6 and the outer tube 4 together form an open ended, cylindrical tube, with a first end 8 opening at the wall of the loudspeaker enclosure and a second end 10 inside the enclosure. The insert flares outwardly at the first and second ends, with a central portion 14 of smaller radius (around the X axis shown) than at the two ends. The first end of the outer tube 4 has a lip 16 which engages with the wall of the loudspeaker enclosure as is known in the art. The insert, which is made of low density foam material, is also formed with a matching lip 18, which seats on the lip 16 when the insert is fully inserted within the outer tube 4; this prevents the insert from being pushed too far inside the outer tube, and instead ensures that the insert 6 is in the correct longitudinal position (along the X axis) relative to the outer tube 4. Also, the lip 18, being outside the loudspeaker enclosure, is easy to grasp if the insert 6 is to be removed. In use, the insert tunes the resonance of the arrangement to attenuate certain frequency ranges (but not others), according to the configuration and dimensions of the inner wall of the insert 6, so as to alter the acoustic performance of the loudspeaker. The resilience of the material from which the insert is formed may be such that in use it deforms slightly and/or the inner wall of the insert deflects and so absorbs sound.

**[0019]** Variations may be made to the above-described embodiment. For example, there may be additional means to hold the insert 6 in place within the outer tube 4, as described above; a suitable place for the application of a releasable adhesive is at the interface between the lips 16, 18; if a peelable adhesive is applied to one or other lip, this holds the insert securely in place until, when the insert is to be removed, the insert lip 18 is peeled away from the port lip 16 and the insert can then be pulled out of the outer tube. Other means could be used to releasably connect the lips 16, 18, such as a bayonet fixing, and/or the lip 16 could be separate from the outer tube 4: this would be advantageous, as such a separate lip could then be configured for mounting the arrangement to a loudspeaker enclosure, with different configurations being available for use with different enclosures. Where the foam insert is self-supporting, part of it may protrude beyond the end of the outer tube. The insert 6 is shown with only a single constriction (generally at 14), however there could be two or more constrictions spaced along the X axis, and the longitudinal shape could be like a wave (e.g. sinusoidal). The inner surface of the tube 6 is shown as being longitudinally symmetric (i.e. along the X axis) and concentric, but there may be benefits in some applications for it to be asymmetric (e.g. the "peaks" and "troughs" in a wave-shaped inner surface may not be equally spaced). As stated above, the inner circumference of the insert is symmetrical at any point along the X axis, however it may be any shape, including asymmetric; in general however, the acoustic calculations are simplest for where the insert is cylindrical and/or symmetric/concentric. Those skilled in the art will understand that, for a generally cylindrical insert (as illustrated), the internal diameter may be varied, as well as its length, to give a wider range of tuning frequencies for less variation in depth, and that similar considerations apply to non-symmetric and/or non-concentric inserts. The inner surface of the insert 6, being made of foam, has a certain roughness, however this surface could in some configurations be coated so as to have a smooth surface; alternatively the insert 6 could be formed with a smooth inner surface. For example by moulding the insert in a foamed material the surface of the moulding forms a solid skin which is sufficiently smooth. The insert 6 could be coloured or bear suitable markings to indicate its effect on tuning the frequency response of the loudspeaker (for example, the inserts could vary in shade, with darker hues indicating a "lower" tune and lighter hues a "higher" tune, or they could be numbered according to a list of different degrees of tuning). The insert may advantageously also comprise means for damping longitudinal resonance such as the impermeable, frequency-dependent acoustic leakage path arrangements described in GB2488758 (which provides a frequency-dependent acoustic leakage path in the reflex port tube, such as by having a port conduit acoustically coupling the interior of the enclosure to a region external thereto, the port conduit comprising an acoustic leakage path through a motive

part thereof in a direction transverse to a longitudinal axis of the port conduit, the acoustic leakage path having a relatively high acoustic impedance at a first frequency value, and a relatively low acoustic impedance at a second, lower, frequency value; this can be achieved with a plurality of holes in the port tube and an impermeable membrane lining the conduit). The arrangement could be provided with a front flare, or annular facing element which has the dual purpose of clamping the front flange or lip 18 of the insert 6 to the lip 16 and of improving the appearance of the arrangement 2 when assembled.

### Claims

1. An acoustic insert (6) for lining an outer tube (4) to form a loudspeaker reflex port, the insert (6) being an elongate hollow tube formed of a flexible, low density foamed polymer material, and having an outer wall sized and configured to seat removably within the outer tube (4) and an inner wall extending in the elongate direction, the inner wall having a circumference which varies along the length of the insert (6), **characterized in that** the foam polymer material is formed with closed cells.
2. An acoustic insert according to Claim 1 wherein at any point along the length of the insert (6), the circumference of the inner wall of the insert (6) is symmetric.
3. An acoustic insert (6) according to Claim 1 or 2 wherein the inner wall of the insert (6) is symmetric in the elongate direction.
4. An acoustic insert (6) according to any preceding claim wherein the insert (6) has two open ends (8, 10) and the inner wall of the insert (6) is narrower at at least one point between the ends (8, 10) than it is towards the ends of the insert (6).
5. An acoustic insert (6) according to any preceding claim wherein the insert (6) has two open ends (8, 10) and the inner wall of the insert is flared outwardly at at least one of the ends.
6. An acoustic insert (6) according to any preceding claim wherein the inner and/or outer wall of the insert, when viewed along the elongate direction, is circular, elliptical, square or rectangular shaped.
7. An acoustic insert (6) according to any preceding claim wherein the foam polymer material is an acoustic absorptive material.
8. An acoustic insert (6) according to any preceding claim wherein the inner wall of the insert (6) deflects so as to absorb sound.

9. A loudspeaker reflex port comprising an acoustic insert (6) according to any preceding claim and an outer tube (4), wherein the outer wall of the insert (6) is the same size as an inner surface of the outer tube (4).
10. A loudspeaker reflex port according to Claim 9, wherein the outer wall of the insert (6) is sized so as to be an interference fit inside the outer tube (4).
11. A loudspeaker reflex port according to Claim 9 or 10, wherein the insert (6) is provided with a lip (16) of greater size than the inner circumference of the outer tube (4) at one end of the insert (6).
12. A loudspeaker reflex port according to any of Claims 9 to 11, wherein the length of the insert (6) is the same as the length of the outer tube (4).
13. A loudspeaker reflex port according to any of Claims 9 to 11, wherein the length of the insert (6) is not the same as the length of the outer tube (4).
14. A kit comprising a plurality of acoustic inserts (6) according to any of Claims 1 to 8, of differing dimensions, configuration and/or material.
15. A loudspeaker of the reflex port type comprising one or more acoustic inserts (6) according to any of Claims 1 to 8, or one or more loudspeaker reflex ports according to any of Claims 9 to 13.

### Patentansprüche

1. Akustischer Einsatz (6) zum Auskleiden eines äußeren Rohres (4) zum Bilden einer Lautsprecherreflexöffnung, wobei der Einsatz (6) ein längliches hohles Rohr ist, das aus einem Polymerschäummaterial mit niedriger Dichte gefertigt ist, und eine äußere Wand, die so dimensioniert und ausgelegt ist, dass sie entferntbar im äußeren Rohr (4) sitzt, und eine innere Wand, die sich in der Längsrichtung erstreckt, aufweist, wobei die innere Wand einen Umfang hat, der entlang der Länge des Einsatzes (6) variiert, **dadurch gekennzeichnet, dass** das Polymerschäummaterial mit geschlossenen Zellen gebildet ist.
2. Akustischer Einsatz nach Anspruch 1, wobei an einem beliebigen Punkt entlang der Länge des Einsatzes (6), der Umfang der inneren Wand des Einsatzes (6) symmetrisch ist.
3. Akustischer Einsatz (6) nach Anspruch 1 oder 2, wobei die innere Wand des Einsatzes (6) in der Längsrichtung symmetrisch ist.

4. Akustischer Einsatz (6) nach einem der vorhergehenden Ansprüche, wobei der Einsatz (6) zwei offene Enden (8, 10) aufweist und wobei die innere Wand des Einsatzes (6) an zumindest einem Punkt zwischen den Enden (8, 10) enger ist, als sie näher an den Enden des Einsatzes (6) ist. 5
5. Akustischer Einsatz (6) nach einem der vorhergehenden Ansprüche, wobei der Einsatz (6) zwei offene Enden (8, 10) aufweist und wobei die innere Wand des Einsatzes an zumindest einem der Enden nach außen hin aufgeweitet ist. 10
6. Akustischer Einsatz (6) nach einem der vorhergehenden Ansprüche, wobei die innere und/oder äußere Wand des Einsatzes, wenn entlang der Längsrichtung gesehen, kreisförmig, elliptisch, quadratisch oder rechteckig geformt ist. 15
7. Akustischer Einsatz (6) nach einem der vorhergehenden Ansprüche, wobei das Polymerschäummaterial ein akustisch absorbierendes Material ist. 20
8. Akustischer Einsatz (6) nach einem der vorhergehenden Ansprüche, wobei die innere Wand des Einsatzes (6) nachgibt, um Schall zu absorbieren. 25
9. Lautsprecherreflexöffnung, umfassend einen akustischen Einsatz (6) nach einem der vorhergehenden Ansprüche und ein äußeres Rohr (4), wobei die äußere Wand des Einsatzes (6) die gleiche Größe wie eine innere Oberfläche des äußeren Rohres (4) hat. 30
10. Lautsprecherreflexöffnung nach Anspruch 9, wobei die äußere Wand des Einsatzes (6) so dimensioniert ist, um mittels Festsitz innerhalb des äußeren Rohres (4) zu sitzen. 35
11. Lautsprecherreflexöffnung nach Anspruch 9 oder 10, wobei der Einsatz (6) mit einer Lippe (16) versehen ist, die eine größere Größe hat als der innere Umfang des äußeren Rohres (4) an einem Ende des Einsatzes (6). 40
12. Lautsprecherreflexöffnung nach einem der Ansprüche 9 bis 11, wobei die Länge des Einsatzes (6) die gleiche ist wie die Länge des äußeren Rohres (4). 45
13. Lautsprecherreflexöffnung nach einem der Ansprüche 9 bis 11, wobei die Länge des Einsatzes (6) nicht die gleiche ist wie die Länge des äußeren Rohres (4). 50
14. Ein Satz, umfassend mehrere akustische Einsätze (6) nach einem der Ansprüche 1 bis 8, von unterschiedlichen Abmessungen, Auslegungen und/oder Materialien. 55
15. Lautsprecher vom Reflexöffnungstyp, umfassend

einen oder mehrere akustische Einsätze (6) nach einem der Ansprüche 1 bis 8, oder eine oder mehrere Lautsprecherreflexöffnungen nach einem der Ansprüche 9 bis 13.

## Revendications

1. Insert acoustique (6) destiné à revêtir un tube extérieur (4) pour former un évent reflex de haut-parleur, l'insert (6) étant un tube creux allongé formé d'un matériau polymère expansé souple à basse densité, et doté d'une paroi extérieure dimensionnée et configurée pour prendre appui de façon amovible à l'intérieur du tube extérieur (4) et d'une paroi intérieure s'étendant dans la direction d'allongement, la paroi intérieure présentant une circonférence qui varie suivant la longueur de l'insert (6), **caractérisé en ce que** le matériau polymère expansé est formé avec des cellules fermées.
2. Insert acoustique selon la revendication 1, la circonférence de la paroi intérieure de l'insert (6) étant symétrique en tout point sur la longueur de l'insert (6).
3. Insert acoustique (6) selon la revendication 1 ou 2, la paroi intérieure de l'insert (6) étant symétrique dans la direction d'allongement.
4. Insert acoustique (6) selon l'une quelconque des revendications précédentes, l'insert (6) présentant deux extrémités ouvertes (8, 10) et la paroi intérieure de l'insert (6) étant plus étroite en au moins un point entre les extrémités (8, 10) qu'elle l'est vers les extrémités de l'insert (6).
5. Insert acoustique (6) selon l'une quelconque des revendications précédentes, l'insert (6) présentant deux extrémités ouvertes (8, 10) et la paroi intérieure de l'insert étant évasée vers l'extérieur à au moins une des extrémités.
6. Insert acoustique (6) selon l'une quelconque des revendications précédentes, la paroi intérieure et/ou extérieure de l'insert, lorsqu'elle est vue suivant la direction d'allongement, étant de forme circulaire, elliptique, carrée ou rectangulaire.
7. Insert acoustique (6) selon l'une quelconque des revendications précédentes, le matériau polymère expansé étant un matériau acoustiquement absorbant.
8. Insert acoustique (6) selon l'une quelconque des revendications précédentes, la paroi intérieure de l'insert (6) déviant de façon à absorber le son.
9. Évent reflex de haut-parleur comportant un insert acoustique (6) selon l'une quelconque des revendi-

cations précédentes et un tube extérieur (4), la paroi extérieure de l'insert (6) étant de même dimension qu'une surface intérieure du tube extérieur (4) .

10. Événement réflex de haut-parleur selon la revendication 9, la paroi extérieure de l'insert (6) étant dimensionnée de façon à être en ajustement serré à l'intérieur du tube extérieur (4). 5
11. Événement réflex de haut-parleur selon la revendication 9 ou 10, l'insert (6) étant muni d'un rebord (16) de dimension plus grande que la circonférence intérieure du tube extérieur (4) à une extrémité de l'insert (6). 10
12. Événement réflex de haut-parleur selon l'une quelconque des revendications 9 à 11, la longueur de l'insert (6) étant la même que la longueur du tube extérieur (4). 15
13. Événement réflex de haut-parleur selon l'une quelconque des revendications 9 à 11, la longueur de l'insert (6) n'étant pas la même que la longueur du tube extérieur (4). 20
14. Kit comportant une pluralité d'inserts acoustiques (6) selon l'une quelconque des revendications 1 à 8, de cotes, de configuration et/ou de matériaux différents. 25
15. Haut-parleur à événement réflex comportant un ou plusieurs inserts acoustiques (6) selon l'une quelconque des revendications 1 à 8, ou un ou plusieurs événements réflex de haut-parleur selon l'une quelconque des revendications 9 à 13. 30

35

40

45

50

55

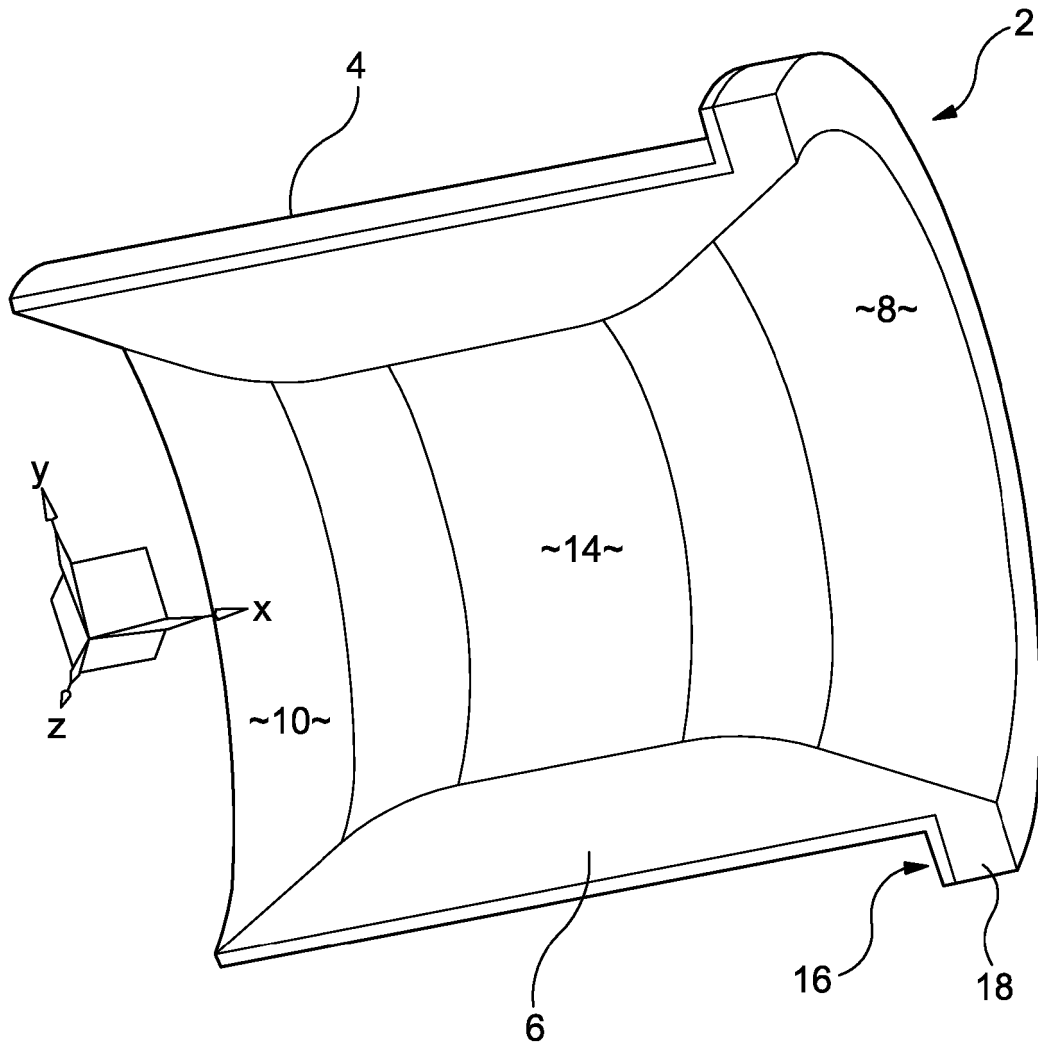


Fig. 1



**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- GB 2352924 A [0007]
- GB 2488758 A [0008] [0019]
- US 4997057 A [0009]