(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) **EP 2 965 666 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
20.12.2017 Bulletin 2017/51

(51) Int Cl.:
A47F 5/00 *(2006.01)*

(21) Application number: **14306123.2**

(22) Date of filing: **09.07.2014**

(54) **Shelving device comprising a moveable bottom shelf for displaying articles**

Regalvorrichtung mit einem beweglichen Bodenregal für Warenpräsentation

Dispositif de rayonnage comprenant une étagère basse mobile pour la présentation de produits

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(43) Date of publication of application:
13.01.2016 Bulletin 2016/02

(73) Proprietor: **HMY Group**
89470 Moneteau (FR)

(72) Inventors:
- **Berthaud, Philippe**
  89700 Tonnerre (FR)
- **Chowaniak, Guillaume**
  89000 Saint-Georges-sur-Baulche (FR)

(74) Representative: **Santarelli**
49, avenue des Champs-Elysées
75008 Paris (FR)

(56) References cited:
EP-A1- 0 441 452
EP-A1- 0 709 049
JP-A- S60 171 902
US-A- 4 063 518
US-B1- 6 364 136

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 965 666 B1

Printed by Jouve, 75001 PARIS (FR)

Description

FIELD OF THE INVENTION

[0001] The invention relates to shelving devices, also named gondola, comprising at least one moveable bottom shelf for displaying articles.

BACKGROUND ART

[0002] Shelving devices, also named gondola, comprising a plurality of shelves for displaying articles are well known. Said shelving devices generally comprise a base, a plurality of vertical columns which extend from the base and a plurality of shelves, also named sales shelves, each mounted on two successive vertical columns.

[0003] Many articles are resting on the shelves so that the latter have to bear the weight of these articles, which weight can be heavy. The shelves have thus to be substantially rigid and must tolerate a shear stress which is high.

[0004] The shelves are generally each formed by a metal plate which is configured to be loaded with many articles.

[0005] Most of shelves are arranged on the shelving device such that they are easily accessible for a user that stocks up again said shelves.

[0006] However, some shelves, in particular the lowermost shelf mounted on the shelving device, are not so easy to access and the user has to bend down or to crouch for facing such a shelf and then to stretch out its arm to reach the rear of said shelf in order to put or to catch articles.

[0007] The position of the user is therefore particularly uncomfortable.

[0008] Others shelving devices have already known, which comprise moveable bottom shelves having generally an inserted position for displaying articles placed thereon and a deployed position for restocking, see for example EP 0709049A. Said moveable shelves are arranged like conventional drawers. Namely, they comprise a casing having slide elements which cooperate with guiding rails fixed on the base or on lateral panels that comprises the shelving device.

SUMMARY OF THE INVENTION

[0009] The invention is directed to a shelving device for displaying articles, comprising at least a moveable bottom shelf, which shelf is configured to be convenient and easily accessible for a user to restock and which is also simple, economic and easy to manufacture.

[0010] The invention accordingly provides a shelving device for displaying articles, comprising a base, at least one moveable bottom shelf which is mounted on said base and a back frame extending from said base and configured to receive at least one fixed shelf overhanging said base, said at least one moveable bottom shelf having an inserted position in which said at least one moveable bottom shelf is introduced into a receiving space defined at least by said base and a deployed position in which said at least one moveable bottom shelf is at least partially remote to said receiving space, wherein said at least one moveable bottom shelf comprises a support plate configured to display articles and a moving system configured to displace said support plate between said inserted and deployed positions, said moving system comprising at least one carrier on which said support plate rests, at least one mounting interface mounted on said base and at least one slide element sandwiched between and attached to both said at least one carrier and said at least one mounting interface; said at least one carrier, said at least one mounting interface and said at least one slide element being configured to allow the displacement of said at least one carrier and of said support plate which rests on said at least one carrier relative to said at least one mounting interface and to said base on which said at least one mounting interface is mounted, wherein said moving system comprises a plurality of wheels fixedly attached to said at least one carrier and configured to roll on a floor for displacing said carrier, characterised in that said base comprises at least one foot member having a receiving U-shaped portion and wherein said at least one mounting interface has a generally C-shaped comprising a main portion, a first and a second auxiliary portions and a first edge portion extending from said first auxiliary portion and configured to be introduced into said receiving U-shaped portion. The shelving device according to the invention is very convenient in that the at least one slide element has only the functions of guiding and sliding of the moveable bottom shelf and in that the at least one carrier has the function of carrying the heavy weight of the articles resting on the support plate. In other words, the at least one slide element does not carry the weight of the support plate.

[0011] The moving system of the moveable bottom shelf of the shelving device according to the invention thus allows the displacement of the moveable bottom shelf between the inserted and deployed positions in order for instance to restock the support plate in a safe manner, while being particularly simple, economic and easy to manufacture.

[0012] According to features preferred as being very simple, convenient and economical for embodying the shelving device according to the invention:

- said at least one slide element comprises a first part fixedly attached to said at least one carrier and a second part slidable relative to said first part, attached to said at least one mounting interface and configured to be at least slightly vertically moveable relative to said at least one mounting interface and said at least one mounting interface is fixedly attached to said base; by virtue of which said at least one carrier on which rests said support plate is able

to compensate the gradient of said floor on which said wheels are configured to roll;

- said at least one mounting interface has a generally C-shaped comprising a main portion, a first and a second auxiliary portions and at least one vertical opening having for instance an oblong shape and being formed in said main portion;
- said base comprises at least one slot formed in said receiving U-shaped portion and said at least one mounting interface comprises at least one tongue formed in said first edge portion, said at least one tongue being configured to be folded with respect to said first edge portion and introduced into said at least one slot;
- said base comprises at least one foot member having a main body and said at least one mounting interface has a generally C-shaped comprising a main portion, a first and a second auxiliary portions and a second edge portion extending from said second auxiliary portion and configured to come into abutment against said main body;
- said at least one carrier has a U-shaped comprising a bottom portion, a first and a second lateral portions and at least one bearing portion extending from at least one of said first and second lateral portions, and said support plate rests on said at least one bearing portion;
- said support plate is welded to said at least one bearing portion;
- said at least one moveable shelf comprises at least one bearing member distinct to said support plate, said at least one bearing member is attached to said at least one carrier and said support plate rests on said at least one bearing member;
- said at least one moveable shelf comprises at least one rigid element fixedly attached to said support plate and said carrier comprises at least one cut-out in which said at least one rigid element is configured to be inserted;
- said base comprises two foot members spaced apart and said moving system comprises two carriers, two mounting interfaces each fixedly attached to a respective foot member and two slide elements each attached to both a respective carrier and a respective mounting interface;
- the shelving device comprises a plinth and said at least one carrier comprises a front wall on which said plinth is configured to be fastened;
- the shelving device comprises at least one fixed shelf which is mounted on said back frame and which overhangs said base and said at least one moveable bottom shelf at least in its inserted position; and/or
- said back frame comprises at least two vertical columns extending from said base and a back panel also extending from said base and disposed between said at least two vertical columns, said at least one fixed shelf being fixed to said at least two vertical columns.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] The description of the invention now continues with a detailed description of a preferred embodiment given hereinafter by way of non-limiting example and with reference to the appended drawings. In these drawings:

- Figures 1 and 2 are perspective views of a shelving device comprising a plurality of fixed shelves and a moveable bottom shelf which is respectively in an inserted position and in a deployed position;
- Figure 3 is a similar view to Figure 1, showing only partially the shelving device, without the fixed shelves and the moveable bottom shelf is devoid of a plinth;
- Figures 4 and 5 are partial front view and side view of the shelving device shown on Figure 3;
- Figure 6 is a similar view to Figure 2, showing only partially the shelving device, without the fixed shelves and the moveable bottom shelf is devoid of a plinth and shown in an exploded state;
- Figure 7 is a partial perspective view of a bearing member that comprises the moveable bottom shelf;
- Figure 8 is a partial and exploded perspective view of a moving system that comprises the moveable bottom shelf;
- Figures 9 and 10 are perspective and top views of a carrier that comprises the moving system;
- Figures 11 and 12 are perspective and front views of a mounting interface that comprises the moving system;
- Figures 13 and 14 are partial perspective and side views of the moveable bottom shelf, showing a slide element that comprises the moving system, here mounted on the carrier;
- Figure 15 is a similar view to Figure 6, showing a variant of the moveable bottom shelf; and
- Figures 16 and 17 are partial perspective and side views of the moveable bottom shelf shown on Figure 15.

DETAILED DESCRIPTION OF PREFERED EMBODIMENTS

[0014] Figures 1 to 6 show a shelving device 1, also named gondola, which is used to display articles (not represented).

[0015] The shelving device 1 is configured to be disposed for instance in a supermarket and to receive articles to display for instance for sale.

[0016] The shelving device 1 comprises a base 2 and a back frame 3 extending from the base 2, a plurality of fixed shelves 6 and one bottom moveable shelf 7.

[0017] The back frame 3 comprises two vertical columns 4 extending from the base 2 and a back panel 5 also extending from the base 2 and disposed between the two vertical columns 4.

[0018] The base 2 is made of metal and comprises two

foot members 8 spaced apart and each extending longitudinally from a first end to a second end opposite to the first end.

[0019] Each foot member 8 is fixedly attached by its first end to a bottom part of a respective vertical column 4.

[0020] Each foot member 8 comprises a main body 9 and a receiving U-shaped portion 10 protruding from a top edge of the main body 9, the receiving U-shaped portion 10 defining a receiving area.

[0021] Each foot member 8 further comprises two adjusting studs 11 extending from a bottom edge of the main body 9, which is opposite to its top edge.

[0022] The adjusting studs 11 are configured to level the shelving device 1 relative to a gradient of a floor (not shown) on which the shelving device 1 is located.

[0023] The base 2 further comprises a plurality of slots 13 formed in each receiving U-shaped portion 10 and opening in the respective receiving area (Figure 5).

[0024] The two vertical columns 4 are made from metal and have each a general shape of a rod having a rectangular section.

[0025] Each vertical column 4 comprises an exterior lateral face 12, an interior lateral face (not represented) opposite to the exterior lateral face 12, a front face 14 and a back face 15, opposite to the front face 14.

[0026] A plurality of first openings 16 are provided both in the front face 14 and in the back face 15. Each first opening 16 has a rectangular general shape whose corners are rounded.

[0027] A plurality of second openings 17 are provided in the lateral face 12.

[0028] The back panel 5 is a flat metal back panel which is sandwiched between the two vertical columns 4.

[0029] The back panel 5 comprises a first lateral end 18 and a second lateral end 19 opposite to the first lateral end 18, which are each mounted on the respective interior lateral face of a vertical column 4.

[0030] The back panel 5 further comprises an upper edge 28, which is a free edge, and a lower edge 29 opposite to the upper edge 28, which lower edge 29 is located close to the base 2.

[0031] The shelving device 1 comprises a plurality of fixed shelves 6, here four, which are each mounted on the back frame 3.

[0032] Each fixed shelf 6 comprises an upper face 20, two lateral faces 21 which are opposite to each other and a front face 23 linking both lateral faces 21.

[0033] The lateral faces 21 and the front face 23 are configured to form a roof-deck for the shelf 6.

[0034] The upper face 20, the lateral faces 21 and the front face 23 are for instance made from a single metal sheet which comprises two lateral edges (not represented) which are opposite to each other and a front edge (not represented), all these edges being folded to form the roof-deck.

[0035] The upper metal sheet comprises two cut-outs provided respectively at a junction between a lateral edge and the front edge in order to allow folding of it to form the roof-deck.

[0036] The fixed shelves 6 are spaced apart on the shelving device 1 and are rigidly hooked on the front face 14 of the vertical columns 4 and thus fastened to the back frame 3.

[0037] Each fixed shelf 6 comprises two consoles 24 (only one is visible on Figures) fastened to the single metal sheet, close to the respective lateral faces 21.

[0038] Each console 24 comprises a body 25 having the shape of a flange and a plurality of hanging members like hooks (not represented) protruding from a back edge 27 of the body 25.

[0039] The fixed shelves 6 are thus configured to be hung to the two vertical columns 4 thanks to the hooks of the consoles 24, hooks which are configured to be introduced into the respective first openings 16 formed in the front face 14 of the vertical columns 4.

[0040] The fixed shelves 6 are thus mounted on the back frame 3 so that they overhang the base 2.

[0041] The shelving device 1 further comprises the bottom moveable shelf 7 which is here located at the bottom of the shelving device 1. The fixed shelves 6 further overhang the moveable shelf 7.

[0042] The bottom moveable shelf 7 is configured to admit an inserted position in which the bottom moveable shelf 7 is close to the back frame 3 (Figures 1 and 3 to 5) and a deployed position in which the bottom moveable shelf 7 is remote to the back frame 3 (Figures 2 and 6).

[0043] The bottom moveable shelf 7 is configured to be introduced into a receiving space 90 defined between the foot members 18 of the base 2 in its inserted position, and is configured to be at least partially remote to the receiving space 90 in its deployed position.

[0044] The bottom moveable shelf 7 comprises a support plate 30 configured to display articles and a moving system 40 (Figure 6) configured to displace the support plate 30 between the inserted position and the deployed position.

[0045] The support plate 30 has a similar structure to the structure of the single metal sheet of the fixed shelves 6.

[0046] In particular, the support plate 30 comprises an upper face 31, two lateral faces 32 which are opposite to each other and a front face 33 linking both lateral faces 32. The support plate 30 further comprises a rear face 34 opposite to the front face 33.

[0047] The lateral faces 32, the front face 33 and the rear face 34 are configured to form a roof-deck for the support plate 30.

[0048] The bottom moveable shelf 7 further comprises two bearing members 35, distinct to the support plate 30 (Figures 6 and 7).

[0049] Each bearing member is formed by an elongated rod 35 having two opposite free ends 36 from each of which protrudes three curved hook portions 37 successively arranged and spaced apart by first insertion gaps 38.

[0050] Each curved hook portion 37 has an L-shaped

and is configured so that a branch of the L-shaped extends remote to the elongated rod 35 and provides a notch 39.

[0051] The bearing members 35 are configured to be fastened to the moving system 40 (see in details below), so that the support plate 30 rests on the bearing members 35, by a lower face (not represented) opposite to the upper face 31.

[0052] The bottom moveable shelf 7 optionally comprises at least one rigid element 50 (Figure 13), distinct to the support plate 30, and configured to be fixedly attached on the lower face of the support plate 31.

[0053] The bottom moveable shelf 7 further comprises a plinth 26 which is configured to be fixedly attached on the moving system 40 (see in details below) and located under the front face 33 of the support plate 30.

[0054] The moving system 40 comprises two carriers 41 which are identical and on which the support plate 30 rests.

[0055] The moving system 40 comprises two mounting interfaces 42 which are identical and configured to be mounted on the base 2, and in particular configured to be fixedly attached to a respective foot member 8.

[0056] The moving system 40 comprises two slide elements 43 which are identical and which are each attached to both a respective carrier 41 and a respective mounting interface 42 (Figures 4, 6 and 8).

[0057] In particular, each slide element 43 is sandwiched between and attached to both a respective carrier 41 and a mounting interface 42.

[0058] The moving system 40 further comprises a couple of wheels 44 fixedly attached to each carrier 41 and configured to roll on a floor for displacing the respective carrier 40.

[0059] Each sub-assembly formed by a carrier 41, a mounting interface 42, a slide element 43 and a couple of wheels 44 is configured to allow the displacement of the wheels 44, the carrier 41 and the support plate 30 which rests on the carrier 41, relative to the mounting interface 42 and to the base 2 on which the mounting interface 41 is mounted.

[0060] In reference to Figures 8 to 10, each carrier 41 has a U-shaped defining an internal space 55 and comprising a bottom portion 51 and a first lateral portion 52 and a second lateral portion 53 which extend from opposite sides of the bottom portion 51 and face to each other.

[0061] Each carrier 41 has an axis of symmetry along the bottom portion 51 and is configured to be used on either side of the moveable bottom shelf 7.

[0062] Each carrier 41 comprises a plurality of bearing portions 54 extending from a free edge of each of the first and second lateral portions 52 and 53, free edges that are opposite to the bottom portion 51.

[0063] The bearing portions 54 extend substantially perpendicularly relative to the first and second lateral portions 52 and 53 and remote to the internal space 55.

[0064] The bearing portions 54 are configured to receive the support plate 30 so that the latter rests on the bearing portions 54.

[0065] In particular, the bearing portions 54 are welded on the lower face of the support plate 30.

[0066] Each carrier 41 comprises a plurality of cut-outs 56 formed in each of the first and second lateral portions 52 and 53, between the bearing portions 54.

[0067] Each cut-out 56 is configured for receiving a rigid element 50 that comprises the moveable bottom shelf 7.

[0068] Each carrier 41 further comprises two first fastening members formed in each of the first and second lateral portions 52 and 53. Each first fastening member comprises three curved slots 57 successively arranged.

[0069] Each curved slots 57 is configured to be pass through by a curved hook portion 37 of the elongated rod 35 for attaching the latter to the respective carrier 41.

[0070] The curved hook portions 37 are inserted into the curved slots 57 and received in the internal space 55, and the elongated rods 35 are rotated for engaging the first and second lateral portions 52 and 53 into the respective notches 39 of the elongated rods 35.

[0071] Each carrier 41 further comprises a plurality of threated holes 70 formed in each of the first and second lateral portions 52 and 53.

[0072] Each threated hole 70 is configured for receiving threated pins 76 for attaching a respective slide element 43 to the carrier 41.

[0073] Each carrier 41 comprises a front wall 59 protruding from the bottom portion 51 and extending at the opposite of the first and second lateral portions 52 and 53, and on which the plinth 26 is configured to be fastened.

[0074] In particular, each carrier 41 comprises two fastening slots 60 formed in the front wall 59 for fastening the plinth 26.

[0075] The front wall 59 is folded relative to the bottom portion 51 thanks to cut-outs 61 formed both on the front wall 59 and on the bottom portion 51.

[0076] Each carrier 41 further comprises a plurality of threated holes 58 formed in the bottom portion 51.

[0077] Each hole 58 is configured for receiving threated pins 62 for attaching the wheels 44 on the carrier 41.

[0078] Each wheel 44 is mounted on a support wheel 62 comprising a base 63 in which complementary threated holes 65 are formed for fixedly attaching the wheel 44 to the bottom portion 51 of the carrier 41, thanks to the threated pins 62.

[0079] Each base 63 here comprises four complementary threated holes 65 and each bottom portion 51 thus comprises a couple of four threated holes 58 formed on opposite sides of the bottom portion 51.

[0080] In reference to Figures 8, 11 and 12, each mounting interface 42 has a generally C-shaped comprising a main portion 81, a first auxiliary portion 82 and a second auxiliary portion 83 opposite to the first auxiliary portion 82.

[0081] Each mounting interface 42 has an internal area in the C-shaped and a rear face 85 opposite to the internal

area.

[0082] Each mounting interface 42 comprises two vertical openings 84 formed in the main portion 81 and having here each an oblong shape.

[0083] Each mounting interface 42 further comprises a first edge portion 87 extending from the first auxiliary portion 82 and configured to be introduced into the receiving U-shaped portion 10 of a respective foot member 8 of the base 2.

[0084] Each mounting interface 42 further comprises two tongues 88 formed at opposite ends of the first edge portion 87.

[0085] Each tongue 88 is configured to be folded with respect to the first edge portion 87 and introduced into a slot 13 formed in the receiving U-shaped portion 10 of the respective foot member 8 of the base 2, for fixedly attached the mounting interface 42 relative to the base 2.

[0086] Each mounting interface 42 further comprises a second edge portion 86 extending from the second auxiliary portion 83 and configured to come into abutment against the main body 9 of the respective foot member 8 of the base 2.

[0087] In reference to Figures 2, 8, 13 and 14, each slide element 43 comprises a first part 71 fixedly attached to a respective carrier 41 and a second part 72 slidable relative to the first part 71 and attached to a respective one mounting interface 42.

[0088] The second part 72 has a general C-shaped and the first part 71 is located inside the internal area in the C-shaped.

[0089] The first part 71 comprises a plurality of threated holes 77 (Figure 2) which are each configured for facing a threated holes 70 of one of the first and second lateral portions 52 and 53 and the threated pins 76 are configured for fixedly attaching the first part 71 and the carrier 41 by passing through the respective threated holes 77 and 70.

[0090] The second part 72 comprises a plurality of cutouts 74 defining a plurality of tongues 73 in which are formed at least one hole 75 configured for facing the rear face 85 of a respective mounting interface 42, and in particular a respective oblong vertical opening 84 of this mounting interface 42.

[0091] The moving system 40 comprises rivets 78 which each comprise a body configured to be received in the hole 75 and the corresponding oblong vertical opening 84, and a head configured to be located in the internal area of the C-shaped of the mounting interface 42.

[0092] The moving system 40 further comprises centering rings 79 each configured to be mounted on the body of a respective rivet 78, close to its head, and also located in the internal area in the C-shaped of the mounting interface 42.

[0093] The moving system 40 further comprises distance rings 80 each configured to be mounted on the body of a respective rivet 78, and sandwiched between the second part 72 of the slide element 43 and the rear face 85 of the mounting interface 42.

[0094] The rivets 78 are configured for assembling the slide element 43 and the mounting interface 42 by keeping a clearance between them so that the heads of the rivets 78 are able to move in the internal area in the C-shaped of the mounting interface 42, thanks to the oblong vertical openings 84 of the latter.

[0095] The slide element 43 is thus configured to be at least slightly vertically moveable relative to the mounting interface 42 in order to compensate the gradient of the floor on which the wheels 44 are configured to roll when the carrier 41 on which rests the support plate 30 is displaced between the inserted position and the deployed position of the bottom moveable shelf 7.

[0096] Figures 15 to 17 show a variant embodiment of the shelving device of Figures 1 to 14.

[0097] In general, we have used the same reference numbers for similar parts, but increased by 100.

[0098] The shelving device 101 is similar to the shelving device 1 shown on Figures 1 to 14.

[0099] The shelving device 101 comprises a base 102 and a back frame 103 extending from the base 102, fixed shelves (not represented) and one bottom moveable shelf 107.

[0100] The base 102 and the back frame 103 are identical to the base 2 and to the back frame 3 shown on Figures 1 to 14.

[0101] The bottom moveable shelf 107 is located at a bottom of the shelving device 101, like the bottom moveable shelf 7, and is configured to admit an inserted position in which the bottom moveable shelf 107 is close to the back frame 103 (not shown) and a deployed position in which the bottom moveable shelf 107 is remote to the back frame 103 (Figure 15).

[0102] The bottom moveable shelf 107 comprises a support plate 130 configured to display articles and a moving system 140 configured to displace the support plate 130 between the inserted position and the deployed position.

[0103] The support plate 130 is similar to the support plate 30 shown on Figures 1 to 6, 13 and 14.

[0104] The bottom moveable shelf 107 is here devoid of bearing members formed by elongated rods.

[0105] The bottom moveable shelf 107 comprises two rigid elements 150, distinct to the support plate 130, and configured to be fixedly attached on the lower face 192 of the support plate 131.

[0106] The moving system 140 is also similar to the moving system 40 shown on Figures 1 to 14, and comprises two carriers 141 on which the support plate 30 rests, two mounting interfaces 142 configured to be mounted on the base 102, and in particular configured to be fixedly attached to a respective foot member 108, and two slide elements 143 each attached to both a respective carrier 141 and a respective mounting interface 142.

[0107] The slide elements 143 and mounting interfaces 142 are attached by keeping a clearance therebe-

tween, as explained above, thanks to oblong vertical openings 184, rivets 178, centering rings 179 and distance rings 180.

[0108] Each carrier 141 comprises a plurality of bearing portions 154 welded on the lower face 192 of the support plate 130, and a plurality of cut-outs 156 formed in the first and second lateral portions 152 and 153, between the bearing portions 154, and configured for receiving the rigid elements 150; so that the rigid elements 150 are sandwiched between the carriers 141 and the lower face 192 of the support plate 130 and so that the support plate 130 rests on the carriers 141.

[0109] In variants that are not shown:

- the bottom moveable shelf is devoid of rigid element and only comprises bearing members that form a part of the moving system;
- the bearing members are not hooked but rather welded to the carrier;
- the support plate of the bottom moveable shelf is not welded to the carriers but fixedly attached to the carriers thanks for instance to screws or rivets;
- the moving system comprises more or less of wheels, for instance only one wheel or three wheels by carrier, or the moving system is devoid of wheel; and/or
- the carrier is devoid of cut-out for the passage of rigid element and comprises single bearing portions which extends from each of first and second lateral portions.

[0110] It should be noted more generally that the invention, as defined in the appended claims, is not limited to the examples described and represented.

Claims

1. Shelving device for displaying articles, comprising a base (2; 102), at least one moveable bottom shelf (7; 107) which is mounted on said base (2; 102) and a back frame (3; 103) extending from said base (2; 102) and configured to receive at least one fixed shelf (6) overhanging said base (2; 102), said at least one moveable bottom shelf (7; 107) having an inserted position in which said at least one moveable bottom shelf (7; 107) is introduced into a receiving space (90) defined at least by said base (2; 102) and a deployed position in which said at least one moveable bottom shelf (7; 107) is at least partially remote to said receiving space (90), wherein said at least one moveable bottom shelf (7; 107) comprises a support plate (30; 130) configured to display articles and a moving system (40; 140) configured to displace said support plate (30; 130) between said inserted and deployed positions, said moving system (40; 140) comprising at least one carrier (41; 141) on which said support plate (30; 130) rests, at least one mounting interface (42; 142) mounted on said base (2; 102) and at least one slide element (43; 143) sandwiched between and attached to both said at least one carrier (41; 141) and said at least one mounting interface (42; 142); said at least one carrier (41; 141), said at least one mounting interface (42; 142) and said at least one slide element (43; 143) being configured to allow the displacement of said at least one carrier (41; 141) and of said support plate (30; 130) which rests on said at least one carrier (41; 141) relative to said at least one mounting interface (42; 142) and to said base (2; 102) on which said at least one mounting interface (42; 142) is mounted;
wherein said moving system (40; 140) comprises a plurality of wheels (44; 144) fixedly attached to said at least one carrier (41; 141) and configured to roll on a floor for displacing said carrier (41; 141); and
characterised in that said base (2; 102) comprises at least one foot member (8; 108) having a receiving U-shaped portion (10) and said at least one mounting interface (42; 142) has a generally C-shaped comprising a main portion (81), a first and a second auxiliary portions (82, 83) and a first edge portion (87) extending from said first auxiliary portion (82) and configured to be introduced into said receiving U-shaped portion (10).

2. Shelving device according to claim 1, wherein said at least one slide element (43; 143) comprises a first part (71) fixedly attached to said at least one carrier (41; 141) and a second part (72) slidable relative to said first part (71), attached to said at least one mounting interface (42; 142) and configured to be at least slightly vertically moveable relative to said at least one mounting interface (42; 142) and said at least one mounting interface (42; 142) is fixedly attached to said base (2; 102); by virtue of which said at least one carrier (41; 141) on which rests said support plate (30; 130) is able to compensate the gradient of said floor on which said wheels (44; 144) are configured to roll.

3. Shelving device according to claim 2, wherein said at least one mounting interface (42; 142) has a generally C-shaped comprising a main portion (81), a first and a second auxiliary portions (82, 83) and at least one vertical opening (84; 184) having for instance an oblong shape and being formed in said main portion (81).

4. Shelving device according to claim 1, wherein said base (2; 102) comprises at least one slot (13) formed in said receiving U-shaped portion (10) and said at least one mounting interface (42; 142) comprises at least one tongue (88) formed in said first edge portion (87), said at least one tongue (88) being configured to be folded with respect to said first edge portion

(87) and introduced into said at least one slot (13).

5. Shelving device according to any one of claims 1 to 4, wherein said base (2; 102) comprises at least one foot member (8; 108) having a main body (9) and said at least one mounting interface (42; 142) has a generally C-shaped comprising a main portion (81), a first and a second auxiliary portions (82, 83) and a second edge portion (86) extending from said second auxiliary portion (83) and configured to come into abutment against said main body (9).

6. Shelving device according to any one of claims 1 to 5, wherein said at least one carrier (41; 141) has a U-shaped comprising a bottom portion (51), a first and a second lateral portions (52, 53; 152, 153) and at least one bearing portion (54; 154) extending from at least one of said first and second lateral portions (52, 53; 152, 153), and said support plate (30; 130) rests on said at least one bearing portion (54; 154).

7. Shelving device according to claim 6, wherein said support plate (30; 130) is welded to said at least one bearing portion (54; 154).

8. Shelving device according to any one of claims 1 to 7, wherein said at least one moveable shelf (7) comprises at least one bearing member (35) distinct to said support plate (30), said at least one bearing member (35) is attached to said at least one carrier (41) and said support plate (30) rests on said at least one bearing member (35).

9. Shelving device according to any one of claims 1 to 8, wherein said at least one moveable shelf (7; 107) comprises at least one rigid element (50; 150) fixedly attached to said support plate (30; 130) and said carrier (41; 141) comprises at least one cut-out (56; 156) in which said at least one rigid element (50; 150) is configured to be inserted.

10. Shelving device according to any one of claims 1 to 9, wherein said base (2; 102) comprises two foot members (8; 108) spaced apart and said moving system (40; 140) comprises two carriers (41; 141), two mounting interfaces (42; 142) each fixedly attached to a respective foot member (8; 108) and two slide elements (43; 143) each attached to both a respective carrier (41; 141) and a respective mounting interface (42; 142).

11. Shelving device according to any one of claims 1 to 10, comprising a plinth (26) and said at least one carrier (41; 141) comprises a front wall (59) on which said plinth (26) is configured to be fastened.

12. Shelving device according to any one of claims 1 to 11, comprising at least one fixed shelf (6) which is mounted on said back frame (3; 103) and which overhangs said base (2; 102) and said at least one moveable bottom shelf (7; 107) at least in its inserted position.

13. Shelving device according to claim 12, wherein said back frame (3; 103) comprises at least two vertical columns (4; 104) extending from said base (2; 102) and a back panel (5; 105) also extending from said base (2; 102) and disposed between said at least two vertical columns (4; 104), said at least one fixed shelf (6) being fixed to said at least two vertical columns (4; 104).

Patentansprüche

1. Regalvorrichtung zum Darstellen von Artikeln, umfassend eine Basis (2; 102), wenigstens ein bewegliches Bodenregal (7; 107), das an der Basis (2; 102) befestigt ist, und einen sich von der Basis (2; 102) erstreckenden Rückenrahmen (3; 103), der zum Empfangen wenigstens eines über die Basis (2; 102) hängenden befestigten Regals (6) eingerichtet ist, wobei das wenigstens eine bewegliche Bodenregal (7; 107) eine eingeschobene Position, in der das wenigstens eine bewegliche Bodenregal (7; 107) in einen wenigstens durch die Basis (2; 102) definierten Empfangsraum (90) eingeführt ist, und eine eingesetzte Position aufweist, in der das wenigstens eine bewegliche Bodenregal (7; 107) wenigstens teilweise von dem Empfangsraum (90) entfernt ist,
wobei das wenigstens eine bewegliche Bodenregal (7; 107) eine Stützplatte (30; 130), die zum Darstellen von Artikeln eingerichtet ist, und ein Bewegungssystem (40; 140) umfasst, das zum Verschieben der Stützplatte (30; 130) zwischen den eingeschobenen und eingesetzten Positionen eingerichtet ist, wobei das Bewegungssystem (40; 140) wenigstens einen Träger (41; 141), auf dem die Stützplatte (30; 130) aufliegt, wenigstens eine auf der Basis (2, 102) befestigte Befestigungsschnittstelle (42; 142) und wenigstens ein Gleitelement (43; 143) umfasst, das zwischen dem wenigstens einen Träger (41; 141) und der wenigstens einen Befestigungsschnittstelle (42, 142) eingelegt und an beiden angebracht ist; wobei der wenigstens eine Träger (41; 141), die wenigstens eine Befestigungsschnittstelle (42, 142) und das wenigstens eine Gleitelement (43; 143) zum Erlauben der Verschiebung des wenigstens einen Trägers (41; 141) und der Stützplatte (30; 130) eingerichtet sind, die auf dem wenigstens einen Träger (41; 141) relativ zu der wenigstens einen Befestigungsschnittstelle (42; 142) und zu der Basis (2; 102), auf der die wenigstens eine Befestigungsschnittstelle (42; 142) befestigt ist, aufliegt;
wobei das Bewegungssystem (40, 140) eine Vielzahl von Rädern (44; 144) umfasst, die fest an dem

wenigstens einen Träger (41; 141) angebracht sind und die zum Rollen auf einem Boden zum Verschieben des Trägers (41; 141) eingerichtet sind; und
dadurch gekennzeichnet, dass
die Basis (2; 102) wenigstens ein Fußelement (8; 108) umfasst, das einen U-förmigen Empfangsteil (10) aufweist, und die wenigstens eine Befestigungsschnittstelle (42; 142) eine allgemein C-Form aufweist, umfassend einen Hauptabschnitt (81), einen ersten und einen zweiten Hilfsabschnitt (82, 83) und einen ersten Eckabschnitt (87), der sich von dem ersten Hilfsabschnitt (82) erstreckt und dazu eingerichtet ist, in den U-förmigen Empfangsteil (10) eingeführt zu werden.

2. Regalvorrichtung nach Anspruch 1, wobei das wenigstens eine Gleitelement (43; 143) ein fest an dem wenigstens einen Träger (41; 141) angebrachtes erstes Stück (71) und ein relativ zu dem ersten Stück (71) verschiebbares zweites Stück (72) umfasst, die an der wenigstens einen Befestigungsschnittstelle (42; 142) angebracht sind und die dazu eingerichtet sind, wenigstens geringfügig relativ zu der wenigstens einen Befestigungsschnittstelle (42; 142) vertikal beweglich zu sein und die wenigstens eine Befestigungsschnittstelle (42; 142) fest an der Basis (2; 102) angebracht ist; aufgrund dessen der wenigstens eine Träger (41; 141), auf dem die Stützplatte (30; 130) aufliegt, in der Lage ist, den Gradienten des Bodens zu kompensieren, auf dem die Räder (44; 144) zum Rollen eingerichtet sind.

3. Regalvorrichtung nach Anspruch 2, wobei die wenigstens eine Befestigungsschnittstelle (42; 142) eine allgemeine C-Form aufweist, umfassend einen Hauptabschnitt (81), einen ersten und einen zweiten Hilfsabschnitt (82, 83) und wenigstens eine vertikale Öffnung (84; 184), die beispielsweise eine rechteckige Form aufweist und in dem Hauptabschnitt (81) gebildet ist.

4. Regalvorrichtung nach Anspruch 1, wobei die Basis (2; 102) wenigstens einen in dem U-förmigen Empfangsteil (10) geformten Schlitz (13) umfasst und die wenigstens eine Befestigungsschnittstelle (42; 142) wenigstens einen in dem ersten Eckabschnitt (87) gebildeten Zapfen (88) umfasst, wobei der wenigstens eine Zapfen (88) dazu eingerichtet ist, hinsichtlich des ersten Eckabschnitts (87) gefaltet zu werden und in den wenigstens einen Schlitz (13) eingeführt zu werden.

5. Regalvorrichtung nach einem der Ansprüche 1 bis 4, wobei die Basis (2; 102) wenigstens ein Fußelement (8; 108) umfasst, das einen Grundkörper (9) umfasst, und die wenigstens eine Befestigungsschnittstelle (42; 142) eine allgemeine C-Form aufweist, umfassend einen Hauptabschnitt (81), einen ersten und einen zweiten Hilfsabschnitt (82, 83) und einen zweiten Eckabschnitt (86), der sich von dem zweiten Hilfsabschnitt (83) erstreckt und zum Anliegen gegen den Grundkörper (9) eingerichtet ist.

6. Regalvorrichtung nach einem der Ansprüche 1 bis 5, wobei der wenigstens eine Träger (41; 141) eine U-Form aufweist, umfassend einen Bodenabschnitt (51), einen ersten und einen zweiten Lateralabschnitt (52, 53; 152, 153) und wenigstens einen Trägerabschnitt (54; 154), der sich von wenigstens einem von den ersten und zweiten Lateralabschnitten (52, 53; 152, 153) erstreckt, und die Stützplatte (30; 130) auf dem wenigstens einen Trägerabschnitt (54; 154) aufliegt.

7. Regalvorrichtung nach Anspruch 6, wobei die Stützplatte (30; 130) an den wenigstens einen Trägerabschnitt (54; 154) geschweißt ist.

8. Regalvorrichtung nach einem der Ansprüche 1 bis 7, wobei wenigstens ein bewegliches Regal (7; 107) wenigstens ein von der Stützplatte (30) getrenntes Trägerelement (35) umfasst, wobei das wenigstens eine Trägerelement (35) an dem wenigstens einen Träger (41) angebracht ist und die Stützplatte (30) auf dem wenigstens einen Trägerelement (35) aufliegt.

9. Regalvorrichtung nach einem der Ansprüche 1 bis 8, wobei das wenigstens eine bewegliche Regal (7; 107) wenigstens ein an der Stützplatte (30; 130) fest angebrachtes steifes Element (50; 150) umfasst und der Träger (41; 141) wenigstens einen Ausschnitt (56; 156) umfasst, wobei das wenigstens eine steife Element (50; 150) dazu eingerichtet ist, in dieses eingeführt zu werden.

10. Regalvorrichtung nach einem der Ansprüche 1 bis 9, wobei die Basis (2; 102) zwei beabstandete Fußelemente (8; 108) umfasst und das Bewegungssystem (40; 140) zwei Träger (41; 141), zwei Befestigungsschnittstellen (42; 142) umfasst, jedes fest an einem jeweiligen Fußelement (8; 108) angebracht und zwei Gleitelemente (43; 143), wobei an jedes der beiden ein jeweiliger Träger (41; 141) und eine jeweilige Befestigungsschnittstelle (42; 142) angebracht ist.

11. Regalvorrichtung nach einem der Ansprüche 1 bis 10, umfassend eine Sockelblende (26) und dass der wenigstens eine Träger (41; 141) eine Vorderwand (59) umfasst, auf der die Sockelblende (26) dazu eingerichtet ist, befestigt zu werden.

12. Regalvorrichtung nach einem der Ansprüche 1 bis 11, umfassend wenigstens ein befestigtes Regal (6), das auf dem Rückenrahmen (3; 103) angebracht ist

und das über die Basis (2; 102) und das wenigstens eine bewegliche Bodenregal (7; 107) wenigstens in seiner eingeschobenen Position hängt.

13. Regalvorrichtung nach Anspruch 12, wobei der Rückenrahmen (3; 103) wenigstens zwei vertikale Spalten (4; 104), die sich von der Basis (2; 102) erstrecken, und eine Rückenplatte (5; 105) umfasst, die sich ebenfalls von der Basis (2; 102) erstreckt und zwischen den wenigstens zwei vertikalen Spalten (4; 104) angeordnet ist, wobei das wenigstens eine befestigte Regal (6) an den wenigstens zwei vertikalen Spalten (4; 104) befestigt ist.

Revendications

1. Dispositif de rayonnage pour présenter des articles, comprenant une base (2 ; 102), au moins une tablette basse mobile (7 ; 107) qui est montée sur ladite base (2 ; 102) et un châssis de fond (3 ; 103) s'étendant depuis ladite base (2 ; 102) et configuré pour recevoir au moins une tablette fixe (6) surplombant ladite base (2 ; 102), ladite au moins une tablette basse mobile (7 ; 107) ayant une position insérée dans laquelle ladite au moins une tablette basse mobile (7 ; 107) est introduite dans un espace récepteur (90) défini au moins par ladite base (2 ; 102) et une position déployée dans laquelle ladite au moins une tablette basse mobile (7 ; 107) est au moins partiellement éloignée dudit espace récepteur (90), ladite au moins une tablette basse mobile (7 ; 107) comprenant une plaque de support (30 ; 130) configurée pour présenter des articles et un système mobile (40 ; 140) configuré pour déplacer ladite plaque de support (30 ; 130) entre lesdites positions insérée et déployée, ledit système mobile (40 ; 140) comprenant au moins un support (41 ; 141) sur lequel ladite plaque de support (30 ; 130) repose, au moins une interface de montage (42 ; 142) montée sur ladite base (2 ; 102) et au moins une glissière (43 ; 143) prise en sandwich entre ledit au moins un support (41 ; 141) et ladite au moins une interface de montage (42 ; 142) et fixée à ceux-ci ; ledit au moins un support (41 ; 141), ladite au moins une interface de montage (42 ; 142) et ladite au moins une glissière (43 ; 143) étant configurés pour permettre le déplacement dudit au moins un support (41 ; 141) et de ladite plaque de support (30 ; 130) qui repose sur ledit au moins un support (41 ; 141) relativement à ladite au moins une interface de montage (42 ; 142) et à ladite base (2 ; 102) sur laquelle ladite au moins une interface de montage (42 ; 142) est montée ;
ledit système mobile (40 ; 140) comprenant une pluralité de roues (44 ; 144) fixées à demeure audit au moins un support (41 ; 141) et configurées pour rouler sur un sol afin de déplacer ledit support (41 ; 141) ; et

caractérisé en ce que
ladite base (2 ; 102) comprend au moins un organe pour pied (8 ; 108) ayant une partie réceptrice en forme de U (10) et ladite au moins une interface de montage (42 ; 142) a généralement une forme de C comprenant une partie principale (81), des première et seconde parties auxiliaires (82, 83) et un premier bord (87) s'étendant depuis ladite première partie auxiliaire (82) et configuré pour être introduit dans ladite partie réceptrice en forme de U (10) .

2. Dispositif de rayonnage selon la revendication 1, dans lequel ladite au moins une glissière (43 ; 143) comprend une première partie (71) fixée à demeure audit au moins un support (41 ; 141) et une seconde partie (72) apte à glisser par rapport à ladite première partie (71), fixée à ladite au moins une interface de montage (42 ; 142) et configurée pour être au moins légèrement mobile verticalement par rapport à ladite au moins une interface de montage (42 ; 142) et ladite au moins une interface de montage (42 ; 142) est fixée à demeure à ladite base (2 ; 102) ; grâce à quoi ledit au moins un support (41 ; 141) sur lequel repose ladite plaque de support (30 ; 130) est apte à compenser l'inclinaison dudit sol sur lequel lesdites roues (44 ; 144) sont configurées pour rouler.

3. Dispositif de rayonnage selon la revendication 2, dans lequel ladite au moins une interface de montage (42 ; 142) a généralement une forme de C comprenant une partie principale (81), des première et seconde parties auxiliaires (82, 83) et au moins une ouverture verticale (84 ; 184) ayant, par exemple, une forme oblongue et étant formée dans ladite partie principale (81).

4. Dispositif de rayonnage selon la revendication 1, dans lequel ladite base (2 ; 102) comprend au moins une fente (13) formée dans ladite partie réceptrice en forme de U (10) et ladite au moins une interface de montage (42 ; 142) comprend au moins une languette (88) formée dans ledit premier bord (87), ladite au moins une languette (88) étant configurée pour être pliée par rapport audit premier bord (87) et introduite dans ladite au moins une fente (13).

5. Dispositif de rayonnage selon l'une quelconque des revendications 1 à 4, dans lequel ladite base (2 ; 102) comprend au moins un organe pour pied (8 ; 108) comportant un corps principal (9) et ladite au moins une interface de montage (42 ; 142) a généralement une forme de C comprenant une partie principale (81), des première et seconde parties auxiliaires (82, 83) et un deuxième bord (86) s'étendant depuis ladite seconde partie auxiliaire (83) et configuré pour venir buter contre ledit corps principal (9).

6. Dispositif de rayonnage selon l'une quelconque des

revendications 1 à 5, dans lequel ledit au moins un support (41 ; 141) a la forme d'un U comprenant une partie basse (51), des première et seconde parties latérales (52, 53 ; 152, 153) et au moins une partie porteuse (54 ; 154) s'étendant depuis au moins l'une desdites première et seconde parties latérales (52, 53 ; 152, 153), et ladite plaque de support (30 ; 130) repose sur ladite au moins une partie porteuse (54 ; 154).

7. Dispositif de rayonnage selon la revendication 6, dans lequel ladite plaque de support (30 ; 130) est soudée à ladite au moins une partie porteuse (54 ; 154).

8. Dispositif de rayonnage selon l'une quelconque des revendications 1 à 7, dans lequel ladite au moins une tablette basse mobile (7) comprend au moins un organe porteur (35) distinct de ladite plaque de support (30 ; 130), ledit au moins un organe porteur (35) est fixé audit au moins un support (41) et ladite plaque de support (30) repose sur ledit au moins un organe porteur (35).

9. Dispositif de rayonnage selon l'une quelconque des revendications 1 à 8, dans lequel ladite au moins une tablette mobile (7 ; 107) comprend au moins un élément rigide (50 ; 150) fixé à demeure à ladite plaque de support (30 ; 130) et ledit support (41 ; 141) comprend au moins une découpe (56 ; 156) dans laquelle ledit au moins un élément rigide (50 ; 150) est configuré pour être inséré.

10. Dispositif de rayonnage selon l'une quelconque des revendications 1 à 9, dans lequel ladite base (2 ; 102) comprend deux organes pour pied (8 ; 108) espacés et ledit système mobile (40 ; 140) comprend deux supports (41 ; 141), deux interfaces de montage (42 ; 142) fixées chacune à demeure à un organe pour pied (8 ; 108) respectif et deux glissières (43 ; 143) fixées chacune à la fois à un support (41 ; 141) respectif et à une interface de montage (42 ; 142) respective.

11. Dispositif de rayonnage selon l'une quelconque des revendications 1 à 10, comprenant une plinthe (26) et ledit au moins un support (41 ; 141) comprend une paroi avant (59) sur laquelle ladite plinthe (26) est configurée pour être fixée.

12. Dispositif de rayonnage selon l'une quelconque des revendications 1 à 11, comprenant au moins une tablette fixe (6) qui est montée sur ledit châssis de fond (3 ; 103) et qui surplombe ladite base (2 ; 102) et ladite au moins une tablette basse mobile (7 ; 107) au moins dans sa position insérée.

13. Dispositif de rayonnage selon la revendication 12, dans lequel ledit châssis de fond (3 ; 103) comprend au moins deux montants verticaux (4 ; 104) s'étendant depuis ladite base (2 ; 102) et un panneau de fond (5 ; 105) s'étendant également depuis ladite base (2 ; 102) et disposé entre lesdits au moins deux montants verticaux (4 ; 104), ladite au moins une tablette fixe (6) étant fixée auxdits au moins deux montants verticaux (4 ; 104).

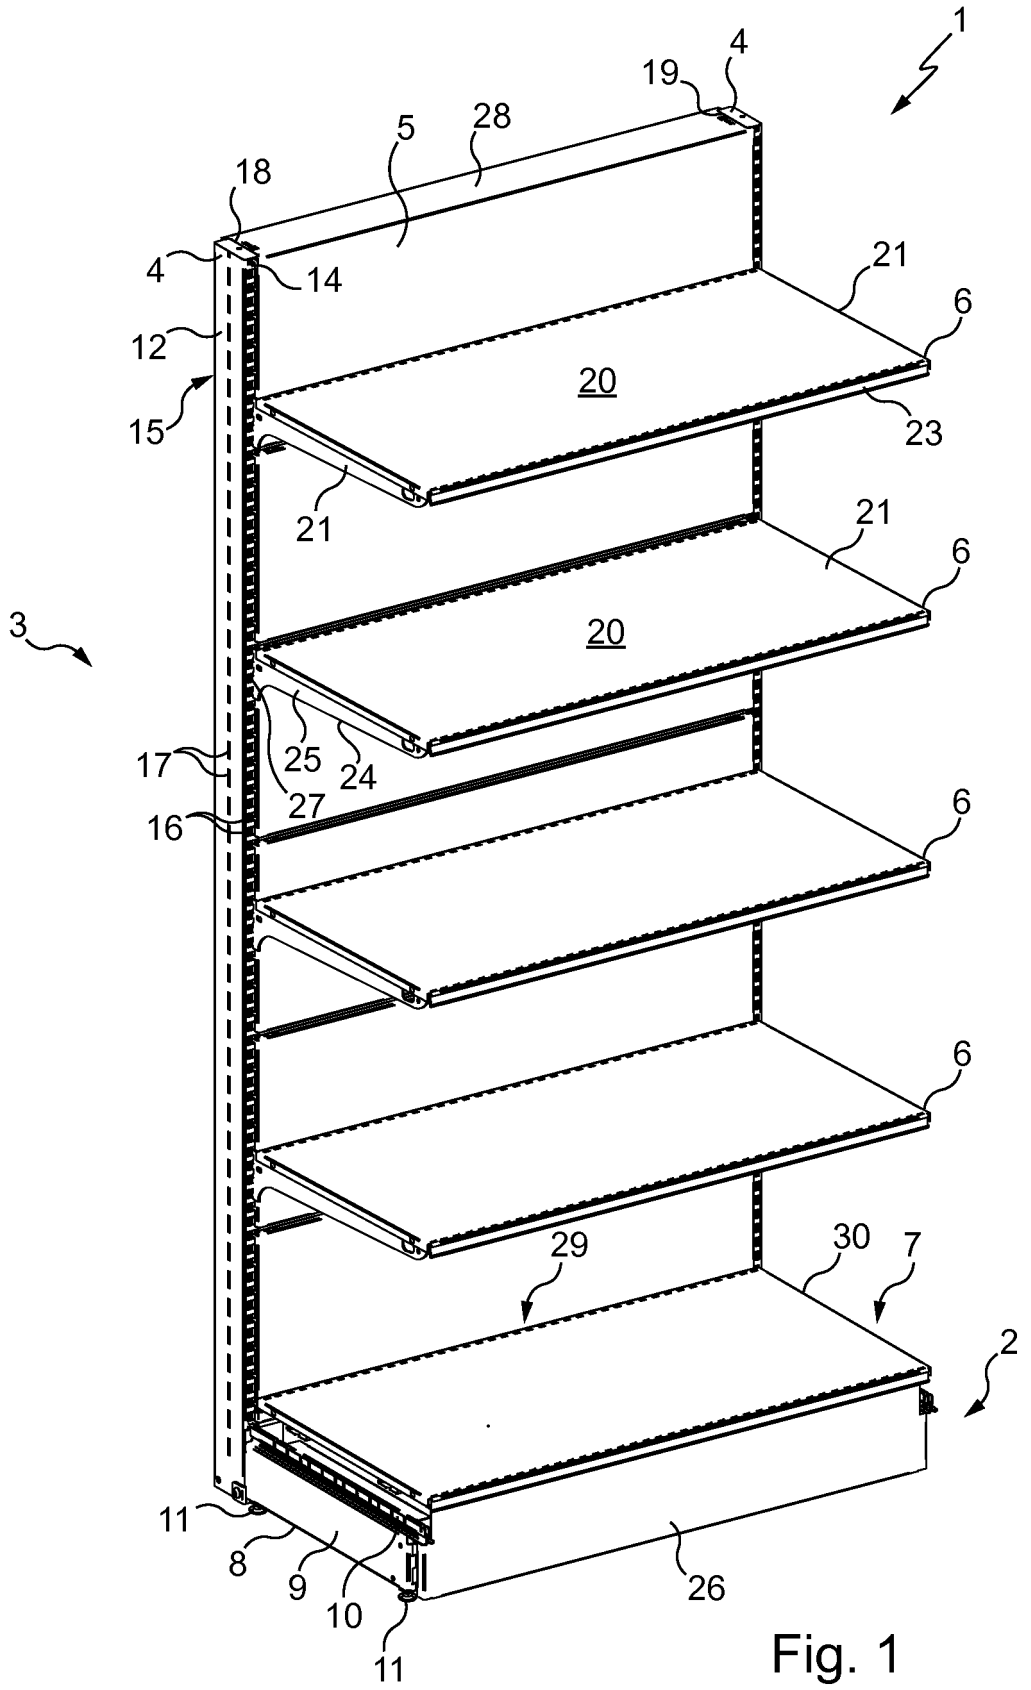

1
4
19
5
28
18
4
14
21
6
12
20
15
23
21
21
6
3
20
17
25
24
27
16
6
6
29
30
7
2
11
8
9
10
11
26

Fig. 1

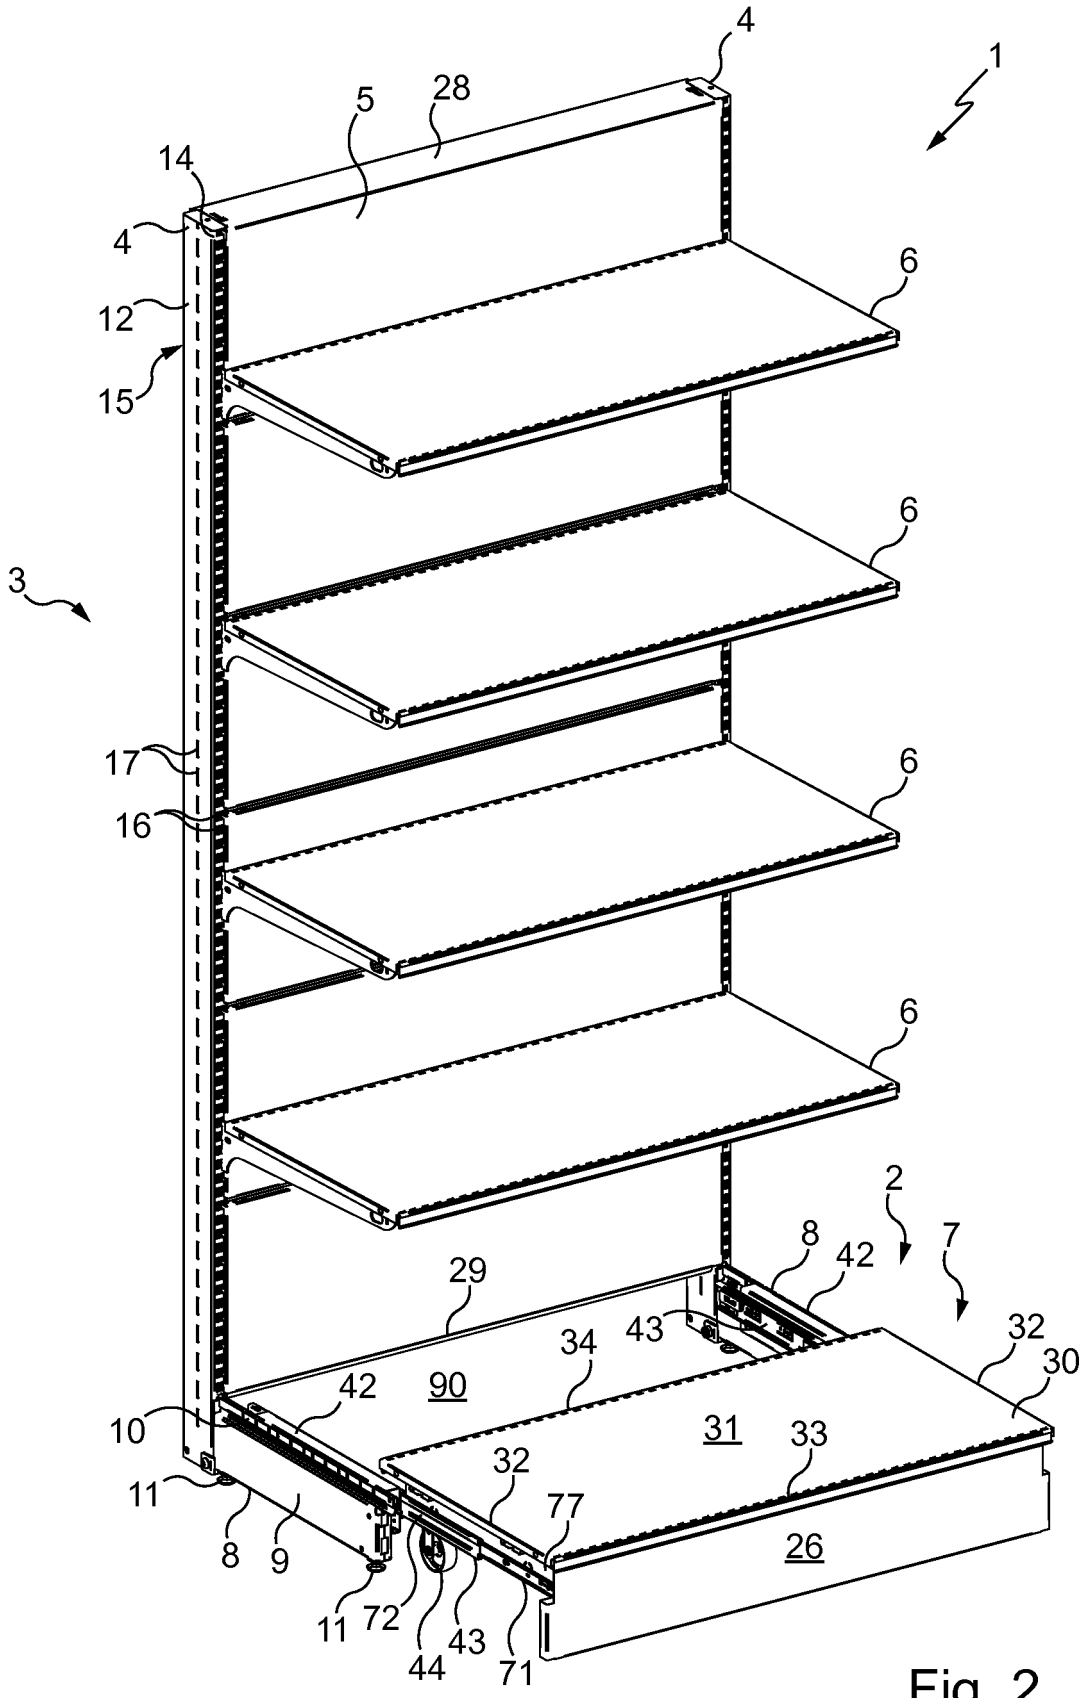

1
2
3
4
5
6
7
8
9
10
11
12
14
15
16
17
26
28
29
30
31
32
33
34
42
43
44
71
72
77
90

Fig. 2

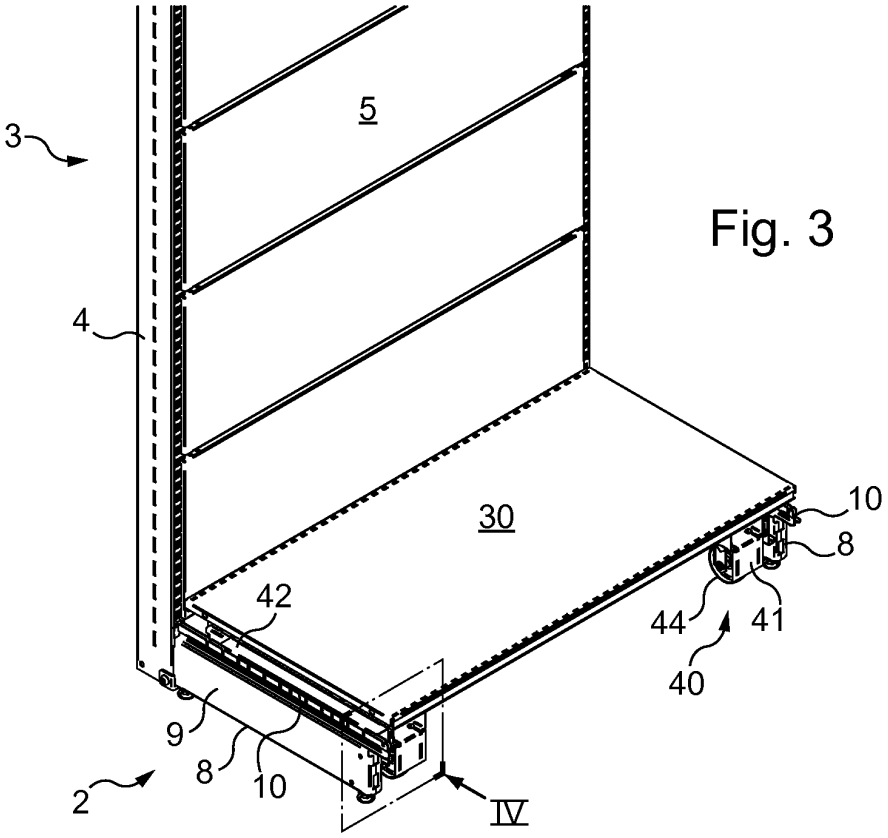

3
5
4
30
10
8
42
44
41
40
9
8
10
2
IV

Fig. 3

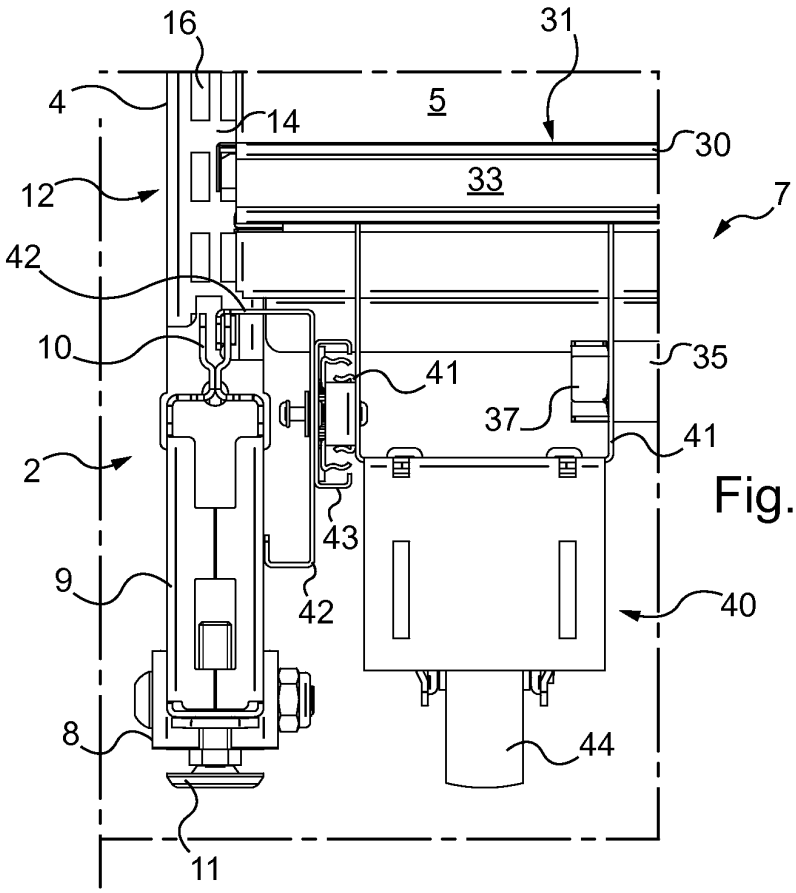

16
31
4
5
14
30
33
12
7
42
10
41
35
37
41
2
43
9
42
40
8
44
11

Fig. 4

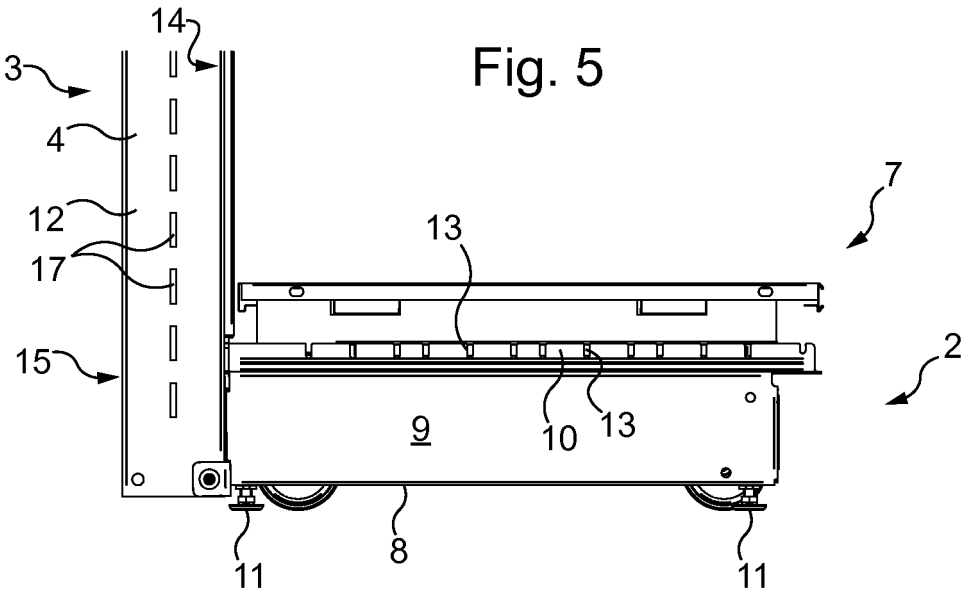

14
3
4
12
17
15
7
13
2
9
10
13
11
8
11

Fig. 5

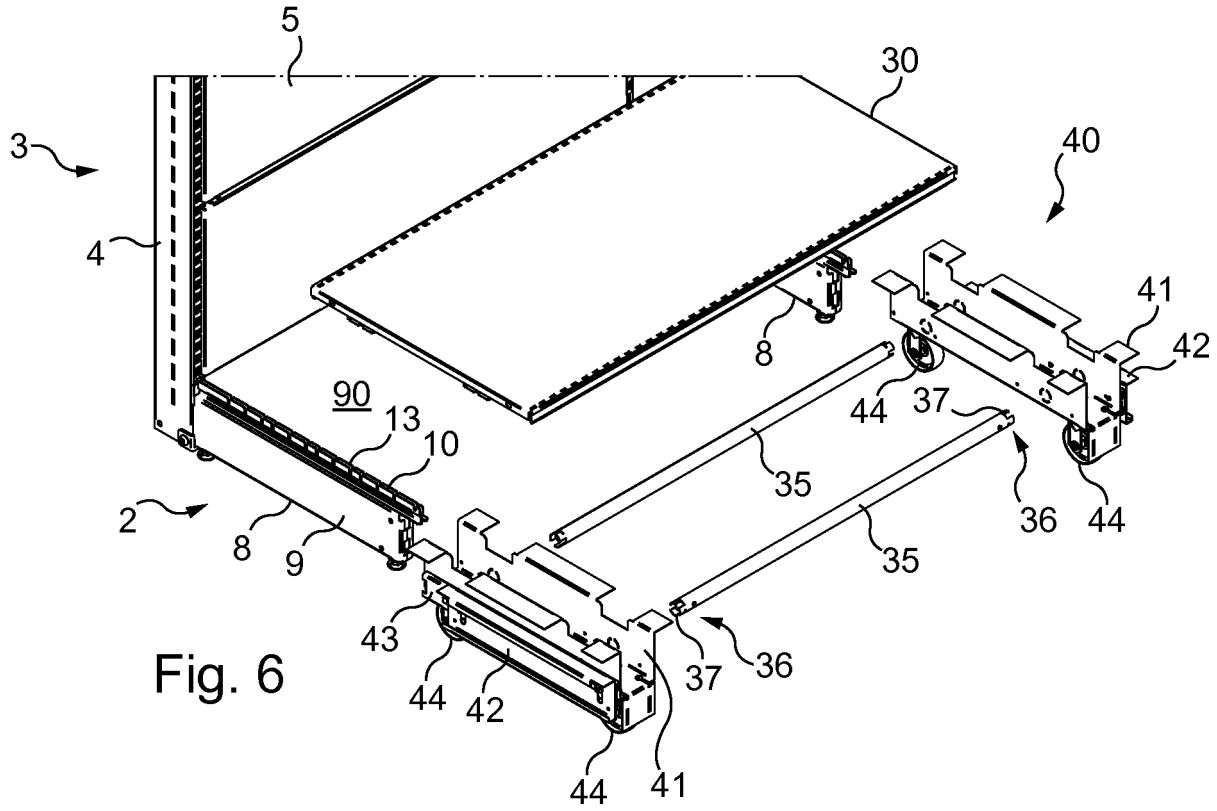

5
30
3
40
4
41
42
8
90
13
10
44
37
35
2
8
9
36
44
35
43
37
36
44
42
44
41

Fig. 6

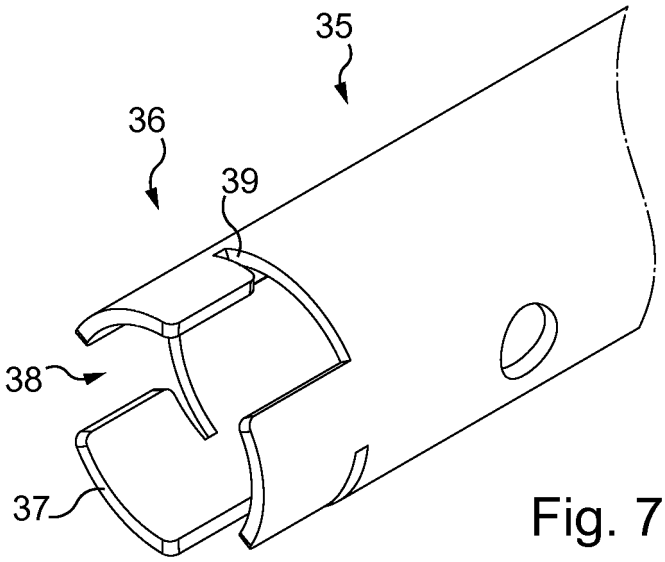

35
36
39
38
37

Fig. 7

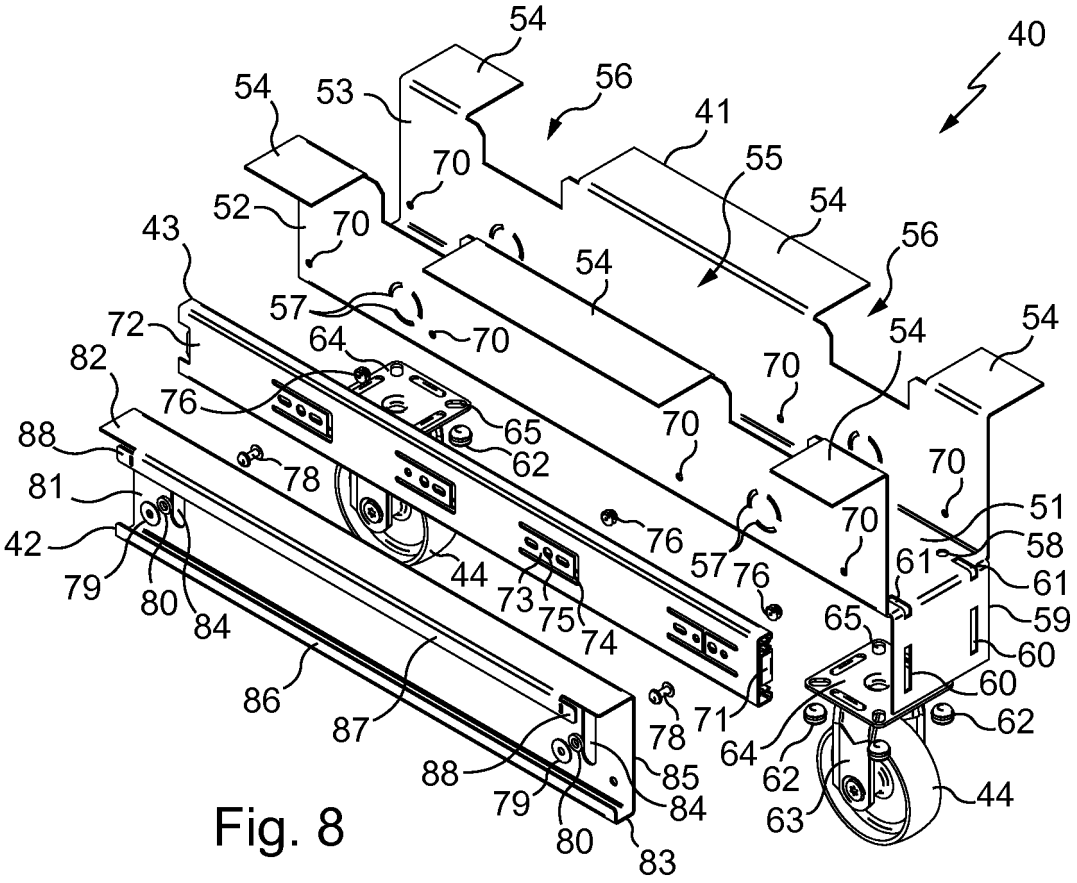

54
40
54
53
56
41
70
55
52
70
54
56
43
54
57
64
70
54
72
82
76
70
70
88
65
62
78
70
81
51
76
70
42
58
57
76
61
79
44
73
75
74
61
80
84
65
59
60
60
86
87
71
62
78
64
62
88
85
44
79
84
63
80
83

Fig. 8

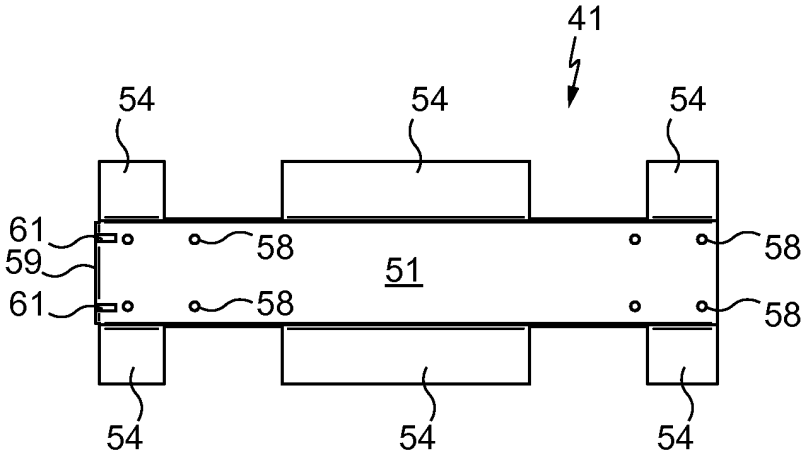
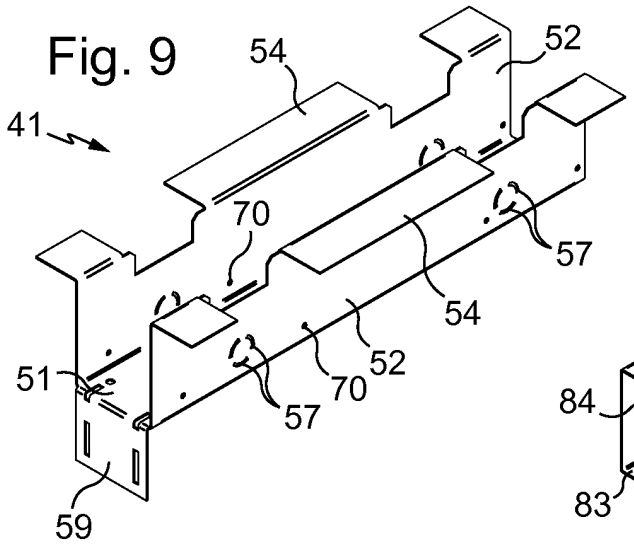


Fig. 10

Fig. 9



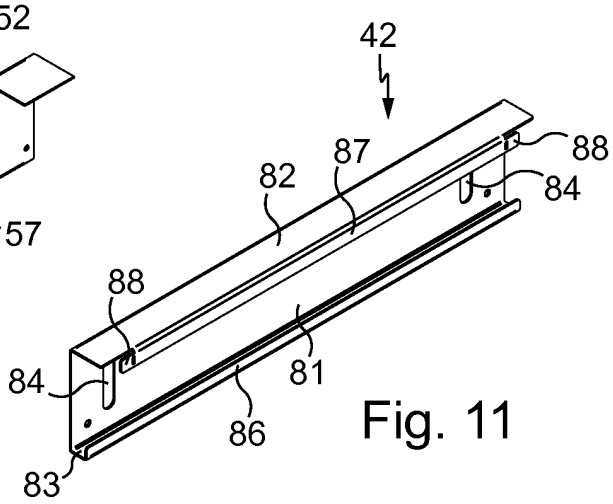


Fig. 11

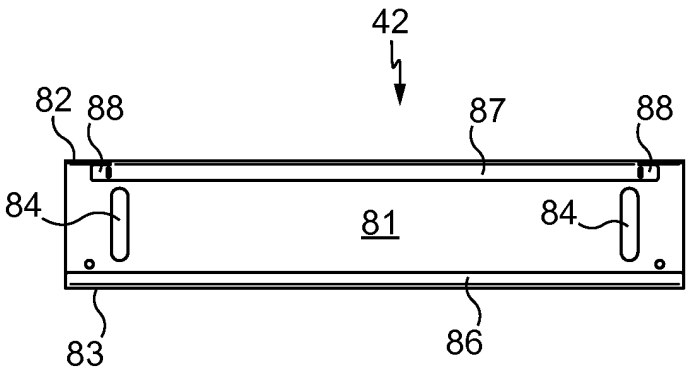


Fig. 12

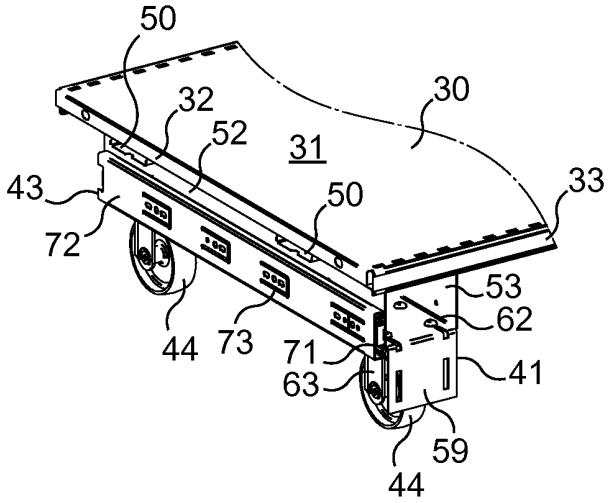


Fig. 13

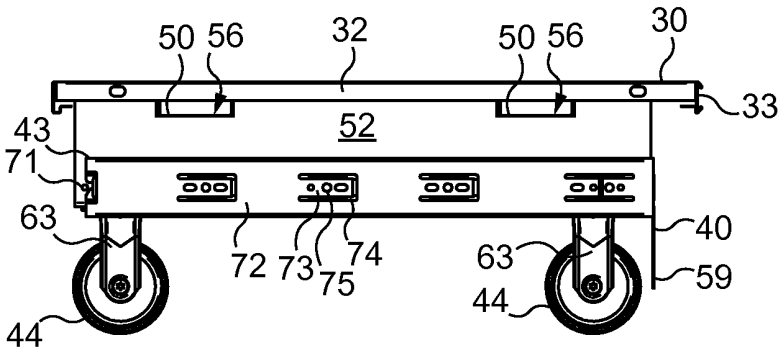


Fig. 14

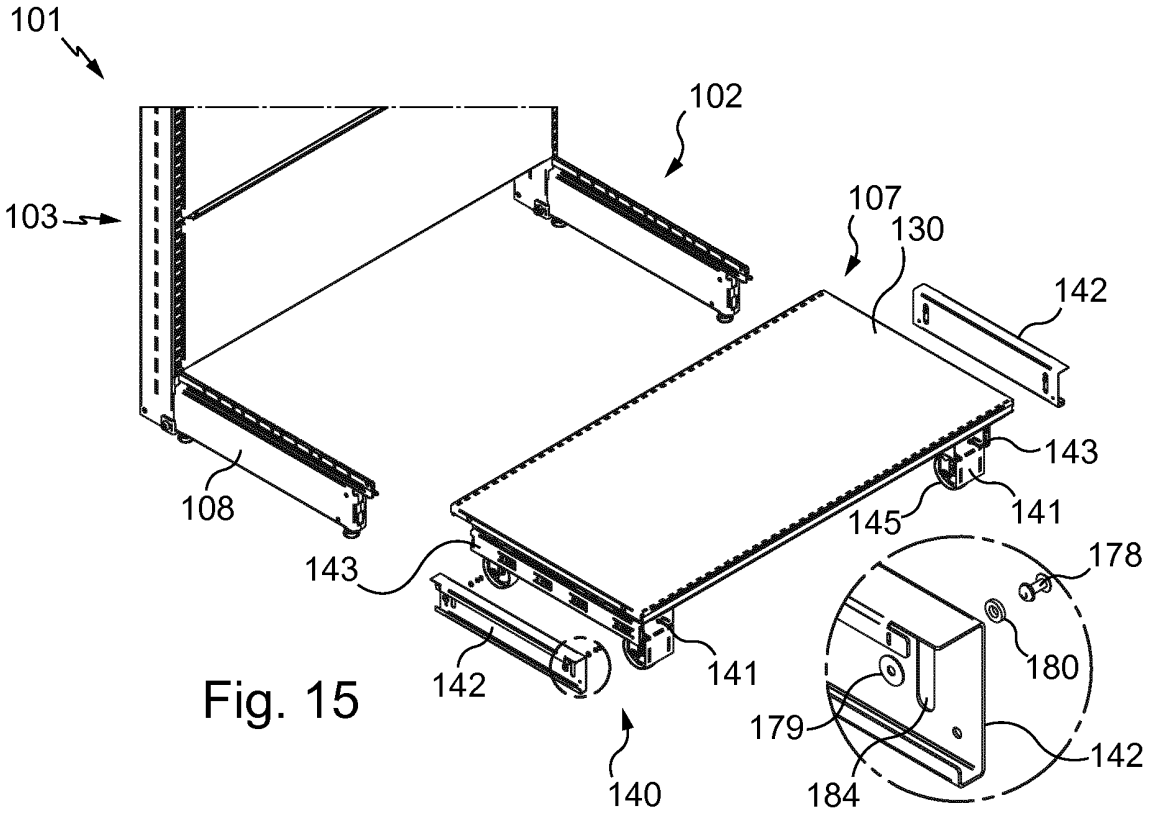
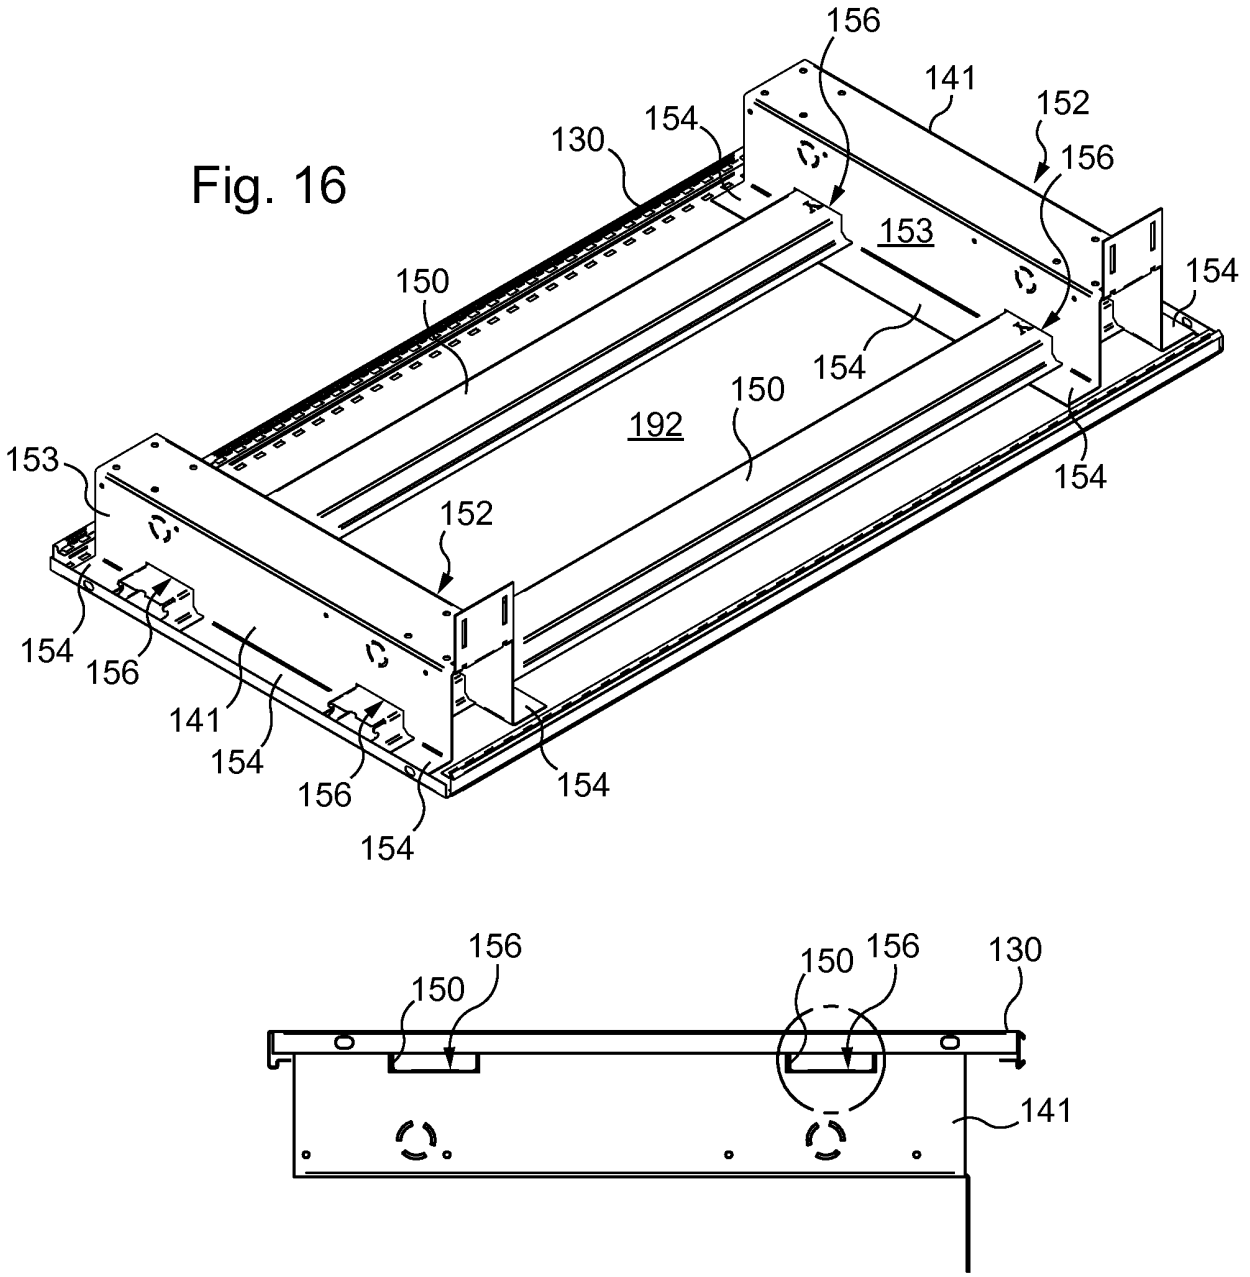


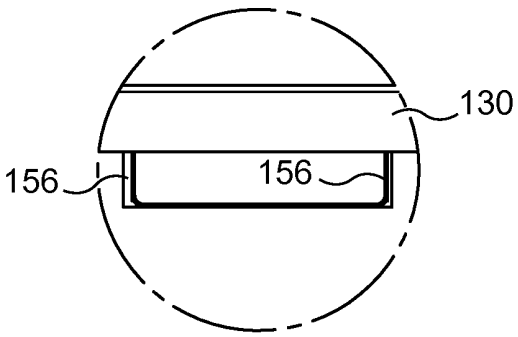
Fig. 15

Fig. 16


156
141
152
154
130
156
153
154
150
154
150
192
153
154
152
154
156
141
154
156
154
154

156
150
150
156
130
141

Fig. 17


130
156
156

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 0709049 A **[0008]**