



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
17.02.2016 Bulletin 2016/07

(51) Int Cl.:
D06F 39/00 (2006.01) **D06F 37/20** (2006.01)
D06F 58/28 (2006.01)

(21) Application number: **14180910.3**

(22) Date of filing: **14.08.2014**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME

• **Stepan, Pavel**
73941 Palkovice (CZ)
• **Janicek, Milan**
74235 Odry (CZ)

(71) Applicant: **Alliance Laundry CE s.r.o.**
742 58 Pribor (CZ)

(74) Representative: **Malusek, Jiri**
Kania, Sedlak, Smola
Mendlovo namesti 1 a
603 00 Brno (CZ)

(72) Inventors:
• **Vasickova, Zuzana**
70030 Ostrava (CZ)

Remarks:
Amended claims in accordance with Rule 137(2) EPC.

(54) **Automatic weighing method of laundry in washing machine**

(57) Automatic weighing method for washing machine, where determination of temperature of an engine by frequency modulator is processed, during that measuring of amount of current passing through the winding of the engine of the washing machine during its inaction is done, and afterwards calculation of resistance of the winding of the engine of the washing machine based on amount of measured current is effected, afterwards angular speed of the drum of the washing machine is increased up to distribution angular speed (ω_0), which is intended to distribute laundry in the drum of the washing machine, afterwards angular speed of the drum of the washing machine is increased up to medium angular speed (ω_1), which is intended to spread the laundry on the inner surface of the drum of the washing machine,

afterwards angular speed of the drum of the washing machine is decreased up to measuring angular speed (ω_2), during that a value of unbalance of the drum of the washing machine is determined, afterwards angular speed of the drum of the washing machine is increased up to maximal angular speed (ω_3), during that energy consumed for acceleration of the drum of the washing machine is measured, afterwards weight of the laundry in the drum of the washing machine is calculated by determined resistance of the winding of the engine, by value of unbalance of the laundry in the drum of the washing machine, and by sum of electrical energy consumed during acceleration of the drum of the washing machine up to the maximal angular speed (ω_3).

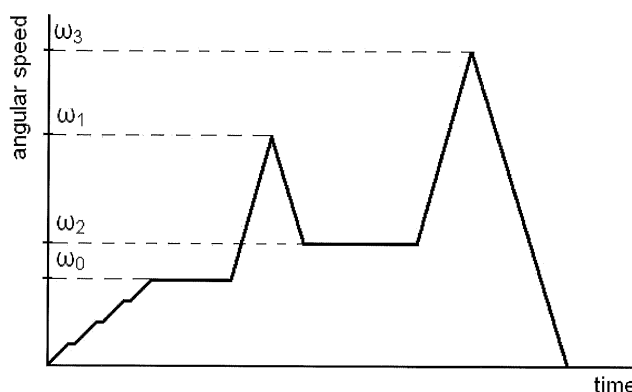


Fig. 1

Description

Background of the Invention

5 **[0001]** The invention concerns the automatic weighing method of laundry in a washing machine.

State of the Art

10 **[0002]** During washing process a washing machine consumes specific quantity of water, washing detergent and electric energy. In present time, consumption of those items in a washing machine without a weighing system depends on a maximal charge of the washing machine. So, if the washing machine is only one quarter charged of its maximum, a consumption of water, electric energy and detergent is same as for a fully charged washing machine. For the reason of optimal reduction of consumed water and energy the washing machine needs to have an information about amount of laundry inserted into the drum of the washing machine for the specific washing process. There are many ways to detect weight of laundry inside the drum of the washing machine.

15 **[0003]** In US 2010/0320007 a method for weighing of washed laundry inside a drum of a washing machine is presented, consisting of following steps:

- laundry distribution in the drum of the washing machine by rotation of mentioned drum by first angular speed,
- 20 - rotation of mentioned drum of the washing machine by second angular speed, where the second angular speed is high than first angular speed, by that the laundry is stable spread on the inner surface of the drum of the washing machine, by that way inertial movement of the laundry with constant moment of inertia is effected,
- measuring of energy absorbed by engine to drive the drum of the washing machine during third angular speed and fourth angular speed, where third angular speed and fourth angular speed is between the first angular speed and the second angular speed.

[0004] In EP 2 264 239 A1 a laundry weighing method for a washing machine is presented, consisting of following steps:

- optimalization of laundry distribution in the drum of the washing machine,
- 30 - limitation of inertia of the laundry with constant moment of inertia,
- measuring of energy absorbed by engine to drive the drum of the washing machine during predetermined positive and negative angular acceleration of the charged drum.

35 **[0005]** In EP 2 009 169 A2 a washing machine consisting of a sensor intended for measuring of rotation of a drum, and control unit intended for calculation amount of laundry based on determined first acceleration of the drum of the washing machine and on determined second acceleration of the drum of the washing machine is presented. However, measuring of weight of laundry based only on knowledge of acceleration and rotation of the drum of the washing machine is insufficient and inaccurate.

40 **[0006]** In WO 2004/081276 A1 a system intended for detection of amount of laundry in a drum in an automatic laundry machine is presented, consisting of:

- a voltage sensor intended for detection of voltage on incoming contacts of an engine,
- a rotation sensor intended to detect rotation of the electrical engine,
- 45 - a control unit interconnected with a timer, with the voltage sensor and with the rotation sensor, intended to count inertia of charge in the drum of the washing machine by acceleration working time and breaking working time. A signal represents amount, respectively weight, of the laundry in the drum of the washing machine is created by subtraction of the inertia of the drum from inertia of the charge in the drum.

50 **[0007]** Disadvantage of all those above mentioned systems is, that there is not any calculation with any correction factors, based on temperature of the engine and on the value of inertia of laundry in the drum of the washing machine. In case of industrial washing machines, which are doing more washing cycles one after another, the difference of the temperature of components of the washing machine between those cycles is substantive. Bearings are heated and its resistance is declined. It causes declination of electrical resistance of the engine and reduction of energy required for acceleration of the washing drum. Declination of energy can influence measured weight of laundry by few kilograms.

55 The same is valid also for unbalance possibly generated by laundry. High unbalance means high energy consumption during acceleration of the drum.

[0008] The aim of the present invention is to disclose an automatic weighing method for a washing machine, which eliminates above mentioned disadvantages of known systems and enables accurate weighing of laundry without sub-

stantial increase of price of the system.

Feature of the Invention

[0009] Above mentioned disadvantages are considerably eliminated by use of the automatic weighing method for a washing machine, where determination of temperature of an engine by frequency modulator is processed, during that measuring of amount of current passing through the winding of the engine of the washing machine during its inaction is done, and afterwards calculation of resistance of the winding of the engine of the washing machine based on amount of measured current is effected, afterwards angular speed of the drum of the washing machine is increased up to distribution angular speed, which is intended to distribute laundry in the drum of the washing machine, afterwards angular speed of the drum of the washing machine is increased up to medium angular speed, which is intended to spread the laundry on the inner surface of the drum of the washing machine, afterwards angular speed of the drum of the washing machine is decreased up to measuring angular speed, during that a value of unbalance of the drum of the washing machine is determined, afterwards angular speed of the drum of the washing machine is increased up to maximal angular speed, during that energy consumed for acceleration of the drum of the washing machine is measured, afterwards weight of the laundry in the drum of the washing machine is calculated by determined resistance of the winding of the engine, by value of unbalance of the laundry in the drum of the washing machine, and by sum of electrical energy consumed during acceleration of the drum of the washing machine up to the maximal angular speed.

[0010] In an advantageous embodiment the angular speed is increased up to the distribution angular speed by steps.

[0011] In another advantageous embodiment the distribution angular speed is from 90 to 150 rpm.

[0012] In another advantageous embodiment the medium angular speed is from 300 to 500 rpm.

[0013] In another advantageous embodiment the maximal angular speed is from 450 to 550 rpm.

[0014] In another advantageous embodiment the maximal angular speed is higher than the medium angular speed.

[0015] In another advantageous embodiment the determination of the value of unbalance depends on a range of a value of current amplitude of the engine and on an average value of current of the engine during the constant measuring angular speed.

Description of the Drawing

[0016] The invention will be further explained by use of Fig. 1, which presents a graph of continuance of angular speed of a drum of a washing machine.

Preferred Embodiment of the Invention

[0017] An automatic weighing method of laundry in a washing machine according to the invention is based on principle of energy conservation, i.e. energy generated by engine intended to start spinning of the drum of the washing machine charged by laundry is directly proportional to weight of the laundry placed in the drum of the washing machine. So, high weight of the laundry means high effected work. Because the value of effected work is not influenced only by weight of laundry inserted into the drum of the washing machine, this method is not possible to use without calculation of correction factors.

[0018] First of those correction factors is unbalance of laundry in the drum. High unbalance of the laundry means that high work have to be effected for beginning of rotation of the drum of the washing machine up to predetermined angular speed for the same weight of the laundry. This relation is possible to determine by measuring and subsequently setting the correction factor. According to that, measuring of unbalance of laundry in the drum of the washing machine is needed to be inserted into the measuring sequence.

[0019] Another correction factor is temperature of an engine and of whole mechanical system of the washing machine. High temperature means lower effected work for acceleration of rotation of the drum of the washing machine for the same weight of laundry. This relation is possible to determine by measuring and subsequently setting the correction parameters. Temperature of the system is specified by temperature of the engine, which is determined without any additional sensors by frequency modulator.

[0020] Continuance of an automatic weighing method of laundry in the washing machine according to the invention comprises following steps illustrated on Fig. 1, which presents the graph of continuance of angular speed of the drum of the washing machine during weighing of laundry:

- determination of temperature of the engine by frequency modulator, i.e. measuring of current passing through the winding of the engine of the washing machine during inaction, and calculation of resistance of the winding of the engine of the washing machine based on amount of measured current,
- distribution of the laundry in the inner space of the drum of the washing machine by acceleration of the drum up to

the distribution angular speed ω_0 , which can be from 90 to 150 rpm, based on size of the washing machine, whereas the acceleration of angular speed can be by steps.

- spreading of the laundry on the inner wall of the drum of the washing machine by its acceleration up to the medium angular speed ω_1 , which can be from 300 to 500 rpm, based on a type of the washing machine.
- reduction of angular speed of the washing machine up to the measuring angular speed ω_2 . During that value of unbalance generated by laundry in the washing machine is determined. The value of unbalance is determined from ratio between value of amplitude of current of the engine and middle value of current of the engine during the stable measuring angular speed ω_2 . The measuring angular speed ω_2 can be same as the distribution angular speed ω_0 .
- increase of angular speed of the drum of the washing machine up to maximal angular speed ω_3 , which can be from 450 to 550 rpm, based on a type of the washing machine. During that acceleration energy consumed by engine for this acceleration is measured. The maximal angular speed ω_3 is high than the medium angular speed ω_1 ,
- calculation of weight of the laundry in the drum of the washing machine by the measured parameters, i.e. resistance of the engine, amount of unbalance of the laundry in the drum of the washing machine, sum of electrical energy consumed during acceleration of the drum of the washing machine to the maximal angular speed ω_3 , calculated by a following formula (1):

$$m = \frac{I + a \cdot T + b \cdot U_n^2 + c \cdot U_n - K}{d} \quad (1)$$

[0021] Where:

I is sum of current during acceleration,
 T is temperature of the motor,
 U_n is value of unbalance,
 K is a calibration constant for the washing machine without loading,
 a, b, c, d are experimentally defined constants.

[0022] Calculation of weight of laundry in the drum of the washing machine is based on principle of direct proportion between energy consumed during acceleration of the drum, and weight of laundry in the drum of the washing machine, and further it is based on previously set dependencies on temperature of engine and on a value of unbalance of the laundry in the drum of the washing machine.

[0023] An advantage of the presented technical solution in comparison to prior of the art is determination of weight of laundry without use of any additional sensors arranged in a construction of the washing machine, so production cost of the washing machine is not increased.

[0024] As mentioned before, knowledge of weight of laundry in the drum of the washing machine is important for an economically working process of the washing machine. Thanks to this knowledge effective dosing of water into the washing machine is possible, because water level in the drum depends on weight of laundry. Thanks to that, during whole cycles the washing machine can save more than 50 % of value of normally consumed water. Another point of economy is value of electrical energy consumed for water heating. In case that the drum comprises less water, heating time is shorter and thanks to that the consumed electrical energy for the whole washing cycle is also less. Knowledge of weight of laundry in the drum of the washing machine also influences consumption of the detergent in direct proportion.

Claims

1. Automatic weighing method for washing machine characterized in, that

- determination of temperature of an engine by frequency modulator is processed, during that measuring of amount of current passing through the winding of the engine of the washing machine during its inaction is done, and afterwards calculation of resistance of the winding of the engine of the washing machine based on amount of measured current is effected,
- afterwards angular speed of the drum of the washing machine is increased up to distribution angular speed (ω_0), which is intended to distribute laundry in the drum of the washing machine,
- afterwards angular speed of the drum of the washing machine is increased up to medium angular speed (ω_1), which is intended to spread the laundry on the inner surface of the drum of the washing machine,

- afterwards angular speed of the drum of the washing machine is decreased up to measuring angular speed (ω_2), during that a value of unbalance of the drum of the washing machine is determined,
 - afterwards angular speed of the drum of the washing machine is increased up to maximal angular speed (ω_3), during that energy consumed for acceleration of the drum of the washing machine is measured,
 - afterwards weight of the laundry in the drum of the washing machine is calculated by determined resistance of the winding of the engine, by value of unbalance of the laundry in the drum of the washing machine, and by sum of electrical energy consumed during acceleration of the drum of the washing machine up to the maximal angular speed (ω_3).

2. Automatic weighing method for washing machine according to the claim 1 **characterized in, that** the angular speed is increased up to the distribution angular speed (ω_0) by steps.
3. Automatic weighing method for washing machine according to the claim 1 **characterized in, that** the distribution angular speed (ω_0) is from 90 to 150 rpm.
4. Automatic weighing method for washing machine according to the claim 1 **characterized in, that** the medium angular speed (ω_1) is from 300 to 500 rpm.
5. Automatic weighing method for washing machine according to the claim 1 **characterized in, that** the maximal angular speed (ω_3) is from 450 to 550 rpm.
6. Automatic weighing method for washing machine according to the claim 1 **characterized in, that** the maximal angular speed (ω_3) is higher than the medium angular speed (ω_1).
7. Automatic weighing method for washing machine according to the claim 1 **characterized in, that** determination of the value of unbalance depends on a range of a value of current amplitude of the engine and on an average value of current of the engine during the constant measuring angular speed (ω_2).

Amended claims in accordance with Rule 137(2) EPC.

1. Automatic weighing method for a washing machine **characterized in, that**

- determination of the temperature of an engine by frequency modulator is processed, where the determination is based on a value of calculated resistance of the winding of the engine of the washing machine, where for the calculation of the resistance of the winding of the engine of the washing machine is used value of current measured on the winding of the engine of the washing machine measured at the time, when the engine doesn't work,
 - afterwards the angular speed of the drum of the washing machine is increased up to a distribution angular speed (ω_0), which is intended to distribute laundry in the drum of the washing machine,
 - afterwards the angular speed of the drum of the washing machine is increased up to a medium angular speed (ω_1), which is intended to spread the laundry on the inner surface of the drum of the washing machine,
 - afterwards the angular speed of the drum of the washing machine is decreased to a measuring angular speed (ω_2), and during maintenance of the angular speed at the measuring angular speed (ω_2) a value of unbalance of the drum of the washing machine is determined,
 - afterwards the angular speed of the drum of the washing machine is increased up to a maximal angular speed (ω_3), during which the current consumed for the acceleration of the drum of the washing machine is measured,
 - afterwards the weight of the laundry in the drum of the washing machine is calculated using the determined temperature of the engine, the value of the unbalance of the laundry in the drum of the washing machine, and the sum of current consumed during the acceleration of the drum of the washing machine from the measuring angular speed (ω_2) up to the maximal angular speed (ω_3).

2. Automatic weighing method for a washing machine according to the claim 1 **characterized in, that** the angular speed is increased up to the distribution angular speed (ω_0) by steps.
3. Automatic weighing method for a washing machine according to the claim 1 **characterized in, that** the distribution angular speed (ω_0) is from 90 to 150 rpm.

4. Automatic weighing method for a washing machine according to the claim 1 **characterized in, that** the medium angular speed (ω_1) is from 300 to 500 rpm.
5. Automatic weighing method for a washing machine according to the claim 1 **characterized in, that** the maximal angular speed (ω_3) is from 450 to 550 rpm, while the maximal angular speed (ω_3) is higher than the medium angular speed (ω_1).
6. Automatic weighing method for a washing machine according to the claim 1 **characterized in, that** determination of the value of unbalance depends on a range of a value of current amplitude of the engine and on an average value of current of the engine during maintenance of the angular speed at the measuring angular speed (ω_2).

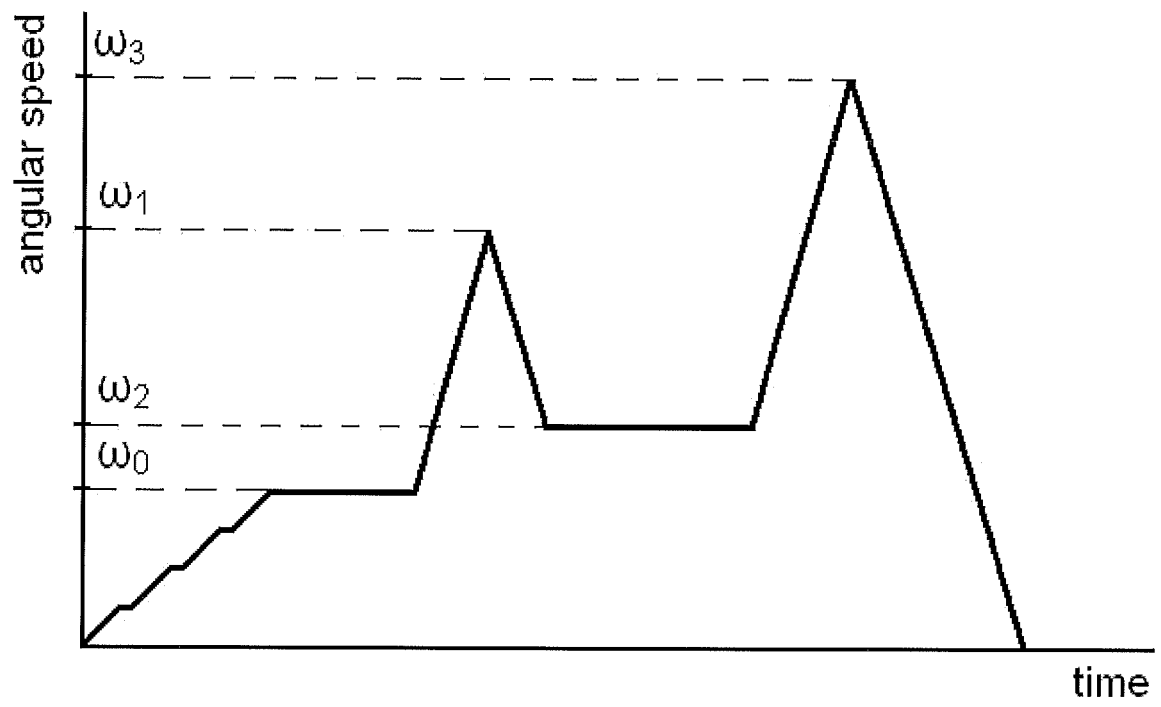


Fig. 1



EUROPEAN SEARCH REPORT

Application Number
EP 14 18 0910

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A,D	EP 2 264 239 A1 (GRANDIMPIANTI ILE ALI S P A [IT]) 22 December 2010 (2010-12-22) * paragraphs [0004], [0015] * * paragraph [0023] - paragraph [0027] * * paragraph [0030] - paragraph [0037] * * paragraph [0041] - paragraph [0048] * * figure 1 *	1-7	INV. D06F39/00 D06F37/20 ADD. D06F58/28
A	EP 2 056 079 A2 (GEN ELECTRIC [US]) 6 May 2009 (2009-05-06) * paragraphs [0007], [0028] * * paragraph [0067] - paragraph [0069] * * paragraph [0053] - paragraph [0056] * * paragraph [0074] *	1-7	
A	WO 2005/005707 A1 (DANFOSS DRIVES AS [DK]; LUNGEANU FLORIN [DK]) 20 January 2005 (2005-01-20) * page 1, line 9 - line 15 * * page 2, line 29 - page 4, line 14 * * page 6, line 7 - line 10 * * page 6, line 24 - page 7, line 19 *	1-7	
A	US 2010/045226 A1 (KIM MYUNG CHUL [KR] ET AL) 25 February 2010 (2010-02-25) * figure 7A * * paragraph [0019] - paragraph [0021] * * paragraph [0025] - paragraph [0031] *	1	
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 4 February 2015	Examiner Bermejo Pasetti, M
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 14 18 0910

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

04-02-2015

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 2264239	A1	22-12-2010	CN 101929052 A	29-12-2010
			EA 201000824 A1	28-02-2011
			EP 2264239 A1	22-12-2010
			ES 2482695 T3	04-08-2014
			US 2010320007 A1	23-12-2010

EP 2056079	A2	06-05-2009	EP 2056079 A2	06-05-2009
			JP 2009115793 A	28-05-2009
			KR 20090045044 A	07-05-2009
			US 2009106913 A1	30-04-2009

WO 2005005707	A1	20-01-2005	DE 10331934 B3	28-10-2004
			WO 2005005707 A1	20-01-2005

US 2010045226	A1	25-02-2010	CN 101654856 A	24-02-2010
			KR 20100022145 A	02-03-2010
			US 2010045226 A1	25-02-2010

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20100320007 A [0003]
- EP 2264239 A1 [0004]
- EP 2009169 A2 [0005]
- WO 2004081276 A1 [0006]